## NoisyEQA: Benchmarking Embodied Question Answering Against Noisy Queries

Tao Wu<sup>1</sup> Chuhao Zhou<sup>1</sup> Yen Heng Wong<sup>1</sup> Lin Gu<sup>2</sup> Jianfei Yang<sup>1</sup> <sup>1</sup> MARS Lab, Nanyang Technological University <sup>2</sup> RIKEN AIP

{twu0190e., chuhao0020e., wong13480e., jianfei.yang0}ntu.edu.sg lin.gu@riken.jp

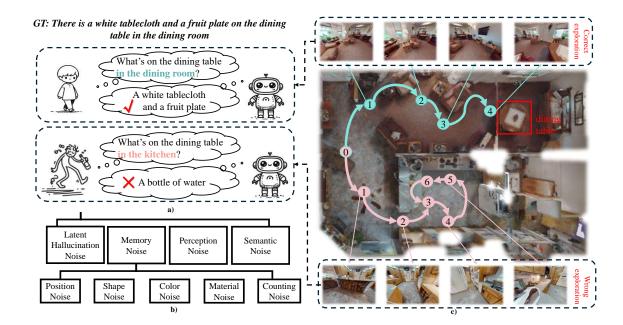


Figure 1. (a) A dining table locates in the dining room, a drunk person mistakenly recalls its location, causing the Agent incorrectly makes a fabricated answer. (b) A systematic taxonomy for human noisy questions. (c) Comparison between Agent's exploration paths under the accurate question(Green) and noisy question(Pink), the latter may be trapped in a loop, causing physical damage.

#### Abstract

The rapid advancement of Vision-Language Models (VLMs) has significantly advanced the development of Embodied Question Answering (EQA), enhancing agents' abilities in language understanding and reasoning within complex and realistic scenarios. However, EQA in real-world scenarios remains challenging, as human-posed questions often contain noise that can interfere with an agent's exploration and response, bringing challenges especially for language beginners and non-expert users. To address this, we introduce a NoisyEQA benchmark designed to evaluate an agent's ability to recognize and correct noisy questions. This benchmark introduces four common types of noise found in real-world applications—Latent Hallucination Noise, Memory Noise, Perception Noise, and Semantic Noise—generated through an automated dataset creation framework. Additionally, we also propose a 'Self-Correction' prompting mechanism and a new evaluation metric to enhance and measure both noise detection capability and answer quality. Our comprehensive evaluation reveals that current EQA agents often struggle to detect noise in questions, leading to responses that frequently contain erroneous information. Through our Self-Correct Prompting mechanism, we can effectively improve the accuracy of agent answers.

## 1. Introduction

Embodied Question Answering (EQA) is a task where an agent actively explores a scene, builds a comprehensive understanding of the environment, and answers questions

about it using natural language [3, 19, 21, 22]. Unlike Visual Question Answering (VQA), which relies on a single static image [2, 16, 27, 33, 38], EQA requires responses based on multiple images collected during the agent's exploration.

Existing QA systems often assume that the questions posed to them are clear and accurate, leading to challenges when erroneous human presumptions or biases are present. This issue is concerning for EQA, as it must interact with diverse clients and conditions in the real world, where incorrect responses can frustrate or even harm users. The situation is more severe in critical or high-stakes environments. For instance, when assisting an Alzheimer's patient, the agent might be asked to locate a commonly misplaced object, such as glasses. If the agent repeatedly searches this area based on the patient's erroneous presumptions, it not only becomes inefficient but may also collide with obstacles or even the patient, posing serious safety risks. Unlike ideal scenarios with accurate questions, real-world queries often contain ambiguities and inaccuracies. It highlights the need for EQA systems to flexibly handle these noisy questions, thereby enhancing practicality for real-world applications.




Figure 2. The accuracy of Explore-EQA decreases significantly on noisy questions compared to clean questions.

To understand the limitations of existing EQA systems in handling real-world ambiguities, we examined **Explore-EQA** [26] and **OpenEQA** [22], which demonstrate weaknesses due to noisy queries. As shown in Figure 1 (a) and the pink path in (c), when faced with a noisy question from a drunk person, the agent may repeatedly search the same location and produce incorrect responses, results in useless exploration or even physical damage. The quantitive results in Figure 2 further demonstrates our advocation. Here, we treat the "noise" as inaccuracies and ambiguities within user queries, which hinder the agent to accurately interpret and respond. The results highlight a critical gap in current EQA systems' capabilities to handle clean and noisy questions. We find that these noisy questions can be derived from the concept of "Presumptuous Questions" where queries containing incorrect or unfounded assumptions about the environment. It is the misleading premises that introduced by such presumptions that induce agents to make erroneous responses. Therefore, we advocate that it is significant to systematically model and define these noisy questions, which facilitates the advent of noise-robust agents.

Hence, we introduce a novel multimodal benchmark, NoisyEQA, specifically designed to assess agents' performance in handling noisy questions. With analysis of typical noise pattern observed in human-posed questions, we model and define them into 4 types, as shown in Figure 1 (b). Specifically, latent hallucination noise arises when a question refers to non-existent objects or entities in a given scene; perception noise originates from the inaccurate object descriptions caused by visual disturbances or occlusions; semantic noise arises from errors in interpreting environment where the original objects are substituted by semantically related but incorrect ones; and memory noise is related to memory error where the object attributes recalled by humans mismatch their actual attributes. We further subdivide memory noise into five attributes-location, color, material, count, and shape-capturing common concepts of mistaken presumptions. With these definitions, we design a systematic framework powered by a LLM to automatically generate noisy questions and ultimately 500 noisy questions are incorporated in the NoisyEQA benchmark.

Furthermore, we take the first step in enhancing the robustness of EQA agents towards noisy questions. A simple yet effective Self-Correction mechanism is proposed, which can be treated as plug-ins and seamlessly incorporated into any EQA system. The core motivation of our Self-Correction mechanism is to prompt agents to inspect the noise by comparing their visual observations with human questions. Once noises is detected, the agents is asked to provide a clear explanation of the noise source, based on which the noise-free responses can be generated. Notably, the self-correction mechanism can be easily extended into a human-in-the-loop approach, where the corrected responses from agents further confirmed by humans before execution. In this case, our proposed method sufficiently meet the AI Act's transparency requirements [6, 31], which is critical for embodied systems.

Finally, we argue that existing metrics (e.g., accuracy) is incapable of evaluating agents' performances to noisy questions. Therefore, a novel evaluation framework that specially designed for noisy questions is proposed. To be specific, we elaborately design a evaluation scale ranging from 1 to 5 to assess agents in terms of noise detection, noise correction and accurate generation. To fully demonstrate the fine-grained capabilities of agents in handling noises, two noise-related metrics—Detection Rate (DR) and Correction Rate (CR)—are also introduced to specify whether the agents achieve to detect and correct noise lied in the questions. The combination of these metrics provide a framework that can comprehensively evaluate the agents' performance in real-world EQA tasks.

In summary, our contributions lied in 4 folds:

- We propose the NoisyEQA benchmark, a benchmark dataset with diverse noise types to evaluate the robustness of EQA agents against noisy questions
- 2. We develop a novel **LLM-powered framework** to systematically generate noisy questions across various types, enabling controlled and scalable data generation
- 3. We introduce a **Self-Correction** mechanism, a method meets AI transparency, to detect and correct the noisy questions, allowing to generate noise-free responses.
- 4. We propose an innovative **evaluation framework** that specially assesses agents' ability to handle noisy questions, allowing to comprehensively evaluate the agents' performance in real-world EQA tasks.

## 2. Related Work

## 2.1. Embodied Question Answering

The Embodied Question Answering (EQA) task aims to navigate a robot agent to an appropriate location in realworld scenarios and enable question-answering through physical interaction with humans. Existing methods for EQA can be divided into two categories: Traditional Neural Networks and those utilizing Large Language Models (LLMs)/Vision-Language Models (VLMs) [19].

**Traditional Neural Network.** Das*et al.* [3] first defined the EQA as a task requiring agents to navigate and answer questions in a real environment. To address this task, most early works employ traditional neural networks with relatively small scales. For example, Das *et al.* [4] proposed a modular, hierarchical strategy for learning long-range navigation from language input. Yu *et al.* [35] further extended EQA by addressing questions involving multiple targets.

LLMs and VLMs. Leveraging the strong reasoning and generalization capabilities of large-scale LLMs and VLMs, EQA has witnessed significant advancements, particularly in complex reasoning, memory integration, and adaptive exploration capabilities [5, 22, 26]. Based on LLMs and VLMs, more complex EQA tasks that are similar to real application can be achieved. For instance, OPEN-EQA [22] focus on EOA tasks with episodic memory (EM-EOA) and active exploration (A-EQA). Based on Open-EQA, agents can memorize history observations and exploration by LLMs equipped with scene graphs, enabling adaptively recall them to answer queries. To explore the real environment more efficiently, Ren et al. [26] leveraged an external semantic map to highlight regions worth investigating, optimizing agents' exploration process by minimizing unnecessary actions.

#### 2.2. Learning with Noisy Labels

Facilitated by availability of large datasets, deep learning has achieved remarkable success across numerous domains. However, the scarcity of high-quality data remains a significant concern in many real-world applications. To develop robust models that can effectively learn from noisy training data, many methods has been developed for robust learning with noisy labels [8, 23, 25, 28, 32, 37, 39]. For example, Quinonero et al. [25] alleviated the distribution shifts between training and testing data, enhancing model adaptability in real-world scenarios. In the field of EQA, Luo et al. [20] first proposed a noise-robust model that employs a hierarchical approach in the navigation module to filter unreliable labels, along with dual-branch training in the VQA module to enhance the performance in noisy environments. Instead of only considering the noise in training data, Northcutt et al. [24] highlighted that noise in testing data is equally critical and should not be overlooked. Inspire by this, our approach takes the first step in addressing the noise in testing data specifically for EQA tasks, and focuses on alleviating noise that will be encountered in real-world EQA tasks.

#### **2.3. Information Inconsistency**

Information inconsistency is a tricky problem faced by existing Vision-Language Models (VLM). Hallucinations, where the generated language output does not align with the visual input [9, 12, 18, 34], is one of the typical forms of information inconsistency. Oceans of works are proposed to alleviate the hallucinations in VLMs [10, 11, 13, 15, 36]. For example, Li et al. [17] formed hallucination detection as a binary classification problem, aiming at eliminating the misalignment of objects between agent responses and visual cues. However, existing works predominantly concentrate on hallucinations generated by agents and overlook one of the most common types of information inconsistency: misalignment between user instructions and the visual cues. Some researchers have tried to formulate this issue. For instance, Taioli et al. [29] introduced a novel benchmark for Vision-Language Navigation in Continuous Environments (VLN-CE) that simulates realistic instruction errors. Followed by a cross-modal transformer to detect these errors, robustness against inaccurate human instructions is enhanced. Gao et al. [7] also introduced the Self-Contradictory Instructions benchmark to evaluate agents in recognizing conflicting commands, and they proposed the Cognitive Awakening Prompting enhance the detection of such noisy instructions. These methods address specific inconsistency issues, however, a framework for systematically analyzing noise types in human inputs is absent. Our work fills this gap by defining a thorough taxonomy on noise types within human questions from a human-agent interaction perspective, comprehensively modeling and solv-



Figure 3. Noise types in NoisyEQA benchmark: Latent Hallucination Noise, Memory Noise, Perception Noise, and Semantic Noise. Memory Noise is further subdivided into Memory Position Noise, Memory Shape Noise, Memory Color Noise, Memory Counting Noise, and Memory Material Noise.

ing the information inconsistency in EQA tasks.

## 3. Dataset

#### 3.1. Overview

When querying about agents, humans often unconsciously introduce various presumptions and implicit biases, which can hinder the agents from generating accurate responses. To model these presumptions and implicit biases in practical scenarios, we define them as different types of "Noise" and taxonomize them into two main categories: Latent Hallucination Noise and Active Noise. The primary difference between these two types of noise lies in the presence of factual errors in human questions. Active Noise arises from the factual errors caused by humans' misperception or misunderstanding of the environment during interacting with agents. Latent Hallucination Noise occurs when questions refer to non-existing objects or entities within the scene.

In this work, we aim to model such mistaken presumptions from humans with finer granularity. As shown in Figure 3, we subdivide the Active Noise into three subtypes: Memory Noise, Perception Noise, and Semantic Noise. Besides, Memory Noise is further classified into five categories based on the forgetting of different object attributes: Position, Counting, Shape, Color and Material.

In total, we generate 500 noisy questions corresponding to 4 types of noise. The distribution of "noise types" and the "attributes of **Memory Noise**" is illustrated in Figure 4 (a) and (b), respectively. Please refer to supplementary materials for more details about the noise types distributions.

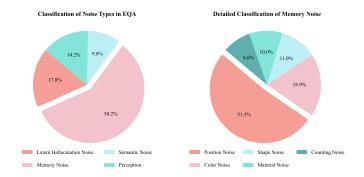


Figure 4. (a) Distribution of various types of noisy questions. (b) Distribution of the attributes within Memory Noise.

### 3.2. Definition of Noise Types

In this subsection, we elaborate our definition of different types of noises in the NoisyEQA dataset.

Latent Hallucination Noise refers that questions from human contain non-existent objects in the scene. Such nonexistent objects could trigger the hallucination of the agent, causing it to incorrectly generate fabricated responses that incorporate non-existent items. This kind of noise is common in the tasks of scene understanding. For example, when asked about the location of a non-existent object, the agent tends to fabricate a position rather than indicate that the object does not exist in the scene. This not only compromises EQA accuracy but also severely misleads users in practical applications.

Memory Noise arises from memory errors, where the



Figure 5. (a) original image and description and (b) disturbed image and description.

human inaccurately recalls an attribute of an object, results in a mismatch between memory and reality. Imagine a scene with a white vase in the living room. If a human incorrectly recalls the vase as being in the bedroom, an example of memory noise about location attribute could be "Is the vase in the bedroom white?". For other attributes, similar noise could be introduced into the questions.

**Perceptual Noise** originates from inaccuracies in humans' perception of the environment, simulating the visual ambiguities that they may encounter when observing objects in a scene. For instance, a nearsighted person without glasses may misidentify the object A as another incorrect object, B, in the scene. In this case, a question containing perceptual noise could be "What's the shape of object B?".

**Semantic Noise** is caused by the incorrect substitutions of objects in a scene when humans attempt to describe the environment. Unlike perceptual noise, which involves visual misidentification of objects, semantic noise contains logically feasible substitutions with semantically related but incorrect objects. Intuitively, in a living room, substituting "fireplace" with a semantically related object (e.g., "stove") could introduce such noise.

## 3.3. Paradigms of Question Generation

Based on our definitions of different types of noise, we present a systematic framework powered by structured templates and LLMs to automatically generate noisy questions, as shown in Figure 6. Inspired by OpenEQA [22], we focus on generating open-ended question-answer pairs to better simulate the challenges of real-world environments.

For Latent Hallucination Noise, we use both Whquestions and yes/no-questions templates, such as "Where is the <OBJ>?" and "Is the <OBJ> {Attribute}?". The non-existent objects <OBJ> and the {Attribute} aim to induce hallucinated responses and simulate the erroneous human presumptions, respectively. Given a scene, we first establish a list of all present objects, then introduce a non-existent object with a random attribute to form a noisy question. For example, if a living room contains a table, chair, and book, one of the generated questions with latent hallucination noise could be "Where is the vase in the living room?" or "Is the vase in the living room white?" Although this question seems to be reasonable, it introduces a phantom object (vase), increasing the likelihood of hallucinated responses.

As for **Active Noise**, the **facts** (red boxes in Figure 6) are pre-defined by assigning each object known attributes. We then introduce different types of Active Noise by modifying or substituting either the object or its attribute. In this way, **factual errors** between the pre-defined facts (or scenes) and the noisy questions are introduced. Except for Whquestions, a yes-no question template is also utilized to introduce additional attributes (*{Attribute2}*), simulating the erroneous presumptions from humans on object attributes. By this way, noisy questions that contain both factual errors and human erroneous presumptions can be generated.

Concretely, for **Memory Noise**, we first select an object with its original attributes from a scene, then replace the attribute with an incorrect one to introduce noise. For instance, to create memory noise related to the location attribute, we select a vase that located in the 'living room' and change its location to the 'bedroom', then ask "What color is the vase located in the bed room?" or "Is the vase located in the bed room?" or similarly be applied to other attributes, allowing us to comprehensively evaluate the robustness against various recall errors.

To generate **Perceptual Noise**, we add Gaussian noise to the original image of the scene to simulate perceptual confusion. Subsequently, a Vision-Language Model (VLM) [1] is utilized to generate a description of the disturbed image, as shown in Figure 5, some objects are incorrectly described due to the distortion (marked by red). We then construct questions with perceptual noise based on these misidentified objects. According to Figure 5, the sofa near the television is recognized as a bed, and a noisy question is formulated as "What's the color of the bed near the television?" or "Is the bed near the television made of wood?".

Finally, we generate **Semantic Noise** by substituting the object in the scene with semantic-related but incorrect object. Particularly, objects from both OpenEQA [22] and HMEQA [26] datasets are gathered, and BERT is adopted to embed all candidate objects. We then create a pairwise similarity matrix to indicate the semantic correlations among objects. For an original object in each question, we first select the objects with top-10 similarities to form a subset of candidates. Then, the logically related object is further chosen from the subset by humans according to two principles: category overlap or functional association. Specifically, category overlap is defined by widely accepted taxonomy, for example, 'sofa' and 'armchair' are both belonged to 'furniture'. Functional association considers objects with similar roles in the same scene, for example, 'fire-




Figure 6. Different question templates for two main noise types.

place' and 'stove' both support for heat function.

Consequently, we replace the original object with a logically related one to introduce the semantic noise. Take the scene of living room as an example, an question with semantics noise could be "What material is the stove in the living room?" or "Is the stove in the living room silver?" while the "stove" is a "fireplace" in reality.

After generating the dataset, we recruit two dedicated volunteers to conduct a thorough review and validation. The volunteers meticulously examine each entry for inconsistencies, errors, and potential biases. Additionally, they also verify that the generated data accurately contains the intended noise types across various scenarios.

## 4. Self-Correction Mechanism

Once the presumptions and implicit biases are incorporated into the human questions (noisy questions), the accuracy of responses generated by agents will significantly degrade. To address this issue, we propose a Self-Correction mechanism to enhance the robustness of agents against noisy questions.

As illustrated in Figure 7 (a), for a scene with multiple views, the noisy question is marked by blue. Instead of directly answering the question, we design an additional "confidence question" in yes/no format (which is marked by green) for the agent to answer first. By taking the probability regards to "yes" token as confidence score, the agent could identify the most reliable view from the scene. Then, the agent equipped with our Self-Correction mechanism answers the noisy question based on the selected view. The Self-Correction mechanism has two formats: **Noise Aware Prompt (NAP)** and **Noise Aware Chain of Thought (NA-CoT)**, which are elaborated in the following.

## 4.1. Noise Aware Prompt (NAP)

The Noise Aware Prompt (NAP) adopts an extra cognition prompt to enhance agents' sensitivity towards poten-

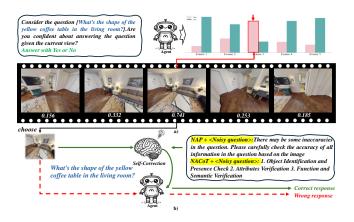


Figure 7. (a) Selection of reliable view. (b) Insights for our Self-Correction mechanism.

tial noise in human questions. As shown in Figure 7 (b), a simple yet effective prompt is appended to the input of the agent, which reminds the agent to carefully review the question-related information before generating a response. Instead of altering the reasoning process of the agent, NAP encourages the agent to aware the mismatches between human questions and visual clues. By this way, the agent achieves to identify the noisy question more accurately, resulting in more robust and reliable responses.

## 4.2. Noise Aware Chain of Thought (NACoT)

Instead of simply prompting the agent to recognize the noise in human questions, we explore a more fine-grained mechanism, called Noise Aware Chain of Thought (NACoT), to guide the agent in detecting and addressing noise step by step. Particularly, NACoT deconstructs a specific question into key components, and systematically prompts the agent to verify whether each component is consistent with the visual content in the scene. As shown in Figure 7 (b), this processes starts with object identification, ensuring that all objects mentioned in the questions are presented in the scene. Followed by attributes checking, the agent makes sure that the attribute of objects are consistent between questions and real scene. Finally, the function and semantics verification utilized to detect any semantic noise. Once any discrepancies are detected, the agent will provide a clear explanation of the detected noise, then the expected responses that not contaminated by noises can be adaptively generated.

## 5. Evaluation Criteria

As discussed in section 1, existing metrics for questionanswering systems (e.g., accuracy) are insufficient for evaluating the agents' performances in the presence of noisy questions. Therefore, we propose a novel evaluation framework that simultaneously considers both the quality of responses and the robustness towards noises. The quality of responses is evaluated based on three aspects: noise detection, noise correction and accurate generation. Assessing these aspects by humans are time-consuming and may introduce biases across different evaluators. Therefore, we elaborately design an evaluation scale based on all three aspects and employ a Large Language Model (LLM) for automatic assessment, as shown in Figure 8, please refer to supplementary materials for detailed evaluation scale. Based on the evaluation scale, for each noisy question  $q_i$ , let  $a_i^*$  and  $a_i$  represents the ground-truth and agent-generated responses, respectively. We then prompt the LLM to score  $a_i$  based on aforementioned three aspects by comparing it with  $a_i^*$ .

Followed by OpenEQA [22], the LLM-Match accuracy is adpoted to evaluate the overall quality of all responses generated by an agent, which is formulated as follows:

$$C = \frac{1}{N} \sum_{i} \frac{\sigma_{i} - 1}{4} \times 100\%$$
 (1)

where N represents the number of noisy questions in NoisyEQA, and  $\sigma_i$  denotes the score for response  $a_i$ .

In addition to the overall quality, two novel noise-related evaluation metrics—**Detection Rate (DR)** and **Correction Rate (CR)**—are introduced to specifically evaluate the capability of an agent in handling noisy questions. To be specific, the DR or CR are designed to quantitatively measure whether the agent can detect or correct different types of noise in noisy questions. Mathematically, we denote the responses to all noisy questions as  $\mathbf{A} = \{a_i\}_{i=1}^N$ , the responses from the agent that successfully detect (correct) the noise as  $\mathbf{A}^{\mathbf{d}} = \{a_i | \sigma_i \geq 3\}$  and  $\mathbf{A}^{\mathbf{c}} = \{a_i | \sigma_i \geq 4\}$ , respectively. Then, the DR and CR could be formulated as:

$$DR = \frac{|\mathbf{A}^{\mathbf{d}}|}{|\mathbf{A}|} \times 100\% \tag{2}$$

$$CR = \frac{|\mathbf{A}^{\mathbf{c}}|}{|\mathbf{A}|} \times 100\% \tag{3}$$

Considering all these metrics, we comprehensively assess an agent's ability to generate accurate responses and handle the questions with substantial noise and presumptions. Agents scoring high on all three metrics are more likely to achieve satisfactory performance in real-world EQA tasks.

## 6. Experiment

In this section, we thoroughly evaluate the performance of different agents in addressing noisy questions.

#### 6.1. Implementation details

**Baseline Agents.** Two common Vision-Language Models (VLMs) are selected as baseline agents, which show

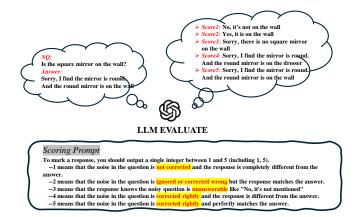


Figure 8. LLM-powered evaluation criteria to noisy questions.

strong question answering and spatial reasoning capabilities based on clean questions. Following Prismatic-VLMs [14], we adopt the mixed DINO+SigLIP as our vision encoder, and replace the LLM with Llama-2 and GPT-40 to formulate our agents, which are denote as "Llama2-EQA" and "GPT-40-EQA", respectively. Notably, the probability of the predicted tokens is necessary in our method to select the most reliable view from the scene. Therefore, LLMs whose probabilities are inaccessible are not included in our experiments, such as Gemini [30], Claude, and others.

**Dataset and Evaluation Metric.** All experiments are conducted using our generated NoisyEQA Dataset, which consists of 500 noisy questions in total. For evaluation, the three metrics: Accuracy, Detection Rate and Correction Rate, are adopted as described in section 5. Additionally, two volunteers are recruited to provide human responses to the noisy questions, creating a benchmark for comparing the capability of agents versus real human.

#### **6.2.** Evaluation results

The evaluation results for different types of noisy questions for Llama2-EQA and GPT-4o-EQA are listed in Table 1 and Table 2, respectively. As shown in the tables, the original Llama2-EQA and GPT-4o-EQA agents exhibit low performance when noise is present the questions. This suggests that the presumptions or implicit biases in human questions pose challenges even for agents with strong question-answering capabilities. It highlights that these noises do hinder the application of agents on EQA tasks in the real-world, forming an issue that must be addressed. By incorporating NAP or NACoT for self-correction, both agents show significant improvements across various types of noisy questions. It fully demonstrates the effectiveness of our proposed self-correction mechanism. However, the best results of our agents (i.e., GPT4o-EQA+NACoT) still fall short of real humans performance, especially for the Ac-

Method	Latent Hallucination Noise	Memory Noise					Perception	Semantic
		Position	Color	Shape	Counting	Material	Noise	Noise
LLama2-EQA	6.08	16.00	15.91	18.55	12.07	20.00	12.86	22.45
LLama2-EQA+NAP	33.41	29.83	32.73	34.68	38.79	17.00	29.64	35.71
LLama2-EQA+NACoT	40.02	36.47	39.55	37.90	44.83	61.00	26.79	28.06
Humans	91.67	98.50	97.27	95.16	97.41	99.00	85.71	93.87

Table 1. Evaluation results of LLama2-EQA on NoisyEQA in terms of LLM-match accuracy (%).

Method	Latent Hallucination Noise	Memory Noise					Perception	Semantic
		Position	Color	Shape	Counting	Material	Noise	Noise
GPT4o-EQA	51.59	24.50	19.09	12.90	24.14	25.00	27.14	25.00
GPT4o-EQA+NAP	86.98	53.50	40.45	41.94	57.76	64.00	43.57	46.42
GPT4o-EQA+NACoT	87.60	39.96	45.91	49.19	62.07	63.00	45.00	51.02
Humans	91.67	98.50	97.27	95.16	97.41	99.00	85.71	93.87

Table 2. Evaluation results of GPT4o-EQA on NoisyEQA in terms of LLM-match accuracy (%).

tive Noise (i.e., Memory, Perception and Semantics Noise). This indicates that noisy questions containing factual errors are extremely challenging to correct. In contrast to identifying of non-existent objects, we conjecture that the agent requires more fine-grained and complex reasoning to detect and correct the factual errors related to the objects.

Method	Detection Rate	Correction Rate		
LLama2-EQA	3.0	2.8		
LLama2-EQA+NAP	47.4	13.8		
LLama2-EQA+NACoT	52.0	23.6		
GPT-4o-EQA	46.2	17.4		
GPT-4o-EQA+NAP	79.0	42.0		
GPT-4o-EQA+NACoT	77.6	35.0		
Humans	97.6	93.4		

Table 3. Evaluation results of LLama2-EQA and GPT4o-EQA on NoisyEQA in terms of DR (%) and CR (%).

Furthermore, we show how NAP and NACoT enhance agents' robustness to noises. As shown in Table 3, our NAP and NACoT achieve to improve agents by significantly boosting the detection and correction rates of the noisy questions. (Please refer to our supplementary materials for more visualization results.) Besides, although both agents achieve relatively high detection rate, the correction rate remains much lower compared with humans. Correcting noisy questions requires to trigger agents' reasoning capability at more fine-grained level, we leave it as an open question for future works.

## 7. Conclusion

In this paper, we introduce the NoisyEQA benchmark, a dataset specially designed to evaluate agents' capability towards noisy human questions. To fully simulate humanposed questions in the real-world scenario, we define four types of noise including Latent Hallucination, Memory, Perception and Semantic noise. Based on these noise types, we systematically generated 500 noisy questions using a novel LLM-based framework, which can be easily scalable. By evaluating various baseline agents on our NoisyEQA benchmark, we reveal that our dataset essentially model the issues existed in real-world EQA tasks, forming a problem must be solved for practical application. To this end, we propose a simple yet effective self-correction mechanism with two formats to help agents detect and correct noise before answering. significantly boosting the robustness of agents. Finally, two novel evaluation metrics that separately focus on noise detection and correction are proposed, providing more thorough evaluation for agents in the real-scene. This work paves the way for building reliable agents for real-word application and a more comprehensive benchmark exploring the noise at finer-grained level is underway.

## References

- Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. arXiv preprint arXiv:2303.08774, 2023. 5
- [2] Stanislaw Antol, Aishwarya Agrawal, Jiasen Lu, Margaret Mitchell, Dhruv Batra, C Lawrence Zitnick, and Devi Parikh. Vqa: Visual question answering. In *Proceedings of the IEEE International Conference on Computer Vision*, pages 2425– 2433, 2015. 2
- [3] Abhishek Das, Samyak Datta, Georgia Gkioxari, Stefan Lee, Devi Parikh, and Dhruv Batra. Embodied question answering. In Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, pages 1–10, 2018. 2, 3
- [4] Abhishek Das, Georgia Gkioxari, Stefan Lee, Devi Parikh, and Dhruv Batra. Neural modular control for embodied question answering. In *Conference on Robot Learning*, pages 53–62. PMLR, 2018. 3
- [5] Vishnu Sashank Dorbala, Prasoon Goyal, Robinson Piramuthu, Michael Johnston, Reza Ghanadhan, and Dinesh Manocha. S-eqa: Tackling situational queries in embodied question answering. *arXiv preprint arXiv:2405.04732*, 2024. 3
- [6] Lilian Edwards. The eu ai act: a summary of its significance and scope. Artificial Intelligence (the EU AI Act), 1, 2021.
  2, 1
- [7] Jin Gao, Lei Gan, Yuankai Li, Yixin Ye, and Dequan Wang. Dissecting dissonance: Benchmarking large multimodal models against self-contradictory instructions. In *European Conference on Computer Vision*, pages 404–420. Springer, 2025. 3
- [8] Hui Wen Goh and Jonas Mueller. Activelab: Active learning with re-labeling by multiple annotators. arXiv preprint arXiv:2301.11856, 2023. 3
- [9] Tianrui Guan, Fuxiao Liu, Xiyang Wu, Ruiqi Xian, Zongxia Li, Xiaoyu Liu, Xijun Wang, Lichang Chen, Furong Huang, Yaser Yacoob, et al. Hallusionbench: an advanced diagnostic suite for entangled language hallucination and visual illusion in large vision-language models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14375–14385, 2024. 3
- [10] Anisha Gunjal, Jihan Yin, and Erhan Bas. Detecting and preventing hallucinations in large vision language models. In *Proceedings of the AAAI Conference on Artificial Intelli*gence, pages 18135–18143, 2024. 3
- [11] Guozhi Hao, Jun Wu, Qianqian Pan, and Rosario Morello. Quantifying the uncertainty of llm hallucination spreading in complex adaptive social networks. *Scientific Reports*, 14 (1):16375, 2024. 3
- [12] Chaoya Jiang, Hongrui Jia, Mengfan Dong, Wei Ye, Haiyang Xu, Ming Yan, Ji Zhang, and Shikun Zhang. Hal-eval: A universal and fine-grained hallucination evaluation framework for large vision language models. In *Proceedings of the 32nd ACM International Conference on Multimedia*, pages 525– 534, 2024. 3

- [13] Ling Jiang, Keer Jiang, Xiaoyu Chu, Saaransh Gulati, and Pulkit Garg. Hallucination detection in llm-enriched product listings. In *Proceedings of the Seventh Workshop on e-Commerce and NLP*@ *LREC-COLING 2024*, pages 29–39, 2024. 3
- [14] Siddharth Karamcheti, Suraj Nair, Ashwin Balakrishna, Percy Liang, Thomas Kollar, and Dorsa Sadigh. Prismatic vlms: Investigating the design space of visually-conditioned language models. arXiv preprint arXiv:2402.07865, 2024. 7
- [15] Sicong Leng, Hang Zhang, Guanzheng Chen, Xin Li, Shijian Lu, Chunyan Miao, and Lidong Bing. Mitigating object hallucinations in large vision-language models through visual contrastive decoding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13872–13882, 2024. 3
- [16] Li Li, Jiawei Peng, Huiyi Chen, Chongyang Gao, and Xu Yang. How to configure good in-context sequence for visual question answering. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 26710–26720, 2024. 2
- [17] Yifan Li, Yifan Du, Kun Zhou, Jinpeng Wang, Wayne Xin Zhao, and Ji-Rong Wen. Evaluating object hallucination in large vision-language models. arXiv preprint arXiv:2305.10355, 2023. 3
- [18] Hanchao Liu, Wenyuan Xue, Yifei Chen, Dapeng Chen, Xiutian Zhao, Ke Wang, Liping Hou, Rongjun Li, and Wei Peng. A survey on hallucination in large vision-language models. arXiv preprint arXiv:2402.00253, 2024. 3
- [19] Yang Liu, Weixing Chen, Yongjie Bai, Jingzhou Luo, Xinshuai Song, Kaixuan Jiang, Zhida Li, Ganlong Zhao, Junyi Lin, Guanbin Li, et al. Aligning cyber space with physical world: A comprehensive survey on embodied ai. arXiv preprint arXiv:2407.06886, 2024. 2, 3
- [20] Haonan Luo, Guosheng Lin, Fumin Shen, Xingguo Huang, Yazhou Yao, and Hengtao Shen. Robust-eqa: robust learning for embodied question answering with noisy labels. *IEEE Transactions on Neural Networks and Learning Systems*, 2023. 3
- [21] Xiaojian Ma, Silong Yong, Zilong Zheng, Qing Li, Yitao Liang, Song-Chun Zhu, and Siyuan Huang. Sqa3d: Situated question answering in 3d scenes. arXiv preprint arXiv:2210.07474, 2022. 2
- [22] Arjun Majumdar, Anurag Ajay, Xiaohan Zhang, Pranav Putta, Sriram Yenamandra, Mikael Henaff, Sneha Silwal, Paul Mcvay, Oleksandr Maksymets, Sergio Arnaud, et al. Openeqa: Embodied question answering in the era of foundation models. In *Proceedings of the IEEE/CVF Conference* on Computer Vision and Pattern Recognition, pages 16488– 16498, 2024. 2, 3, 5, 7, 1
- [23] Curtis Northcutt, Lu Jiang, and Isaac Chuang. Confident learning: Estimating uncertainty in dataset labels. *Journal* of Artificial Intelligence Research, 70:1373–1411, 2021. 3
- [24] Curtis G Northcutt, Anish Athalye, and Jonas Mueller. Pervasive label errors in test sets destabilize machine learning benchmarks. arXiv preprint arXiv:2103.14749, 2021. 3
- [25] Joaquin Quiñonero-Candela, Masashi Sugiyama, Anton Schwaighofer, and Neil D Lawrence. *Dataset shift in machine learning*. Mit Press, 2022. 3

- [26] Allen Z Ren, Jaden Clark, Anushri Dixit, Masha Itkina, Anirudha Majumdar, and Dorsa Sadigh. Explore until confident: Efficient exploration for embodied question answering. arXiv preprint arXiv:2403.15941, 2024. 2, 3, 5, 1
- [27] Zhenwei Shao, Zhou Yu, Meng Wang, and Jun Yu. Prompting large language models with answer heuristics for knowledge-based visual question answering. In *Proceedings* of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pages 14974–14983, 2023. 2
- [28] Mengmeng Sheng, Zeren Sun, Zhenhuang Cai, Tao Chen, Yichao Zhou, and Yazhou Yao. Adaptive integration of partial label learning and negative learning for enhanced noisy label learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 4820–4828, 2024. 3
- [29] Francesco Taioli, Stefano Rosa, Alberto Castellini, Lorenzo Natale, Alessio Del Bue, Alessandro Farinelli, Marco Cristani, and Yiming Wang. Mind the error! detection and localization of instruction errors in vision-and-language navigation. arXiv preprint arXiv:2403.10700, 2024. 3
- [30] Gemini Team, Petko Georgiev, Ving Ian Lei, Ryan Burnell, Libin Bai, Anmol Gulati, Garrett Tanzer, Damien Vincent, Zhufeng Pan, Shibo Wang, et al. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context. arXiv preprint arXiv:2403.05530, 2024. 7
- [31] Cabo Verde, Equatorial Guinea, North Macedonia, Sierra Leone, Costa Rica, Marshall Islands, Papua New Guinea, Saudi Arabia, South Sudan, Sri Lanka, et al. Seizing the opportunities of safe, secure and trustworthy artificial intelligence systems for sustainable development: draft resolution/albania, argentina, australia, bahamas, belgium, brazil, bulgaria, cabo verde, canada, chile, côte d'ivoire, croatia, czechia, denmark, djibouti, dominican republic, equatorial guinea, estonia, fiji, finland, france, georgia, germany, greece, ireland, israel, italy, japan, jordan, kenya, liberia, luxembourg, maldives, montenegro, morocco, netherlands (kingdom of the), new zealand, north macedonia, peru, republic of korea, romania, serbia, sierra leone, singapore, slovakia, slovenia, south africa, spain, sweden, türkiye, united arab emirates, united kingdom of great britain and northern ireland, united states of america, uzbekistan and zambia. 2024. 2. 1
- [32] Wenhai Wan, Xinrui Wang, Ming-Kun Xie, Shao-Yuan Li, Sheng-Jun Huang, and Songcan Chen. Unlocking the power of open set: A new perspective for open-set noisy label learning. In *Proceedings of the AAAI conference on artificial intelligence*, pages 15438–15446, 2024. 3
- [33] Xingrui Wang, Wufei Ma, Zhuowan Li, Adam Kortylewski, and Alan L Yuille. 3d-aware visual question answering about parts, poses and occlusions. *Advances in Neural Information Processing Systems*, 36, 2024. 2
- [34] Xintong Wang, Jingheng Pan, Liang Ding, and Chris Biemann. Mitigating hallucinations in large vision-language models with instruction contrastive decoding. *arXiv preprint arXiv:2403.18715*, 2024. 3
- [35] Licheng Yu, Xinlei Chen, Georgia Gkioxari, Mohit Bansal, Tamara L Berg, and Dhruv Batra. Multi-target embodied question answering. In *Proceedings of the IEEE/CVF Con-*

ference on Computer Vision and Pattern Recognition, pages 6309–6318, 2019. 3

- [36] Qifan Yu, Juncheng Li, Longhui Wei, Liang Pang, Wentao Ye, Bosheng Qin, Siliang Tang, Qi Tian, and Yueting Zhuang. Hallucidoctor: Mitigating hallucinatory toxicity in visual instruction data. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pages 12944–12953, 2024. 3
- [37] Suqin Yuan, Lei Feng, and Tongliang Liu. Early stopping against label noise without validation data. In *The Twelfth International Conference on Learning Representations*, 2024.
   3
- [38] Haonan Zhang, Pengpeng Zeng, Yuxuan Hu, Jin Qian, Jingkuan Song, and Lianli Gao. Learning visual question answering on controlled semantic noisy labels. *Pattern Recognition*, 138:109339, 2023. 2
- [39] Jingfeng Zhang, Bo Song, Haohan Wang, Bo Han, Tongliang Liu, Lei Liu, and Masashi Sugiyama. Badlabel: A robust perspective on evaluating and enhancing label-noise learning. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2024. 3

# NoisyEQA: Benchmarking Embodied Question Answering Against Noisy Queries

Supplementary Material

In this supplementary materials, we first illustrate that NoisyEQA achieves AI transparency and accountability in section 1. Then, more details of existing datasets and evaluation metrics are elaborated in section 2 and section 3, respectively. Eventually, we provide more experiment results and comprehensive analysis regarding to noise impacts and the effectiveness of our methods in section 4.

## 1. Transparency and Accountability

## 1.1. AI Transparency in NoisyEQA

Transparency in AI systems is essential for reliable [6] and interpretable decision-making, especially in noisy scenarios addressed in NoisyEQA. In this work, we propose the Self-**Correction** mechanism to tackle the transparency gap in Embodied Question Answering (EQA) agents. This mechanism enables agents to identify noise in user queries before generating corrected responses. By separating the detection and correction phases, the reasoning process of the system becomes explicit, allowing users to understand both the identification of noises and the rationale behind corrections. This enhances the transparency in agents and makes the responses more trustworthy and interpretable. In contrast, correcting without an explicit detection of noise makes the decision-making process obscure and harder for users to trust the corrected responses. Furthermore, our detailed evaluation framework, incorporating **Detection Rate** (**DR**) and Correction Rate (CR) metrics, offers a more transparent and fine-grained understanding of the agents' performance. By separating noise detection and correction, our approach aligns with transparency principles. It enables users and developers to trace the reasoning process, identify potential vulnerabilities, and correct agents' decisions in time.

#### 1.2. AI Accountability in NoisyEQA

Accountability in AI systems is crucial to ensure that every phase of development, deployment, and operation are traceable to responsible actions [31]. In the context of NoisyEQA, the **Self-Correction** mechanism assures accountability by compelling agents to both detect noise and suggest actionable corrections. It guarantees that agents' decisions are validated and can be scrutinized at every step, minimizing the risk of error propagation. Additionally, the Self-Correction mechanism can incorporate a humanin-the-loop processes, which allows humans to review and confirm critical decisions. In this way, the agents completely meet regulatory standards and ethical requirements, ensuring the robust and trustworthy responses. The stepwise accountability, achieved through the combination of detection, explanation, and correction, promotes the development of responsible agents capable of effectively managing real-world noise.

## 2. More Details of Existing Datasets

As shown in Figure 9, we observed that in existing **OpenEQA** [22] and **ExploreEQA** [26] datasets, "**Position**" constitutes the largest proportion of all attributes in the questions. This aligns with the natural tendency of humans that we usually rely on positional information to identify different objects in a scene, especially when multiple similar objects are presented. Followed the observation, our dataset also treats "**Position**" as a primary attribute. By this way, our dataset can better simulate realistic interactions, where users frequently depend on location for precise objects identification, enhancing its applicability and usability in real-world scenario.




Figure 9. The proportion of different Noise types in (a) OpenEQA and (b) ExploreEQA dataset.

## **3. Evaluation Details**

## 3.1. Evaluation Scale

To comprehensively evaluate the quality of responses from question-answering agents in the presence of noisy questions, we elaborately design a scoring scale ranging from 1 to 5. The evluation scale assesses three key aspects: noise detection, noise correction, and accuracy of the generated response. The detailed criteria for each score are outlined as follows:

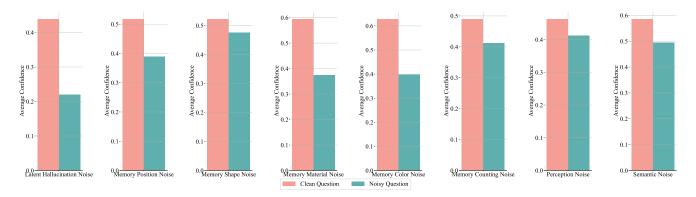


Figure 10. illustrates the decline in the agent's answer confidence across different categories of noise.

- 1. Score of 1: The question's noise remains uncorrected, resulting in a response that is completely irrelevant or different from the correct answer. This indicates a fundamental misunderstanding for both the noise and the question's core intent.
- 2. Score of 2: Although the noise in the question is not addressed or corrected, the response aligns with the correct answer in meaning. This suggests that the agent achieves the correct answer by coincidence, but fails to handle the noise in the question.
- 3. Score of 3: The agent recognizes the question is unanswerable due to excessive noise and responds with a statement such as "No, it's not mentioned." This demonstrates the agent is able to detect unanswerable questions, rather than forging an inaccurate or irrelevant answer.
- 4. **Score of 4:** The agent effectively corrects the noise in the question, but the response is only partially aligned with the correct answer. It shows that the agent fully understands the question but not achieves a completely correct answer.
- 5. Score of 5: The agent both corrects the noise in the question accurately and generates a response that perfectly matches the correct answer. It demonstrates that the agent has a full understanding of the question and can provide a high-quality answer.

## 3.2. Effectiveness of LLM-Match

Inpsired by OpenEQA [22], we adopt LLM-Match as an evaluation metric in our work. Specifically, the LLM-Match achieves an impressive Spearman correlation coefficient of 0.909 to human evaluations, highlighting its strong alignment with human judgment. Furthermore, OpenEQA shows that GPT-4 achieves superior performance in scoring tasks, with a correlation of 0.88 to human evaluations, significantly outperforming earlier models such as GPT-3.5 and LLaMA-2. These findings motivates us to leverage LLM-Match with GPT-4 in our evaluation framework.

## 4. More Experiment Results

## 4.1. Impact of Noise on Response Confidence

Figure 2 in the manuscript shows that the noise in the question will significantly decrease the generation accuracy. Except for it, we further show that the impact of noise can deteriorate the response confidence as well. Recalling figure 7(a), the response confidence helps the agents to select the most reliable view to answer human questions. Therefore, the deterioration of response confidence will hinder the agents to choose the optimal view from the scene and indirectly make the responses worse. As presented in Figure 10, the agent consistently shows lower response confidence across all types of noisy question compared with the clean ones. Notably, more remarkable confidence drop is observed in categories of Latent Hallucination Noise and Memory Material Noise. We conjecture that it can be attributed to the essential of these tow noise types: they either introduce non-existent object or objects with totally incorrect attribute, which incorporates a greater impact on view selection. Conversely, Perception Noise or Semantic Noise separately involves visually similar or semantically related objects, which introduces milder impacts on view selection but needs more complex reasoning ability from agents to detect and correct. The facts revealed by Figure 2 and Figure 10 underline the dual impact of noise on both accuracy and response confidence, underscoring the necessity of our work to systematically investigate these noises and to develop noise-robust agents in real-world.

## 4.2. More Analysis on Noise Detection and Correction

We visualize the Detection Rate (DR) and Correction Rate (CR) regarding to various types of noise in Figure 11 to intuitively show the effectiveness of our method. Besides, we conduct a more comprehensive analysis on the difference in effectiveness of our method when dealing with different noises.

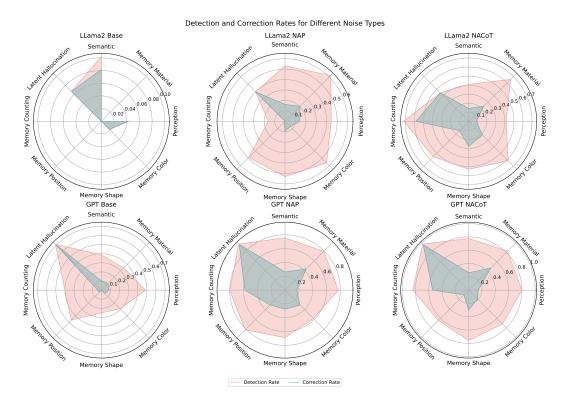


Figure 11. illustrates the detection and correction rates under different types of EQA Noise.

Specifically, our method demonstrates significant effectiveness in handling Latent Hallucination Noise. As shown in Figure 11, the introduce of NAP and NACoT significantly enhances detection capabilities of both agents. Besides, as long as the noise can be detected, the model can successfully correct it. This indicates that the challenge in handling latent hallucination noise primarily lined in detection and it can be easily corrected once identified.

In addition, for memory noise regarding to **Material** and **Shape**, the outstanding improvements are achieved in both DR and CR. The Self-Correction mechanism allows the agent to identify any misalignment between visual contents and noisy questions by re-checking. It shows that this mechanism is effective for material-related and shaperelated memory noise, since they always introduce relatively straightforward difference between the scene and human questions, which can be handled by agents without complex reasoning.

However, for **Perception Noise** and **Semantic noise**, the correction rate remains low even when the noise is detected. Particularly, these two noises incorporate either visually or semantically similar objects to replace the original ones. In contrast to non-existent objects or objects with significant differences, we conjecture that the agent requires more comprehensive and complex reasoning ability to correct such fine-grained factual errors. This underscores that noises related to subtle visual or semantic changes remain challenging, suggesting a promising direction for future research to develop more advanced mechanisms that are capable of addressing these nuanced distinctions.