

Oblivious Robots Under Sequential Schedulers: Universal Pattern Formation

Paola Flocchini¹, Alfredo Navarra², Debasish Pattanayak¹, Francesco Piselli², Nicola Santoro³

¹ School of Electrical Engineering and Computer Science, University of Ottawa, Canada,
paola.flocchini@uottawa.ca; drdebmath@gmail.com

² Department of Mathematics and Computer Science, University of Perugia, Perugia, Italy,
alfredo.navarra@unipg.it; francesco.piselli@unifi.it

³ School of Computer Science, Carleton University, Canada, santoro@scs.carleton.ca

Abstract. We study the computational power that oblivious robots operating in the plane have under *sequential* schedulers. We show that this power is much stronger than the obvious capacity these schedulers offer of breaking symmetry, and thus to create a leader. In fact, we prove that, under any sequential scheduler, the robots are capable of solving problems that are unsolvable even with a leader under the fully synchronous scheduler \mathcal{FSYNC} . More precisely, we consider the class of *pattern formation* problems, and focus on the most general problem in this class, **Universal Pattern Formation** (UPF), which requires the robots to form *every* pattern given in input, starting from *any* initial configurations (where some robots may occupy the same point). We first show that UPF is *unsolvable* under \mathcal{FSYNC} , even if the robots are endowed with additional strong capabilities (multiplicity detection, rigid movement, agreement on coordinate systems, presence of a unique leader). On the other hand, we prove that, except for point formation (**Gathering**), UPF is *solvable* under any sequential scheduler without any additional assumptions. We then turn our attention to the **Gathering** problem, and prove that weak multiplicity detection is necessary and sufficient for solvability under sequential schedulers. The obtained results show that the computational power of the robots under \mathcal{FSYNC} (where **Gathering** is solvable without any multiplicity detection) and that under sequential schedulers are *orthogonal*.

1 Introduction

Distributed systems composed of a set \mathcal{R} of autonomous mobile robots operating in Euclidean spaces, have been the object of rather extensive investigations in theoretical computer science since their introduction in [26]. Robots operate performing *Look-Compute-Move* cycles; in each cycle, a robot observes the location of the other robots (*Look*), executes its algorithm to determine a destination (*Compute*), and moves towards the computed destination (*Move*). Several formal models have been proposed, describing different levels of computation capabilities of the robots. In this paper we consider the standard model, **OBLLOT**, which describes the computationally weakest robots (e.g., see [2,14,20,27]). In this model, the robots are *anonymous*: they are indistinguishable by their appearance and do not have distinct identities; *disoriented*: they may not agree on a common coordinate system; *silent*: they have no means of direct communication; and they are *oblivious*: at the beginning of each cycle, a robot has no memory of past actions and computations.

As for other distributed systems, the main research objective is the determination of what is computable, under what conditions, and at what cost; the main goal is to identify the minimal capabilities needed by the robots for the system to be able to solve a given problem or perform an assigned task. Our focus is on deterministic computations. The feasibility of a

task and the solvability of a problem are influenced by several specific factors. However, the most determinant one concerns the nature of the timing of the robots actions imposed by the adversarial environment in which the robots operate.

Sequential Schedulers. The timing of when a robot is active and performs a cycle as well as the duration of each action within a cycle is determined by an adversary, called *scheduler*. There are two general classes of schedulers, the asynchronous and the synchronous ones; in both classes, all schedulers must respect the *fairness*: every robot is activated infinitely often.

In the *asynchronous* class (ASYNC), each robot may be activated at arbitrary times, independently of the others, and the duration of each operation in the cycle is finite but possibly unpredictable, and might be different in different cycles. In this class, the standard scheduler investigated in the literature is the one with unrestricted adversarial power; called simply (*fully*) *asynchronous* and denoted by \mathcal{ASYNC} , it was introduced in [16]. A few other schedulers in this class have also been investigated (see, e.g., [5,19,22]).

In the *synchronous* class (SYNCH), time is logically divided into a sequence of *rounds*. In each round, the scheduler activates a non-empty subset of the robots, and they perform each phase of their *Look-Compute-Move* cycle simultaneously, in perfect synchrony. Thus the only distinction between one synchronous scheduler and another is their *adversarial power*, i.e., the amount of freedom it has in the choice of which robots to activate in each round. In this class, the standard scheduler is the one with unrestricted adversarial power, known as *semi-synchronous*, denoted by \mathcal{SSYNCH} , introduced in [26]. At the other end of the spectrum, there is the very popular *fully-synchronous* scheduler, denoted by \mathcal{FSYNCH} , where all robots are activated in every round; that is, the scheduler has no adversarial power.

An (apparently) intuitive consequence of this view is that, since \mathcal{FSYNCH} has no adversarial power, the computational power of the robots under \mathcal{FSYNCH} is the strongest.⁴ Such an intuition is however erroneous. Indeed there are schedulers in SYNCH that allow robots to solve important problems unsolvable under \mathcal{FSYNCH} . Such is the subclass of *sequential* schedulers, $\mathcal{SEQUENTIAL} \subset \mathcal{SYNCH}$, where only a single robot is activated in each round.

An immediate obvious computational advantage that such schedulers offer the robots is that they allow them to break symmetry (and thus, e.g., elect a leader), a task impossible to achieve under \mathcal{FSYNCH} when starting from a symmetric configuration. In spite of this remarkable fact, very little is known on the computational power of robots under sequential schedulers; in fact, unlike the interest shown on sequential schedulers in fields like self-stabilization (where they are called *centralized*) and cellular automata (where they are called *asynchronous*), in the field of mobile robots on the plane they have been analyzed mainly in the area of fault-tolerance (where they are called *centralized*) limited to the problems of gathering and scattering (see [9] for a recent survey).

In this paper we analyze the adversarial power of the schedulers in $\mathcal{SEQUENTIAL}$ and show their impact with respect to the large and important class of *Pattern Formation* problems. In particular, we focus on the ability of robots to solve those problems under the $\mathcal{SEQUENTIAL}$ scheduler with the strongest adversarial power, henceforth denoted by \mathcal{SEQ} .

⁴ I.e., the problems solvable under \mathcal{FSYNCH} include all the ones solvable under any other synchronous scheduler.

Pattern Formation. *Pattern formation* refers to the abstract problem of the robots rearranging themselves so that, at some point in time, the set of their locations in the plane (the *configuration*) satisfies some geometric predicate given in input (the *pattern*) and no longer move. Typically, the pattern is specified as a set of points \hat{P} representing some geometric figure that the robots must form (irrespective to rotation, reflection, translation or scaling). In some applications, forming a specific pattern (e.g., a line, a circle, as in [10,11,15]) may be the first step of a more complex task (e.g., flocking, sweep, search, etc.).

Due to their importance, the class of pattern formation problems has been extensively studied under a number of different assumptions. A very special role in this class is held by *point formation*; that is, the problem of forming the pattern consisting of a single point, i.e., $|\hat{P}| = 1$. It is relevant because it corresponds to the important coordination problem, extensively studied in the literature, called **Gathering** or **Rendezvous**, requiring all robots to meet at the same location, not fixed in advance (see, e.g., [1,7,13,21,23,24,25]). The class of pattern formation problems is quite large, not only because of the different types of geometric patterns that can be formed, many requiring special ad-hoc techniques for their formation (if at all possible), but also for wide range of more general research questions it poses. These include, for a specific adversarial scheduler: under what conditions can all patterns be formed, what patterns are formable from a given initial configuration, what patterns are formable from any initial configuration; in such investigations, the positive answers are usually established through the design of algorithms that allow the robots to form the claimed patterns.

Clearly, to form a pattern, there must be at least as many robots as there are points in the pattern, i.e., $|\mathcal{R}| \geq |\hat{P}|$; we shall call this the *trivial assumption*. Most of the research has however relied on a variety of non-trivial assumptions, such as: the robots occupy distinct initial locations; the number of robots is equal to the number of points in the pattern, $|\mathcal{R}| = |\hat{P}|$; the robots have some agreement on coordinate systems or chirality; one of the robots is visibly different from all the others (i.e., there is a *leader*), etc. (see, e.g., [3,4,6,12,15,17]).

In this paper we are interested in the most general problem in this class, **Universal Pattern Formation** (UPF), which requires the robots to form *every* pattern given in input starting from *any* initial configurations, regardless of their number, of the locations they initially occupy, and of the number of points in the pattern, and we are interested in satisfying only the trivial assumption with the minimal robots capabilities.

Contributions. In this paper we bring to light the very strong computational power that robots have under the SEQUENTIAL class of schedulers in regards to pattern formation problems, and analyze the adversarial power of sequential schedulers in comparison to that of the other synchronous schedulers studied in the literature.

We do so by focusing on the general UPF problem. We prove that this problem is *unsolvable* under \mathcal{FSYNC} (and, thus, under \mathcal{SSYNC}), even if the robots are empowered with strong multiplicity detection (i.e., robots can detect the exact number of robots occupying the same location), their movements are rigid (i.e., they always reach their destination regardless of the distance), have total agreement on the coordinate system, and there is a unique leader robot (i.e., distinguishable from all others), see Section 3.

On the other hand, in Section 4 we prove that, except for point formation, the **Universal Pattern Formation** problem is *solvable* under any sequential schedulers without any additional assumptions on the computational capabilities of the robots, namely even if they are

unable of multiplicity detection, their movements are non-rigid, they have no agreement on coordinate system nor on chirality, and are all identical. The proof is constructive: we present a solution protocol, prove its correctness, and analyze its time complexity. These results indicate the strong impact that the presence of a sequential scheduler can have on the computational power of the robots, allowing them to solve, with minimal capabilities, problems unsolvable even under \mathcal{FSYNC} with stronger power and a leader.

Then, in Section 5, we turn our attention to the point formation or **Gathering** problem. This is known to be unsolvable under \mathcal{SSYNC} even with strong multiplicity detection (i.e., a robot can detect the exact number of robots in each point). In contrast, we prove that, under any sequential scheduler, the problem becomes solvable with weak multiplicity detection (i.e., a robot can detect only whether a point is occupied by one or more than one robot). We also prove that, without weak multiplicity detection, the problem, while solvable under \mathcal{FSYNC} , is unsolvable under \mathcal{SEQ} . The obtained results prove that the computational power of the robots under \mathcal{SEQ} and that under \mathcal{FSYNC} are *orthogonal*.

2 Model and Terminology

We consider the standard *OBLLOT* model of distributed systems of autonomous mobile robots (e.g., see [14]).

Robots. The system is composed of a set $\mathcal{R} = \{r_1, r_2, \dots, r_n\}$ of computational *robots*, moving and operating in the Euclidean plane \mathbb{R}^2 . Viewed as points, the robots can move freely and continuously in the plane. A robot is endowed with motorial and computational abilities, a private coordinate system of which it perceives itself at the origin, and sensorial devices that allow it to observe the positions of the other robots with respect to its local coordinate system. When active, a robot performs a *Look-Compute-Move* cycle:

1. *Look:* The robot obtains an instantaneous snapshot of the positions occupied by the robots expressed within a private coordinate system;
2. *Compute:* The robot executes its built-in deterministic algorithm, the same for all robots, using the snapshot as input; the result of the computation is a destination point;
3. *Move:* The robot moves towards the computed destination. If the destination is the current location, the robot stays still.

The duration of each cycle is finite. Robots are *autonomous*: they operate without a central control or external supervision; *identical*: they are indistinguishable by their appearance and do not have distinct identities that can be used during the computation; *disoriented*: they may not agree on a common coordinate system nor on chirality (a clockwise orientation of the plane); *silent*: they have no means of direct communication of information to other robots, so any communication occurs in a totally implicit manner, by moving and by observing the positions of the other robots; and they are *oblivious*: at the beginning of each cycle, a robot has no memory of past actions and computations, so the computation is based solely on what determined in the current cycle.

Movements are said to be *rigid* if the robots always reach their destination in the same round they started moving. They are said to be *non-rigid* if they may be unpredictably stopped by an adversary whose only limitation is the existence of $\delta > 0$, unknown to the

robots, such that if the destination is at distance at most δ , the robot will reach it, otherwise it will move at least δ towards the destination.

More than one robot can be at the same point at the same time; such a point is said to be a *multiplicity*. The robots are said to be capable of *multiplicity detection* if they can determine whether or not points are multiplicities; multiplicity detection is said to be *strong* if a robot can determine the exact number of robots located at a point, *weak* otherwise.

Schedulers. The timing of when a robot becomes active as well as the duration of *Compute* and *Move* phases within each cycle, and the rate of motion within each *Move* phase, is viewed as determined by an adversarial *scheduler*. The shortest period of time in which all the robots have finished at least one cycle is called *epoch*. There are two classes of schedulers, the asynchronous and the synchronous ones.

In the *asynchronous* class (ASYNCH), each robot may be activated at arbitrary times, independently of the others, the duration of each *Compute* and *Move* phase is finite but unpredictable, and might be different in different cycles. Traditionally, the scheduler in this class with strongest adversarial power is simply called asynchronous and denoted by \mathcal{ASYNCH} .

In the *synchronous* class (SYNCH), time is logically divided into *rounds*. In each round, the scheduler activates a non-empty subset of the robots, and they perform each phase of their *Look-Compute-Move* cycle simultaneously, in perfect synchrony. Clearly, $\text{SYNCH} \subset \text{ASYNCH}$.

Given a synchronous scheduler $\mathcal{S} \in \text{SYNCH}$ and a set of robots \mathcal{R} , an *activation sequence* of \mathcal{R} by (or, under) \mathcal{S} is an infinite sequence $E = \langle R_1, R_2, \dots, R_i, \dots \rangle$, where $R_i \subseteq \mathcal{R}$ denotes the set of robots activated in round i , satisfying the *fairness constraint*: $(\forall r \in \mathcal{R}, \exists R_i : r \in R_i)$ **and** $(\forall i \geq 1, r \in R_i \Rightarrow \exists j > i : r \in R_j)$.

Let $\mathcal{E}(\mathcal{S}, \mathcal{R})$ denote the set of all activation sequences of \mathcal{R} by \mathcal{S} . We shall denote by \mathcal{SSYNCH} the synchronous scheduler, traditionally called *semi-synchronous*, without any other restriction (and, thus, with the strongest adversarial power in this class). The special *fully-synchronous* scheduler \mathcal{FSYNCH} , which activates every robot in every round (i.e., a round coincides with an epoch) corresponds to further restricting the activation sequences by: $\forall i \geq 1, R_i = \mathcal{R}$. Note that this activation scheduler has no adversarial power.

The class of *sequential* schedulers $\text{SEQUENTIAL} \subset \text{SYNCH}$ is defined by the restriction: $\forall i \geq 1, |R_i| = 1$, that is, only one robot is activated in each round. We shall denote by \mathcal{SEQ} the sequential scheduler without any other restriction (and, thus, with strongest adversarial power). We remind that the fairness constraint is common to every scheduler.

Pattern Formation Problems. A *configuration* $C(t)$ is the *multiset* of the locations of the robots at time t . Let $Q(t) = \{q_1, q_2, \dots, q_m\}$ be the corresponding *set* of unique points occupied by the robots at time t , where $m \leq n$.

Since robots can only observe the positions of others and move, in the *OBLLOT* model, a *problem* to be solved is typically expressed in terms of a *temporal geometric predicate*, which the configuration formed by the robot positions must satisfy from some time on.

A *pattern* $\hat{P} = \{\hat{p}_1, \hat{p}_2, \dots, \hat{p}_k\} \subset \mathbb{R}^2$ is a set of distinct points. A pattern P' is said to be *isomorphic* to a pattern P'' if P'' can be obtained by a combination of translation, rotation, reflection and scaling of pattern P' . We shall denote by $\mathcal{B}(\hat{P})$ the (infinite) set of patterns isomorphic to P . We say the robots have *formed* a pattern \hat{P} at time t , if the configuration $C(t)$ is such that $Q(t) \in \mathcal{B}(\hat{P})$.

The class of *Pattern Formation* problems is quite large, not only because of the different types of geometric patterns that can be formed, many types requiring special ad-hoc techniques for their formation (if at all possible), but also for the scope of the requirements.

The most general problem in this class is **Universal Pattern Formation** (UPF) that requires the robots, executing the same algorithm and starting from any arbitrary initial configuration $C(0)$, to form any arbitrary pattern \hat{P} , given as its sole input and no longer move. It is defined by the predicate:

$$\begin{aligned} \text{UPF} \equiv & \forall \hat{P} \subset \mathbb{R}^2, \forall n \geq |\hat{P}|, \forall C(0) \in \mathbb{R}_n^2, \\ & \exists t \geq 0 : (Q(t) \in \mathcal{B}(\hat{P})) \text{ and } (\forall t' > t, C(t') = C(t)). \end{aligned}$$

A particular instance is the problem of forming the pattern consisting of a single point, i.e., $|\hat{P}| = 1$. This problem is special because it corresponds to the important coordination problem, called **Gathering** or **Rendezvous**, of having all robots meet at the same location, not fixed in advance (see [13] for a recent survey); it is defined by the predicate:

$$\begin{aligned} \text{Gather} \equiv & \forall n \in \mathbb{Z}^+, \forall C(0) \in \mathbb{R}_n^2, \\ & \exists t \geq 0 : (|Q(t)| = 1) \text{ and } (\forall t' > t, Q(t') = Q(t)), \end{aligned}$$

where \mathbb{R}_n^2 denotes all possible set of n points. Due to its particular nature, the **Gathering** problem has been treated in the literature differently from all other cases of pattern formation where $|\hat{P}| > 1$. Also in this paper we shall make the same distinction, and refer to the case $|\hat{P}| > 1$ of UPF as UPF*.

3 Impossibilities for UPF under \mathcal{FSYNC}

In this section, we show that UPF is unsolvable under the fully-synchronous scheduler \mathcal{FSYNC} , and, thus, under \mathcal{ASYNC} and \mathcal{SSYNC} .

Theorem 1. *UPF is unsolvable under \mathcal{FSYNC} even if the robots have strong multiplicity detection, share the same coordinate system, their movements are rigid, and one of them is distinguishable from all others.*

Proof. By contradiction, let \mathcal{A} be a solution protocol for UPF. Consider an initial configuration $C(0)$ where there is a multiplicity composed by non-leader robots and $|Q(0)| < |\hat{P}|$. Consider an execution of \mathcal{A} . Under \mathcal{FSYNC} , since all robots share the same coordinate system, the non-leader robots composing the multiplicity have the same view in the *Look* phase; thus, they will compute the same destination and reach it at the end of the cycle because of the rigid movement, continuing to be co-located. In other words, during the execution of \mathcal{A} , separate groups of non-leader robots may become co-located, but it is impossible for co-located non-leader robots to separate; as for the leader robot, in each round, it might become co-located with non-leader robots, or remain alone.

In other words, in this execution, $|Q(t)| \leq |Q(0)|$ for all $t > 0$. Since $|Q(0)| < |\hat{P}|$, it follows that the robots will never be able to form \hat{P} , contradicting the correctness of \mathcal{A} . \square

On the other hand, it is known that the special case of **Gathering** is solvable under \mathcal{FSYNC} without any additional robot capability [8].

4 Possibility for UPF* under \mathcal{SEQ}

In this section, we study the **Universal Pattern Formation** problem under the \mathcal{SEQ} scheduler in the case $|\hat{P}| > 1$ (i.e., UPF*) and prove that it is solvable even if the robots have no additional capabilities. We do so by presenting a solution algorithm under the \mathcal{SEQ} scheduler when the robots have no multiplicity detection, no agreement on coordinate systems nor chirality, their movements are non-rigid, $|\mathcal{R}|$ is unknown, and $|\hat{P}| \geq 5$. The case where $|\hat{P}| < 5$ will be addressed in the subsequent section.

We start by introducing some important terminology; we then present the algorithm, prove its correctness, and discuss its complexity.

4.1 Terminology and Preliminaries

The *Smallest Enclosing Circle* of $C(t)$ is the circle of smallest radius such that every point of $Q(t)$ lies on the circle or in its interior; it is denoted by $SEC(Q(t))$. Let $\rho(t)$ and $c(Q(t))$ denote the radius and the center of $SEC(Q(t))$, respectively. In the following, should no ambiguity arise, the temporal indicator t shall be omitted (ref. Fig. 2(a) in Appendix B). Furthermore, $c(Q)$ will be also denoted simply by O .

Let $S \subset \mathbb{R}^2$ be a finite set of $l > 2$ points where no two points are *co-radial*,⁵ and let $c(S)$ be the center of $SEC(S)$.

The positions of the points of S , in the clockwise order, around $c(S)$ induce a cyclic order ψ among the points in S . Let $\psi(S) = (s_1, s_2, \dots, s_l)$ be the corresponding cyclic sequence of the points, with s_1 chosen arbitrarily, and let us denote by $\theta(s_i, s_{i+1})$ the angle, with respect to $c(S)$, between the two consecutive points s_i and s_{i+1} (ref. Fig. 2(b) in Appendix B).

Let $\theta(S) = \{\theta(s_i, s_{i+1}), \theta(s_{i+1}, s_{i+2}), \dots, \theta(s_{l-1}, s_l)\}$ be an *angle sequence* starting at s_i induced on S .

We now consider a set S' containing only robot positions Q or both Q and pattern points \hat{P} , suitably overlapped in such a way that $SEC(S') = SEC(Q) = SEC(\hat{P})$. Furthermore, if there are co-radial points, then only the most external robot position is taken in S' , if any, otherwise the most external pattern point is considered, and all other points are discarded. In this way, S' does not contain co-radial points. Still we assume $|S'| = l' > 2$. An angle sequence $\theta(S') = (\theta_1, \dots, \theta_{l'})$ is a *leader angular sequence*, denoted by $\lambda(Q)$ or $\lambda(Q \cup \hat{P})$, if (i) $\theta_1 < \min\{\theta_2, \dots, \theta_{l'}\}$, and (ii) the two adjacent points s_i and s_{i+1} defining θ_1 belong to Q , with s_i inside $SEC(Q)$ and s_{i+1} on $SEC(Q)$.

Without loss of generality, if S' admits a leader angular sequence, then the rotational direction to overlap the radius containing s_i with the radius containing s_{i+1} spanning angle θ_1 , is considered to be clockwise. Therefore, a configuration $C(t)$ (possibly overlapped with a pattern \hat{P}), inducing the set S' that admits a leader angular sequence, is asymmetric (apart for possible multiplicities) and all the robots can agree on the chirality of the system.

When S' admits a leader angular sequence, we define the “*radiangular*” distance between two points as follows. Let A and B be two points that make the clockwise (according to the leader angular sequence) angle $\theta = \angle AOB$ at O , the center of the SEC . The radiangular distance is defined by the tuple (i) $(\theta, |\overline{OA}| + |\overline{OB}|)$, if $\theta > 0$, (ii) $(0, |\overline{AB}|)$, otherwise. When A and B are not co-radial, the path of a robot from A to B consists of moving along \overline{AO}

⁵ Two points of a set S are co-radial if they reside on the same radius of the $SEC(S)$.

to reach the center O , then along \overline{OB} to reach B . When A and B are co-radial, the path is simply \overline{AB} . In both cases, the defined path is called a *radial detour*.

Let us now consider the set of pattern points \hat{P} , with $|\hat{P}| \geq 5$. Two pattern points p_i and p_{i+1} are said to be *adjacent* if they are co-radial and no other pattern point is in between them, or there is no other pattern point inside the sector defined by angle $\theta(\hat{p}_i, \hat{p}_{i+1})$ calculated in the clockwise order, and there are no other pattern points on the segments $\overline{O\hat{p}_i}$ and $\overline{O\hat{p}_{i+1}}$. Let $\alpha^{(i)}(\hat{P}) = \{(\theta(\hat{p}_i, \hat{p}_{i+1}), |\overline{O\hat{p}_i}|, |\overline{O\hat{p}_{i+1}}|), (\theta(\hat{p}_{i+1}, \hat{p}_{i+2}), |\overline{O\hat{p}_{i+1}}|, |\overline{O\hat{p}_{i+2}}|), \dots, (\theta(\hat{p}_{i-1}, \hat{p}_i), |\overline{O\hat{p}_{i-1}}|, |\overline{O\hat{p}_i}|)\}$ be the set of triples determining what we call the *clockwise pattern sequence* induced on \hat{P} starting at an arbitrary \hat{p}_i . Similarly, let $\beta^{(i)}(\hat{P}) = \{(\theta(\hat{p}_i, \hat{p}_{i-1}), |\overline{O\hat{p}_i}|, |\overline{O\hat{p}_{i-1}}|), (\theta(\hat{p}_{i-1}, \hat{p}_{i-2}), |\overline{O\hat{p}_{i-1}}|, |\overline{O\hat{p}_{i-2}}|), \dots, (\theta(\hat{p}_{i+1}, \hat{p}_i), |\overline{O\hat{p}_{i+1}}|, |\overline{O\hat{p}_i}|)\}$ be the *counter-clockwise pattern sequence*. We shall denote by $\hat{\mu}$ the lexicographical smallest of all pattern sequences $\alpha^{(i)}(\hat{P})$ and $\beta^{(i)}(\hat{P})$, $1 \leq i \leq k$. Note that, if \hat{P} admits symmetries, then there is more than one index determining the same $\hat{\mu}$.

4.2 Strategy in case $|\hat{P}| \geq 5$

When $|\hat{P}| \geq 5$, the strategy followed by the robots ideally consists of four consecutive stages: *Initialization*, *Leader Configuration*, *Partial Pattern Formation*, and *Finalization*.

The scope of the *Initialization* stage is to create a configuration C , if not already available, where the number $|Q|$ of distinct locations occupied by the robots is at least as large as the number $|\hat{P}|$ of points in the pattern, i.e., $|Q| \geq k = |\hat{P}|$. This is achieved through Procedure SEPARATE, invoked and executed as long as $|Q| < k$; its execution by an activated robot consists of the robot choosing as its destination: (i) an unoccupied point located along its own x -axis at its own unit distance, if this path does not contain other robots; or (ii) the point located along its own x -axis, at half of the distance from the closest robot along such a direction. After the activation of at most $k - 1$ distinct robots, there will be at least k distinct locations occupied by the robots. Once $|Q| \geq k$, or if it was already as such from the initial configuration, the activated robot considers the pattern at a scale such that $SEC(\hat{P})$ overlaps $SEC(Q)$, i.e., their respective radii have the same length.

In the *Leader Configuration* stage, the goal is to create a specific map, called joint configuration, that shows both the points occupied by the robots and the points of the pattern. Informally, this is done as follows. After *Initialization*, if the current configuration does not concern the special cases managed by Procedure LAST, Procedure OVERLAP is executed to verify whether the robots can agree on the same joint configuration. If such an agreement is not possible, then Procedure LEADER is executed to create a leader configuration. To do so, the activated robot moves to the center of the configuration (if not yet occupied), provided it has a free path to the center and it is not responsible for maintaining the $SEC(Q)$. Then, the robot at the center moves towards a point to create the smallest unique angle determining a leader angular sequence. Once Procedure OVERLAP returns a joint configuration, then we check if it is a leader configuration. If this is not the case, Procedure LEADER is executed to create a leader angular sequence in the joint configuration.

Subsequently, in the *Partial Pattern Formation* stage, the pattern points are filled sequentially by the robots; this is accomplished through Procedure OCCUPY. This involves the movement of suitable robots along radial detours that avoids overpassing other robots. Ideally, this stage lasts as long as only one robot position does not coincide with a pattern point.

In the *Finalization* stage, Procedure LAST is invoked when $|Q| \geq k$, any pattern point \hat{p}_i , $1 \leq i < k$ is occupied, and any robot position not located on a pattern point, is located at $\overline{O\hat{p}_k}$, i.e., the segment from O to the lowest priority pattern point \hat{p}_k . If the robot running Procedure LAST is located at $\overline{O\hat{p}_k}$, it moves towards \hat{p}_k . Moreover, whenever the activated robot detects that the current configuration matches the pattern irrespective to rotation, reflection, and translation,⁶ it does not move, i.e., the pattern is formed.

Our solution to the Pattern Formation problem is provided by means of Algorithm SEQPF, which in turn exploits five procedures, determining the four stages described above: SEPARATE (in *Initialization*), OVERLAP and LEADER (in *Leader Configuration*), OCCUPY (in *Partial Pattern Formation*) and LAST (in *Finalization*); they are individually presented and described next, their pseudocodes are given in Appendix A, and the correctness proof is in Appendix C.

Algorithm SEQPF. In this section, we describe the overall structure of the resolution algorithm SEQPF from the point of view of the robot executing it. An activated robot r , obtains a snapshot Q in the *Look* phase, and then it executes Algorithm SEQPF in its *Compute* phase. Let $q \in Q$ be the position of robot r .

The first operation the robot performs is to check if the number $|Q|$ of robots currently on distinct locations is sufficient to form the pattern. If $|Q| < k$, then it executes Procedure SEPARATE, to determine an appropriate destination point, and terminates this execution. Otherwise, it proceeds to the next step and the first thing it does is to scale the pattern \hat{P} in such a way that the radius of $SEC(\hat{P})$ has the same length ρ of the radius of $SEC(Q)$.

Whenever $|Q| \geq k$, the activated robot checks if the current configuration Q falls in one of the special cases, i.e., if it is already equivalent to the target pattern or the robot positions not coinciding with a specific pattern point are all located at $\overline{O\hat{p}_k}$. In the former case, i.e., if the configuration already satisfies the pattern, no robot moves. In the latter, Procedure LAST is invoked to finalize the formation of the pattern.

If it is not a special case, i.e., Procedure LAST returns *null*, then the activated robot computes a joint configuration, denoted by Γ , following Procedure OVERLAP to properly overlap the pattern on the current configuration.

If a joint configuration cannot be computed, i.e., $\Gamma = null$, then there must be at least a robot that can move towards O (provided it is not responsible for $SEC(Q)$ and it has a free radial path) by means of Procedure LEADER, or there must be a robot located at O . In this latter case, again Procedure LEADER is executed to create a leader configuration with a leader angular sequence.

Once Q admits a leader angular sequence, the activated robot overlaps Q and \hat{P} in a specific way creating the joint configuration Γ , and then it checks if Γ admits a leader angular sequence. If not, Procedure LEADER is executed to create a leader angular sequence in Γ . Otherwise, Procedure OCCUPY is executed. The goal of this Procedure is to move a specific robot to the highest priority empty pattern point p_l .

Once all robot positions but the lowest priority one coincide with the highest priority pattern points, then this is one of the special cases described before.

⁶ The scale has been fixed to the dimension of $SEC(Q)$.

Procedure SEPARATE. This procedure consists of a very simple operation. The activated robot r computes a point q' along its own x -axis at one unit distance. If $\overline{qq'}$ does not contain other robots, r selects as its destination q' . Otherwise, r computes the position of its closest robot q'' along its own x -axis, and selects as its destination the midpoint of $\overline{qq''}$.

Procedure LAST. As previously described, Procedure LAST is executed to manage some special cases. Once the activated robot r has verified that $|Q| \geq k$, it starts with checking if the current configuration already is the target pattern, i.e., $Q \in \mathcal{B}(\hat{P})$. Robot r checks this by rotating and reflecting the pattern as follows. Let \hat{p}_1 be a pattern point on $SEC(\hat{P})$. Consider all the robot positions $(q_1, \dots, q_s) = SEC(Q) \cap Q$ in the cyclic order of some $\psi(S')$. Let q_i be a robot position in (q_1, \dots, q_s) . The robot r overlaps the pattern point \hat{p}_1 with each of the robot positions q_i “one by one” by reflecting the pattern (across the radius $\overline{O\hat{p}_1}$). If one of these transformations exactly overlaps all the points of Q with all the points of \hat{P} , it follows that $Q \in \mathcal{B}(\hat{P})$, and r does not move. In the worst case, if all the robot positions are on the $SEC(Q)$, then r has to check at most $2k$ transformations (k rotations and k reflections).

If $|Q| \geq k$ and $Q \notin \mathcal{B}(\hat{P})$, the activated robot checks if the configuration falls into the special cases “last one”. These cases occur when pattern points \hat{p}_i , $1 \leq i < k$, are occupied and the only robot positions not on pattern points are located at $\overline{O\hat{p}_k}$, with \hat{p}_k being the lowest priority pattern point. The activated robot checks at most $2k + 2$ transformations.

The lowest priority pattern point \hat{p}_k is defined by any lexicographical smallest pattern sequence $\hat{\mu}$. Once a robot located at $\overline{O\hat{p}_k}$ is activated, it moves towards \hat{p}_k , if not yet there.

Procedure OVERLAP. When the activated robot r determines that $|Q| \geq k$ and that the configuration does not concern the special cases managed by Procedure LAST (i.e., call LAST() returns *null*), it checks if Q has a leader angular sequence $\lambda(Q)$. If this is the case, r proceeds to overlap the pattern points on the current configuration and subsequently achieve a joint configuration Γ .

Let $\nabla = \{Cir_1, Cir_2, \dots, Cir_\sigma\}$ be the set of all concentric circles, in the decreasing order of their radii, containing points of \hat{P} , and let ρ_j be the radius of Cir_j , $1 \leq j \leq \sigma$; thus $Cir_1 = SEC(\hat{P})$ and $\rho_1 = \rho$ (ref. Fig. 2(f) in Appendix B). The objective of the robot is to rotate and/or reflect \hat{P} until some points in the $SEC(Q)$ and $SEC(\hat{P})$, with specific properties, are co-located, i.e., they precisely overlap. This is done as follows.

Let $\hat{\mu}$ be the lexicographical smallest pattern sequence of \hat{P} and $\psi(\hat{P})$ be the corresponding cyclic order of points. Let \hat{p}_i be the first pattern point on the $SEC(\hat{P})$ in the cyclic order $\psi(\hat{P})$. Let q_j be the second robot position determining θ_1 in $\lambda(Q)$. The activated robot proceeds to overlap Q and \hat{P} so that q_j overlaps with \hat{p}_i and the order induced by $\hat{\mu}$ follows the clockwise direction induced by $\lambda(Q)$.

Procedure LEADER. As input, Procedure LEADER can get: a configuration Q with no leader angular sequence if $\Gamma = null$ or, a joint configuration Γ if Procedure OVERLAP has been executed from a configuration Q admitting a leader angular sequence.

The objective of LEADER is to first send a robot to O if O is empty, and then to create a leader configuration. If O is empty, then the robots that can move are the ones not responsible for the $SEC(Q)$ and that have a path with no other robot positions towards O , or if there

is a joint configuration Γ , the robot that also cannot move is the one responsible for the smallest angle θ_1 if it has no other co-radial robots.

If, instead, O is occupied by a robot, once such robot is activated, it computes ξ , the smallest angle in the input configuration, and moves to u' such that $|\overline{u'O}| = \rho/2$ and for a given $q_j \in SEC(Q)$, it forms $\angle u'Oq_j = \xi/3$.

Procedure OCCUPY. Procedure OCCUPY deals with the movement of robots to reach pattern points. Given a joint configuration Γ with leader angular sequence, the ranking of the pattern points can be established. A robot is then chosen as the one to move, i.e., the *walker*, provided it satisfies some conditions. The walker robot moves to the target pattern point via a radial detour. Recall that u' and q_j are the robot positions defining the smallest angle θ_1 with q_j on the $SEC(\Gamma)$. Let q_j be located at A . Now \overline{OA} is the radius. Consider points A_2, \dots, A_σ be the projections of A on the circles $Cir_2, Cir_3, \dots, Cir_\sigma$, respectively. For each Cir_i , the pattern points are ranked in the increasing order starting from A_i and moving following the clockwise direction induced by $\lambda(\Gamma)$ until we reach A_i again. The rank of pattern points in Cir_i is smaller than Cir_{i+1} for any $i = 1, \dots, \theta - 1$. For Cir_1 , the rank follows a different strategy. This is required in order to maintain the original SEC during the execution of the algorithm. By Procedure OVERLAP, we already have a robot at q_j , which is also the highest priority pattern point. We start at q_j as p_1 . Consider p'_1 as the antipodal point of p_1 , positioned on the SEC . If there is a pattern point at p'_1 , then that becomes p_2 . Otherwise, consider the two closest pattern points to p'_1 positioned on the SEC , going from p'_1 to p_1 , one in the counterclockwise direction and the other one in the clockwise direction. They respectively become p_2 and p_3 . The remaining pattern points on Cir_1 are assigned in the increasing order as usual. Notice that, p_1 is the smallest rank pattern point and p_k is the highest rank pattern point. Point p_k is located on Cir_σ , see Fig. 2(i) in Appendix B.

– **Defining the walker.** The walker is a robot in the current configuration that will move to occupy an unoccupied pattern point. Before we define the walker, we define an order among the robots. The order among robots uses the radiangular distance from p_1 and we say that a robot is *free* if it is not located at a pattern point. Let r' and r'' be two robots that have radiangular distance from p_1 equal to (θ', x') and (θ'', x'') , respectively. We say that r' has higher priority than r'' , if either (i) $\theta' < \theta''$, (ii) $\theta' = \theta'' \neq 0$ and $x' > x''$, or (iii) $\theta' = \theta'' = 0$ and $x' < x''$. In other words, a robot that is closer in angle to the radius $\overline{Op_1}$ has higher priority and when two (or more) robots are on the same radius, the robot that is farther from the center has higher priority.

Now, consider the radial detour from the highest priority free robot to the highest priority empty pattern point, and the radius ρ_l where such a point lies. The following could happen:

- If the radial detour and ρ_l do not contain other robots, then the highest priority free robot becomes the walker;
- If the radial detour contains another robot and ρ_l does not contain other robots, the robot with smallest radiangular distance from the target pattern point, along the computed radial detour, becomes the walker;
- Otherwise, if ρ_l contains other robots, compute the path from the highest priority free robot in ρ_l to p_l : if this path is empty, then the free robot becomes the walker, otherwise, in the computed path, the robot closest to p_l becomes the walker.

Notice that the walker has always a free path to the target pattern point and that under these restrictions, the internal robot defining θ_1 becomes the last walker since it has the largest radiangular distance from p_1 .

Also, notice that once the pattern points fixing the $SEC(\hat{P})$ are occupied by robots, the remaining robots on the $SEC(Q)$ are free to move, since they will not be necessary to maintain the SEC anymore.

– **Movement of a robot.** The movement of a robot always follows a radial detour. If a robot r is determined as the walker and its target pattern point is located on a different radius from the one where it is currently located, r first moves to the center, and then moves towards its target pattern point from the center. When r is co-radial with its target pattern point, it moves directly to that point. By definition, the walker does not have any other robot on the radial detour, and hence it can move to its target pattern point unobstructed. In Fig. 4 (in Appendix B), we show the movement of the walker to its corresponding destination.

4.3 Strategy in case $|\hat{P}| \leq 4$

In this section, we consider the case $|\hat{P}| \leq 4$. We remind also that in UPF* $|\hat{P}| > 1$. Similarly to SEQPF, the strategy to solve this case follows four stages: *Initialization*, *Unique Maximum*, *Equalization*, and *Finalization*. An activated robot r does the following:

1. If $|Q| < |\hat{P}|$, r executes Procedure SEPARATE to make $|Q| \geq |\hat{P}|$ (*Initialization* stage);
2. If Q does not admit a unique pair of points defining the maximum distance among any pair of points in Q , then the first activated robot r located at one of the points that define the current maximum distance, makes a move so as to enlarge its maximum distance (*Unique Maximum* stage);
3. Once Q admits a unique maximum distance defined by the pair $\{q_1, q_2\}$, then:
 - If $|Q| > |\hat{P}|$ then any robot not in $\{q_1, q_2\}$ moves towards the closest point among q_1 and q_2 (*Equalization* stage);
 - Else (i.e., $|Q| = |\hat{P}|$), r suitably overlaps \hat{P} with Q so as to make the pair $\{q_1, q_2\}$ coincident with one of the pairs $\{\hat{p}_i, \hat{p}_j\}$ of \hat{P} that define the maximum distance in \hat{P} . The *Finalization* stage can then start to finalize the formation of the pattern.

In the *Finalization* stage, when $|Q| = |\hat{P}|$ and Q admits a unique maximum distance defined by the pair $\{q_1, q_2\}$, the overlap is computed as follows. Without loss of generality, let \hat{p}_1 and \hat{p}_2 be two pattern points (not necessarily unique) that define the maximum distance in \hat{P} . The activated robot r overlaps the pattern by scaling it in such a way that $\overline{q_1 q_2}$ and $\overline{\hat{p}_1 \hat{p}_2}$ coincide. The pattern is considered at this scale. Now, if the activated robot r is located at q_1 or q_2 , it does not move. Consider r not located at q_1 or q_2 . There are multiple ways to overlap \hat{P} with Q . Since there are at most 4 points in the pattern, there can be at most three pairs in \hat{P} that can admit the maximum distance (three vertices of an equilateral triangle). Hence, the total number of distinct overlaps with rotation and reflection is at most 12. The activated robot computes the pattern with smallest distance deviation, i.e., the sum of distances between pattern points and robot positions. If there are two overlaps of the pattern that have the same smallest distance deviation, then r can consider one of them indiscriminately.

We define the distance deviation between two sets of points in Q and P (the corresponding overlap) as follows. Let (q_1, q_2) be the unique maximum distance pair, and let (p_1, p_2) be the corresponding maximum distance pair in the pattern. The distance deviation is given by:

1. $|\overline{p_3q_3}|$ if $|Q| = |\hat{P}| = 3$;
2. $\min(|\overline{p_3q_3}| + |\overline{p_4q_4}|, |\overline{p_4q_3}| + |\overline{p_3q_4}|)$ if $|Q| = |\hat{P}| = 4$.

Now, for each unoccupied pattern point, r determines the closest robot position, and moves towards the unoccupied pattern point from which it is the closest. Notice that, it does not move towards the empty pattern point that it is closest to, since there maybe another robot that is closer to that pattern point.

The pseudo-code of the above algorithm, called SEQPF', is given in Appendix A whereas its correctness is in Appendix D.

5 Gathering under Sequential Schedulers

In the previous section, we have seen how to solve UPF* (i.e., for $|\hat{P}| > 1$) under \mathcal{SEQ} . We now consider the case $|\hat{P}| = 1$, that is, **Gathering**. Recall that this problem is called **Rendezvous** when there are only two robots (i.e., $|\mathcal{R}| = 2$). In the literature, **Gathering** has been extensively studied. However, one of the main assumptions that has been considered was to start from initial configurations without multiplicities. Despite such an assumption, still some known results can be easily extended to the more general **Gathering** studied here, where initial configurations can admit multiplicities.

For instance, in \mathcal{FSYNC} , **Gathering** (and hence **Rendezvous** as well) can be easily solved by the `Go_to_the_center_of_SEC` algorithm (see, e.g., [8]) that makes robots move towards the center of the current *SEC*.

Concerning \mathcal{SSYNC} , it is known that **Rendezvous**, and hence **Gathering**, are unsolvable (see, e.g., [27]).

In \mathcal{SEQ} (actually in any sequential scheduler), **Rendezvous** can be easily solved by making the active robot move towards the position occupied by the other robot. Although the moving robot may not reach the destination, due to the non-rigid movements, still the distance between the two robots decreases of at least δ . Hence, as soon as the distance becomes smaller than or equal to δ , we are ensured that **Rendezvous** is accomplished. Without any additional robot capability, we can prove that this result however does not extend to **Gathering**. In fact, we show that, under a sequential scheduler, **Gathering** of more than two robots cannot be solved in general.

Theorem 2. *Gathering is unsolvable under a sequential scheduler.*

Proof. By contradiction, let \mathcal{A} be an algorithm that solves **Gathering** under a sequential scheduler $\mathcal{S} \in \text{SEQUENTIAL}$.

Consider a configuration $C(t)$ with $|\mathcal{R}| > 2$ and let $Q(t)$ be the corresponding set of distinct points. A robot r activated at time t decides its destination based on the observed set of points $Q(t)$; as a result, there are only three possible outcomes: (*Act*₁) not moving; (*Act*₂) moving to a point occupied by another robot; (*Act*₃) moving to a point not occupied by another robot. Since the robots have no multiplicity detection capabilities, this decision is

taken by a robot without knowing whether or not there are other robots located at its own position. We shall examine now the execution of \mathcal{A} starting from $Q(t)$.

Consider first the case where $|Q(t)| > 2$. Because of the assumed correctness of \mathcal{A} , and since at most one robot is moving in a round, there must exist a time $t' \geq t$ where $|Q(t')| = 2$.

Consider then the case $|Q(t)| = 2$. Let A and B be the two points of $Q(t)$; since $|Q(t)| = 2 < |\mathcal{R}|$, the configuration must have at least one multiplicity, say A . Consider the scenario where at any time $t' \geq t$, as long as $|Q(t')| = 2$, all robots co-located at A (resp. B) have the same coordinate system, which is reflexive to that of those co-located at B (resp. A). In this scenario, which we shall call *mirror*, any activated robot will make the same decision as long as $|Q(t')| = 2$.

Observe that, regardless of where the activated robot r resides, the decision according to \mathcal{A} cannot be Act_1 , i.e., not moving. Otherwise, in the execution of \mathcal{A} in the mirror scenario, no activated robot will ever move; that is, $\forall t' > t$, $Q(t') = Q(t) = 2$ and **Gathering** remains unsolved, contradicting the assumed correctness of \mathcal{A} .

Moreover, the decision by a robot according to \mathcal{A} cannot be Act_2 , i.e., move to B . Consider in fact the execution of \mathcal{A} in the mirror scenario where the scheduler activates sequentially all robots but one (say a) from A , then sequentially all the robots originally in B , and finally a . In so doing, the reached configuration is another mirror configuration, where the positions of the robots have now switched. Observe that, at any time t' during this process, $|Q(t')| = 2$. From this moment on, the scheduler continues to perform these switches. Thus, again $\forall t > 0$, $Q(t) = Q(0) = 2$, and **Gathering** remains unsolved, contradicting the assumed correctness of \mathcal{A} .

It remains to analyze Act_3 , i.e., moving to a point distinct from A and B , say C ; if the activated robot located in either A or B is part of a multiplicity, then $|Q(t+1)| = 3$, otherwise $|Q(t+1)| = 2$. In other words, in any execution of \mathcal{A} , if $|Q(t)| = 2$, then $|Q(t+1)| \geq 2$.

Summarizing, $\forall t \geq 0$, $|Q(t)| > 1$; that is, in any execution of \mathcal{A} the robots never gather, contradicting the assumed correctness of \mathcal{A} . \square

We have just seen that without any additional capability, **Gathering** is unsolvable under any sequential scheduler. Here we consider the case where the capability of the robots is empowered with weak multiplicity detection, i.e., robots are able to distinguish whether a point is occupied by a single robot or by a multiplicity (but not the exact number of robots composing the multiplicity). More precisely, any robot r activated at time t detects the set $Q'(t) = \{(q_1, b_1), \dots, (q_m, b_m)\}$ where $b_i \in \{0, 1\}$ indicates whether q_i contains a multiplicity ($b = 1$) or not ($b = 0$).

Let r be the robot activated at time t and κ be the number of multiplicities in $Q'(t)$; the action of r dictated by Algorithm 8 SEQGATHERING (see Appendix A) follows a very simple principle, depending on κ :

1. $\kappa = 1$: If r is at the multiplicity, do not move. Otherwise, move to the point with multiplicity;
2. $\kappa > 1$: If r is at a multiplicity, move to a point not occupied by any other robot. Otherwise, do not move;
3. $\kappa = 0$: Move to the closest point occupied by another robot.

Theorem 3. *Gathering is solvable with weak multiplicity detection under any sequential scheduler.*

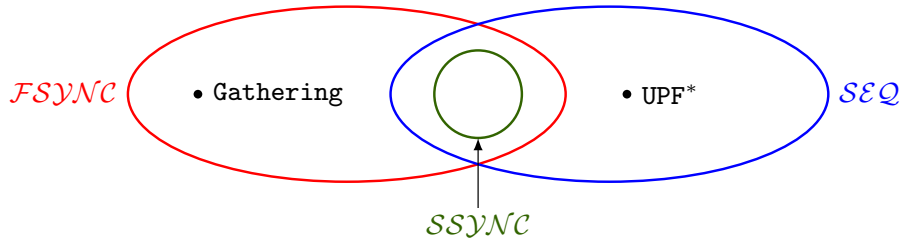


Fig. 1: Relationship between the set of problems solvable under \mathcal{FSYNC} , \mathcal{SEQ} , and \mathcal{SSYNC} , without any additional assumptions.

Proof. Algorithm `SEQGATHERING` solves **Gathering** by maintaining a unique multiplicity point and moving other robots sequentially to that multiplicity point. If there is no multiplicity, then the activated robot creates a multiplicity. If there is more than one multiplicity at time t , then the robots move to unoccupied points to separate such that at some time $t' > t$, there is only one multiplicity. Then for all $t'' > t'$, that multiplicity is maintained. \square

By contrast, the addition of multiplicity detection is not enough under most synchronous schedulers, as shown by the following known result:

Lemma 1. *Gathering is unsolvable with multiplicity detection under \mathcal{SSYNC} .*

Proof. From [27], **Rendezvous** is unsolvable under \mathcal{SSYNC} . Such a result can be easily extended to the case where robots are empowered with weak multiplicity detection. It is sufficient to start from a configuration with two multiplicities. Similarly, the result can be extended to the case where robots are empowered with the strong multiplicity detection, i.e., when they recognize how many robots compose a multiplicity. In this case it is sufficient to start from a configuration with two multiplicities composed by the same number of robots. \square

6 Conclusion

We have studied the computational power of oblivious robots operating in the plane under *sequential* schedulers. Focusing on the fundamental class of pattern formation problems, we investigated the adversarial power of such schedulers in comparison to that of the other two synchronous schedulers studied in the literature: \mathcal{FSYNC} and \mathcal{SSYNC} . Specifically, we considered the resolution of the following problems: **UPF**, the most general problem in the class; **Gathering**, or point-formation; and $\mathbf{UPF}^* = \mathbf{UPF} \setminus \mathbf{Gathering}$.

We have shown that, under any sequential scheduler, oblivious robots can solve: \mathbf{UPF}^* , without any additional assumption; **Gathering** and, hence, **UPF**, with only weak multiplicity detection.

In contrast, we proved that \mathbf{UPF}^* is unsolvable under \mathcal{FSYNC} (and hence under \mathcal{SSYNC} and \mathcal{ASYNC}) even by assuming strong multiplicity detection, a leader, rigid movements, orientation.

Since it is known from the literature that **Gathering** is solvable under \mathcal{FSYNC} but not under \mathcal{SSYNC} , then we conclude that \mathcal{SEQ} and \mathcal{FSYNC} are orthogonal in general, whereas the computational power of the robots under \mathcal{SEQ} is stronger than under \mathcal{SSYNC} , see Fig. 1.

References

1. Noa Agmon and David Peleg. Fault-tolerant gathering algorithms for autonomous mobile robots. *SIAM Journal on Computing*, 36(1):56–82, January 2006.
2. Davide Canepa, Xavier D efago, Taisuke Izumi, and Maria Potop-Butucaru. Flocking with oblivious robots. In *Proc. of 18th International Symposium on Stabilization, Safety, and Security of Distributed Systems (SSS)*, pages 94–108, 2016.
3. Serafino Cicerone, Gabriele Di Stefano, and Alfredo Navarra. Asynchronous arbitrary pattern formation: The effects of a rigorous approach. *Distributed Computing*, 32(2):91–132, April 2019.
4. Serafino Cicerone, Gabriele Di Stefano, and Alfredo Navarra. Embedded pattern formation by asynchronous robots without chirality. *Distributed Computing*, 32(4):291–315, August 2019.
5. Serafino Cicerone, Gabriele Di Stefano, and Alfredo Navarra. Semi-asynchronous: A new scheduler in distributed computing. *IEEE Access*, 9:41540–41557, 2021.
6. Serafino Cicerone, Gabriele Di Stefano, and Alfredo Navarra. Solving the pattern formation by mobile robots with chirality. *IEEE Access*, 9:88177–88204, 2021.
7. Mark Cieliebak, Paola Flocchini, Giuseppe Prencipe, and Nicola Santoro. Distributed computing by mobile robots: Gathering. *SIAM Journal on Computing*, 41(4):829–879, January 2012.
8. Reuven Cohen and David Peleg. Convergence properties of the gravitational algorithm in asynchronous robot systems. *SIAM Journal on Computing*, 34(6):1516–1528, 2005.
9. Xavier D efago, Maria Potop-Butucaru, and S ebastien Tixeuil. *Fault-Tolerant Mobile Robots*. Chapter 10 of [18], pages 234–251, 2019.
10. Xavier D efago and Samia Souissi. Non-uniform circle formation algorithm for oblivious mobile robots with convergence toward uniformity. *Theoretical Computer Science*, 396(1-3):97–112, May 2008.
11. Yoann Dieudonn e, Ouiddad Labbani-Igbida, and Franck Petit. Circle formation of weak mobile robots. *ACM Transactions on Autonomous and Adaptive Systems*, 3(4):1–20, November 2008.
12. Yoann Dieudonn e, Franck Petit, and Vincent Villain. Leader election problem versus pattern formation problem. In *Proc. of 24th International Symposium on Distributed Computing (DISC)*, pages 267–281, 2010.
13. Paola Flocchini. *Gathering*. Chapter 4 of [18], pages 63–82, 2019.
14. Paola Flocchini, Giuseppe Prencipe, and Nicola Santoro. *Distributed Computing by Oblivious Mobile Robots*. Synthesis Lectures on Distributed Computing Theory. 2012.
15. Paola Flocchini, Giuseppe Prencipe, Nicola Santoro, and Giovanni Viglietta. Distributed computing by mobile robots: Uniform circle formation. *Distributed Computing*, 30(6):413–457, 2017.
16. Paola Flocchini, Giuseppe Prencipe, Nicola Santoro, and Peter Widmayer. Hard tasks for weak robots: The role of common knowledge in pattern formation by autonomous mobile robots. In *Proc. of 10th International Symposium on Algorithms and Computation (ISAAC)*, pages 93–102, 1999.
17. Paola Flocchini, Giuseppe Prencipe, Nicola Santoro, and Peter Widmayer. Arbitrary pattern formation by asynchronous, anonymous, oblivious robots. *Theoretical Computer Science*, 407(1):412–447, November 2008.
18. Paola Flocchini, Giuseppe Prencipe, and Nicola Santoro (Eds). *Distributed Computing by Mobile Entities*. Springer, 2019.
19. Paola Flocchini, Nicola Santoro, Yuichi Sudo, and Koichi Wada. On asynchrony, memory, and communication: Separations and landscapes. In *Proc. of 27th International Conference on Principles of Distributed Systems (OPODIS)*, pages 28:1–28:23, 2023.
20. Taisuke Izumi, Samia Souissi, Yoshiaki Katayama, Nobuhiro Inuzuka, Xavier D efago, Koichi Wada, and Masafumi Yamashita. The gathering problem for two oblivious robots with unreliable compasses. *SIAM Journal on Computing*, 41(1):26–46, 2012.
21. Sayaka Kamei, Anissa Lamani, Fukuhito Ooshita, and S ebastien Tixeuil. Asynchronous mobile robot gathering from symmetric configurations without global multiplicity detection. In *Proc. of 18th International Colloquium on Structural Information and Communication Complexity (SIROCCO)*, pages 150–161, 2011.
22. David Kirkpatrick, Irina Kostitsyna, Alfredo Navarra, Giuseppe Prencipe, and Nicola Santoro. On the power of bounded asynchrony: Convergence by autonomous robots with limited visibility. *Distributed Computing*, pages 1–30, 2024.
23. Debasish Pattanayak, John Augustine, and Partha Sarathi Mandal. Randomized gathering of asynchronous mobile robots. *Theoretical Computer Science*, 858:64–80, 2021.

24. Debasish Pattanayak, Kaushik Mondal, Ramesh H., and Partha Sarathi Mandal. Gathering of mobile robots with weak multiplicity detection in presence of crash-faults. *Journal of Parallel and Distributed Computing*, 123:145–155, January 2019.
25. Giuseppe Prencipe. Impossibility of gathering by a set of autonomous mobile robots. *Theoretical Computer Science*, 384(2-3):222–231, 2007.
26. Ichiro Suzuki and Masafumi Yamashita. Distributed anonymous mobile robots: Formation of geometric patterns. *SIAM Journal on Computing*, 28(4):1347–1363, January 1999.
27. Masafumi Yamashita and Ichiro Suzuki. Characterizing geometric patterns formable by oblivious anonymous mobile robots. *Theoretical Computer Science*, 411(26-28):2433–2453, June 2010.

Appendix A: Pseudocodes

Algorithm 1: SEQPF

```

Input:  $\hat{P}, Q$ 
Output: Destination of the robot
1  $q \leftarrow$  activated robot position;
2 if  $|Q| < |\hat{P}| = k$  then
3   | destination  $\leftarrow$  SEPARATE();
4 else
5   | Scale  $\hat{P}$  such that radius of  $SEC(\hat{P})$  is  $\rho$ ;
6   |  $res \leftarrow$  LAST();
7   | if  $res \neq null$  then
8   | | destination  $\leftarrow res$ ;
9   | else
10  | |  $\Gamma \leftarrow$  OVERLAP();
11  | | if  $\Gamma = null$  then
12  | | | destination  $\leftarrow$  LEADER();
13  | | else
14  | | | if  $\Gamma$  has a leader angular sequence then
15  | | | | destination  $\leftarrow$  OCCUPY();
16  | | | else
17  | | | | destination  $\leftarrow$  LEADER();

```

Procedure 2: SEPARATE()

```

1  $q' \leftarrow$  a point at one unit distance from  $q$  along the  $x$ -axis;
2 if  $\overline{qq'}$  does not contain other robots then
3   |  $z \leftarrow q'$ ;
4 else
5   |  $q'' \leftarrow$  robot position closer to  $q$  along the  $x$ -axis;
6   |  $z \leftarrow$  midpoint of  $\overline{qq''}$ ;
7 return  $z$ ;

```

Procedure 3: LAST()

```
1 if  $|Q| \geq k$  then
2   Compute at most  $2k + 2$  transformations  $\mathcal{T}$  of the pattern  $\hat{P}$  such that pattern point  $\hat{p}_1$  overlaps
   with any  $q_i \in SEC(Q)$ ;
3   For each  $\tau \in \mathcal{T}$ , let  $\hat{p}_k \in \hat{P}$  be the lowest priority pattern point defined by any lexicographical
   smallest pattern sequence  $\hat{\mu}$ ;
4   if  $\exists \tau \in \mathcal{T}$  such that  $Q \in \mathcal{B}(\hat{P})$  then
5     return  $q$ ;
6   else
7     if  $\exists \tau \in \mathcal{T}$  such that  $q \in \overline{O\hat{p}_k}$  and  $(\hat{P} \setminus Q = \hat{p}_k \vee \hat{P} \setminus Q = \emptyset) \wedge (Q \setminus \hat{P} = (Q \cap \overline{O\hat{p}_k}) \setminus \{\hat{p}_k\})$ 
      then return  $\hat{p}_k$ ;
8 return null;
```

Procedure 4: OVERLAP()

```
1 Let  $\hat{p}_i$  be the first pattern point on the  $SEC(\hat{P})$  in the cyclic order  $\psi(\hat{P})$  determined by  $\hat{\mu}$ ;
2 if  $Q$  admits a leader angular sequence then
3   Let  $q_j$  be the second robot position determining  $\theta_1$  in  $\lambda(Q)$ ;
4   Overlap  $Q$  and  $\hat{P}$  in such a way that  $q_j$  overlaps with  $\hat{p}_i$ ,  $Q$  is considered in the clockwise order
   induced by  $\lambda(Q)$  and the order induced by  $\hat{\mu}$  follows such clockwise direction;
5   return  $\Gamma$ ;
6 else
7   return null;
```

Procedure 5: LEADER()

```
1 if there is no robot at  $O$  then
2   if  $q$  is responsible for the  $SEC(Q)$  or  $\overline{Oq}$  contains other robot positions then
3     return  $q$ ;
4   if  $\Gamma \neq null$  and  $q$  is responsible for  $\theta_1$  and  $q$  is not co-radial to another robot position then
5     return  $q$ ;
6   else
7     return  $O$ ;
8 else
9   if  $q = O$  then
10    if  $\Gamma = null$  then
11      Let  $q_j$  any robot on  $SEC(Q)$ ;
12       $\xi \leftarrow$  smallest angle in  $\theta(S')$ , with  $S'$  induced by  $Q$ ;
13    else
14      Let  $q_j$  be the second robot determining  $\theta_1$  in  $\theta(S')$ , with  $S'$  induced by  $\Gamma$ ;
15       $\xi \leftarrow$  smallest angle in  $\theta(S')$ , with  $S'$  induced by  $\Gamma$ ;
16    Let  $u'$  such that  $|\overline{Ou'}| = \rho/2$  and  $\angle u'q_j = \xi/3$ ;
17    return  $u'$ ;
18  else
19    return  $q$ ;
```

Procedure 6: OCCUPY()

```
1  $p_k \leftarrow$  the lowest priority pattern point;
2 if all pattern points are occupied then
3   |  $p_l \leftarrow p_k$ ;
4 else
5   |  $p_l \leftarrow$  the highest priority empty pattern point;
6 Determine the highest priority free robot position  $u$  not defining the  $SEC(Q(t))$ ;
7 if the radial detour from  $u$  to  $p_l$ , and  $\rho_l$ , do not contain other robots then
8   |  $w \leftarrow u$ ;
9 else if the radial detour from  $u$  to  $p_l$  contains another robot and  $\rho_l$  does not then
10  | along the radial detour from  $u$  to  $p_l$ , determine the robot position  $v$  with smallest radiangular
11  | distance from  $p_l$ ;
12  |  $w \leftarrow v$ ;
13 else
14  | consider  $\rho_l$  from the  $SEC$  to  $O$  and compute the path from the first free robot position  $v$  to  $p_l$ ;
15  | if  $\overline{vp_l}$  does not contain other robot positions then
16  |   |  $w \leftarrow v$ ;
17  |   else
18  |     | in  $\overline{vp_l}$  determine the closest robot position  $v'$  to  $p_l$  with free path;
19  |     |  $w \leftarrow v'$ ;
20 if  $q = w$  then
21  | if  $q$  and  $p_l$  are co-radial then
22  |   | return  $p_l$ ;
23  |   else
24  |     | return  $O$ ;
25 else
26  | return  $q$ ;
```

Algorithm 7: SEQPF'()

Input: \hat{P}, Q
Output: Destination of the robot

```
1  $q \leftarrow$  activated robot position;  
2 destination  $\leftarrow q$ ;  
3 if  $|Q| < |\hat{P}|$  then  
4 | destination  $\leftarrow$  SEPARATE();  
5 else  
6 | if  $Q$  does not admit one unique maximum distance pair then  
7 | | if  $q$  is one of the points among all possible pairs defining the maximum distance in  $Q$  then  
8 | | | let  $q'$  be one of the furthest points from  $q$  and  $\ell$  be the line passing through  $q$  and  $q'$ ;  
9 | | | let  $q''$  be the point on  $\ell$  at one unit distance from  $q$ , furthest from  $q'$  with respect to  $q$ ;  
10 | | | destination  $\leftarrow q''$ ;  
11 | else  
12 | |  $\{q_1, q_2\} \leftarrow$  unique maximum distance pair of  $Q$ ;  
13 | | if  $|Q| > |\hat{P}|$  then  
14 | | | if  $q \notin \{q_1, q_2\}$  then  
15 | | | | Let  $q' \in \{q_1, q_2\}$  be the closest point to  $q$ ;  
16 | | | | if  $\overline{qq'}$  does not contain other robot positions then  
17 | | | | | destination  $\leftarrow q'$ ;  
18 | | else  
19 | | | if  $q \notin \{q_1, q_2\}$  then  
20 | | | | for any pair  $\{\hat{p}_1, \hat{p}_2\}$  defining the maximum distance of  $\hat{P}$  do  
21 | | | | | Scale  $\hat{P}$  such that  $\overline{q_1q_2}$  and  $\overline{\hat{p}_1\hat{p}_2}$  coincide;  
22 | | | | | for any rotation and reflection of  $\hat{P}$  with respect to  $\overline{q_1q_2}$  do  
23 | | | | | | determine an overlap pattern with smallest distance deviation;  
24 | | | | | |  $p_i \leftarrow$  the unoccupied pattern point such that  $q$  is the closest robot position  
25 | | | | | | | to  $p_i$  not on a pattern point;  
26 | | | | | | | if  $\overline{qp_i}$  does not contain other robot positions then  
26 | | | | | | | | destination  $\leftarrow p_i$ ;
```

Algorithm 8: SEQGATHERING

Input: $Q'(t)$
Output: Destination of the robot

- 1 $(q, b) \leftarrow$ position of the activated robot;
- 2 $\kappa \leftarrow$ number of multiplicities in $Q'(t)$;
- 3 destination $\leftarrow q$;
- 4 **if** $\kappa = 1$ **then**
- 5 **if** $b = 0$ **then**
- 6 $q_m \leftarrow$ the multiplicity point in $Q'(t)$;
- 7 destination $\leftarrow q_m$;
- 8 **else**
- 9 **if** $\kappa > 1$ **then**
- 10 **if** $b = 1$ **then**
- 11 $q' \leftarrow$ closest point to q ;
- 12 $z \leftarrow$ midpoint of $\overline{qq'}$;
- 13 destination $\leftarrow z$;
- 14 **else**
- 15 $q' \leftarrow$ closest point to q ;
- 16 destination $\leftarrow q'$;

Appendix B: Figures

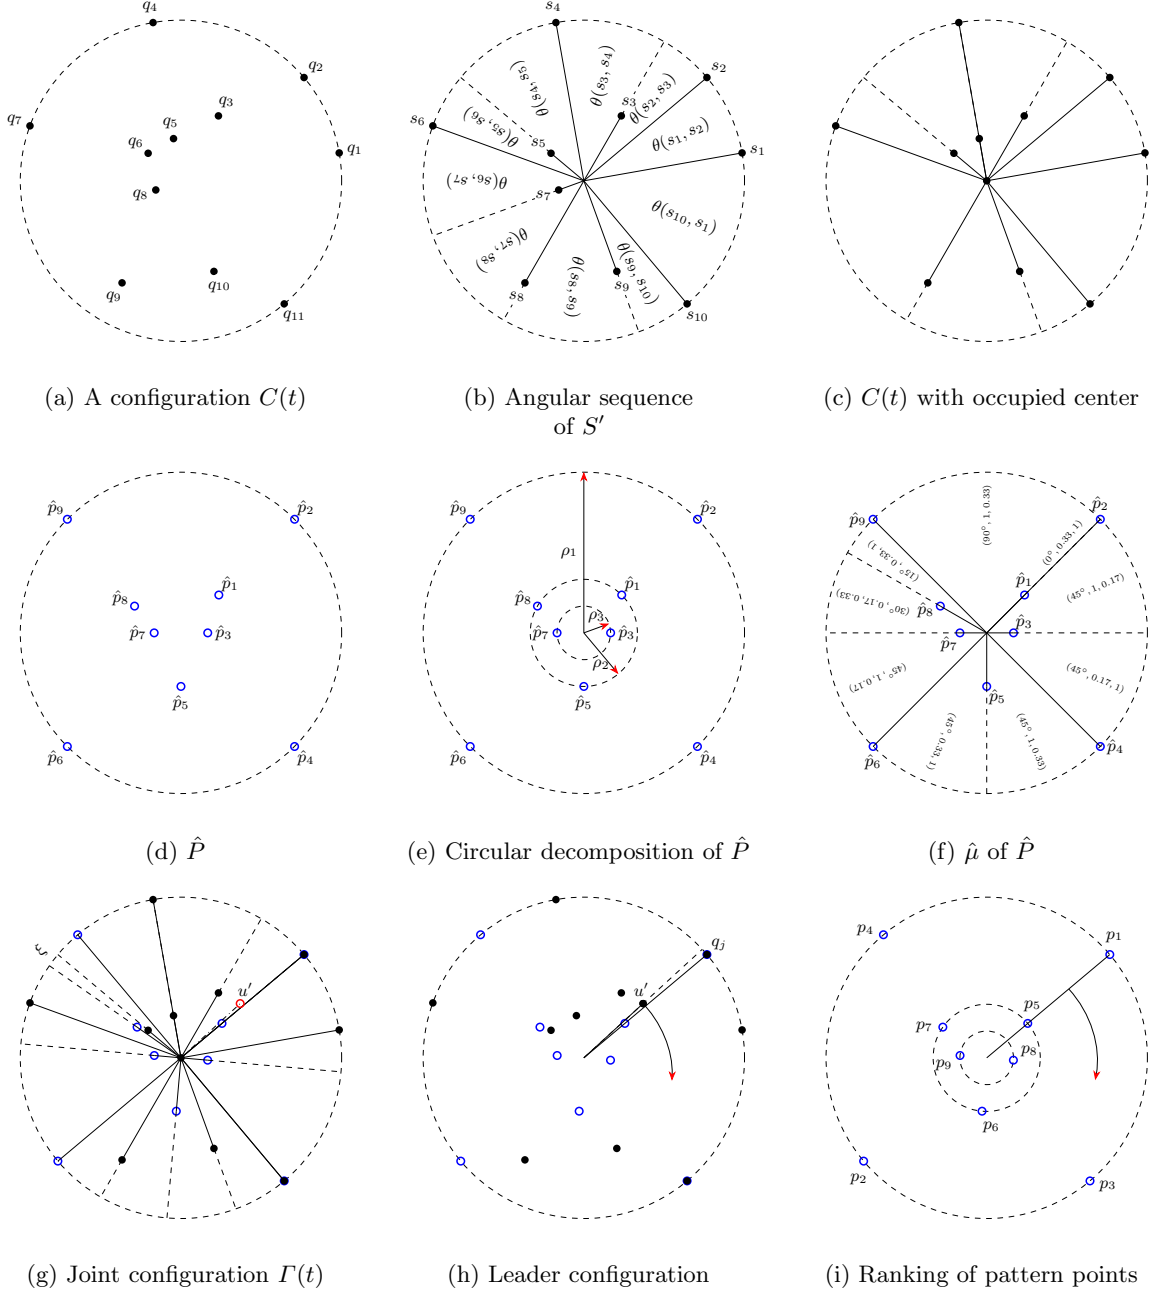


Fig. 2: (a) A configuration $C(t)$ and $SEC(Q(t))$; (b) The subset of non co-radial points; (c) Since $Q(t)$ does not have a leader angular sequence, q_8 moved to O ; (d) The pattern \hat{P} ; (e) Circular decomposition ∇ of the pattern \hat{P} ; (f) The smallest angular sequence $\hat{\mu}$ of \hat{P} ; (g) The joint configuration $\Gamma(t)$ and the smallest angle ξ ; (h) The leader configuration and the induced clockwise direction; (i) The ranking of the pattern points with $q_j = p_1$.

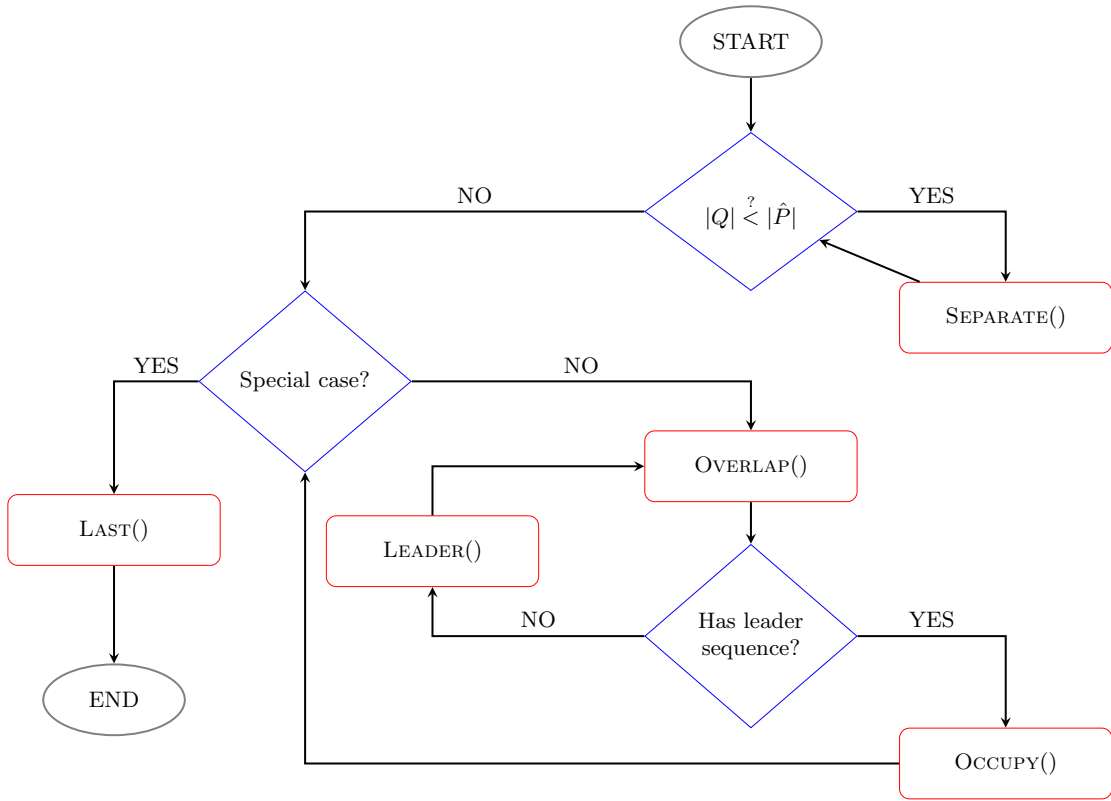


Fig. 3: Flowchart of Algorithm SEQPF showing the four stages: *Initialization*, *Leader Configuration*, *Partial Pattern Formation*, and *Finalization*. The flow shows how an activated robot processes the current configuration and makes movement decisions.

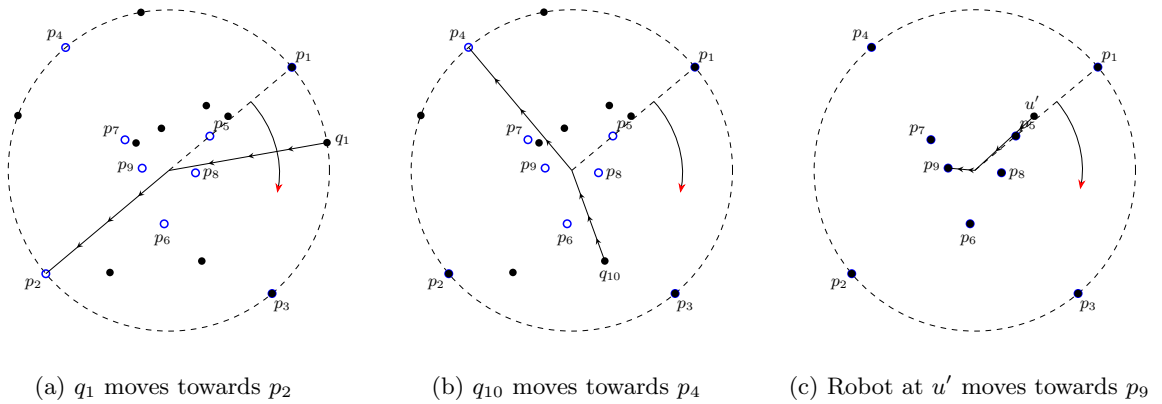


Fig. 4: Movement of robots to occupy the pattern points in the order of priority.

Appendix C: Correctness and Complexity of SEQPF

In this section, we show the correctness of the proposed Algorithm SEQPF and discuss on its complexity.

Lemma 2. *Given a configuration C and a pattern \hat{P} , such that $|Q| < |\hat{P}|$, then Algorithm SEQPF, by means of Procedure SEPARATE, requires at most one epoch in order to reach a configuration C' with $|Q'| = |\hat{P}|$.*

Proof. At Line 3, Algorithm SEQPF calls Procedure SEPARATE as long as $|Q| < |\hat{P}|$. The activated robot r located at q , moves along its own x -axis of one unit distance if this path is empty, otherwise it computes the position of its closest robot position q'' along its own x -axis, and moves towards the midpoint z of $\overline{qq''}$.

Regarding the position q initially occupied by r , there can be two possibilities: (i) q was occupied only by r ; (ii) q was a multiplicity containing at least one more robot other than r . In the former case, after r has performed its movement, the total number of robot positions remains the same; in the latter, after a movement performed by r , the number of robot positions increases by one.

Since after each robot's movement the cardinality of Q doesn't change or increases by one, in order to reach a configuration C' with $|Q'| = |\hat{P}|$, it is sufficient to activate $|\hat{P}| - |Q|$ different robots belonging to a multiplicity in C .

Therefore, in at most one epoch, i.e., after the activation of all the robots, we are ensured to reach a configuration C' where the number of positions occupied by the robots $|Q'| = |\hat{P}|$. \square

Lemma 3. *Let C be a configuration and \hat{P} a pattern such that C belongs to the Finalization stage. Algorithm SEQPF, by means of Procedure LAST, finalizes the configuration in at most $\lceil \frac{\rho}{\delta} \rceil$ epochs.*

Proof. The *Finalization* phase occurs when $Q \in \mathcal{B}(\hat{P})$, i.e., the pattern is formed, or when $(\hat{P} \setminus Q = \hat{p}_k \vee \hat{P} \setminus Q = \emptyset) \wedge (Q \setminus \hat{P} = (Q \cap \overline{O\hat{p}_k}) \setminus \{\hat{p}_k\})$. In all such cases, $|Q| \geq |\hat{P}|$ holds and Algorithm SEQPF invokes Procedure LAST.

If $Q \in \mathcal{B}(\hat{P})$, Procedure LAST finds the correct overlapping between Q and \hat{P} by means of an exhaustive search at Line 2. Hence, at Line 5, the returned target is the current position of the active robot, i.e., no robot moves henceforth.

In all the other cases, if the activated robot q is located at $\overline{O\hat{p}_k}$, it moves towards \hat{p}_k , see Line 7. In each epoch, all the movements performed by the activated robots maintain the properties to belong to the *Finalization* stage since such movements are along $\overline{O\hat{p}_k}$. Once all the moved robots reach \hat{p}_k , we have that $Q \in \mathcal{B}(\hat{P})$.

Since the robots perform non-rigid movements, i.e., they move at least δ distance, it follows that in at most $\lceil \frac{|\overline{O\hat{p}_k}|}{\delta} \rceil \leq \lceil \frac{\rho}{\delta} \rceil$ epochs the pattern is formed. \square

Lemma 4. *Let C be a configuration in stage Leader Configuration. Algorithm SEQPF, by means of Procedures OVERLAP and LEADER, requires at most $\lceil \frac{\rho}{\delta} \rceil + 1$ epochs to reach a configuration C' that is either in the Partial Pattern Formation or in the Finalization stages.*

Proof. Configuration C is in stage *Leader Configuration* whenever $|Q| \geq k$ and Procedure LAST returns *null*, i.e., Algorithm SEQPF executes the Else branch of Line 9. The intent

of the stage is to move robots so as to ensure a unique overlap between Q and \hat{P} . In order to check whether such a unique overlap exists, Procedure OVERLAP is invoked. This verifies whether Q either (i) admits a leader angular sequence or (ii) not. In either cases, since by hypothesis C belongs to the *Leader Configuration* stage, then Procedure LEADER is invoked.

When (i) holds, it means that Q admits a leader angular sequence but Γ does not. In this case, Procedure OVERLAP exploits the cyclic order $\psi(\hat{P})$ determined by $\hat{\mu}$ and the leader angular sequence of Q in order to obtain Γ . In particular, the overlap of Q with \hat{P} , creating the joint configuration Γ , is done by overlapping the following: for Q , a robot position q_j such that it is the second robot position determining θ_1 in $\lambda(Q)$; for \hat{P} , the first pattern point \hat{p}_i on the $SEC(\hat{P})$ in the cyclic order $\psi(\hat{P})$ determined by $\hat{\mu}$. By definition, $\lambda(Q)$ and $\hat{\mu}$ are uniquely identifiable by all the robots. In case of \hat{P} being symmetric, any selected point \hat{p}_i would be equivalent with respect to positions occupied. Moreover, the robots also take into consideration the clockwise direction induced by $\lambda(Q)$ and they compute the overlap in such a way that the order of pattern points induced by $\hat{\mu}$ follows such clockwise direction. Therefore, each robot computes the joint configuration Γ in the exact same way.

However, Procedure LEADER is invoked because the resulting joint configuration does not admit a leader angular sequence. This means that either Γ does not admit a unique smallest angle, or that the smallest angle induced by Γ is not defined by two robot positions. The execution of Procedure LEADER either makes a robot move toward O , or from O toward a point u' , that guarantees a leader angular sequence for Γ . Point u' is chosen at distance $\rho/2$ from O , along a radius that forms an angle with a robot position on the SEC which measures $1/3$ of the smallest angle present in $\theta(S')$, with S' induced by Γ , hence creating one unique smallest angle. This induces a leader angular sequence for Γ . The existence of a robot that can move toward O is guaranteed by the fact that $k \geq 5$. The number of epochs required for the whole process is at most $\lceil \frac{3\rho}{2\delta} \rceil$, where $\frac{3}{2}\rho$ is the length of the longest path that a robot may trace to reach O and then u' . It is worth noting that during the movement towards O , angles do not change and the configuration maintains the described properties. In fact, any activated moving robot, is selected in such a way that it has a free path towards O , it does not break the $SEC(Q)$ and does not break the smallest unique angle θ_1 .

When (ii) holds, it means that Q does not admit a leader angular sequence and hence Procedure OVERLAP returns *null* and Procedure LEADER is invoked. Again a robot at the center O is needed to create the smallest unique angle in the configuration. If no robot is at the center, Procedure LEADER selects any robot not responsible for the $SEC(Q)$ with a free path towards O , to occupy O . Once the robot at O is activated, it computes the smallest angle ξ in $\theta(S')$ induced by Q and it selects as its destination the point u' computed as previously described. In this case as well, the overall cost of Procedure LEADER is at most $\lceil \frac{3\rho}{2\delta} \rceil$ epochs.

In both cases (i) and (ii), as soon as the robot at O moves towards u' , the smallest unique angle is created and the configuration admits the required leader angular sequence, regardless of the robot reaching u' . Therefore, after reaching O in at most $\lceil \frac{\rho}{\delta} \rceil$ epochs, just one more epoch is necessary to reach a configuration C' either in *Partial Pattern Formation* or in *Finalization*. \square

Lemma 5. *Let C be a configuration in stage Partial Pattern Formation. Algorithm SEQPF, by means of Procedures OCCUPY, requires at most $2n\lceil \frac{\rho}{\delta} \rceil$ epochs to reach a configuration C' that is in the Finalization stage.*

Proof. A configuration C is in the *Partial Pattern Formation* stage whenever Procedure LAST returns *null* and there is a joint configuration Γ with a leader angular sequence. The goal of this stage is to make the robots move to occupy the pattern points. The robot r designated to move in each epoch, called walker, is selected in such a way that: r never crosses another robot position if there are still empty pattern points, i.e., it does not create or becomes part of a multiplicity; r does not create a new smallest angle possibly changing the leader angular sequence, since it only moves following a radial detour, i.e., first towards the center O if its target pattern point p_l is located on a different radius, otherwise directly towards p_l ; r does not position itself on the path of a future walker robot, i.e., if the radius ρ_l where the target pattern point p_l is located contains robot positions, r is the highest priority free robot in ρ_l that has a free path towards p_l . Those conditions to select the walker robot, ensure that each movement of r makes it closer to its target pattern point p_l . In at most $\lceil \frac{\ell}{\delta} \rceil$ epochs r reaches the center O and, again in at most $\lceil \frac{\ell}{\delta} \rceil$ epochs, it reaches p_l . Therefore, in at most $2\lceil \frac{\ell}{\delta} \rceil$ epochs each robot moves and reaches its target pattern point. Since only one robot is selected as the walker in each epoch, after at most $2n\lceil \frac{\ell}{\delta} \rceil$ epochs, a configuration C' in the *Finalization* stage is reached. In fact, C' is reached as soon as the last moved robot reaches O . Note that, the existence of a robot that can move is guaranteed by the fact that $k \geq 5$, i.e., 3 might be stuck to maintain the *SEC* and 1 to maintain θ_1 .

Moreover, it is important to consider the two orders of priority in Γ : the order of priority of the robots and the order of priority of the pattern points. The first one is given by the radiangular distance that separates each robot from q_j , i.e., the robot positioned on the $SEC(Q)$ adjacent to the smallest angle θ_1 . With such an ordering, the robot(s) fixing θ_1 with q_j is (resp., are) the last one (resp., ones) to become the walker. Let us consider the case where the walker robot r is located on such a position. Then, either (i) r is not located at a multiplicity or (ii) r is located at a multiplicity. In the first case (i), once r reaches O , the smallest angle θ_1 disappears and the configuration falls in the *Finalization* stage. This happens because once the least priority robot moves, all the higher priority robots have already occupied their target pattern point and it only remains to occupy the last empty pattern point if $|Q| = |\hat{P}|$, or to position r on a pattern point already occupied if $|Q| > |\hat{P}|$.

In the second case (ii), the walker robot r moves and reaches O and it does so without destroying θ_1 since r was located on a multiplicity point and such a point still maintains θ_1 with q_j . After reaching O , r moves towards p_l . Once all the robots except the last one moved out of the multiplicity point to reach their target pattern point, case (i) happens.

Finally, recall that Procedure OCCUPY is executed only if Γ admits a leader angular sequence and, as we have just stated, this is maintained for the entire execution of the Procedure. This implies that for the entire *Partial Pattern Formation* stage, the order of priority of the robots and the order of priority of the pattern points are uniquely identified by the activated robots in each epoch. \square

Theorem 4. *For every pattern \hat{P} with $|\hat{P}| \geq 5$, Algorithm SEQPF correctly solves UPF* in at most $2(n+1)\lceil \frac{\ell}{\delta} \rceil + 2$ epochs under \mathcal{SEQ} .*

Proof. Let C be the initial configuration. As a preliminary step, Algorithm SEQPF takes care of Q , ensuring that $|Q| \geq |\hat{P}|$. By Lemma 2 we know that this is verified after at most one epoch.

Subsequently, the algorithm checks by means of Procedure LAST whether the configuration is already in the *Finalization* stage or not. If this is the case, by means of Lemma 3 we know that the algorithm finalizes the configuration in at most $\lceil \frac{\ell}{\delta} \rceil$ epochs.

If, instead, Procedure LAST returns *null*, the configuration falls into (i) the *Leader Configuration* stage or into (ii) the *Partial Pattern Formation* stage.

In case (i), according to Lemma 4, SEQPF, by means of Procedure LEADER, requires at most $\lceil \frac{\ell}{\delta} \rceil + 1$ epochs to reach a configuration in the *Partial Pattern Formation* stage as in case (ii) or in the *Finalization* stage.

In case (ii), according to Lemma 5, by means of Procedure OCCUPY, SEQPF requires at most $2n \lceil \frac{\ell}{\delta} \rceil$ epochs to reach a configuration in the *Finalization* stage.

In either cases, once the *Finalization* stage is reached, again according to Lemma 3, in at most $\lceil \frac{\ell}{\delta} \rceil$ epochs, the configuration is finalized.

Overall, Algorithm SEQPF requires at most $2(n+1) \lceil \frac{\ell}{\delta} \rceil + 2$ epochs, to solve UPF* under \mathcal{SEQ} . \square

Appendix D: Correctness and Complexity of SEQPF'

We now show the correctness of the proposed Algorithm SEQPF' and discuss its complexity. First of all, we observe that if the input configuration admits a number of robot positions smaller than $|\hat{P}|$, then the algorithm at Line 4 applies Procedure SEPARATE so as to obtain $|Q| = |\hat{P}|$. By Lemma 2, we have that this preliminary step costs at most one epoch.

Lemma 6. *Given a configuration C with $|Q| \geq |\hat{P}|$, Algorithm SEQPF', in at most one epoch, results in a configuration C' with Q' admitting one unique maximum distance pair.*

Proof. Considering a configuration C with $|Q| \geq |\hat{P}|$, if Line 6 is true, once a robot r located on q and defining a maximum distance in Q is activated, by means of Algorithm SEQPF', at Line 7 r selects as its destination the point q'' computed as described at Lines 8–9. In particular, among all its most distant points in Q , r selects one q' and let ℓ be the line passing through q and q' . Then q'' is the point on ℓ at one unit distance from q , furthest from q' with respect to q . Since r was defining the previous maximum distance in Q , computing as its destination q'' means that $|\overline{q'q''}| > |\overline{q'q}|$. Moreover, by means of the triangular inequality, we know that the increment of the distance from q' , is greater than the increment of the distance from any other point. Hence, $|\overline{q'q''}|$ becomes the unique maximum distance in the reached configuration C' . \square

Another property that will be useful for our discussion, outcoming from the standard triangular inequality, concerns three points in the Euclidean plane:

Property 1. Let A , B , and C be three points in \mathbb{R}^2 such that $|\overline{AB}| > |\overline{AC}|$ and $|\overline{AB}| > |\overline{BC}|$. For any point A' on \overline{AC} , $|\overline{A'B}| < |\overline{AB}|$.

Lemma 7. *Given a configuration C with a unique maximum distance pair $\{q_1, q_2\}$ and a pattern \hat{P} such that $|Q| > |\hat{P}|$, Algorithm SEQPF' achieves a configuration C' with $|Q'| = |\hat{P}|$ in at most $(n-2) \lceil \frac{|q_1 q_2|}{\delta} \rceil$ epochs.*

Proof. Given the assumptions, Algorithm SEQPF' executes the Lines from 12 to 17. In particular, once a robot r located at $q \notin \{q_1, q_2\}$ is activated, it selects as its destination the closest point q' between q_1 and q_2 . Thanks to Property 1 and to the hypothesis, such a movement performed by r cannot create a new maximum distance between any pair of points in Q . Moreover, robot r moves only if it has a free path towards q' (see Line 16). As long as there are robot positions such that $|Q| > |\hat{P}|$, Algorithm SEQPF' makes the robots not located in $\{q_1, q_2\}$ move in each epoch. Since there can be at most $n - 2$ of such robots, all aligned towards a same target with $|\hat{P}| = 2$, after at most $(n - 2) \lceil \frac{|q_1 q_2|}{\delta} \rceil$ epochs, a configuration C' with $|Q'| = |\hat{P}|$ is achieved. \square

Lemma 8. *Given a configuration C with a unique maximum distance pair $\{q_1, q_2\}$ and a pattern \hat{P} such that $|Q| = |\hat{P}|$, Algorithm SEQPF', in at most $2 \lceil \frac{|q_1 q_2|}{\delta} \rceil$ epochs, either finalizes the pattern formation or brings to a configuration C' with $|Q'| > |\hat{P}|$.*

Proof. According to the given assumptions, once a robot r located at $q \notin \{q_1, q_2\}$ is activated (see Line 19), it scales the pattern \hat{P} in such a way that, the maximum distance defined by any pair of pattern points, has the same length of $|\overline{q_1 q_2}|$ (see Lines 20 and 21). After that, r executes Line 22 computing all the possible transformations of \hat{P} with respect to $\overline{q_1 q_2}$. The transformation selected to overlap Q with \hat{P} is the one with the smallest distance deviation. Robot r then computes the point p_i as the unoccupied pattern point such that q is the closest robot position to p_i not on a pattern point (see Line 24) and selects p_i as its destination in Line 26. As long as there are unoccupied pattern points, Lines 24–26 are executed by the activated robot r to finalize the pattern. Note that, there can be at most two robots positions not coincident with pattern points. Such robot positions can be aligned with a target. However, because of the maximum distance defined by $\overline{q_1 q_2}$, no other robot position nor pattern point can be aligned with $\overline{q_1 q_2}$ and outside such a segment. Therefore, in at most two epochs, Algorithm SEQPF' makes the robots not located at $\{q_1, q_2\}$ move.

Furthermore, it is possible that after one movement a robot leaves a multiplicity, hence increasing the number of robot positions, leading to a configuration C' with $|Q'| > |\hat{P}|$.

If no multiplicities are involved, after at most $2 \lceil \frac{|q_1 q_2|}{\delta} \rceil$ epochs, all the pattern points are occupied and the pattern formation is finalized. \square

Theorem 5. *Given a configuration C and a pattern \hat{P} such that $|\hat{P}| \leq 4$, Algorithm SEQPF' correctly solves UPF* in at most $2(n - 2) \lceil \frac{|q_1 q_2|}{\delta} \rceil + 2$ epochs, with $\{q_1, q_2\}$ being the unique maximum distance pair, possibly created during the execution.*

Proof. Algorithm SEQPF' may require Procedure SEPARATE for one epoch in order to obtain $|Q| = |\hat{P}|$. At most another epoch is consumed to achieve one unique maximum distance pair $\{q_1, q_2\}$. As long as $|Q| > |\hat{P}|$ or there are multiplicities not on pattern points, then, by Lemma 7, at most $(n - 2) \lceil \frac{|q_1 q_2|}{\delta} \rceil$ epochs to reach a configuration with a number of robot positions $|Q| = |\hat{P}|$ are required. Actually, the algorithm may alternate periods where $|Q| = |\hat{P}|$ with periods where $|Q| > |\hat{P}|$, still depending on whether there are multiplicities or not. Overall, by combining Lemmata 7 and 8, the algorithm requires at most $2(n - 2) \lceil \frac{|q_1 q_2|}{\delta} \rceil$ to finalize the pattern. Hence, by summing up among all the possible stages of the algorithm, the claim holds. \square