

Breaking the Barrier: A Polynomial-Time Polylogarithmic Approximation for Directed Steiner Tree

Bundit Laekhanukit*

December 17, 2024

Abstract

The Directed Steiner Tree (DST) problem is defined on a directed graph $G = (V, E)$, where we are given a designated root vertex r and a set of k terminals $K \subseteq V \setminus r$. The goal is to find a minimum-cost subgraph that provides directed $r \rightarrow t$ paths for all terminals $t \in K$.

The approximability of DST has long been a central open problem in network design. Although there exist polylogarithmic-approximation algorithms with quasi-polynomial running times (Charikar et al. 1998; Grandoni, Laekhanukit, and Li 2019; Ghuge and Nagarajan 2020), the best-known polynomial-time approximation until now has remained at k^ϵ for any constant $\epsilon > 0$. Whether a polynomial-time algorithm achieving a polylogarithmic approximation exists has been a longstanding mystery.

In this paper, we resolve this question by presenting a polynomial-time algorithm that achieves an $O(\log^3 k)$ -approximation for DST on arbitrary directed graphs. This result nearly matches the state-of-the-art $O(\log^2 k / \log \log k)$ approximations known only via quasi-polynomial-time algorithms. The resulting gap – $O(\log^3 k)$ versus $O(\log^2 k / \log \log k)$ – mirrors the known complexity landscape for the Group Steiner Tree problem. This parallel suggests intriguing new directions: Is there a hardness result that provably separates the power of polynomial-time and quasi-polynomial-time algorithms for DST?

1 Introduction

In the Directed Steiner Tree (DST) problem, we are given a directed graph $G = (V, E)$ with $n = |V|$ vertices and nonnegative edge-costs $c : E \rightarrow \mathbb{R}_0^+$. We are also given a designated root vertex $r \in V$ and a set of k terminals $K \subseteq V \setminus r$. The objective is to find a minimum-cost subgraph $H \subseteq G$ that provides a directed path from the root r to every terminal $t \in K$. DST and its undirected counterpart are central problems in network design, with numerous practical applications such as communication network design, VLSI design automation [GMW97, She95, SW96, AMS08], information retrieval [SXC⁺21, YSL⁺22], and phylogenetics [WMT12, BTN⁺09, LTL02, ABMS12]. Over the decades, DST has been at the center of extensive study both theoretically and practically.

The Steiner Tree problem (both directed and undirected) is among the earliest known NP-hard problems. Its decision version is listed as one of *Karp's 21 NP-complete problems* [Kar72]. This intractability leaves theoretical computer scientists with no option but to seek approximation algorithms.

*The author is unofficially affiliated with Kasetsart University, Bangkok, Thailand. E-mail: lbundit@gmail.com

For the undirected Steiner tree problem, a factor-two approximation algorithm was discovered in the late 1960s by Gilbert and Pollak [GP68], and the approximation ratio has steadily improved. Currently, thanks to the state-of-the-art algorithm by Byrka, Grandoni, Rothvoß, and Sanità [BGRS13], the approximation ratio for the undirected case is nearing $\ln(4) < 1.39$.

In stark contrast, the best-known polynomial-time approximation ratio for DST has remained at k^ϵ for every fixed $\epsilon > 0$ since the 1990s from the work of Zelikovsky [Zel97] and Charikar et al. [Zel97] and Charikar et al. [CCC⁺99].¹ Evidence from integrality gaps [HKK⁺07, ZK02, LL24] and hardness results [HK03] strongly suggests that DST is inherently more difficult. In fact, no constant-factor approximation is known under plausible complexity assumptions – DST admits no $\log^{2-\epsilon} n$ -approximation, for any $\epsilon > 0$ unless $\text{NP} \subseteq \text{ZPTIME}(n^{\text{polylog}(\cdot)})$ [HK03]. Until recently, no polynomial-time algorithm was known that could even achieve a sub-polynomial approximation ratio.

Yet, if we allow quasi-polynomial-time algorithms, the picture changes dramatically. Charikar et al. [CCC⁺99] first showed that DST admits a polylogarithmic approximation ratio of $O(\log^3 k)$ in quasi-polynomial time. Two independent works by Grandoni, Laekhanukit, and Li [GLL23], and by Ghuge and Nagarajan [GN22], further improved this approximation ratio to $O(\log^2 k / \log \log k)$, but still with quasi-polynomial running times. This leaves a striking gap: While quasi-polynomial-time algorithms achieve nearly optimal polylogarithmic approximations, no sub-polynomial approximation is known in strictly polynomial time. This gap has remained a major open problem in the area for nearly three decades.

Open Problem 1. *Is there a polylogarithmic approximation algorithm for the Directed Steiner Tree problem that runs in polynomial time? Is there even a polynomial-time sub-polylogarithmic approximation algorithm for the problem?*

1.1 Our Result and Contribution

This paper resolves the longstanding open question of whether there exists a polynomial-time polylogarithmic approximation for the Directed Steiner Tree problem. We present a randomized polynomial-time $O(\log^3 k)$ -approximation algorithm for DST.

Theorem 1. *There exists a randomized polynomial-time $O(\log^3 k)$ -approximation algorithm for the Directed Steiner Tree problem.*

Our result brings polynomial-time performance significantly closer to that of quasi-polynomial-time algorithms, missing only an $O(\log k)$ factor. Notably, this residual gap mirrors the situation in the Group Steiner Tree problem, where the best polynomial-time approximations also lag behind quasi-polynomial-time ones by about a $\log k$ factor.

The core of our approach is a novel LP formulation. We strengthen the standard flow-based LP relaxation for DST by adding carefully designed constraints that enforce consistency between capacity and flow variables. Exploiting these constraints, we decompose the fractional solution into a tree-like structure that can be rounded using techniques originally developed for the Group Steiner Tree problem on a tree. Crucially, unlike previous approaches relying on LP/SDP hierarchies or large enumerations, our decomposition and rounding run in polynomial time. By reverse-engineering known integrality gap constructions [HKK⁺07], we show how to maintain the

¹Zelikovsky’s approximation scheme was originally developed for DST in directed acyclic graphs. Later, Charikar et al. [CCC⁺99] showed that it also applies to general graphs.

flow structure through the decomposition, yielding the first polynomial-time polylogarithmic approximation for DST.

1.2 Implications and Open Problems

Our result answers a major open question in approximation algorithms and network design. It narrows the gap between polynomial and quasi-polynomial time approximations, leaving a scenario reminiscent of the Group Steiner Tree problem. This raises intriguing new directions:

- **Hardness Thresholds:** Is there a matching hardness result that excludes $O(\log^2 k / \log \log k)$ -approximations (or better) in polynomial time?
- **Extensions:** Can our LP-based decomposition approach be applied to other optimization problems, potentially yielding improved approximations there as well?

1.3 Related Work

The Steiner Tree problem and its variants lie at the heart of network design, encompassing a rich family of problems with wide-ranging applications. Among these, two of the most fundamental are the Undirected Steiner Tree problem and its directed counterpart – the Directed Steiner Tree problem, which is the focus of this paper.

For the Undirected Steiner Tree problem, approximation algorithms have a long history. The first known approximation, a factor-two algorithm, was given by Gilbert and Pollak in 1968 [GP68]. Breaking through the factor-of-two barrier took decades: Zelikovsky’s algorithm [Zel93] achieved a factor of $11/6$, a key early improvement. Subsequent efforts have steadily lowered the approximation ratio, culminating in the current state-of-the-art result by Byrka, Grandoni, Rothvoß, and Sanit’a [BGRS13], which obtains an approximation ratio approaching $\ln(4) < 1.39$. This progression highlights significant advances on the undirected side.

In contrast, the Directed Steiner Tree (DST) problem is substantially more challenging. The first approximation algorithm achieving a ratio of k^ϵ (for any $\epsilon > 0$) was devised by Zelikovsky [Zel97] for directed acyclic graphs. Charikar et al. [CCC⁺99] later extended this result to general directed graphs and additionally introduced the first polylogarithmic approximation for DST, attaining an $O(\log^3 k)$ -approximation ratio but requiring quasi-polynomial time.² Subsequent works [Rot11, FKK⁺14] also attained $O(\log^3 k)$ approximations, still relying on quasi-polynomial running times.

More recently, two independent breakthroughs by Grandoni, Laekhanukit, and Li [GLL23], as well as Ghuge and Nagarajan [GN22], improved the approximation ratio for DST to $O(\log^2 k / \log \log k)$, yet these results still hinge on quasi-polynomial-time algorithms. Notably, [GLL23] showed that this ratio is essentially the best possible in the quasi-polynomial regime, assuming the Projection Game Conjecture and that $\text{NP} \not\subseteq \bigcup_{\delta > 0} \text{ZPTIME}(2^{n^\delta})$. Under the more standard assumption $\text{NP} \not\subseteq \text{ZPTIME}(n^{\text{polylog}(n)})$, the hardness result by Halperin and Krauthgamer [HK03] establishes that no $\log^{2-\epsilon} n$ -approximation for DST is possible for any constant $\epsilon > 0$.

A closely related special case of DST is the Group Steiner Tree (GST) problem, defined on undirected graphs. In Group Steiner Tree, the goal is to ensure connectivity from a root to at least

²Charikar et al. originally claimed a ratio of $O(\log^2 k)$ [CCC⁺99]. However, the correct ratio is $O(\log^3 k)$ due to a subtle issue in Zelikovsky’s height reduction lemma [Zel97], which was identified and corrected by Helvig, Robin, and Zelikovsky in [HRZ01].

one node in each of several specified groups (subsets) of vertices. Through a standard reduction, any instance of Group Steiner Tree can be transformed into a DST instance with minimal overhead. For Group Steiner Tree on trees, the seminal work of Garg, Konjevod, and Ravi [GKR00] achieved an $O(\log^2 k)$ -approximation. By applying probabilistic metric-tree embeddings [Bar98, FRT04], their approach extends to yield an $O(\log^3 k)$ -approximation for general undirected graphs. This randomized LP-rounding algorithm was later derandomized by Charikar, Chekuri, Goel, and Guha [CCGG98].

On the negative side, Halperin et al. [HKK⁺07] established an integrality gap of $\Omega(\log^2 n / (\log \log n)^2)$ for a standard LP-relaxation of Group Steiner Tree on a tree. Subsequently, Halperin and Krauthgamer [HK03] proved that no $\log^{2-\epsilon} n$ -approximation is possible for any constant $\epsilon > 0$, unless $\text{NP} \subseteq \text{ZPTIME}(n^{\text{poly} \log(n)})$. These hardness results closely parallel the complexity landscape observed for the DST problem.

High-connectivity generalizations of both DST and Group Steiner Tree problems have also been studied, requiring λ edge-disjoint or vertex-disjoint paths from the root to each terminal or group. For DST, nontrivial approximation results are known only for the special case $\lambda = 2$ (2-edge connectivity), where Grandoni and Laekhanukit [GL17] obtained a quasi-polynomial-time polylogarithmic approximation. For higher connectivity requirements ($\lambda \geq 3$), only special cases admit nontrivial results [Lae16, CLWZ20, Nut24]. Liao, Chen, Laekhanukit, and Zhang [LCLZ22] showed that the hardness of the λ -Connected DST problem grows exponentially in λ , even for constant λ , indicating an inherent difficulty. More generally, the hardness is almost polynomial in n (see, e.g., [CLNV14, Lae14, Man19]). For the Group Steiner Tree variant with λ -edge-connectivity, polynomial-time polylogarithmic approximations exist for any value of λ , as shown by Chen, Laekhanukit, Li, and Zhang [CLLZ22], setting it apart from the directed case. For additional relevant and related results, see [GKR10, KKN12, CGL15].

2 Overview of the Algorithm

This section provides intuition and an informal overview of our algorithm. We delay formal definitions and notations to Section 3; readers unfamiliar with the topic may wish to briefly go through the preliminaries before returning here.

Simplifying the Instance. As the first step, we use a height-reduction technique due to Zelikovsky [Zel97] to simplify the input instance. This result shows that every solution to the DST problem can be approximated by a directed binary tree of height $O(\log k)$ whose cost is within $O(\log k)$ of the optimum. Thus, we may assume without loss of generality that the input graph is a directed acyclic graph (DAG) with $L = O(\log k)$ layers. This layered structure is crucial for formulating a strong LP relaxation.

Formulating a Strong LP. A natural LP-relaxation for DST assigns capacities x_e to each edge $e \in E(G)$ and flow variables f_e^t to send a unit $r \rightarrow t$ flow to every terminal $t \in K$; see Figure 2 and the discussion in Section 4. Unfortunately, the standard flow-based LP for DST has an integrality gap of at least $\Omega(n^{0.418})$ [LL24], making it too weak for achieving a polylogarithmic approximation ratio.

While applying $\Theta(L)$ rounds of LP or SDP hierarchies (such as Sherali-Adams, Lasserre, or Lov'asz-Schrijver) would reduce the integrality gap to $O(L \log k)$ (i.e., $O(\log^2 k)$ for $L = O(\log k)$)

as shown in [Rot11, FKK⁺14], the resulting LP would have size $n^{\Omega(L)}$ and thus would not be solvable in polynomial time when $L = \Omega(\log n)$.

Instead, we tackle the main source of difficulty directly: the *inconsistency between flow and capacity* that arises when multiple terminals share the same edges. In any integral solution, each vertex (except the root) has exactly one incoming edge, so each $r \rightarrow t$ path is unique. Thus, if different terminals' flows use the same edges, they must share a common prefix. However, in a fractional solution, distinct terminals' flows can merge or diverge arbitrarily, allowing multiple paths that differ in their initial segments to share an edge, as illustrated in Figure 1.

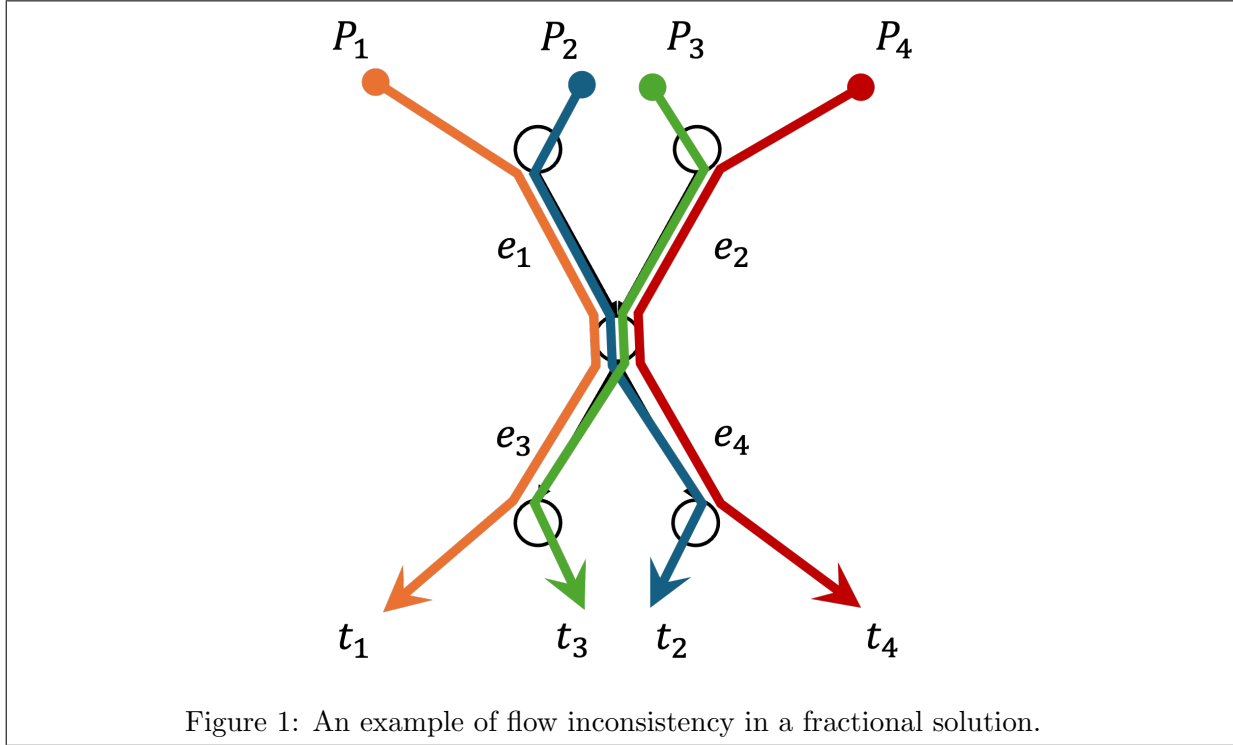


Figure 1: An example of flow inconsistency in a fractional solution.

In Figure 1, we illustrate how multiple $r \rightarrow t$ flow paths can cause inconsistencies in a fractional solution. Consider four terminals t_1, t_2, t_3 , and t_4 with corresponding flow paths p_1, p_2, p_3 , and p_4 . The paths p_1 and p_2 initially share the same edge e_1 before diverging onto edges e_3 and e_4 , respectively. Meanwhile, p_3 and p_4 share a different edge e_2 before eventually merging into the same edges e_3 and e_4 as p_2 and p_1 . In an integral solution, each vertex (except the root) has exactly one incoming edge, ensuring a unique $r \rightarrow t$ path per terminal and preventing such complex merges and divergences. However, a fractional solution allows different terminals to share edges in a manner that cannot arise integrally. This issue is compounded if flow paths separate and then rejoin later, making it much harder to enforce a tree-based structure without additional constraints.

To prevent such inconsistencies, we introduce new variables and constraints that enforce a property akin to *degree-one connectivity*, ensuring that if multiple terminals' flows reach the same edge, they do so in a structured, tree-like manner. Previous approaches [Rot11, FKK⁺14] rely on $\Theta(L)$ rounds of hierarchies to ensure the *unique path* property, effectively controlling the entire length- L path. However, this leads to a quasi-polynomial-size LP. Since we cannot afford such blow-up, we only enforce capacity-flow consistency locally, on each pair of consecutive edges.

More concretely, we add constraints of the form:

$$\sum_{uv} x_{uv \rightarrow vw} = x_{vw}$$

The constraints ensure that the capacity used to enter v from various predecessors u can only “flow” into vw under separate sets of capacity variables $x_{uv \rightarrow vw}$. Similar constraints can be derived from two rounds of the Sherali-Adams hierarchy, but those only guarantee inequalities rather than equalities:

$$(x_{vw}) \times \left(\sum_{uv \in \delta^{in}(v)} x_{uv} \leq 1 \right) \implies \sum_{uv \in \delta^{in}(v)} x_{uv} \leq x_{vw}$$

The equality constraints we introduce here are crucial, as the weaker inequalities would allow decomposition into a tree-like structure but fail to ensure sufficient capacity to support a unit flow for each terminal.

Decomposing the Fractional Solution into a Tree. With these strengthened constraints, we show that the LP solution can be decomposed into a capacitated tree structure – referred to as the *decomposition tree*. Initially, we only consider the integrality gap upper bound and allow the decomposition tree to be of quasi-polynomial size.

The decomposition is layered: we handle one layer at a time and form a probabilistic distribution of possible “children” structures for the next layer. Ensuring coherence across layers is the main challenge. By carefully analyzing these probabilities, we argue that the resulting decomposition tree supports a fractional solution that resembles a Group Steiner Tree (GST) instance on a tree.

The well-studied GST problem admits an $O(\log^2 k)$ integrality gap on a tree instance [GKR00], giving us a polylogarithmic integrality gap for our strengthened LP as well. Thus, we conclude that our LP is significantly stronger than the standard flow-based relaxation.

Ensuring Feasibility and Controlling Error Accumulation. While the conceptual outline is clear, ensuring the feasibility of the GST instance derived from our probabilistic decomposition is intricate. Each layer introduces small multiplicative errors in capacities and flows. Even an $(1 \pm \epsilon)$ distortion per layer can accumulate into $(1 \pm \epsilon)^L$ distortion over $L = O(\log k)$ layers, potentially growing polynomially in k .

Our feasibility analysis is inspired by the work of Halperin et al. [HKK⁺07] and Halperin and Krauthgamer [HK03], who built integrality gap constructions through recursive instances of Set Cover (a special case of GST on a star). By “reverse-engineering” their proofs, we adapt their techniques to analyze our randomized decomposition. The key difference is that we cannot control the random instances of Set Cover as they could. Instead, we carefully choose a probability distribution that aligns with our LP variables. Another subtlety is that we construct a *pre-flow* (not necessarily feasible) and then argue that a feasible flow of the same value must exist. These refinements allow us to bound error accumulation and maintain the desired polylogarithmic integrality gap.

From Integrality Gap to a Polynomial-Time Algorithm. Our analysis shows that for an L -layer DAG with $L = O(\log k)$, the integrality gap of our strengthened LP is polylogarithmic.

However, the decomposition tree constructed in the proof may have quasi-polynomial size, which does not immediately yield a polynomial-time algorithm.

To overcome this, we interleave the decomposition and rounding steps *on-the-fly*. Our rounding algorithm is based on the Garg-Konjevod-Ravi (GKR) algorithm for the GST problem on a tree. A key insight, as discussed by Rothvoß [Rot11], is that although GKR might conceptually operate on a large (even quasi-polynomial-size) tree, it only needs to query a polynomial number of LP variables. This ensures that, despite the complexity of the underlying structure, the overall computation remains polynomial in time.

We prove that a similar phenomenon holds in our setting: by carefully interleaving the decomposition and rounding steps, we ensure that only a polynomial number of recursive calls are made. As a result, we obtain a randomized polynomial-time algorithm for DST that achieves a polylogarithmic approximation ratio.

Previous approaches [Rot11, FKK⁺14] relied on solving LPs or SDPs of quasi-polynomial size, making polynomial-time computability unlikely. Our method, in contrast, directly encodes essential structural properties into the LP and interleaves decomposition and rounding to overcome this complexity barrier. This innovative approach leads to the first known polynomial-time polylogarithmic approximation for DST.

3 Preliminaries

We use standard graph terminology. Let G be any directed graph, with vertex set $V(G)$ and edge set $E(G)$. We usually denote an edge between vertices $u, v \in V(G)$ by uv . However, at times we will write (u, v) to clearly distinguish between u and v and emphasize the direction of the edge. For any subset of vertices $U \subseteq V(G)$ (or a single vertex), we define the set of incoming edges to U and outgoing edges from U as

$$\delta_G^{\text{in}}(U) = \{vu \in E(G) : u \in U\} \quad \text{and} \quad \delta_G^{\text{out}}(U) = \{uv \in E(G) : u \in U\}$$

The indegree and outdegree of U are $\text{indeg}_G(U) = |\delta_G^{\text{in}}(U)|$ and $\text{outdeg}_G(U) = |\delta_G^{\text{out}}(U)|$. When G is clear from the context, we omit the subscript and write V and E for $V(G)$ and $E(G)$, respectively.

An *arborescence* is a directed graph analog of a tree, meaning that its underlying undirected graph forms a tree. Formally, a directed graph H with a designated root vertex $r \in V(H)$ is an *arborescence* if it satisfies the following properties:

- (1) H is *weakly connected*.
- (2) Every vertex in H except the root r has indegree one.
- (3) There is a unique directed path connecting r to each vertex $v \in V(H) \setminus \{r\}$ (or making r reachable from every v).

Arborescences come in two types: (1) *out-arborescences*, where all paths are directed away from the root, and (2) *in-arborescences*, where all paths are directed toward the root. In this paper, we consider only out-arborescences and will refer to such graphs simply as *trees*.

A *layered graph* (or an *L-layered graph*) is a *directed acyclic graph* (DAG) G whose vertex set is partitioned into L disjoint subsets, called *layers*, V_1, V_2, \dots, V_L . In a layered graph, every edge

connects a vertex in layer ℓ to a vertex in layer $\ell + 1$ for $i = 1, 2, \dots, L - 1$. Formally, an L -layered graph G is defined by

$$\begin{aligned} V(G) &= V_1 \dot{\cup} V_2 \dot{\cup} \dots \dot{\cup} V_L, \\ E(G) &= E_1 \dot{\cup} E_2 \dot{\cup} \dots \dot{\cup} E_{L-1}, \text{ where } E_i \subseteq V_i \times V_{i+1}. \end{aligned}$$

We also partition the edges of G into E_1, E_2, \dots, E_{L-1} , where E_ℓ consists of edges uv whose head is in layer V_ℓ and tail is in $V_{\ell+1}$. A vertex $v \in V(G)$ is said to be at *level* ℓ if $v \in V_\ell$, and an edge $uv \in E(G)$ is at level ℓ if $uv \in E_\ell$. For any vertex v or edge uv , we denote its level by $\text{Level}(v)$.

In a tree (out-arborescence) or a DAG, we define the *height* as the length of the longest path from the root (or source vertex) to any leaf (or sink vertex). Specifically, the height of a tree is the maximum number of edges on a path from the root to a leaf, while the height of a DAG is the maximum number of edges on a path from any source to any sink vertex.

Problem Definitions: We define the problems considered in this paper as follows:

- **Directed Steiner Tree (DST):** Given a directed graph G with n vertices, m edges, and nonnegative edge costs c_e , a root vertex $r \in V(G)$, and a set of k terminals $K \subseteq V(G) \setminus r$, the goal is to find a minimum-cost subgraph $H \subseteq G$ that contains a directed path from r to each terminal $t \in K$.
- **Group Steiner Tree (GST):** Given an undirected graph G with n vertices, m edges, and nonnegative edge costs c_e , a root vertex $r \in V(G)$, and a collection of subsets $\mathcal{G}_1, \dots, \mathcal{G}_k$ called *groups*, the goal is to find a minimum-cost subgraph $H \subseteq G$ that contains a path from r to at least one vertex in each group \mathcal{G}_i for $i = 1, 2, \dots, k$.

Pseudo-Flow, Pre-Flow and Feasible-Flow: Our discussion requires the notions of several types of flows, which are relevant to the formulation of our LP and for our analysis. Readers already familiar with these concepts may skip this part.

A cut in a directed graph G is a partition of $V(G)$ into two parts S and $\bar{S} = V(G) \setminus S$. We may refer to a cut as (S, \bar{S}) or simply S . For a cut $S \subseteq V(G)$, its *cut-set* is the set of edges going from S to \bar{S} , i.e., $\delta^{\text{out}}(S)$. An edge $e \in E(G)$ *belongs to* a cut S if $e \in \delta^{\text{out}}(S)$. A cut S *separates* vertices s and t if $s \in S$ and $t \notin S$, and may be called an $s \rightarrow t$ -cut. By Menger's theorem, there are λ edge-disjoint $s \rightarrow t$ paths in G if and only if every $s \rightarrow t$ -cut S has at least λ edges. In particular, to guarantee an $s \rightarrow t$ -path exists, we must have at least one edge crossing every $s \rightarrow t$ -cut (S, \bar{S}) .

An s, t -flow network N is defined on a directed graph G with capacities x_e on each edge $e \in E(G)$, where $s, t \in V(G)$ are the source and sink, respectively. A *pseudo-flow* (or *pseudo- s, t -flow*) f is a function $f : E(G) \rightarrow \mathbb{R}$ assigning each edge $uv \in E(G)$ a real value f_{uv} , subject to the **capacity constraint**:

$$f_{uv} \leq x_{uv} \text{ for all edges } uv \in E(G).$$

We often refer to a pseudo-flow by its values $f_{e \in E(G)}$. The value of a pseudo-flow on any cut $S \subseteq V(G)$ is the **net-flow**, defined as the total flow entering S minus the total flow leaving S :

$$\sum_{uv \in \delta^{\text{in}}(S)} f_{uv} - \sum_{vw \in \delta^{\text{out}}(S)} f_{vw}.$$

The value of a flow f on the network is the net-flow entering the sink t .

A *pre-flow* (or *pre- s, t -flow*) is a pseudo- s, t -flow where every vertex except the source s has non-negative net-flow. A *feasible s, t -flow* is a pseudo- s, t -flow where every vertex except the source s and the sink t has zero net-flow, i.e., it satisfies the **flow-conservation constraint**:

$$\sum_{uv \in \delta^{in}(v)} f_{uv} = \sum_{vw \in \delta^{out}(v)} f_{vw} \text{ for all vertices } v \in V(G) \setminus \{s, t\}.$$

Throughout our discussion, all s, t -flows have the root vertex r as the common source, while the sink can be any terminal $t \in K$. Thus, we will often refer to such a flow simply as a t -flow.

Concentration Bounds: Our analysis relies heavily on the well-known Chernoff-Hoeffding bounds [Che52, Hoe63]. We use the versions commonly presented in modern literature, as found in the textbook by Mitzenmacher and Upfal [MU17].

Lemma 2 (Chernoff-Hoeffding [Che52, Hoe63, MU17]). *Let X_1, X_2, \dots, X_n be independent 0 – 1 random variables such that $\Pr[X_i = 1] = \rho_i$ and $\Pr[X_i = 0] = 1 - \rho_i$, for $i = 1, 2, \dots, n$. Let $X = \sum_{i=1}^n X_i$, and let $\mu = \mathbb{E}[X] = \sum_{i=1}^n \rho_i$. Then the following hold:*

- **Upper Tail:** $\Pr[X \geq (1 + \epsilon)\mu] \leq e^{-\frac{\epsilon^2}{3}\mu}$, for all $0 < \epsilon \leq 1$.
- **Lower Tail:** $\Pr[X \leq (1 - \epsilon)\mu] \leq e^{-\frac{\epsilon^2}{2}\mu}$, for all $0 < \epsilon < 1$.

3.1 Parameters and Settings of the Directed Steiner Tree Instance

Throughout the discussion, we assume that the input graph G is an L -layered directed graph with $L = \lceil \log_2 k \rceil + 1$ layers. From now on, we focus on directed graphs and omit the word “directed” for brevity. The number of vertices, edges, and terminals are denoted by n , m , and k , respectively.

In general, we can assume that G is a layered graph with n layers. To see this, given any graph G , create n copies of $V(G)$ as V_1, V_2, \dots, V_n . For each edge $uv \in E(G)$, join a copy \tilde{u} of u at level ℓ to a copy \tilde{v} of v at level $\ell + 1$ by an edge with cost $c_{(\tilde{u}, \tilde{v})} = c_{uv}$, for all $\ell = 1, 2, \dots, L - 1$. In addition, join a copy of u at level ℓ to another copy of u at level $\ell + 1$ by a zero-cost edge. It is not hard to see that this transformation preserves the optimal solution. We may further assume that $V_1 = \{r\}$ and $V_L = K$.

However, for technical reasons, our algorithm requires $L = O(\log k)$ layers, while the trivial transformation might result in $L = n$. Consider, for example, a case where the optimal solution is a path of length n .

Nevertheless, Zelikovsky [Zel97, HRZ01] showed that the *metric closure* of the input graph contains a tree of height L , for $L = 2, \dots, \lceil \log_2 k \rceil + 1$, that preserves the cost of an optimal solution within a factor of $L \cdot k^{1/L}$.

Lemma 3 (Zelikovsky’s Height Reduction [Zel97, HRZ01]). *Let T be any tree (out-arborescence) with cost c_e on each edge $e \in E(T)$ having a root r and k leaves. Then there exists a tree (out-arborescence) \hat{T} of height ℓ , for $L = 2, 3, \dots, \lceil \log_2 k \rceil + 1$, in the metric closure $\mathcal{M}(T)$ of T that has r as a root, spans all the k leaves and has cost at most:*

$$\text{cost}(\hat{T}) \leq L^2 k^{1/L} \text{cost}(T)$$

It follows from the basic transformation mentioned above that the metric closure of G can be transformed into an L -layered graph with $L = \lceil \log_2 k \rceil + 1$ layers, while preserving the cost of an optimal solution within a factor of $O(\log k)$.

4 Formulating a Strong Linear Program

We begin by explaining how to formulate our LP. The standard flow-based LP-relaxation for DST seeks a minimum-cost solution vector $\{x_e\}_{e \in E(G)}$ that supports a unit $r \rightarrow t$ flow for every terminal $t \in K$.

In this standard flow-based LP-relaxation, we have two types of variables on an edge $e \in E(G)$.

- The variable x_e indicates whether an edge $e \in E(G)$ is chosen in the solution.
- The variable f_e^t is a flow variable indicating how much $r \rightarrow t$ flow is carried on edge e .

A basic description of the standard flow-based LP-relaxation for DST is shown in Figure 2.

$$\begin{aligned}
 & \min \sum_{e \in E(G)} c_e x_e \\
 & \text{s.t} \\
 & \{x_e\}_{e \in E(G)} \text{ supports a unit } r \rightarrow t\text{-flow to every terminal } t \in K \\
 & \{f_e^t\}_{e \in E(G)} \text{ defines a unit } r \rightarrow t\text{-flow} \qquad \qquad \qquad \forall t \in K \\
 & 0 \leq f_e^t \leq x_e \leq 1 \qquad \qquad \qquad \forall e \in E(G), \forall t \in K
 \end{aligned}$$

Figure 2: Standard flow-based LP-relaxation for DST

In our formulation, we strengthen the LP by adding constraints that ensure, for any edge vw , the number of paths containing any two consecutive edges uv and vw is at most x_{vw} (the number of paths passing through vw). These are valid constraints because, in any minimal integral solution, each vertex v except the root has exactly one incoming edge.

More precisely, for every pair of consecutive edges $uv, vw \in E(G)$ and every terminal $t \in K$, we introduce additional variables $x_{uv \rightarrow vw}$ and $f_{uv \rightarrow vw}^t$. We then impose the following constraints:

$$\begin{aligned}
 \sum_{uv \in E(G)} x_{uv \rightarrow vw} &= x_{vw}, & \sum_{uv \in E(G)} f_{uv \rightarrow vw}^t &= f_{vw}^t, \\
 f_{uv \rightarrow vw}^t &\leq x_{uv \rightarrow vw}, & \sum_{vw \in E(G)} f_{uv \rightarrow vw}^t &= f_{uv}^t \\
 x_{uv \rightarrow vw} &\leq \min\{x_{uv}, x_{vw}\}, & f_{uv \rightarrow vw}^t &\leq \min\{f_{uv}^t, f_{vw}^t\}
 \end{aligned}$$

Note that a similar constraint can be derived from two rounds of the Sherali-Adams hierarchy, but it would not hold with equality.

Let $G = (V, E)$ be the input graph, r be the root vertex, $K \subseteq V \setminus r$ be the set of terminals, and let E_ℓ , for $\ell = 1, 2, \dots, L$ with $L = \lceil \log_2 k \rceil + 1$, denote the set of edges at level ℓ . Our LP-relaxation is shown in Figure 3.

$$\begin{array}{ll}
\min & \sum_{e \in E(G)} c_e x_e \\
\text{s.t.} & \\
& \sum_{uv \in E(G)} x_{uv \rightarrow vw} = x_{vw} \quad \forall vw \in E(G) \quad (\star) \\
& 0 \leq x_{uv \rightarrow vw} \leq x_{uv} \quad \forall uv, vw \in E(G) \\
& 0 \leq x_{uv \rightarrow vw} \leq x_{vw} \quad \forall uv, vw \in E(G) \\
& \sum_{uv \in E(G)} f_{uv \rightarrow vw}^t = f_{vw}^t \quad \forall vw \in E(G), \forall t \in K \\
& \sum_{vw \in E(G)} f_{uv \rightarrow vw}^t = f_{uv}^t \quad \forall uv \in E(G), \forall t \in K \\
& 0 \leq f_{uv \rightarrow vw}^t \leq f_{uv}^t \quad \forall uv, vw \in E(G), \forall t \in K \\
& 0 \leq f_{uv \rightarrow vw}^t \leq f_{vw}^t \quad \forall uv, vw \in E(G), \forall t \in K \\
& f_{vw}^t \leq x_{vw} \quad \forall vw \in E(G), \forall t \in K \\
& f_{uv \rightarrow vw}^t \leq x_{uv \rightarrow vw} \quad \forall uv, vw \in E(G), \forall t \in K \\
& \{f_{vw}^t\}_{vw \in E(G)} \text{ defines a unit } r \rightarrow t\text{-flow.} \quad \forall t \in K \\
& \{f_{vw}^t\}_{uv \in E(G)} \text{ defines an } r \rightarrow t\text{-flow with value } f_{vw}^t. \quad \forall t \in K \\
& 0 \leq x_e \leq 1 \quad \forall e \in E(G)
\end{array}$$

Figure 3: Strengthened LP-relaxation for Directed Steiner Tree

5 Bounding Integrality Gap

Before describing our algorithm, we first analyze an upper bound on the integrality gap of the LP in Figure 3. The key idea is to show that any feasible fractional solution can be decomposed into a capacitated tree \mathcal{T} that supports a *feasible flow* of value close to one. More concretely, we transform an optimal fractional solution of the DST LP into a corresponding LP solution for the Group Steiner Tree (GST) problem on a tree. Applying the rounding algorithm of Garg, Konjevod, and Ravi [GKR00] to this GST instance, we conclude that the integrality gap of our LP is polylogarithmic in the number of terminals.

A direct implementation of the decomposition, however, would produce a tree of quasi-polynomial size, making it infeasible to run explicitly, even though our LP can be solved in polynomial time. To achieve a polynomial running time, we interleave the rounding and decomposition steps so that only a polynomial number of elements need to be processed. Additionally, we must carefully handle the capacity distortion in the resulting tree since each original edge $uv \in E(G)$ may appear multiple times in the decomposition tree.

Our upper bound analysis draws on insights from the lower bound construction of Halperin et al. [HKK⁺07] for the GST problem on a tree. Their approach recursively composes an integrality gap instance of the *Set Cover* problem to form a complex GST instance. In contrast, we essentially

apply a similar idea in reverse: by treating each level of the layered graph as a Set Cover instance, we break down a given fractional DST solution into a simpler, tree-based structure that the GST rounding algorithm can effectively handle.

5.1 Constructing the Decomposition Tree

We now describe a random process that constructs a tree \mathcal{T} . Note that \mathcal{T} is not a subgraph of the original graph G and may be significantly larger. To avoid confusion, we will use the term *nodes* when referring to vertices of \mathcal{T} , while continuing to use *vertex* for those of G .

The tree \mathcal{T} is an out-arborescence whose root node corresponds to r , and whose leaves correspond to the set of terminals K . Thus, the root and terminals of \mathcal{T} match those in the original DST instance.

In Section 5.1.1, we outline the overall structure of the decomposition tree. Then, in Section 5.1.2, we describe the random growth process that, starting from the root, recursively decomposes the fractional solution along each edge $uv \in E(G)$ associated with each node in \mathcal{T} . Next, we detail the capacity and flow assignments in Section 5.1.3, and finally, we analyze the resulting integrality gap in Section 5.2.

5.1.1 Structure of the Decomposition Tree

The decomposition tree \mathcal{T} is an out-arborescence constructed from decomposing the fractional solution of our LP. Its nodes come in two distinct types: *edge-copy nodes* and *subset nodes*. As we grow this tree level by level, starting from a special root node, we maintain a layered structure to mirror the complexity of the underlying layered graph G .

- **Height:** The decomposition tree \mathcal{T} has $\hat{L} = 2L - 1$ levels, where L is the number of layers in the original L -layered graph G . The levels of \mathcal{T} are numbered from 1 through $2L - 1$. Thus, each level in G roughly corresponds to two levels in \mathcal{T} : one containing edge-copy nodes and one containing subset nodes.
- **Root Node:** At level 1, we have a special *edge-copy node* \tilde{r} associated with the root vertex r of G . We may think of r as arising from an auxiliary edge $r'r$. We call this unique node \hat{r} the *root node* of \mathcal{T} .
- **Leaf Nodes:** The leaves of \mathcal{T} lie at level \hat{L} , which is an odd level. Leaf nodes are “edge-copy nodes” corresponding to edges entering terminal vertices $t \in K$. Specifically, each leaf is denoted by \tilde{vt} , for $vt \in E(G)$ and $t \in K$. These leaves can be partitioned into groups \mathcal{G}_t based on their associated terminal t . Each \mathcal{G}_t represents a group in a Group Steiner Tree instance on the decomposition tree \mathcal{T} .
- **Odd-Level Nodes (Edge-Copy Nodes):** At every odd level $1, 3, 5, \dots, 2L - 1$, the nodes of \mathcal{T} are *edge-copy nodes*. Each such node corresponds to an edge in G . We write \tilde{uv} to denote an edge-copy node associated with an original edge $uv \in E(G)$. Since a single edge uv may appear multiple times as we branch out in the decomposition, we may have multiple copies labeled \tilde{uv} . Except at the leaves, each edge-copy node \tilde{uv} at an odd level has exactly d children, and these children are subset nodes.

- **Even-Level Nodes (Subset Nodes):** At every even level $2, 4, 6, \dots, 2L - 2$, the nodes of \mathcal{T} are *subset nodes*. Each subset node s_{uv}^j corresponds to a randomly chosen subset of edges from $E(G)$ that are “children” of the edge uv . There are d such subsets for each edge-copy node. The subset nodes s_{uv}^j serve as probabilistic intermediaries, chosen independently at random, that refine the decomposition down to the next layer.

In summary, \mathcal{T} alternates levels of edge-copy nodes and subset nodes, starting with an edge-copy node at the root and ending with edge-copy nodes at the leaves. Edge-copy nodes represent edges of the original graph G , while subset nodes represent random subsets of edges, guiding the decomposition through each layer. This alternating structure enables us to progressively “zoom in” on the fractional solution, ultimately transforming it into a tree-structured instance for which an existing technique – the Garg-Konjevod-Ravi rounding algorithm – is applicable.

5.1.2 Randomized Construction

The decomposition tree \mathcal{T} is built using a randomized procedure applied to each edge-copy node \widetilde{uv} , proceeding level by level until terminal nodes are reached. We remark that both the first and the last levels of \mathcal{T} consist exclusively of edge-copy nodes.

Given an edge-copy node \widetilde{uv} , the randomized construction process operates as follows:

- **From \widetilde{uv} to s_{uv}^j :** If v is not a terminal vertex in K , then we independently generate d subsets $s_{uv}^1, s_{uv}^2, \dots, s_{uv}^d$. For each subset s_{uv}^j , we consider every outgoing edge $vw \in E(G)$ (i.e., edges emanating from v). We include the edge-copy node \widetilde{vw} in subset s_{uv}^j with probability:

$$\Pr \left[\widetilde{vw} \in s_{uv}^j \right] = \frac{x_{uv \rightarrow vw}}{x_{uv}}.$$

This probability ensures that the selection of child edges in each subset aligns proportionally with their corresponding capacity x_{uv} distributed to each $x_{uv \rightarrow vw}$ in the LP solution.

- **From s_{uv}^j to \widetilde{vw} :** For each subset node s_{uv}^j , we create a child edge-copy node \widetilde{vw} corresponding to edge $vw \in E(G)$ only if \widetilde{vw} is included in s_{uv}^j . Formally, \widetilde{vw} becomes a child of s_{uv}^j *if and only if* $\widetilde{vw} \in s_{uv}^j$. That is,

$$(s_{uv}^j, \widetilde{vw}) \in E(\mathcal{T}) \iff \widetilde{vw} \in s_{uv}^j.$$

Importantly, observe that each subset s_{uv}^j contains *at most one copy* of any edge $vw \in E(G)$.

We may conceptualize the randomized construction as a form of fractional set packing, where our goal is to fractionally pack a star (a height-1 tree) into a capacity determined by the LP solution of the Strengthened LP. This perspective helps in understanding how the decomposition aligns with the flow and capacity constraints imposed by the LP, ensuring that the resulting tree structure accurately represents the fractional solution in expectation.

An illustration of the decomposition process is provided in Figure 4.

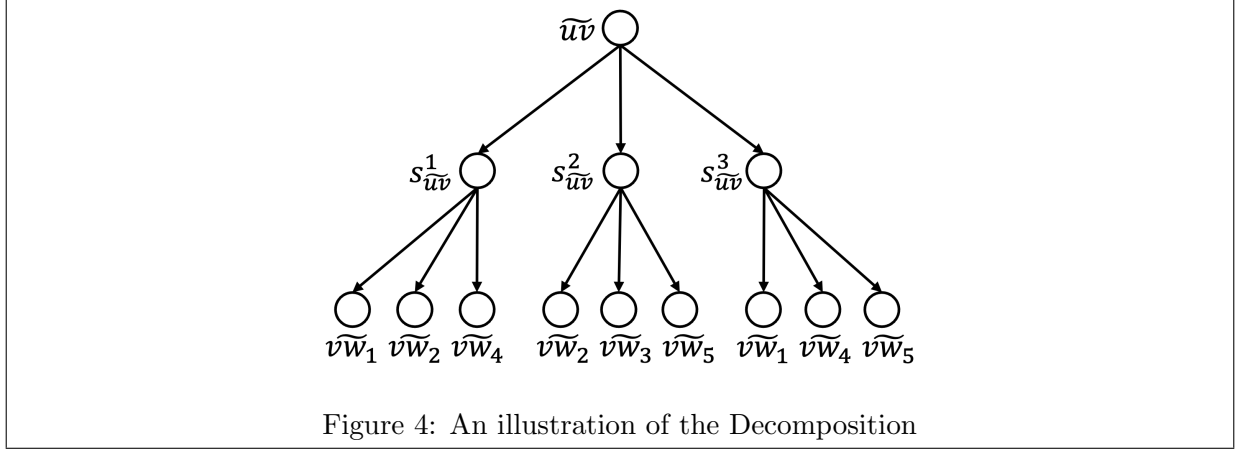


Figure 4: An illustration of the Decomposition

Handling the Root Level: The randomized process described above generates a *block* of subtrees emanating from each edge-copy node \widetilde{uv} . However, the first level of the input graph G consists only of the root vertex r , which has no incoming edge. To uniformly apply the decomposition process to all edge-copy nodes, including the root, we introduce auxiliary LP variables by treating the root $r \in V(G)$ as if it were an edge, and we add its copy \widetilde{r} as the root of the decomposition tree \mathcal{T} . Specifically, we set the capacity $x_r = 1$, representing the root's total capacity, and for each outgoing edge rv from r , we set $x_{r \rightarrow rv} = x_{rv}$, where rv denotes an edge outgoing from the root vertex r in G . Additionally, for each terminal $t \in K$, we set the flow $f_r^t = 1$ to ensure that one unit of flow is directed towards each terminal, and $f_{r \rightarrow rv}^t = f_{rv}^t$ to maintain flow consistency. That is,

$$x_r = 1, x_{r \rightarrow rv} = x_{rv} \quad \text{and} \quad f_r^t = 1, f_{r \rightarrow rv}^t = f_{rv}^t \quad \text{for all terminals } t \in K.$$

This setup ensures that the root vertex r correctly distributes flow and capacity to its outgoing edges in accordance with the LP solution, and the edge-copy \widetilde{r} can be seeded as the first node in the construction.

Terminals in the Decomposition Tree: In the decomposition process, each terminal $t \in K$ is represented by a collection of edge-copy nodes within the decomposition tree \mathcal{T} . Specifically, a terminal $t \in K$ is associated with all edge-copy nodes corresponding to edges directed into t in the original graph G . Formally, the set of edge-copy nodes representing terminal t is defined as

$$\mathcal{G}_t := \{\widetilde{vt} \in V(\mathcal{T}) : vt \in E(G)\}.$$

Borrowing terminology from the Group Steiner Tree (GST) problem, each set \mathcal{G}_t is referred to as a group. Each group \mathcal{G}_t encapsulates all potential connections to the terminal $t \in K$ within the tree structure and serves as the basis for defining a GST instance on the decomposition tree \mathcal{T} .

5.1.3 Assigning Capacities and Flow to the Decomposition Tree

Now, we assign the capacities and flows to the edges of the decomposition tree \mathcal{T} . The assignments will be described for each block in the decomposition tree \mathcal{T} consisting of an edge-copy node $\widetilde{uv} \in V(\mathcal{T})$, its children $s_{\widetilde{uv}}^j$, and nodes $\widetilde{vw} \in s_{\widetilde{uv}}^j$.

Intuition Behind The Distribution: We briefly explain the intuition behind our choice of distributions.

Firstly, we treat x_{uv} as the probability that an edge uv appears in an integral solution, and we interpret f_{uv}^t as the probability that an integral t -flow chooses to route through the edge uv . Thus, the ratio f_{uv}^t/x_{uv} represents the conditional probability that the t -flow chooses to route through uv given that uv is included in the integral solution.

Viewing the fractional solution this way, $x_{uv \rightarrow vw}/x_{uv}$ can be seen as the probability that an edge vw appears in the integral solution as a child of uv , given that uv is chosen. This forms the basis of the distribution we employ. Consequently, the probability is

$$\Pr[vw \text{ appears in an integral as a child of } uv | uv \text{ appears in an integral solution}] = \frac{x_{uv \rightarrow vw}}{x_{uv}}$$

Now, one may interpret $f_{uv \rightarrow vw}^t/x_{uv \rightarrow vw}$ as the probability that an integral t -flow routes through the edges uv and then vw . The key observation is that the flow variables f_{uv}^t are not **relatively integral** with respect to x_{uv} – that is, $f_{uv}^t/x_{uv} < 1$ is often the case. Therefore, we need to scale the t -flow by a factor of x_{uv}/f_{uv}^t and multiply by the fraction of t -flow \hat{f}_{uv}^t routing through uv in the decomposition tree. This yields the probability:

$$\Pr[t\text{-flow routes through } uv \rightarrow vw | uv \text{ and } vw \text{ appear in an integral solution}] = \hat{f}_{uv}^t \cdot \frac{x_{uv}}{f_{uv}^t} \cdot \frac{x_{uv \rightarrow vw}}{x_{uv}}$$

These ideas form the basis of our capacity and flow assignments. The t -flow on the decomposition tree is maintained so that it is close to being integral relative to the capacities – specifically, $\hat{x}_{\widetilde{uv}} = \hat{f}_{\widetilde{uv}}^t$.

Notation Simplification: To avoid confusion with the LP variables on the original graph G , we use \hat{x}_α and \hat{f}_α^t to denote the capacity and flow variables on an edge $\alpha \in E(\mathcal{T})$ in the decomposition tree. For convenience, since every node in a tree has a unique incoming edge, we may refer to an edge $(a, b) \in E(\mathcal{T})$ simply by its head node b when it appears in a subscript. For example, \hat{x}_b and \hat{f}_b^t correspond to $\hat{x}_{(a,b)}$ and $\hat{f}_{(a,b)}^t$, respectively.

$$\begin{aligned} \hat{x}_{(\widetilde{uv}, s_{\widetilde{uv}}^j)} &\iff \hat{x}_{s_{\widetilde{uv}}^j} & \hat{f}_{(\widetilde{uv}, s_{\widetilde{uv}}^j)}^t &\iff \hat{f}_{s_{\widetilde{uv}}^j}^t \\ \hat{x}_{(s_{\widetilde{uv}}^j, \widetilde{vw})} &\iff \hat{x}_{\widetilde{vw}} & \hat{f}_{(s_{\widetilde{uv}}^j, \widetilde{vw})}^t &\iff \hat{f}_{\widetilde{vw}}^t \end{aligned}$$

Capacity Assignments: First, we assign a capacity of $d^{-(\ell+1)}$ to each path $(\widetilde{uv}, s_{\widetilde{uv}}^j, \widetilde{vw})$, where ℓ is the current level of node \widetilde{uv} . Formally,

$$\hat{x}_{s_{\widetilde{uv}}^j} = \hat{x}_{\widetilde{vw}} = d^{-(\ell+1)}$$

Defining Pseudo-Flow: Next, for each terminal $t \in K$, we define a pseudo-flow \hat{f}^t by pushing the t -flow from a node \widetilde{uv} of level ℓ to its descendant \widetilde{vw} of level $\ell + 1$.

- **Initialization:** For each terminal $t \in K$, we initialize a pseudo-flow \hat{f}^t by pushing a flow of value $\hat{f}_r^t = 1$ to the root node \tilde{r} .
- **Selecting Recipient Node:** For each level $\ell = 0, 1, \dots, L-1$, we propagate the pseudo-flow from each node $\tilde{u}\tilde{v}$ at level ℓ to its descendants $\tilde{v}\tilde{w}$ at level $\ell + 1$ as follows:

Consider a node $\tilde{u}\tilde{v} \in V(\mathcal{T})$ at level ℓ with incoming pseudo-flow $\hat{f}_{\tilde{u}\tilde{v}}^t$. For each subset $s_{\tilde{u}\tilde{v}}^j$, we mark **one child node** $\tilde{v}\tilde{w} \in s_{\tilde{u}\tilde{v}}^j$ with probability:

$$\hat{f}_{\tilde{u}\tilde{v}}^t \cdot \frac{x_{uv}}{f_{uv}^t} \cdot \frac{f_{uv \rightarrow vw}^t}{x_{uv \rightarrow vw}} = \frac{\hat{f}_{\tilde{u}\tilde{v}}^t}{f_{uv}^t} \cdot x_{uv} \cdot \frac{f_{uv \rightarrow vw}^t}{x_{uv \rightarrow vw}}.$$

Observe that the above is a valid probability as each term in the product is at most 1. This ensures that the overall probability does not exceed 1. More specifically, we have $\hat{f}_{\tilde{u}\tilde{v}}^t \leq f_{uv}^t$ because our construction either sets $\hat{f}_{\tilde{u}\tilde{v}}^t$ to either $\hat{x}_{\tilde{u}\tilde{v}} = d^{-\ell}$ or $\hat{f}_{\tilde{u}\tilde{v}}^t = 0$, whereas $f_{uv}^t \geq 1/n^2 > 1/d$. The latter two terms are bounded by 1 due to the constraints of the Strengthened LP (Figure 3), i.e., $0 \leq x_u \leq 1$ and $f_{uv \rightarrow vw}^t \leq x_{uv \rightarrow vw}$.

Moreover, with the setting $d = n^7$, the value $\hat{f}_{\tilde{u}\tilde{v}}^t = d^{-\ell}$ becomes significantly smaller than the other terms. This ensures that even when summed over all child edges vw , the result remains no more than one.

- **Propagating the Flow:** If a node $\tilde{v}\tilde{w} \in s_{\tilde{u}\tilde{v}}^j$ is marked, then we push a pseudo-flow of value $\hat{x}_{\tilde{v}\tilde{w}} = d^{-(\ell+1)}$ through the path $(\tilde{u}\tilde{v}, s_{\tilde{u}\tilde{v}}^j, \tilde{v}\tilde{w})$. Formally,

$$\Pr \left[\hat{f}_{\tilde{v}\tilde{w}}^t = \hat{x}_{\tilde{v}\tilde{w}} \mid \tilde{u}\tilde{v} \in V(\mathcal{T}) \wedge \tilde{v}\tilde{w} \in s_{\tilde{u}\tilde{v}}^j \right] = \frac{\hat{f}_{\tilde{u}\tilde{v}}^t}{f_{uv}^t} \cdot x_{uv} \cdot \frac{f_{uv \rightarrow vw}^t}{x_{uv \rightarrow vw}}$$

Remark: It is possible that no node in $s_{\tilde{u}\tilde{v}}^j$ is marked. In such cases, the edge $(\tilde{u}\tilde{v}, s_{\tilde{u}\tilde{v}}^j)$ carries no t -flow. The probability of this event is

$$\Pr \left[\hat{f}_{s_{\tilde{u}\tilde{v}}^j}^t = 0 \mid \tilde{u}\tilde{v} \in V(\mathcal{T}) \right] = 1 - \sum_{\tilde{v}\tilde{w} \in s_{\tilde{u}\tilde{v}}^j} \Pr \left[\hat{f}_{\tilde{v}\tilde{w}}^t = \hat{x}_{\tilde{v}\tilde{w}} \mid \tilde{u}\tilde{v} \in V(\mathcal{T}) \wedge \tilde{v}\tilde{w} \in s_{\tilde{u}\tilde{v}}^j \right]$$

5.1.4 Alternative View of the Decomposition Tree

The decomposition tree \mathcal{T} can be conceptualized as a *path-splitting* tree, which is a *suffix tree* representing all possible paths in the layered graph G . Note, however, that our decomposition tree allows subpaths of length ℓ to appear up to d^ℓ times within the tree. Consequently, an edge-copy node $\tilde{v}\tilde{w}$ that is absent from a subset $s_{\tilde{u}\tilde{v}}^j$ can be considered as having a capacity of $\hat{x}_{(\tilde{u}\tilde{v}, \tilde{v}\tilde{w})} = 0$.

Path-splitting trees have been instrumental in developing algorithms for various variants of the Directed Steiner Tree and Group Steiner Tree problems; see, for example, [NPS11, CEKP18, CEGS11]. Additionally, the path-splitting tree is a key component in rounding fractional solutions obtained from LP and SDP hierarchies [Rot11, FKK⁺14], as well as in addressing the 2-Edge-Connected Directed Steiner Tree problem [GL17].

5.2 Analysis for the Integrality Gap

In this subsection, we analyze the integrality gap of the Straightened LP formulation for DST. Throughout this analysis, we adhere strictly to the construction of the decomposition tree \mathcal{T} as described in Section 5.1.2 and the capacity and flow assignments detailed in Section 5.1.3.

Our analysis is organized as follows. First, in Section 5.2.1, we introduce the necessary notations, parameter settings, and prerequisites required for the subsequent discussion. Then, in Section 5.2.2, we analyze the distortion on the capacity of edges when mapped to the decomposition tree. This distortion analysis shows that the cost of the fractional solution on the decomposition tree deviates by only a constant factor. The proofs also serve as a warm-up for the subsequent analysis. Next, in Section 5.2.3, we analyze the feasibility of the flow assignments as described in Section 5.1.3.

Following the distortion and flow feasibility analyses, in Section 5.2.4, we leverage the known integrality gap of the Group Steiner Tree problem on a tree to argue that the integrality gap of the fractional solutions on the decomposition tree is polylogarithmic.

Finally, we combine the transformation steps to conclude the existence of a randomized polynomial-time polylogarithmic approximation *estimation* algorithm for DST – an algorithm that estimates the value of an optimal solution without providing the actual solution. The integrality gap result is subsequently transformed into a polynomial-time approximation algorithm in Section 6.

5.2.1 Notation, Parameters and Prerequisite

Before proceeding to the analysis, we will define the notation, parameter settings, and prerequisites that will be used throughout the discussion.

Prerequisite: We assume the following *prerequisite*:

$$x_{uv}, f_{uv}^t \geq 1/n^2 \quad \text{and} \quad x_{uv \rightarrow vw}, f_{uv \rightarrow vw}^t \geq 1/n^4.$$

This assumption is valid because even after removing all edges with x_e below $\frac{1}{n^2}$, the remaining edges still support a t -flow of value at least $\frac{1}{2}$. More formally, after removing such edges, each cut still has a capacity of at least

$$1 - |E(G)| \cdot \frac{1}{n^2} \geq 1 - \frac{n(n-1)}{2} \cdot \frac{1}{n^2} \geq 1 - \frac{1}{2} = \frac{1}{2}.$$

Note that The first inequality holds because the graph G is directed acyclic, meaning that any pair of vertices u, v can have at most one of the edges uv or vu .

Although the prerequisite only ensures a t -flow of at least $1/2$, we will assume a flow of value one to simplify the discussion.

Notation: Regarding the levels of nodes in the decomposition tree, we define the level of a node $\widetilde{uv} \in V(\mathcal{T})$ to be the level of its corresponding edge $uv \in E(G)$, and we define the level of the root node as level-0.

The following *notation* will be used throughout the proofs:

$\text{Copy}(uv)$ = the set of copies of an edge $uv \in E(G)$ in the decomposition tree

$\text{Level}(uv)$ = the level of an edge uv in the graph G

Z_{uv} = the number of copies of $uv \in E(G)$ in the decomposition tree
 $= |\text{Copy}(uv)|$

$Z_{\widetilde{uv} \rightarrow (vw)}$ = the number of copies of $vw \in E(G)$ created from a node $\widetilde{uv} \in V(\mathcal{T})$
 $= \left| \left\{ j : \widetilde{vw} \in s_{\widetilde{uv}}^j \right\} \right|$

Q_{uv}^t = the number of copies of $uv \in E(G)$ that has positive t -flow in the decomposition tree
 $= \left| \left\{ \widetilde{uv} \in \text{Copy}(uv) \mid \hat{f}_{\widetilde{uv}}^t > 0 \right\} \right|$

$Q_{\widetilde{uv} \rightarrow (vw)}^t$ = the number of copies of $vw \in E(G)$ created from a node $\widetilde{uv} \in V(\mathcal{T})$
 $= \left| \left\{ j : \widetilde{vw} \in s_{\widetilde{uv}}^j \wedge \hat{f}_{\widetilde{vw}}^t > 0 \right\} \right|$

Parameter Settings: We conclude by setting the parameters

$$d = n^7 \quad \text{and} \quad \delta = 1/4.$$

The choice of d ensures that $1/d$ is smaller than any LP variables (e.g., $x_{uv}, x_{uv \rightarrow vw}$) by a polynomial factor. The constant δ is used in our probabilistic analysis. Its value is chosen to guarantee the applicability of all necessary inequalities.

5.2.2 Analysis of Capacity Distortion

This subsection is devoted to analyzing the distortion of the capacity variables x_{uv} as they appear as multiple copies in the decomposition tree. The upper bound on the distortion provides an upper limit on the blow-up of the cost of the fractional solution as it is mapped to the decomposition tree, while the lower bound ensures that the connectivity requirements are met.

However, the lower bound alone does not suffice to argue that the capacities on the decomposition tree support a flow of value close to one. Therefore, a more involved analysis using flow-based arguments is necessary, which we postpone to Section 5.2.3. Here, we present the proofs of both lower and upper bounds on distortion as a warm-up to the analysis of flow feasibility. Additionally, the proof of the distortion upper bound serves as a precursor to the analysis of the running time of the ‘‘Decompose-and-Round’’ algorithm discussed in Section 6.

We will proceed at a slow pace to familiarize readers with the use of concentration bounds by proving a simple lemma using Chernoff-Hoeffding bounds. Readers already acquainted with the subject may choose to skip this part.

Lemma 4. *Consider an edge $uv \in E(G)$ at level ℓ and its child $vw \in E(G)$. Let $\delta = 1/4$, and let $Z_{\widetilde{uv} \rightarrow (vw)}$ denote the number of copies of vw created from a copy \widetilde{uv} in the decomposition tree \mathcal{T} , i.e., $Z_{\widetilde{uv} \rightarrow (vw)} = \left| \left\{ j : \widetilde{vw} \in s_{\widetilde{uv}}^j \right\} \right|$. Then it holds that*

$$\bullet \Pr \left[Z_{\widetilde{uv} \rightarrow (vw)} \leq \left(1 - \frac{\delta}{2^{\ell+1}} \right) \cdot d \cdot \frac{x_{uv \rightarrow vw}}{x_{uv}} \right] \leq \exp \left(-\frac{1}{2} \cdot \left(\frac{\delta}{2^\ell} \right) \cdot d \cdot \frac{x_{uv \rightarrow vw}}{x_{uv}} \right)$$

- $\Pr \left[Z_{\widetilde{uv} \rightarrow (vw)} \geq \left(1 + \frac{\delta}{2^{\ell+1}}\right) \cdot d \cdot \frac{x_{uv \rightarrow vw}}{x_{uv}} \right] \leq \exp \left(-\frac{1}{3} \cdot \left(\frac{\delta}{2^{\ell+1}}\right) \cdot d \cdot \frac{x_{uv \rightarrow vw}}{x_{uv}} \right)$

In particular, given that a copy \widetilde{uv} of $uv \in E(G)$ appears in the decomposition tree \mathcal{T} , the number of copies \widetilde{vw} created from \widetilde{uv} is $(1 \pm \delta/2^{\ell+1}) \cdot d \cdot \frac{x_{uv \rightarrow vw}}{x_{uv}}$ with probability at least $1 - \exp(-n)$.

Proof. We recall that the probability that a copy \widetilde{vw} is added to a subset $s_{\widetilde{uv}}^j$ is

$$\Pr \left[\widetilde{vw} \in s_{\widetilde{uv}}^j \mid \widetilde{uv} \in V(\mathcal{T}) \right] = \frac{x_{uv \rightarrow vw}}{x_{uv}}.$$

Thus, the expected number of copies of \widetilde{vw} created from \widetilde{uv} is

$$\mathbb{E} \left[Z_{\widetilde{uv} \rightarrow (vw)} \right] = \sum_{j=1, \dots, d} \Pr \left[\widetilde{vw} \in s_{\widetilde{uv}}^j \mid \widetilde{uv} \in V(\mathcal{T}) \right] = \frac{x_{uv \rightarrow vw}}{x_{uv}} \cdot d.$$

Plugging in $\epsilon = \delta/2^{\ell+1}$ to the Chernoff-Hoeffding bounds in Lemma 2, the desired inequalities immediately follow.

Moreover, from the prerequisite, we have $d \geq n^7$, $x_{uv \rightarrow vw} \leq 1$ and $x_{uv} \geq 1/n$. Therefore, applying the union bound, we conclude that the number of copies \widetilde{vw} deviates from the expectation by a factor $(1 \pm \delta/2^{\ell+1})$ with probability at most $\exp(-n)$. \square

Distortion Lower Bound: With the concentration bounds in place, we are now ready to prove the distortion lower and upper bounds. Intuitively, we apply the concentration bounds similar to those in Lemma 4. However, the number of copies of an edge vw at level $\ell + 1$ depends on the number of copies of its parent edges $uv \in E(G)$. Therefore, we need to condition on the lower bound provided by the previous level.

Lemma 5 (Distortion Lower Bound). *Suppose all edges $uv \in E(G)$ have $x_{uv} \geq 1/n^2$, and let $\delta = 1/4$. Then it holds for all edges $uv \in E(G)$ at level ℓ , for $\ell = 0, 1, 2, \dots, L - 1$, that*

$$\Pr \left[\hat{Z}_{uv} \leq \left(\prod_{i=1, \dots, \ell} \left(1 - \frac{\delta}{2^i}\right) \right) \cdot d^\ell x_{uv} \right] \leq \exp \left(-\frac{1}{2} \cdot \left(\frac{\delta}{2^\ell}\right)^2 \cdot \left(\prod_{i=1, \dots, \ell-1} \left(1 - \frac{\delta}{2^i}\right) \right) \cdot d^\ell x_{uv} \right)$$

In particular, for $d \geq n^7$, every edge $uv \in E(G)$ at level ℓ has at least $(d^\ell x_{uv})/2$ copies in the decomposition tree with high probability.

Proof. We prove the lemma by induction on ℓ . At the level 0, there is only the root r , which we treat as a special edge. Thus, the statement holds immediately as the root has exactly one copy \widetilde{r} in the decomposition tree, implying

$$Z_r = 1 \geq \left(\prod_{i=1, \dots, \ell} \left(1 - \frac{\delta}{2^i}\right) \right) \cdot d^\ell x_r = d^0 \cdot 1 = 1.$$

Assume inductively that, for some $\ell \geq 1$, the claim holds for all edges $uv \in E(G)$ at level ℓ . For notational convenient, we define the threshold ϑ_{uv} for edges $uv \in E(G)$ as

$$\vartheta_{uv} := \left(\prod_{i=1, \dots, \ell} \left(1 - \frac{\delta}{2^i}\right) \right) \cdot d^\ell x_{uv}.$$

Now, consider any edge $vw \in E(G)$ at level $\ell + 1$. Observe that the number of copies of $vw \in E(G)$ depends on the number of copies of its parents in the decomposition tree \mathcal{T} . This means that

$$\Pr [Z_{vw} \leq \vartheta_{uv}] \leq \Pr [Z_{vw} \leq \vartheta_{uv} | Z_{uv} \geq \vartheta_{uv} \forall uv \in E(G)].$$

Thus, it suffices to analyze the expected number of copies of vw given that all its parents uv have at least ϑ_{uv} copies.

We first analyze the expected value of Z_{vw} , conditioning on the event that all the parents of vw have the number of copies no less than the threshold.

$$\begin{aligned} \mathbb{E} [Z_{vw} | Z_{uv} \geq \vartheta_{uv} \forall uv \in E(G)] &\geq \sum_{uv \in E(G)} \left(\vartheta_{uv} \cdot \sum_{j=1,2,\dots,d} \Pr [\widetilde{vw} \in s_{uv}^j] \right) \\ &= \sum_{uv \in E(G)} \left(\vartheta_{uv} \cdot d \cdot \frac{x_{uv \rightarrow vw}}{x_{uv}} \right) \\ &= \sum_{uv \in E(G)} \left(\left(\prod_{i=1,\dots,\ell} \left(1 - \frac{\delta}{2^i} \right) \right) \cdot d^\ell x_{uv} \cdot d \cdot \frac{x_{uv \rightarrow vw}}{x_{uv}} \right) \\ &= \sum_{uv \in E(G)} \left(\left(\prod_{i=1,\dots,\ell} \left(1 - \frac{\delta}{2^i} \right) \right) \cdot d^{\ell+1} \cdot x_{uv \rightarrow vw} \right) \\ &= \left(\prod_{i=1,\dots,\ell} \left(1 - \frac{\delta}{2^i} \right) \right) \cdot d^{\ell+1} \cdot \sum_{uv \in E(G)} x_{uv \rightarrow vw} \\ &= \left(\prod_{i=1,\dots,\ell} \left(1 - \frac{\delta}{2^i} \right) \right) \cdot d^{\ell+1} x_{vw} \end{aligned}$$

The first inequality follows because we are given that the number of copies of every edge $uv \in E(G)$ is at least ϑ_{uv} . The last equality follows from the constraint $\sum_{uv} x_{uv \rightarrow vw} = x_{vw}$ in the Strengthened LP.

It then follows by Chernoff-Hoeffding bounds (Lemma 2) that

$$\begin{aligned} \Pr \left[Z_{vw} \geq \left(1 - \frac{\delta}{2^{\ell+1}} \right) \cdot \left(\prod_{i=1,\dots,\ell} \left(1 - \frac{\delta}{2^i} \right) \cdot d^{\ell+1} \right) \cdot x_{vw} \mid Z_{uv} \geq \vartheta_{uv} \forall uv \in E(G) \right] \\ \leq \exp \left(-\frac{1}{2} \cdot \left(\frac{\delta}{2^{\ell+1}} \right)^2 \cdot \left(\prod_{i=1,\dots,\ell} \left(1 - \frac{\delta}{2^i} \right) \right) \cdot d^{\ell+1} x_{vw} \right) \end{aligned}$$

This proves the first item of the lemma.

Lastly, we show that, for $d \geq n^7$, every edge $uv \in E(G)$ at level ℓ has at least $d^\ell x_{uv}$ copies with high probability. We apply the fact that $\exp(-y) \leq 1 - y/2$, for $y \in [0, 1.59]$ to the product

$\prod_{i=1,\dots,\ell} (1 - \frac{\delta}{2^i})$. Then we have

$$\prod_{i=1,\dots,\ell} \left(1 - \frac{\delta}{2^i}\right) \geq \prod_{i=1,\dots,\ell} \exp\left(-\frac{\delta}{2^{i-1}}\right) = \exp\left(-\sum_{j=1,\dots,\ell} \frac{\delta}{2^{j-1}}\right) \geq \exp(-2\delta) = \exp(-1/2) \geq 1/2.$$

Applying the same arguments to the term $\left(\prod_{i=1,\dots,\ell-1} (1 - \frac{\delta}{2^i})\right)$, we have that

$$\Pr\left[Z_{uv} \leq \frac{d^\ell x_{uv}}{2}\right] \leq \exp\left(-\frac{1}{2} \cdot \left(\frac{\delta}{2^\ell}\right)^2 \cdot \frac{d^\ell x_{uv}}{2}\right)$$

Thus, for $\ell \geq 1$, $x_{uv} \geq 1/n^2$ and $d = n^7$, it holds that $Z_{uv} \geq (d^\ell x_{uv})/2$ with probability at least $1 - \exp(-n)$. Since the graph G has at most n^2 edges, it follows by the union bound that all the edges $uv \in E(G)$ have $Z_{uv} \geq (d^\ell x_{uv})/2$ copies in the decomposition tree with probability at least $1 - 1/n$, i.e., with high probability. This completes the proof of the lower bound. \square

Distortion Upper Bound: The proof of the distortion upper bound is almost identical to that of the lower bound (Lemma 5) except that the concentration bound is applied to the upper tail.

Lemma 6 (Distortion Upper Bound). *Suppose all edges $uv \in E(G)$ have $x_{uv} \geq 1/n^2$, and let $\delta = 1/4$. Then it holds for all edges $uv \in E(G)$ at level ℓ , for $\ell = 0, 1, 2, \dots, L-1$, that*

$$\Pr\left[Z_{uv} \geq \left(\prod_{i=1,\dots,\ell} \left(1 + \frac{\delta}{2^i}\right)\right) \cdot d^\ell x_{uv}\right] \leq \exp\left(-\frac{1}{3} \cdot \left(\frac{\delta}{2^\ell}\right)^2 \cdot \left(\prod_{i=1,\dots,\ell-1} \left(1 + \frac{\delta}{2^i}\right)\right) \cdot d^\ell x_{uv}\right)$$

In particular, for $d \geq n^7$, every edge $uv \in E(G)$ at level ℓ has at most $2 \cdot (d^\ell x_{uv})$ copies in the decomposition tree with high probability.

Proof. We prove the lemma by induction on ℓ . At the level 0, there is only the root r , which we treat as a special edge. Thus, the statement holds immediately as the root has exactly one copy \tilde{r} in the decomposition tree, implying

$$Z_r = 1 \leq \left(\prod_{i=1,\dots,\ell} \left(1 + \frac{\delta}{2^i}\right)\right) \cdot d^\ell x_r = d^0 \cdot 1 = 1.$$

Assume inductively that, for some $\ell \geq 1$, the claim holds for all edges $uv \in E(G)$ at level ℓ . For notational convenient, we define the threshold ϑ_{uv} for edges $uv \in E(G)$ as

$$\vartheta_{uv} := \left(\prod_{i=1,\dots,\ell} \left(1 + \frac{\delta}{2^i}\right)\right) \cdot d^\ell x_{uv}.$$

Now, consider any edge $vw \in E(G)$ at level $\ell + 1$. Observe that the number of copies of $vw \in E(G)$ depends on the number of copies of its parents in the decomposition tree \mathcal{T} . This means that

$$\Pr[Z_{vw} \geq \vartheta_{vw}] \leq \Pr[Z_{vw} \geq \vartheta_{vw} \mid Z_{uv} \leq \vartheta_{uv} \forall uv \in E(G)].$$

Thus, it suffices to analyze the probability that the number of copies of vw is above the threshold ϑ_{vw} given that all its parents uv have at most ϑ_{uv} copies in the decomposition tree.

We first analyze the expected value of Z_{vw} , conditioning on the event that all the parents of vw have the number of copies no more than the threshold.

$$\begin{aligned}
\mathbb{E}[Z_{vw} | Z_{uv} \leq \vartheta_{uv} \forall uv \in E(G)] &\leq \sum_{uv \in E(G)} \left(\vartheta_{uv} \sum_{j=1,2,\dots,d} \Pr[\widetilde{vw} \in s_{uv}^j] \right) \\
&= \sum_{uv \in E(G)} \left(\vartheta_{uv} \cdot d \cdot \frac{x_{uv \rightarrow vw}}{x_{uv}} \right) \\
&= \sum_{uv \in E(G)} \left(\left(\prod_{i=1,\dots,\ell} \left(1 + \frac{\delta}{2^i} \right) \cdot d^\ell x_{uv} \right) \cdot d \cdot \frac{x_{uv \rightarrow vw}}{x_{uv}} \right) \\
&= \sum_{uv \in E(G)} \left(\left(\prod_{i=1,\dots,\ell} \left(1 + \frac{\delta}{2^i} \right) \right) \cdot d^{\ell+1} \cdot x_{uv \rightarrow vw} \right) \\
&= \left(\prod_{i=1,\dots,\ell} \left(1 + \frac{\delta}{2^i} \right) \right) \cdot d^{\ell+1} \cdot \sum_{uv \in E(G)} x_{uv \rightarrow vw} \\
&= \left(\prod_{i=1,\dots,\ell} \left(1 + \frac{\delta}{2^i} \right) \right) \cdot d^{\ell+1} x_{vw}
\end{aligned}$$

The first inequality follows because we are given that the number of copies of every edge $uv \in E(G)$ is at most ϑ_{uv} . The last equality follows from the constraint $\sum_{uv} x_{uv \rightarrow vw} = x_{vw}$ in the strengthened LP.

It then follows by Chernoff-Hoeffding bounds (Lemma 2) that

$$\begin{aligned}
\Pr \left[Z_{vw} \geq \left(1 + \frac{\delta}{2^{\ell+1}} \right) \cdot \left(\prod_{i=1,\dots,\ell} \left(1 + \frac{\delta}{2^i} \right) \cdot d^{\ell+1} \right) \cdot x_{vw} \mid Z_{uv} \geq \vartheta_{uv} \forall uv \in E(G) \right] \\
\leq \exp \left(-\frac{1}{3} \cdot \left(\frac{\delta}{2^{\ell+1}} \right)^2 \cdot \left(\prod_{i=1,\dots,\ell} \left(1 + \frac{\delta}{2^i} \right) \right) \cdot d^{\ell+1} x_{vw} \right)
\end{aligned}$$

This proves the first item of the lemma.

Lastly, we show that, for $d \geq n^7$, every edge $uv \in E(G)$ at level ℓ has at least $d^\ell x_{uv}$ copies with high probability. We apply the fact that $\exp(y) \geq 1 + y$, for all real number y , to the product $\prod_{i=1,\dots,\ell} \left(1 + \frac{\delta}{2^i} \right)$. Then we have

$$\prod_{i=1,\dots,\ell} \left(1 + \frac{\delta}{2^i} \right) \leq \prod_{i=1,\dots,\ell} \exp \left(\frac{\delta}{2^i} \right) = \exp \left(\sum_{j=1,\dots,\ell} \frac{\delta}{2^j} \right) \leq \exp(2\delta) = \exp(1/2) \leq 2.$$

Plugging the above to the upper bound on probability, we have

$$\Pr \left[Z_{uv} \geq 2 \cdot d^\ell x_{uv} \right] \leq \exp \left(-\frac{1}{3} \cdot \delta^2 \cdot \left(\frac{d}{4} \right)^\ell x_{uv} \right)$$

Thus, for $\ell \geq 1$, $x_{uv} \geq 1/n^2$ and $d = n^7$, it holds that $Z_{uv} \geq 2 \cdot d^\ell x_{uv}$ with probability at least $1 - \exp(-n)$. Since the graph G has at most n^2 edges, it follows by the union bound that all the edges $uv \in E(G)$ has $Z_{uv} \leq 2 \cdot d^\ell x_{uv}$ copies in the decomposition tree with probability at least $1 - 1/n$, i.e., with high probability This completes the proof of the upper bound. \square

Concluding Capacity Distortion Bounds: The following is an immediate corollary of Lemma 5 and Lemma 6.

Corollary 7 (Bounds on Capacity Distortion). *It holds with high probability for every edge $uv \in E(G)$ at level ℓ , for $\ell = 0, 1, \dots, L$, that*

$$\frac{x_{uv}}{2} \leq \sum_{\tilde{uv} \in \text{Copy}(uv)} \hat{x}_{\tilde{uv}} = Z_{uv} \cdot d^\ell \leq 2 \cdot x_{uv}$$

\square

5.2.3 Flow Feasibility Analysis

At first glance, the distortion lower bound established in Lemma 5 might suggest that the capacities on the decomposition tree are sufficient to guarantee the existence of a t -flow of value at least half of the original flow for every terminal $t \in K$. However, the distortion lower bound only provides guarantees on the mapping of an $r \rightarrow t$ -cut in the original graph G to the decomposition tree \mathcal{T} . It does not directly rule out the existence of an $\tilde{r} \rightarrow \mathcal{G}_t$ -cut in \mathcal{T} that has a sub-constant value. Addressing this issue would lead to a complicated analysis.

Therefore, instead of solely relying on the distortion lower bound, we directly show the existence of an $\tilde{r} \rightarrow \mathcal{G}_t$ -flow using a flow-based argument. Specifically, we show that the pseudo- t -flow $\{\hat{f}_\alpha^t\}_{\alpha \in E(\mathcal{T})}$, defined in Section 5.1.3 is a pre- t -flow of value at least $1/2$. In other words, it satisfies the following properties:

- **Capacity Constraints:** For every edge $\alpha \in E(\mathcal{T})$, the flow \hat{f}_α^t does not exceed its assigned capacity \hat{x}_α .
- **Flow Conservation:** At every node $\tilde{uv} \in V(\mathcal{T})$ (excluding leaves), the incoming flow is at least equal to the outgoing flow, ensuring no negative net-flow.
- **Flow Value Preservation:** The total flow value from the root to each terminal's group \mathcal{G}_t in the decomposition tree is at least half of the original flow value ρ_t in the input graph G .

More formally, given that a terminal $t \in K$ receives a flow of value ρ_t in the input graph G , the corresponding pseudo- t -flow \hat{f}^t in the decomposition tree \mathcal{T} is a pre- t -flow with a flow value of at least $\rho_t/2$.

Lemma 8. For any terminal $t \in K$, the pseudo- t -flow $\{\hat{f}_\alpha^t\}_{\alpha \in E(\mathcal{T})}$ defines a **pre- t -flow** on the decomposition tree \mathcal{T} . Moreover, with high probability, if the terminal t receives a t -flow of value ρ_t in the input graph G , then the total flow received by its corresponding group \mathcal{G}_t in the decomposition tree is at least $\rho_t/2$.

Consequently, the capacity assignments \hat{x} on the decomposition tree \mathcal{T} support a **feasible- t -flow** of value at least $1/2$ from the root to every group \mathcal{G}_t with high probability.

Proof. We prove the lemma by induction on the level ℓ of the decomposition tree, for $\ell = 0, 1, \dots, L$. More formally, we claim that the following invariants hold at any node $\widetilde{uv} \in V(\mathcal{T})$ at level ℓ and for any terminal $t \in K$:

- **Non-Negative Net-Flow:** For any node $\widetilde{uv} \in V(\mathcal{T})$, the amount of t -flow entering \widetilde{uv} is at least the sum of t -flow leaving it, i.e., $\hat{f}_{\widetilde{uv}}^t \geq \sum_{j=1, \dots, d} \hat{f}_{s_{\widetilde{uv}}^j}^t$.
- **Capacity Constraint:** For any edge $\alpha \in E(\mathcal{T})$, the flow \hat{f}_α^t does not exceed its capacity \hat{x}_α , i.e., $\hat{f}_\alpha^t \leq \hat{x}_\alpha$.
- **Flow Value Preservation:** For any original edge $uv \in E(G)$ at level ℓ , the probability that the total t -flow across all its copies in the decomposition tree is less than $\left(\prod_{i=1, \dots, \ell} \left(1 - \frac{\delta}{2^i}\right)\right) f_{uv}^t$ is at most

$$\exp\left(-\frac{1}{2} \cdot \left(\frac{\delta}{2^\ell}\right) \cdot \left(\prod_{i=1, \dots, \ell-1} \left(1 - \frac{\delta}{2^i}\right)\right) f_{uv}^t \cdot d^\ell\right)$$

The first and second invariants are immediately satisfied by the flow assignment, while the third invariant is established through induction on the level ℓ .

Non-negative Excess Flow: Consider any node \widetilde{uv} at level ℓ . By construction, the t -flow entering node \widetilde{uv} is either zero ($\hat{f}_{\widetilde{uv}}^t = 0$) or equal to its capacity ($\hat{f}_{\widetilde{uv}}^t = \hat{x}_{\widetilde{uv}} = d^{-\ell}$). In the former case, no flow is sent out from \widetilde{uv} . In the latter case, node \widetilde{uv} distributes a t -flow of either zero or $d^{-(\ell+1)}$ to each of its d children (the subset nodes $s_{\widetilde{uv}}^j$). Consequently, the total outgoing t -flow from \widetilde{uv} is at most $d \cdot d^{-(\ell+1)} = d^{-\ell}$, which does not exceed the incoming flow. Thus, the invariant is automatically satisfied.

Capacity Constraints: The second invariant is maintained by the construction of the flow. Specifically, for every edge $\alpha \in E(\mathcal{T})$, the flow \hat{f}_α^t is either set to its capacity \hat{x}_α during the flow assignment or set to zero. Therefore, the capacity constraints are inherently satisfied.

It remains to verify the third invariant regarding the flow value lower bound.

Flow Value Preservation: Fix a terminal $t \in K$, and consider any node $\widetilde{uv} \in V(\mathcal{T})$, which can be either a copy of an edge $uv \in E(G)$ at level $\ell \geq 1$ or the root node (i.e., $\widetilde{uv} = \tilde{r}$). If \widetilde{uv} receives no t -flow, then we are done. Thus, we assume that $\hat{f}_{\widetilde{uv}}^t > 0$.

We recall the construction of the t -flow. Given that the node \widetilde{uv} receives a positive t -flow, we push a t -flow of value $\hat{x}_{\widetilde{uv}}$ to each child node $\widetilde{vw} \in s_{uv}^j$ with probability

$$\begin{aligned} \Pr \left[\hat{f}_{\widetilde{vw}}^t = \hat{x}_{\widetilde{uv}} \mid \hat{f}_{\widetilde{uv}}^t > 0 \wedge \widetilde{vw} \in s_{uv}^j \right] &= \Pr \left[\hat{f}_{\widetilde{vw}}^t = \hat{x}_{\widetilde{uv}} \mid \widetilde{uv} \in V(\mathcal{T}) \wedge \widetilde{vw} \in s_{uv}^j \right] \\ &= \frac{\hat{f}_{\widetilde{uv}}^t}{f_{uv}^t} \cdot x_{uv} \cdot \frac{f_{uv \rightarrow vw}^t}{x_{uv \rightarrow vw}} \end{aligned}$$

Now we prove by induction on ℓ that, for any level $\ell = 0, 1, \dots, d$ and any edge $uv \in E(G)$ at level ℓ , the number of copies of \widetilde{uv} in the decomposition tree that carry positive t -flow is at least

$$\prod_{i=1, \dots, \ell} \left(1 - \frac{\delta}{2^i} \right) \cdot d^\ell f_{uv}^t$$

with probability at least

$$1 - \exp \left(-\frac{1}{2} \cdot \left(\frac{\delta}{2^\ell} \right) \cdot \left(1 - \frac{1}{d^\ell} \right) \cdot \prod_{i=1, \dots, \ell-1} \left(1 - \frac{\delta}{2^i} \right) \cdot d^\ell f_{uv}^t \right)$$

Base Case ($\ell = 0$): At level $\ell = 0$, there is only the root node \widetilde{r} . By construction, the flow assigned to the root is $\hat{f}_{\widetilde{r}}^t = \hat{x}_{\widetilde{r}} = 1$. Therefore, the number of copies with positive t -flow is 1, which satisfies the base case as

$$\prod_{i=1}^0 \left(1 - \frac{\delta}{2^i} \right) \cdot d^0 f_r^t = 1 \cdot 1 \cdot f_r^t = f_r^t.$$

Assuming $f_r^t = 1$, the base case holds trivially.

Inductive Step: Assume inductively that the invariants hold for every edge $uv \in E(G)$ at level $\ell \geq 0$. For notational convenient, we define the threshold φ_{uv}^t for edges $uv \in E(G)$ and a terminal $t \in K$ as

$$\varphi_{uv}^t = \prod_{i=1, \dots, \ell} \left(1 - \frac{\delta}{2^i} \right) \cdot d^\ell f_{uv}^t$$

Now, consider any edge $uv \in E(G)$ at level ℓ , and its child edge $vw \in E(G)$. Observe that the number of copies \widetilde{vw} that receive positive t -flow depends on the number of copies of its parent edge $uv \in E(G)$ at level ℓ that carry positive t -flow. This means that

$$\Pr \left[Q_{vw}^t \leq \left(1 - \frac{\delta}{2^{\ell+1}} \right) \varphi_{uv}^t \right] \leq \Pr \left[Q_{vw}^t \leq \left(1 - \frac{\delta}{2^{\ell+1}} \right) \varphi_{uv}^t \mid Q_{uv}^t \geq \varphi_{uv}^t \forall uv \in E(G) \right].$$

Thus, it suffices to analyze the expected value of Q_{vw}^t given that the value Q_{uv}^t of any its parent uv is at least φ_{uv}^t .

By linearity of expectation, we know that

$$\mathbb{E} \left[Q_{vw}^t \mid Q_{uv}^t \geq \varphi_{uv}^t \forall uv \in E(G) \right] = \mathbb{E} \left[\sum_{\widetilde{uv} \in \text{Copy}(uv): \hat{f}_{\widetilde{uv}}^t > 0} Q_{\widetilde{uv} \rightarrow (vw)}^t \mid Q_{uv}^t \geq \varphi_{uv}^t \forall uv \in E(G) \right].$$

Hence, we first need to analyze the t -flow received by copies of \widetilde{vw} created from some node \widetilde{uv} with positive t -flow.

$$\begin{aligned}
\mathbb{E} \left[Q_{\widetilde{uv} \rightarrow (vw)}^t \mid \hat{f}_{\widetilde{uv}}^t > 0 \right] &= \sum_{j=1, \dots, d} \Pr \left[\hat{f}_{\widetilde{vw}}^t > 0 \mid \hat{f}_{\widetilde{uv}}^t > 0 \right] \\
&= \sum_{j=1, \dots, d} \Pr \left[\hat{f}_{\widetilde{vw}}^t > 0 \wedge \widetilde{vw} \in s_{\widetilde{uv}}^j \mid \hat{f}_{\widetilde{uv}}^t > 0 \wedge \widetilde{vw} \in s_{\widetilde{uv}}^j \right] \cdot \Pr \left[\widetilde{vw} \in s_{\widetilde{uv}}^j \mid \hat{f}_{\widetilde{uv}}^t > 0 \right] \\
&= d \cdot \left(\frac{\hat{f}_{\widetilde{uv}}^t}{f_{uv}^t} \cdot x_{uv} \cdot \frac{f_{uv \rightarrow vw}^t}{x_{uv \rightarrow vw}} \right) \cdot \left(\frac{x_{uv \rightarrow vw}}{x_{uv}} \right) \\
&= d \cdot \hat{f}_{\widetilde{uv}}^t \cdot \frac{f_{uv \rightarrow vw}^t}{f_{uv}^t} = d \cdot \hat{x}_{\widetilde{uv}} \cdot \frac{f_{uv \rightarrow vw}^t}{f_{uv}^t} = d^{-\ell+1} \cdot \frac{f_{uv \rightarrow vw}^t}{f_{uv}^t}
\end{aligned}$$

The last equality follows because $\hat{f}_{\widetilde{uv}}^t = \hat{x}_{\widetilde{uv}}$ whenever $\hat{f}_{\widetilde{uv}}^t$ and that every node \widetilde{uv} at level ℓ has $\hat{x}_{\widetilde{uv}} = d^{-\ell}$.

Summing over all the copies \widetilde{uv} of $uv \in E(G)$, we have

$$\begin{aligned}
\mathbb{E} \left[Q_{vw}^t \mid Q_{uv}^t \geq \varphi_{uv}^t \forall uv \in E(G) \right] &= \mathbb{E} \left[\sum_{\widetilde{uv} \in \text{Copy}(uv): \hat{f}_{\widetilde{uv}}^t > 0} Q_{\widetilde{uv} \rightarrow (vw)}^t \mid Q_{uv}^t \geq \varphi_{uv}^t \forall uv \in E(G) \right] \\
&\geq \left(\prod_{i=1, \dots, \ell} \left(1 - \frac{\delta}{2^i} \right) \cdot d^\ell f_{uv}^t \right) \cdot \mathbb{E} \left[Q_{\widetilde{uv} \rightarrow (vw)}^t \mid \hat{f}_{\widetilde{uv}}^t > 0 \right] \\
&= \left(\prod_{i=1, \dots, \ell} \left(1 - \frac{\delta}{2^i} \right) \cdot d^\ell f_{uv}^t \right) \cdot d^{-\ell+1} \cdot \frac{f_{uv \rightarrow vw}^t}{f_{uv}^t} \\
&= \left(\prod_{i=1, \dots, \ell} \left(1 - \frac{\delta}{2^i} \right) \right) \cdot d \cdot f_{uv \rightarrow vw}^t
\end{aligned}$$

Applying Chernoff-Hoeffding bounds (Lemma 2), it follows that

$$\begin{aligned}
&\Pr \left[Q_{vw}^t \leq \left(1 - \frac{\delta}{2^{\ell+1}} \right) \varphi_{uv}^t \mid Q_{uv}^t \geq \varphi_{uv}^t \forall uv \in E(G) \right] \\
&\leq \exp \left(-\frac{1}{2} \cdot \left(\frac{\delta}{2^{\ell+1}} \right)^2 \cdot \left(\prod_{i=1, \dots, \ell} \left(1 - \frac{\delta}{2^i} \right) \right) \cdot d \cdot \hat{f}_{uv \rightarrow vw}^t \right)
\end{aligned}$$

Lastly, we show that with high probability, at any level ℓ , every edge $uv \in E(G)$ has at least $d^\ell f_{uv}^t/2$ copies with positive t -flow. To see this, we recall the setting that $d \geq n^7$ and the prerequisite that $f_{uv}^t \geq 1/n^2$ for all edges $uv \in E(G)$. Then, applying the fact that $\exp(-y) \leq 1 - y/2$, for

$y \in [0, 1.59]$ to the product $\prod_{i=1, \dots, \ell} (1 - \frac{\delta}{2^i})$, we have

$$\prod_{i=1, \dots, \ell} \left(1 - \frac{\delta}{2^i}\right) \geq \prod_{i=1, \dots, \ell} \exp\left(-\frac{\delta}{2^{i-1}}\right) = \exp\left(-\sum_{j=1, \dots, \ell} \frac{\delta}{2^{j-1}}\right) \geq \exp(-2\delta) = \exp(-1/2) \geq 1/2.$$

Applying the same arguments to the term $(\prod_{i=1, \dots, \ell-1} (1 - \frac{\delta}{2^i}))$, we have that

$$\Pr \left[Q_{uv}^t \leq \frac{d \cdot f_{uv}^t}{2} \right] \leq \exp\left(-\frac{1}{2} \cdot \left(\frac{\delta}{2^\ell}\right)^2 \cdot \frac{d \cdot f_{uv}^t}{2}\right)$$

Thus, for $\ell \geq 1$, $f_{uv}^t \geq 1/n^2$ and $d = n^7$, it holds that $Q_{uv}^t \geq (d^\ell f_{uv}^t)/2$ with probability at least $1 - \exp(-n)$. Since the graph G has at most n^2 edges, it follows by the union bound that every edge $uv \in E(G)$ have $Q_{uv}^t \geq (d^\ell x_{uv})/2$ copies with positive t -flow with probability at least $1 - 1/n$, i.e., with high probability.

By the flow assignment, each edge at level ℓ has t -flow of value either 0 or $d^{-\ell}$. Therefore, we conclude that \hat{f}^t is a pre- t -flow with value at least

$$\sum_{ut \in E_L} d^L f_{ut}^t / 2 = \rho_t / 2,$$

where ρ_t is the value of the t -flow sending from the root r to the terminal $t \in K$ in the original graph.

As we may push the excess flow on each node back to the source, the existence of the pre- t -flow \hat{f}^t of value $1/2$ then implies that the capacities \hat{x} on the decomposition tree \mathcal{T} is enough to support a feasible t -flow from the root \tilde{r} to each group \mathcal{G}_t with value at least $1/2$, for every terminal $t \in K$. This completes the proof that the flow value lower bound. \square

5.2.4 Bounding Integrality Gap via Group Steiner Tree Algorithm

We now argue using a Group Steiner Tree (GST) rounding algorithm by Garg, Konjevod, and Ravi [GKR00] that the integrality gap of the group Steiner tree instance induced by the decomposition is polylogarithmic.

To construct the GST instance, we use the decomposition tree \mathcal{T} as the input graph. We designate \tilde{r} as the root of the tree and define each group \mathcal{G}_t for $t \in K$ as the set of edge-copy nodes corresponding to edges entering the terminal t . Thus, \mathcal{G}_t represents the group associated with a terminal t in the GST instance.

Next, we define the LP variables $\{\hat{x}_\alpha\}_{\alpha \in E(\mathcal{T})}$ corresponding to the standard LP relaxation for GST. According to Garg, Konjevod, and Ravi, given an LP solution $\{x_e\}_{e \in E(T)}$ for a tree instance T of GST, their rounding algorithm produces an integral solution with an expected cost of at most $O(\Delta \log k)$ times the cost of the LP solution, where Δ denotes the height of the tree T and k is the number of terminals. Importantly, this guarantee depends only on the tree's height and the number of terminals, and is independent of the number of nodes in the tree.

Furthermore, the Garg-Konjevod-Ravi rounding algorithm requires only that the fractional solution $\{x_e\}_{e \in E(T)}$ supports a flow of constant value. It is not necessary to support a flow of value one for every terminal. More formally, we state the following theorem derived from the later interpretation and analysis of the Garg-Konjevod-Ravi rounding algorithm by Rothvoß [Rot11].

Lemma 9 (Garg-Konjevod-Ravi Rounding [GKR00, Rot11]). *There exists a randomized polynomial-time algorithm that, given a solution $\{x_e\}_{e \in E(T)}$ to the standard LP-relaxation of the Group Steiner Tree problem on an input tree T of height Δ with k groups, outputs a feasible integral solution $T' \subseteq T$ so that each edge $e \in E(T)$ appears in the tree T' with probability at most $O(\Delta \log k)$.*

In other words, the integrality gap of the standard LP-relaxation of the group Steiner tree problem is upper bounded by $O(\Delta \log k)$.

Consequently, we only need the fact that the decomposition tree has capacities that support a t -flow of value at least a constant, say $1/2$, for every terminal $t \in K$ as shown in Lemma 8. Furthermore, by Lemma 6, the cost of the fractional solution on the decomposition tree is at most twice that of the fractional solution to the Strengthened LP in Figure 3.

Therefore, we conclude that the integrality gap of the Strengthened LP is $O(L \log k)$, which is $O(\log^2 k)$ as we set $L = O(\log k)$.

Theorem 10 (Integrality Gap of Strengthened LP). *The integrality gap of the Strengthened LP in Figure 3 defined on an instance of the Directed Steiner Tree problem on an L -layered graph with k terminals is at most $O(L \log k)$.*

We recall that Zelikovsky's Height Reduction lemma Lemma 3 allows us to reduce an arbitrary instance of DST to an instance on a layered graph with $L = O(\log k)$ layers by paying a factor $O(\log k)$. As our LP has polynomial size on the input graph and, thus, can be solved in polynomial time, we therefore prove the existence of an $O(\log^3 k)$ -estimation algorithm for DST that runs in polynomial time.

Theorem 11 (Polynomial Time Estimation Algorithm). *There exists a randomized algorithm that, given an instance of the Directed Steiner Tree problem with k terminals defined on an arbitrary directed graph, outputs in polynomial time an estimate of the value of an optimal solution within a factor of $O(\log^3 k)$.*

6 Polynomial Time Approximation Algorithm

In the previous section, we presented a decomposition algorithm that transforms a solution from the Strengthened LP defined on an L -layered graph into an LP solution of a standard flow-based LP corresponding to the Group Steiner Tree (GST) problem on a tree of size $n^{\Theta(L)}$. However, for an arbitrary input graph, transforming an instance into an L -layered graph G incurs an approximation factor of $O(L \cdot n^{1/L})$ (refer to Lemma 3). To achieve a polylogarithmic approximation ratio, we require L to be $\Theta(\log n)$. Consequently, while the integrality gap upper bound proof is constructive, it does not directly yield a polynomial-time polylogarithmic approximation algorithm.

To circumvent this limitation, we apply the decomposition process iteratively, level-by-level, interleaving with the rounding algorithm. This approach ensures that our algorithm operates in polynomial time in expectation and produces a solution with a cost of at most $O(\log^3 k)$, where k is the number of terminals.

6.1 Decompose-and-Round Algorithm

Now, we describe our algorithm, which we refer to as **Decompose-and-Round**. Let E_0, E_1, \dots, E_L denote the sets of edges at levels $0, 1, 2, \dots, L$ in the graph G , respectively, where $E_0 = \{r\}$ and E_L

consists of the edges entering terminals. Specifically, the root vertex r is treated as an auxiliary edge with LP values defined as

$$\begin{aligned} x_r &= 1, \\ f_r^t &= 1 \text{ for all terminals } t \in K, \\ x_{r \rightarrow rv} &= x_{rv} \text{ for all child edges } rv \in E(G) \text{ of } r, \\ f_{r \rightarrow rv}^t &= x_{rv} \text{ for all terminals } t \in K, \text{ for all child edges } rv \in E(G) \text{ of } r \end{aligned}$$

For each level $\ell = 0, 1, 2, \dots, L$, we create an **active set** A_ℓ containing copies of edges at level ℓ . Initially, all active sets are empty except for $A_0 = \tilde{r}$, which contains a copy of the root r . We then iteratively create active sets $A_{\ell+1}$ from A_ℓ for $\ell = 0, 1, \dots, L-1$, following these two steps:

- **Decomposition:** For each copy $\tilde{uv} \in A_\ell$ of an edge $uv \in E_\ell$, we create d subsets $s_{\tilde{uv}}^1, \dots, s_{\tilde{uv}}^d$. We then add to $s_{\tilde{uv}}^j$ a copy \tilde{vw} of each child-edge $vw \in E(G)$ with probability:

$$\Pr \left[\tilde{vw} \in s_{\tilde{uv}}^j \mid \tilde{uv} \in A_\ell \right] = \frac{x_{uv \rightarrow vw}}{x_{uv}}.$$

To emphasize the hierarchical structure of the decomposition, we will refer to each edge-copy \tilde{vw} as a *node*.

- **Rounding:** Next, we independently at random mark each subset $s_{\tilde{uv}}^j$ with probability:

$$\Pr \left[s_{\tilde{uv}}^j \text{ is marked} \mid \tilde{uv} \in A_\ell \right] = \frac{1}{d}.$$

We then add all elements from the marked subsets $s_{\tilde{uv}}^j$ to the active set $A_{\ell+1}$. Then we continue our procedure to the level $\ell + 1$.

Upon completion of the decomposition and rounding steps for all levels, we construct the output graph H by including all edges that have at least one active copy across all levels, i.e.,

$$H = \bigcup_{\ell=0,1,\dots,L} A_\ell.$$

6.2 Main Algorithm

Our main algorithm begins by transforming the input directed graph into an L -layered graph with $L = \lceil \log_2 k \rceil + 1$, where k denotes the number of terminals. This transformation, as shown in Lemma 3, introduces an $O(\log k)$ multiplicative factor to the overall cost. We then solve the Strengthened LP defined on the L -layered graph G .

After the preparation, we repeatedly execute the Decompose-and-Round procedure $q \log^2 k$ times, for some sufficiently large constant $q > 0$ (for example, $q = 100$). The subgraphs generated in each iteration are aggregated, and the union is returned as the final solution. This ensures that, with high probability, that a directed path exists from the root vertex to every terminal, while paying an approximation factor of $O(\log^3 k)$ in expectation.

The Decompose-and-Round procedure and the main algorithm are formally presented in Algorithm 1 and Algorithm 2, respectively.

Algorithm 1 Decompose-and-Round(G, x)

Input: An L -layered graph G , and an LP solution $\{x_{uv}, x_{uv \rightarrow vw}\}_{uv, vw \in E(G)}$.

Output: A solution subgraph $H \subseteq G$.

- 1: Set $x_r = 1$ and $x_{r \rightarrow rv} = x_{rv}$ for all $rv \in E(G)$.
- 2: Initialize the subgraph $H = (V(G), \emptyset)$.
- 3: Initialize the active sets $A_0 := \{\tilde{r}\}$, and $A_\ell := \emptyset$, for all $\ell = 1, 2, \dots, L$.
- 4: **for** $\ell = 0, 1, \dots, L$ **do**
- 5: **for** each copy $\widetilde{uv} \in \mathcal{Z}_\ell$ **do**
- 6: **for** $j = 1, 2, \dots, d$ **do**
- 7: Create a subset $s_{\widetilde{uv}}^j$.
- 8: **for** each edge $vw \in E(G)$ **do**
- 9: Independently at random add a copy \widetilde{vw} to $s_{\widetilde{uv}}^j$ with probability

$$\Pr \left[\widetilde{vw} \in s_{\widetilde{uv}}^j \mid \widetilde{uv} \in A_\ell \right] = \frac{x_{uv \rightarrow vw}}{x_{uv}}.$$

- 10: Mark $s_{\widetilde{uv}}^j$ with probability

$$\Pr \left[s_{\widetilde{uv}}^j \text{ is marked} \mid \widetilde{uv} \in A_\ell \right] = \frac{1}{d}.$$

- 11: If $s_{\widetilde{uv}}^j$ is marked, add all its copies of edges to H .
-

Algorithm 2 Main Algorithm

Input: An input DST instance: a directed graph G , a root r , a terminal set K .

Output: A feasible solution $\hat{H} \subseteq G$ to the DST instance.

- 1: Construct an L -layered graph \hat{G} from an arbitrary directed graph G .
 - 2: Compute an optimal solution $\{x_{uv}, x_{uv \rightarrow vw}, f_{uv}^t, f_{uv \rightarrow vw}^t\}_{uv, vw \in E(G), t \in K}$ of LP in Figure 3.
 - 3: Set $R := 100 \log^2 k$.
 - 4: **for** $i = 1, 2, \dots, R$ **do**
 - 5: Compute $H_i := \text{Decompose-and-Run}(\hat{G}, \{x_{uv}, x_{uv \rightarrow vw}\}_{uv, vw \in E(G)})$.
 - return** The solution subgraph $\hat{H} = \bigcup_{i=1, \dots, R} H_i$.
-

6.3 Running Time and Cost Analysis

First, we show that, with high probability, the number of active copies of any edge $uv \in E(G)$ at level ℓ is at most $O(d \cdot x_{uv})$. Consequently, the total number of active nodes across all levels is bounded by $O(d \cdot |E(G)|)$. This implies that the algorithm runs in expected polynomial time.

Lemma 12. *Consider any edge $uv \in E(G)$ residing at level ℓ , for $\ell = 0, 1, \dots, L$. Let \mathcal{Z}_{uv} denote the number of active copies of uv during the run of the algorithm, i.e., the number of copies of uv*

appearing in the active set A_ℓ . Setting $\delta = 1/4$, the following holds:

$$\Pr \left[\mathcal{Z}_{uv} \geq \left(\prod_{i=1}^{\ell} \left(1 - \frac{\delta}{2^i} \right) \right) \cdot d \cdot x_{uv} \right] \leq \exp \left(-\frac{1}{3} \cdot \left(\frac{\delta}{2^\ell} \right)^2 \cdot \left(\prod_{i=1, \dots, \ell-1} \left(1 - \frac{\delta}{2^i} \right) \right) \cdot d \cdot x_{uv} \right)$$

Consequently, with high probability, every level ℓ has at most $O(d \cdot |E_\ell|)$ active nodes.

Proof. We proceed with proof by induction on ℓ , for $\ell = 0, 1, \dots, L$. The claim is trivial for the base case $\ell = 0$ because we only have r as an active node in A_0 .

Assume inductively that, for some $\ell \geq 1$, the claim holds for all edges $uv \in E(G)$ at level ℓ . For notational convenient, we define the threshold φ_{uv} for edges $uv \in E(G)$ as

$$\varphi_{uv} := \left(\prod_{i=1, \dots, \ell} \left(1 + \frac{\delta}{2^i} \right) \right) \cdot d \cdot x_{uv}.$$

Now consider any edge $vw \in E(G)$ at level $\ell + 1$. Observe that the number of active copies vw depends on the number of copies of its active parents. This means that

$$\Pr [\mathcal{Z}_{vw} \geq \varphi_{vw}] \leq \Pr [\mathcal{Z}_{vw} \geq \varphi_{uv} \mid \mathcal{Z}_{uv} \leq \varphi_{uv} \forall uv \in E(G)].$$

Thus, it suffices to analyze the probability that the number of active copies of vw is above the threshold φ_{vw} given that all its parents uv have at most φ_{uv} copies in the decomposition tree.

We first analyze the expected value of $\mathcal{Z}_{\widetilde{vw}}$, conditioning on the event that all the parents of vw have the number of active copies no more than the threshold.

$$\begin{aligned}
& \mathbb{E} [\mathcal{Z}_{vw} \mid \mathcal{Z}_{uv} \leq \varphi_{uv} \forall uv \in E(G)] \\
& \leq \sum_{uv \in E(G)} \left(\varphi_{uv} \cdot \sum_{j=1, \dots, d} \Pr [\widetilde{vw} \text{ is active} \mid \widetilde{uv} \text{ was active}] \right) \\
& \leq \sum_{uv \in E(G)} \left(\varphi_{uv} \cdot \sum_{j=1, \dots, d} \Pr [\widetilde{vw} \in s_{\widetilde{uv}}^j \wedge s_{\widetilde{uv}}^j \text{ is marked} \mid \widetilde{uv} \text{ was active}] \right) \\
& \leq \sum_{uv \in E(G)} \left(\varphi_{uv} \cdot \sum_{j=1, \dots, d} \Pr [\widetilde{vw} \in s_{\widetilde{uv}}^j \mid \widetilde{uv} \text{ was active}] \cdot \Pr [s_{\widetilde{uv}}^j \text{ is marked} \mid \widetilde{uv} \text{ was active}] \right) \\
& = \sum_{uv \in E(G)} \left(\varphi_{uv} \cdot d \cdot \frac{x_{uv \rightarrow vw}}{x_{uv}} \cdot \frac{1}{d} \right) \\
& = \sum_{uv \in E(G)} \left(\left(\prod_{i=1, \dots, \ell} \left(1 + \frac{\delta}{2^i} \right) \cdot d \cdot x_{uv} \right) \cdot \frac{x_{uv \rightarrow vw}}{x_{uv}} \right) \\
& = \sum_{uv \in E(G)} \left(\left(\prod_{i=1, \dots, \ell} \left(1 + \frac{\delta}{2^i} \right) \cdot d \right) \cdot x_{uv \rightarrow vw} \right) \\
& = \left(\prod_{i=1, \dots, \ell} \left(1 + \frac{\delta}{2^i} \right) \right) \cdot d \cdot \sum_{uv \in E(G)} x_{uv \rightarrow vw} \\
& = \left(\prod_{i=1, \dots, \ell} \left(1 + \frac{\delta}{2^i} \right) \right) \cdot d \cdot x_{vw}
\end{aligned}$$

The first inequality follows because we condition on the event that the number of copies of every edge $uv \in E(G)$ is at most ϑ_{uv} . The last equality follows from the constraint $\sum_{uv} x_{uv \rightarrow vw} = x_{vw}$ in the Strengthened-LP.

It then follows by Chernoff-Hoeffding bounds (Lemma 2) that

$$\begin{aligned}
& \Pr \left[\mathcal{Z}_{vw} \geq \left(1 + \frac{\delta}{2^{\ell+1}} \right) \cdot \left(\prod_{i=1, \dots, \ell} \left(1 + \frac{\delta}{2^i} \right) \right) \cdot d \cdot x_{vw} \mid \mathcal{Z}_{uv} \geq \vartheta_{uv} \forall uv \in E(G) \right] \\
& \leq \exp \left(-\frac{1}{3} \cdot \left(\frac{\delta}{2^{\ell+1}} \right)^2 \cdot \left(\prod_{i=1, \dots, \ell} \left(1 + \frac{\delta}{2^i} \right) \right) \cdot d \cdot x_{vw} \right)
\end{aligned}$$

This proves the first item of the lemma.

Lastly, we show that, for $d \geq n^7$, every edge $uv \in E(G)$ at level ℓ has at least $d \cdot x_{uv}$ copies with high probability. We apply the fact that $\exp(y) \geq 1 + y$, for all real number y , to the product $\prod_{i=1, \dots, \ell} \left(1 + \frac{\delta}{2^i} \right)$. Then we have

$$\prod_{i=1, \dots, \ell} \left(1 + \frac{\delta}{2^i} \right) \leq \prod_{i=1, \dots, \ell} \exp \left(\frac{\delta}{2^i} \right) = \exp \left(\sum_{j=1, \dots, \ell} \frac{\delta}{2^j} \right) \leq \exp(2\delta) = \exp(1/2) \leq 2.$$

Plugging the above to the upper bound on probability, we have

$$\Pr[\mathcal{Z}_{uv} \geq 2 \cdot d \cdot x_{uv}] \leq \exp\left(-\frac{1}{3} \cdot \delta^2 \cdot \left(\frac{d}{4}\right) \cdot x_{uv}\right)$$

Thus, for $\ell \geq 1$, $x_{uv} \geq 1/n^2$ and $d = n^7$, it holds that $\mathcal{Z}_{uv} \geq 2 \cdot d^\ell x_{uv}$ with probability at least $1 - \exp(-n)$. Since the graph G has at most n^2 edges, it follows by the union bound that all the edges $uv \in E(G)$ has $\mathcal{Z}_{uv} \leq 2 \cdot d^\ell x_{uv}$ copies in the decomposition tree with probability at least $1 - 1/n$, i.e., with high probability. The last part of the lemma follows because $d \cdot \sum_{uv \in E_\ell} \mathcal{Z}_{uv} \leq d \cdot |E_\ell|$. This completes the proof. \square

The running time of our algorithm follows as a corollary of Lemma 12

Corollary 13 (The Running time of Decompose-and-Round). *With high probability, the running time of the algorithm Decompose-and-Round is polynomial on the size of the input graph.*

Proof. The running time of the Decompose-and-Round algorithm is proportional to the total number of active nodes processed. From Lemma 12, with high probability, the number of active copies for each edge $uv \in E(G)$ at any level ℓ is $O(d \cdot x_{uv})$. Therefore, the total number of active nodes across all levels is

$$O\left(\sum_{\ell=0,1,\dots,L} \sum_{uv \in E_\ell} \mathcal{Z}_\ell\right) = O\left(d \sum_{\ell=0,1,\dots,L} |E_\ell|\right) = O(d \cdot |E|).$$

Therefore, by setting $d = \text{poly}(n)$, the algorithm runs in polynomial time on the size of input with high probability. \square

It also follows from Lemma 12 that the cost of the solution subgraph H produced by the Decompose-and-Round algorithm is linear in the cost of the LP solution.

Corollary 14 (The Cost of Solution produced by Decompose-and-Round). *The expected cost of the solution subgraph H produced by the Decompose-and-Round algorithm is $(1 + o(1)) \cdot \sum_{e \in E(G)} c_e x_e$.*

Proof. Observe that each copy of an edge $uv \in E(G)$ appears in a different subset s_α^j , where α is a parent edge of uv . From Lemma 12, we assert that the expected number of copies of any edge $uv \in E(G)$ is at most $(1 + o(1)) \cdot d \cdot x_{uv}$. Since each subset s_α^j is marked independently with probability $1/d$, it follows that the expected number of active copies of any edge uv is

$$\mathbb{E}[\mathcal{Z}_{uv}] \leq \frac{1}{d} \cdot ((1 + o(1)) \cdot d \cdot x_{uv}) = (1 + o(1)) \cdot x_{uv}$$

Since each active copy of an edge uv contributes a cost of c_{uv} to the solution subgraph H , the expected total cost of H is

$$\mathbb{E}[\text{cost}(H)] = \sum_{e \in E(G)} c_e \cdot \mathbb{E}[\mathcal{Z}_{uv}] = (1 + o(1)) \sum_{e \in E(G)} c_e x_e$$

\square

6.4 Feasibility Analysis

In this subsection, we analyze the probability that the solution subgraph H produced by the Decompose-and-Round algorithm successfully connects the root vertex to each terminal $t \in K$.

To conduct the reachability analysis, we model the algorithm as a Markov process, where edge selections occur iteratively across the levels of the decomposition tree. A direct analysis of this process involves examining the decision tree induced by the random process.

Fundamentally, our algorithm is a compact description of running the Garg-Konjevod-Ravi (GKR) algorithm on the decomposition tree described in Section 5.1. Thus, it suffices to map the workings of our algorithm to those of the GKR rounding algorithm. Consequently, the analysis can be derived directly from the existing results [GKR00, Rot11] known for the GKR rounding algorithm.

To be formal, the GKR algorithm operates as follows: Given a tree \hat{T} and an LP solution \hat{x} , the algorithm initially marks edges incident to the root with probability \hat{x}_α . For each subsequent edge α in the tree, the algorithm marks α with probability $\frac{\hat{x}_\alpha}{x_{\text{parent}(\alpha)}}$, where $\text{parent}(\alpha)$ represents the (unique) parent edge of α . Edges are included in the solution subgraph H if and only if all of their ancestor edges up to the root are marked.

The GKR rounding algorithm can be re-formulated as a Markov process that proceeds level by level. For each selected edge α , each of its child edges β is independently selected with probability $\frac{x_\beta}{x_\alpha}$. This random process aligns closely with the Decompose-and-Round algorithm, allowing us to interpret and analyze our approach within the framework devised for the GKR rounding technique.

Garg-Konjevod-Ravi Rounding (Re-interpretation): The input to the GKR rounding procedure consists of a tree \hat{T} with height \hat{L} and an LP solution \hat{x} that supports a flow of at least a constant, say $1/2$, from the root to every terminal $t \in K$. The Garg-Konjevod-Ravi algorithm works as follows:

Starting from level $\ell = 0$, i.e., the root level, the algorithm adds to an active set A_0 an auxiliary edge \tilde{r} . Next, the algorithm iteratively constructs active sets $A_{\ell+1}$ from active sets A_ℓ for $\ell = 0, 1, \dots, \hat{L} - 1$. For each edge $\alpha \in A_\ell$, the algorithm adds its child edge $\beta \in E(\hat{T})$ to $A_{\ell+1}$ with probability

$$\Pr[\beta \text{ is active} | \alpha \text{ is active}] = \frac{\hat{x}_\beta}{\hat{x}_\alpha}$$

The pseudocode of Garg-Konjevod-Ravi rounding is given in Algorithm 3.

Algorithm 3 Garg-Konjevod-Ravi Rounding(\hat{T}, \hat{x}):

- 1: Initialize $A_0 = \{\tilde{r}\}$.
- 2: **for** $\ell = 1, 2, \dots, \hat{L} - 1$ **do**
- 3: **for** each edge $\alpha \in A_\ell$ **do**
- 4: Add to $A_{\ell+1}$, child edges $\beta \in E(\hat{T})$ of α , each with probability:

$$\Pr[\beta \text{ is active} | \alpha \text{ is active}] = \frac{\hat{x}_\beta}{\hat{x}_\alpha}$$

return The solution subgraph $H = \bigcup_{\ell=1, \dots, \hat{L}} A_\ell$.

Next, we show that the distributions that the Decompose-and-Round algorithm and the Garg-Konjevod-Ravi algorithm select edges of G are the same.

Lemma 15 (Identical Distributions). *The probability that the Decompose-and-Round and Garg-Konjevod-Ravi algorithms select edges are statistical equivalent.*

Proof. Consider the decomposition tree \hat{T} as described in Section 5.1. There are two types of edges in \hat{T} : (i) edges of the form $(\widetilde{uv}, s_{\widetilde{uv}}^j)$ and (ii) edges of the form $(s_{\widetilde{uv}}^j, \widetilde{vw})$.

For edges of type (i), the value of $\hat{x}_{(\widetilde{uv}, s_{\widetilde{uv}}^j)}$ is equal to $1/d$ times the LP value of its parent edge. Under the GKR rounding algorithm, $(\widetilde{uv}, s_{\widetilde{uv}}^j)$ is marked as active with probability $1/d$. This aligns with the Decompose-and-Round algorithm, where each subset $s_{\widetilde{uv}}^j$ is marked with probability $1/d$.

For edges of type (ii), the value of $\hat{x}_{(s_{\widetilde{uv}}^j, \widetilde{vw})}$ is equal to the LP value of its parent edge. Under the GKR rounding algorithm $(s_{\widetilde{uv}}^j, \widetilde{vw})$ is marked as active with probability one. This aligns with the Decompose-and-Round algorithm, where all copies \widetilde{vw} in the selected subset $s_{\widetilde{uv}}^j$ are deterministically marked as active.

Therefore, the edge selection probabilities in the Decompose-and-Round algorithm precisely mirror those of the GKR rounding algorithm when applied to the decomposition tree \hat{T} . In other words, they are statistically equivalent. \square

Consequently, we deduce from Lemma 8 the probability that the solution subgraph H connects the root vertex r to each terminal $t \in K$.

Corollary 16 (Reachability Probability). *Consider the solution subgraph H constructed by running the Decompose-and-Round algorithm. Then the probability that H contains a directed path from the root vertex r to any terminal $t \in K$ is at least*

$$\Pr[H \text{ has } r \rightarrow t\text{-path}] \geq \frac{1}{2L}$$

Proof. First, we argue using Lemma 15 that the Decompose-and-Round procedure behaves identically to the GKR rounding algorithm running on the decomposition tree \hat{T} . Then from Lemma 8, we know that the decomposition tree \hat{T} supports an $r \rightarrow t$ flow of value at least $1/2$ for every terminal $t \in K$ with high probability. This implies the capacities on the decomposition tree meets the prerequisite of Lemma 15. Consequently, as the input to Decompose-and-Round algorithm is an L layered – thus, inducing a decomposition tree of height $2L - 1$ – the Garg-Konjevod-Ravi algorithm guarantees that each terminal $t \in K$ is connected to the root vertex r with probability at least $\frac{1}{2L}$. \square

6.5 Combining Everything Together

In this subsection, we summarize the previously discussed components to conclude that the main algorithm runs in polynomial time and achieves an approximation ratio of $O(\log^3 k)$ for the Directed Steiner Tree problem.

Polynomial Running Time: Firstly, the main algorithm invokes the Decompose-and-Round algorithm $O(\log^2 k)$ times. By Corollary 13, each procedural call runs in polynomial time on the input size with high probability (at least $1 - 1/n$). Consequently, the overall running time of the main algorithm remains polynomial with high probability.

Approximation Ratio: Secondly, we analyze the expected cost of the solution subgraph \hat{H} produced by the main algorithm. The expected cost is bounded by $O(\log^3 k) \times \text{OPT}$, where OPT denotes the cost of the optimal solution to the directed Steiner tree problem.

This bound arises from two primary factors:

- **Height Reduction:** The initial step involves transforming an arbitrary directed graph into an L -layered graph G . This transformation incurs an $O(\log k)$ factor in the cost, as shown by Lemma 3.
- **Repeated Runs of Decompose-and-Round:** Each run of the Decompose-and-Round algorithm produces a subgraph H with an expected cost of $O\left(\sum_{e \in E(G)} c_e x_e\right)$. Since the main algorithm performs $O(\log^2 k)$ such rounds and takes the union of their outputs, this incurs an additional $O(\log^2 k)$ factor in the expected cost.

Summary: Therefore, our main algorithm runs in polynomial time with high probability and outputs a solution with expected cost $O(\log^3 k)$ times the optimum, thus proving Theorem 1.

7 Conclusion and Open Problems

In this paper, we have presented a randomized polynomial-time polylogarithmic-approximation algorithm for the Directed Steiner Tree problem, thereby resolving a major open problem in the area. Our proof is proceeded through a detailed analysis of the random process induced by the decomposition algorithm.

Currently, the gap in approximation ratios between quasi-polynomial-time and polynomial-time algorithms stands at $O(\log^3 k)$ versus $O\left(\frac{\log^2 k}{\log \log k}\right)$. This discrepancy is particularly noteworthy as it mirrors the same gap observed in the Group Steiner Tree problem, despite the utilization of different techniques. Specifically, both our algorithm and the Group Steiner Tree algorithm achieve an $O(\log^3 k)$ approximation ratio. In the latter, the $O(\log^2 k)$ factor arises from rounding a fractional solution on a tree support, while our additional $O(\log k)$ factor is due to reducing the height of the directed graph to $O(\log k)$. In contrast, the $O(\log k)$ factor in the Group Steiner Tree algorithm results from embedding a general graph into a tree using probabilistic metric-tree embedding. It remains an open question whether this approximation gap can be bridged for either problem or if a lower bound exists that separates the capabilities of quasi-polynomial-time and polynomial-time algorithms.

Another intriguing open question for network design researchers is the Two-Edge Connected Directed Steiner Tree problem. Grandoni and Laekhanukit [GL17] developed a quasi-polynomial-time approximation algorithm for this problem, achieving polylogarithmic approximation ratios. They further claimed that achieving an approximation ratio of $k^\epsilon \cdot \text{polylog}(n)$ for any constant $\epsilon > 0$ is feasible if one seeks a polynomial running time, where k denotes the number of terminals. Their techniques rely on structural results indicating that any feasible solution can be decomposed into two independent spanning trees. Consequently, it is highly plausible that our Decompose-and-Round technique could be applied to this problem, potentially yielding a polynomial-time polylogarithmic approximation algorithm for the Two-Edge Connected Directed Steiner Tree problem as well.

Finally, we are actively exploring further applications of our techniques, as many problems involving Markov processes can be decomposed into extensive decision trees. Such trees can be effectively captured by reachability constraints, similar to those in the Directed Steiner Tree and Group Steiner Tree problems. This opens up promising avenues for applying our Decompose-and-Round framework to a broader class of optimization problems, potentially leading to new approximation algorithms with improved performance guarantees.

Thus, while significant progress has been made, several avenues for future research remain open, promising further advancements in approximation algorithms for complex optimization problems.

References

- [ABMS12] Pranjali Awasthi, Avrim Blum, Jamie Morgenstern, and Or Sheffet. Additive approximation for near-perfect phylogeny construction. In Anupam Gupta, Klaus Jansen, José D. P. Rolim, and Rocco A. Servedio, editors, *Approximation, Randomization, and Combinatorial Optimization. Algorithms and Techniques - 15th International Workshop, APPROX 2012, and 16th International Workshop, RANDOM 2012, Cambridge, MA, USA, August 15-17, 2012. Proceedings*, volume 7408 of *Lecture Notes in Computer Science*, pages 25–36. Springer, 2012.
- [AMS08] Charles J. Alpert, Dinesh P. Mehta, and Sachin S. Sapatnekar. *Handbook of Algorithms for Physical Design Automation*. Auerbach Publications, USA, 1st edition, 2008.
- [Bar98] Yair Bartal. On approximating arbitrary metrics by tree metrics. In *Proceedings of the Thirtieth Annual ACM Symposium on Theory of Computing, STOC '98*, page 161–168, New York, NY, USA, 1998. Association for Computing Machinery.
- [BGRS13] Jarosław Byrka, Fabrizio Grandoni, Thomas Rothvoß, and Laura Sanità. Steiner tree approximation via iterative randomized rounding. *J. ACM*, 60(1), February 2013. Preliminary version in STOC 2010.
- [BTN⁺09] M. Brazil, D. A. Thomas, B. K. Nielsen, P. Winter, C. Wulff-Nilsen, and M. Zachariasen. A novel approach to phylogenetic trees: d-dimensional geometric steiner trees. *Netw.*, 53(2):104–111, March 2009.
- [CCC⁺99] Moses Charikar, Chandra Chekuri, To-yat Cheung, Zuo Dai, Ashish Goel, Sudipto Guha, and Ming Li. Approximation algorithms for directed Steiner problems. *J. Algorithms*, 33(1):73–91, October 1999. Preliminary version in SODA '98.
- [CCGG98] Moses Charikar, Chandra Chekuri, Ashish Goel, and Sudipto Guha. Rounding via trees: deterministic approximation algorithms for group steiner trees and k-median. In *Proceedings of the Thirtieth Annual ACM Symposium on Theory of Computing, STOC '98*, page 114–123, New York, NY, USA, 1998. Association for Computing Machinery.
- [CEGS11] Chandra Chekuri, Guy Even, Anupam Gupta, and Danny Segev. Set connectivity problems in undirected graphs and the directed steiner network problem. *ACM Trans. Algorithms*, 7(2):18:1–18:17, 2011. Preliminary in SODA'08.

- [CEKP18] Deeparnab Chakrabarty, Alina Ene, Ravishankar Krishnaswamy, and Debmalya Panigrahi. Online buy-at-bulk network design. *SIAM J. Comput.*, 47(4):1505–1528, 2018. Preliminary in FOCS’15.
- [CGL15] Parinya Chalermsook, Fabrizio Grandoni, and Bundit Laekhanukit. On survivable set connectivity. In *Proceedings of the Twenty-Sixth Annual ACM-SIAM Symposium on Discrete Algorithms*, SODA ’15, page 25–36, USA, 2015. Society for Industrial and Applied Mathematics.
- [Che52] Herman Chernoff. A Measure of Asymptotic Efficiency for Tests of a Hypothesis Based on the sum of Observations. *The Annals of Mathematical Statistics*, 23(4):493 – 507, 1952.
- [CLLZ22] Qingyun Chen, Bundit Laekhanukit, Chao Liao, and Yuhao Zhang. Survivable network design revisited: Group-connectivity. In *2022 IEEE 63rd Annual Symposium on Foundations of Computer Science (FOCS)*, pages 278–289, 2022.
- [CLNV14] Joseph Cheriyan, Bundit Laekhanukit, Guylsain Naves, and Adrian Vetta. Approximating rooted steiner networks. *ACM Trans. Algorithms*, 11(2), October 2014. Preliminary version in SODA 2012.
- [CLWZ20] Chun-Hsiang Chan, Bundit Laekhanukit, Hao-Ting Wei, and Yuhao Zhang. Polylogarithmic Approximation Algorithm for k-Connected Directed Steiner Tree on Quasi-Bipartite Graphs. In Jarosław Byrka and Raghu Meka, editors, *Approximation, Randomization, and Combinatorial Optimization. Algorithms and Techniques (APPROX/RANDOM 2020)*, volume 176 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 63:1–63:20, Dagstuhl, Germany, 2020. Schloss Dagstuhl – Leibniz-Zentrum für Informatik.
- [FKK⁺14] Zachary Friggstad, Jochen Könnemann, Young Kun-Ko, Anand Louis, Mohammad Shadravan, and Madhur Tulsiani. Linear programming hierarchies suffice for directed Steiner tree. In Jon Lee and Jens Vygen, editors, *Integer Programming and Combinatorial Optimization - 17th International Conference, IPCO 2014, Bonn, Germany, June 23-25, 2014. Proceedings*, volume 8494 of *Lecture Notes in Computer Science*, pages 285–296. Springer, 2014.
- [FRT04] Jittat Fakcharoenphol, Satish Rao, and Kunal Talwar. A tight bound on approximating arbitrary metrics by tree metrics. *J. Comput. Syst. Sci.*, 69(3):485–497, November 2004.
- [GKR00] Naveen Garg, Goran Konjevod, and R. Ravi. A polylogarithmic approximation algorithm for the group Steiner tree problem. *J. Algorithms*, 37(1):66–84, 2000. Preliminary version in SODA ’98.
- [GKR10] Anupam Gupta, Ravishankar Krishnaswamy, and R. Ravi. Tree embeddings for two-edge-connected network design. In *Proceedings of the Twenty-First Annual ACM-SIAM Symposium on Discrete Algorithms*, SODA ’10, page 1521–1538, USA, 2010. Society for Industrial and Applied Mathematics.

- [GL17] Fabrizio Grandoni and Bundit Laekhanukit. Surviving in directed graphs: a quasi-polynomial-time polylogarithmic approximation for two-connected directed steiner tree. In *Proceedings of the 49th Annual ACM SIGACT Symposium on Theory of Computing*, STOC 2017, page 420–428, New York, NY, USA, 2017. Association for Computing Machinery.
- [GLL23] Fabrizio Grandoni, Bundit Laekhanukit, and Shi Li. $o(\log^2 k / \log \log k)$ -approximation algorithm for directed Steiner tree: A tight quasi-polynomial time algorithm. *SIAM J. Comput.*, 52(2):STOC19–298–STOC19–322, 2023. Preliminary version in STOC 2019.
- [GMW97] M. Grötschel, A. Martin, and R. Weismantel. The steiner tree packing problem in vlsi design. *Math. Program.*, 78(2):265–281, August 1997.
- [GN22] Rohan Ghuge and Viswanath Nagarajan. Quasi-polynomial algorithms for submodular tree orienteering and directed network design problems. *Math. Oper. Res.*, 47(2):1612–1630, 2022. Preliminary version in SODA 2020.
- [GP68] E. N. Gilbert and H. O. Pollak. Steiner minimal trees. *SIAM J. Appl. Math.*, 16(1):1–29, January 1968.
- [HK03] Eran Halperin and Robert Krauthgamer. Polylogarithmic inapproximability. In *Proceedings of the Thirty-Fifth Annual ACM Symposium on Theory of Computing*, STOC '03, page 585–594, New York, NY, USA, 2003. Association for Computing Machinery.
- [HKK⁺07] Eran Halperin, Guy Kortsarz, Robert Krauthgamer, Aravind Srinivasan, and Nan Wang. Integrality ratio for group steiner trees and directed steiner trees. *SIAM Journal on Computing*, 36(5):1494–1511, 2007. Preliminary version in SODA '03.
- [Hoe63] Wassily Hoeffding. Probability inequalities for sums of bounded random variables. *Journal of the American Statistical Association*, 58(301):13–30, 1963.
- [HRZ01] Christopher S. Helvig, Gabriel Robins, and Alexander Zelikovsky. An improved approximation scheme for the group Steiner problem. *Networks*, 37(1):8–20, 2001.
- [Kar72] Richard M. Karp. Reducibility among combinatorial problems. In Raymond E. Miller, James W. Thatcher, and Jean D. Bohlinger, editors, *Complexity of Computer Computations: Proceedings of a symposium on the Complexity of Computer Computations, held March 20–22, 1972, at the IBM Thomas J. Watson Research Center, Yorktown Heights, New York, and sponsored by the Office of Naval Research, Mathematics Program, IBM World Trade Corporation, and the IBM Research Mathematical Sciences Department*, pages 85–103, Boston, MA, 1972. Springer US.
- [KKN12] Rohit Khandekar, Guy Kortsarz, and Zeev Nutov. Approximating fault-tolerant group-steiner problems. *Theor. Comput. Sci.*, 416:55–64, January 2012. Preliminary version in FSTTCS'09.
- [Lae14] Bundit Laekhanukit. Parameters of two-prover-one-round game and the hardness of connectivity problems. In *Proceedings of the Twenty-Fifth Annual ACM-SIAM Symposium on Discrete Algorithms*, SODA '14, page 1626–1643, USA, 2014. Society for Industrial and Applied Mathematics.

- [Lae16] Bundit Laekhanukit. Approximating Directed Steiner Problems via Tree Embedding. In Ioannis Chatzigiannakis, Michael Mitzenmacher, Yuval Rabani, and Davide Sangiorgi, editors, *43rd International Colloquium on Automata, Languages, and Programming (ICALP 2016)*, volume 55 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 74:1–74:13, Dagstuhl, Germany, 2016. Schloss Dagstuhl – Leibniz-Zentrum für Informatik.
- [LCLZ22] Chao Liao, Qingyun Chen, Bundit Laekhanukit, and Yuhao Zhang. Almost Tight Approximation Hardness for Single-Source Directed k -Edge-Connectivity. In Miłkołaj Bojańczyk, Emanuela Merelli, and David P. Woodruff, editors, *49th International Colloquium on Automata, Languages, and Programming (ICALP 2022)*, volume 229 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 89:1–89:17, Dagstuhl, Germany, 2022. Schloss Dagstuhl – Leibniz-Zentrum für Informatik.
- [LL24] Shi Li and Bundit Laekhanukit. Polynomial integrality gap of flow lp for directed steiner tree. *ACM Trans. Algorithms*, 21(1), November 2024. Preliminary version in SODA 2022.
- [LTL02] Chin Lung Lu, Chuan Yi Tang, and Richard Chia-Tung Lee. The full steiner tree problem in phylogeny. In Oscar H. Ibarra and Louxin Zhang, editors, *Computing and Combinatorics*, pages 107–116, Berlin, Heidelberg, 2002. Springer Berlin Heidelberg.
- [Man19] Pasin Manurangsi. A note on degree vs gap of min-rep label cover and improved inapproximability for connectivity problems. *Inf. Process. Lett.*, 145(C):24–29, May 2019.
- [MU17] Michael Mitzenmacher and Eli Upfal. *Probability and Computing: Randomization and Probabilistic Techniques in Algorithms and Data Analysis*. Cambridge University Press, USA, 2nd edition, 2017.
- [NPS11] Joseph Naor, Debmalya Panigrahi, and Mohit Singh. Online node-weighted steiner tree and related problems. In Rafail Ostrovsky, editor, *IEEE 52nd Annual Symposium on Foundations of Computer Science, FOCS 2011, Palm Springs, CA, USA, October 22-25, 2011*, pages 210–219. IEEE Computer Society, 2011.
- [Nut24] Zeev Nutov. On rooted k -connectivity problems in quasi-bipartite digraphs. *Operations Research Forum*, 5(1):10, 2024. Preliminary version in CSR 2021.
- [Rot11] Thomas Rothvoß. Directed Steiner tree and the Lasserre hierarchy. *CoRR*, abs/1111.5473, 2011.
- [She95] Naveed A. Sherwani. *Algorithms for VLSI Physical Design Automation*. Kluwer Academic Publishers, USA, 2nd edition, 1995.
- [SW96] Majid Sarrafzadeh and C. K. Wong. *An Introduction to VLSI Physical Design*. McGraw-Hill Higher Education, 1st edition, 1996.
- [SXC⁺21] Yahui Sun, Xiaokui Xiao, Bin Cui, Saman Halgamuge, Theodoros Lappas, and Jun Luo. Finding group steiner trees in graphs with both vertex and edge weights. *Proc. VLDB Endow.*, 14(7):1137–1149, March 2021.

- [WMT12] J. F. Weng, I. Mareels, and D. A. Thomas. Probability steiner trees and maximum parsimony in phylogenetic analysis. *Journal of Mathematical Biology*, 64(7):1225–1251, 2012.
- [YSL⁺22] Shuang Yang, Yahui Sun, Jiesong Liu, Xiaokui Xiao, Rong-Hua Li, and Zhewei Wei. Approximating probabilistic group steiner trees in graphs. *Proc. VLDB Endow.*, 16(2):343–355, October 2022.
- [Zel93] A. Z. Zelikovsky. An 11/6-approximation algorithm for the network steiner problem. *Algorithmica*, 9(5):463–470, 1993.
- [Zel97] Alexander Zelikovsky. A series of approximation algorithms for the acyclic directed Steiner tree problem. *Algorithmica*, 18(1):99–110, 1997.
- [ZK02] Leonid Zosin and Samir Khuller. On directed steiner trees. In *Proceedings of the Thirteenth Annual ACM-SIAM Symposium on Discrete Algorithms*, SODA '02, page 59–63, USA, 2002. Society for Industrial and Applied Mathematics.