
Video Diffusion Transformers are In-Context Learners

Zhengcong Fei, Di Qiu, Changqian Yu*, Debang Li
Mingyuan Fan, Xiang Wen
Kunlun Inc.
Beijing, China
{feizhengcong}@gmail.com

Abstract

This paper investigates a solution for enabling in-context capabilities of main video diffusion transformers, with minimal tuning required for activation. Specifically, we propose a simple pipeline to leverage in-context generation: (i) concatenate videos along spacial or time dimension, (ii) jointly caption multi-scene video clips from one source, and (iii) apply task-specific fine-tuning using carefully curated small datasets. Through a series of diverse controllable tasks, we demonstrate qualitatively that existing advanced text-to-video models can effectively perform in-context generation. Notably, it allows for the creation of consistent multi-scene videos exceeding 30 seconds in duration, without additional computational overhead. Importantly, this method requires no modifications to the original models, results in high-fidelity video outputs that better align with prompt specifications and maintain role consistency. Our framework presents a valuable tool for the research community and offers critical insights for advancing product-level controllable video generation systems. The data, code, and model weights are publicly available at: <https://github.com/feizc/Video-In-Context>.

1 Introduction

Diffusion models have set a new benchmark in vision generation tasks, by employing an iterative denoising process applied to a Gaussian noise latent space [39, 77, 61, 13, 71, 34, 75, 70]. Such iterative denoising process has proven to be both robust and versatile in the context of video generation. Meantime, large-scale, pre-trained video diffusion models [3, 32, 63, 98] have greatly advanced downstream applications, with many methods providing enhanced control over various attributes, thereby enabling more precise adjustments during the generation process [104, 73, 29, 19]. Despite these advancements, adapting text-to-video models for a wide range of generative tasks, especially those requiring the creation of coherent video sets with complex intrinsic relationships, remains an open challenge [44, 62, 107]. Moreover, the generation and control of multi-scene, long-duration videos continue to pose difficulties due to the complexity of the spatio-temporal domain and the substantial GPU memory requirements.

In-context learning (ICL), initially identified as a latent capability in large autoregressive language models [67], has garnered significant attention in recent research [10]. This technique involves providing models with a small set of labeled data as controllable demonstrations, enhancing their ability to reason and perform specific tasks [5, 10, 87]. ICL has been shown to notably improve model performance across a wide range of tasks [31, 57, 64, 50]. Through ICL, models can dynamically adjust their behavior according to the contextual information provided, enabling them to execute tasks with minimal labeled data. The success of ICL in language models has sparked interest in extending these capabilities to vision tasks. However, implementing vision-based ICL presents greater challenges than in language models due to the inherently high-dimensional and diverse nature of

*Corresponding author



Prompt: Four video storyboards. [1] The video captures a serene countryside scene where a group of people are riding black horses. [2] The video captures a serene rural scene where a group of people are riding horses on a dirt road. [3] The video captures a serene rural scene where a person is riding a dark-colored horse along a dirt path. [4] The video captures a serene rural scene where a woman is riding a horse on a country road.



Prompt: Four video storyboards. [1] The video captures a serene autumn scene in a forest, where a group of people are riding horses along a dirt path. [2] The video captures a group of horse riders traversing a dirt road in a rural setting. [3] The video captures a group of horse riders in a grassy field, with a backdrop of distant mountains and a clear sky. [4] The video captures a serene autumnal scene in a forest, where a group of horse riders is traversing a dirt trail.

Figure 1: **Examples of in-context generalist for multi-scene video tasks.** Four sub-videos are concurrently generated within a single diffusion process that are tuned specifically. A carefully designed prompt template, incorporating distinct scenes, is employed to ensure consistent portrayal and seamless integration of scenes in the generated video sets.

visual data [47, 105], particularly when dealing with video data. As the temporal dimension in videos introduces dynamic causality and long-sequence complexity.

Inspired from [45], we aim at adapting text-to-video models for conditional control tasks with in-context capacity, offering a universal approach for multi-scene long-duration video generation. Our approach begins with a key assumption: *Although trained with cut video clips, text-to-video models possess in-context generation capabilities for homologous scenes in inner connection.* By effectively triggering and enhancing this built-in functionality, we aim to leverage it for more complex conditional generative tasks. Specifically, we concatenate multiple video clips from one source into an extended video sequence and combine individual video prompts into one comprehensive prompt, enabling the model to process and generate multiple-scene videos simultaneously. Then, we fine-tune a Low-Rank Adaptation (LoRA) [42] of the model with a small set of carefully designed samples. It effectively reduces the computational resources required while preserving much of the original model’s knowledge and in-context generation capabilities.

Despite its simplicity transferring from image generation domain, it demonstrates remarkable adaptability and high-quality generative performance across a diverse range of conditional tasks. Example outputs for multi-scene tasks that create videos exceeding 30 seconds in one shot, are illustrated in Figure 1, specific portrait photograph and style transfer task cases are shown in Figure 2, and conditional generation results, including outpainting and inpainting, are presented in Figure 3. Although our method necessitates small-scale, task-specific tuning data to enhance in-context capabilities for generative controllability, the core video diffusion transformer and pipeline remain task-agnostic. Notably, our method also can generate consistent multi-scene videos exceeding 30 seconds without additional computational overhead. This combination of minimal data requirements and broad applicability provides a valuable tool for the generative community. To support continued exploration, we have made our data, models, and training configurations publicly available on GitHub.


2 Related Works

2.1 Text-to-Video Generation


Generation of video remains a longstanding challenge in the field of computer vision [40, 103]. In between, text-to-video generation has progressed significantly over time, evolving from early approaches based on GANs and VAEs to more advanced structures such as diffusion. Initial GAN-based methods [84, 76, 81, 9, 102] faced dilemma with temporal coherence, leading to inconsistencies between consecutive frames. To address these issues, video diffusion models based on U-Net adapted originally designed for text-to-image, thereby improving the continuity of frames. Furthermore, DiT-based architectures [61, 55, 56, 30] introduced spatio-temporal attention and full 3d attention, which enhanced the ability to capture the intricate dynamics of video and ensure greater frame consistency [37, 4, 8, 33]. Meanwhile, auto-regressive models [95, 41, 83, 48, 93, 51] employed token-based approaches to effectively model temporal dependencies, particularly excelling in the generation of long-form videos [101, 85, 108, 38, 79, 110] and in video-to-video translation tasks [97, 2, 99, 43]. Our work investigates the effectiveness of video diffusion Transformers for in-context capacity in long-duration multi-scene tasks and use a lightweight fine-tuning to activate it.

2.2 Diffusion Transformers

Transformer architecture [82] has garnered significant attention for its success in language modeling [65, 66, 69] and substantial potential across a wide range of computer vision applications, including image classification [11, 36, 80], object detection [53, 88, 89, 6], and semantic segmentation [109, 92, 78], among others [54, 36, 21, 17, 18, 16]. Building on this success, diffusion Transformers [60] and their variants [1, 24, 26, 27, 25] have replaced the traditional convolutional U-Net backbone [72] with Transformer-based architectures. This shift has resulted in improved scalability and simpler parameter expansion compared to U-Net-based diffusion models. Such advantages in scalability have been particularly evident in areas like video generation [56], image generation [7], speech generation [52], and video generation [98]. Furthermore, recent innovations, such as StableAudio [14] and FluxMusic [23, 22, 20], have explored the application of the DiT architecture in the generation of audio and music.

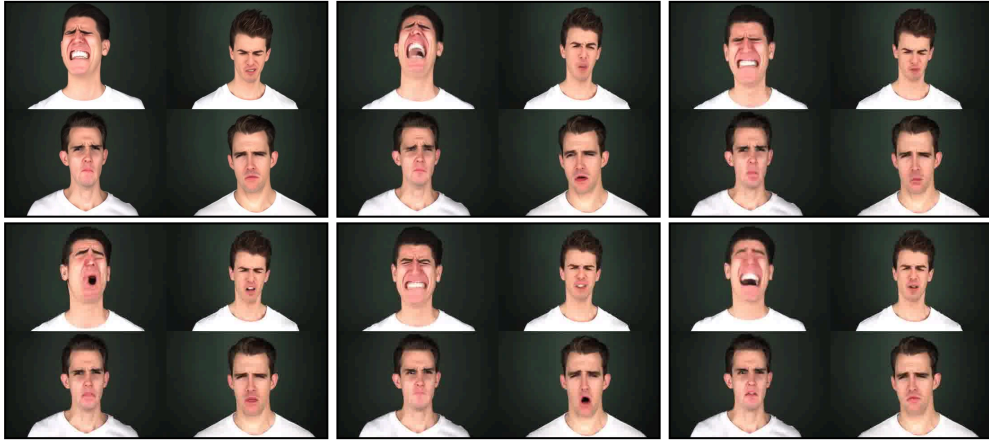

Prompt: Four video storyboards of one young boy. [1] sad. [2] happy. [3] disgusted. [4] contempt.

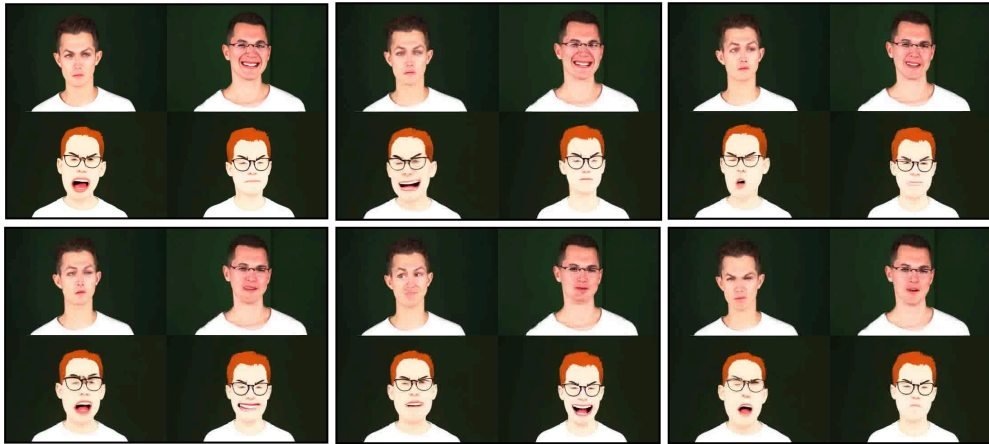

Prompt: Four video storyboards of one young boy. [1] sad. [2] happy. [3] disgusted in cartoon style. [4] contempt in cartoon style.

Figure 2: **Examples of in-context generalist for portrait photograph and style transfer tasks.** Four sub-videos are generated simultaneously within a single diffusion process being specifically tuned for the desired outcome. Consistent subject identities are preserved across all sub-videos within each set, as demonstrated in the accompanying figure.

2.3 Controllable Video Generation

As video generation techniques advanced, early approaches to conditioning diffusion models with spatial controls primarily relied on concatenation [71, 74]. The emergence of large-scale, pretrained text-to-image models [12, 13] has harnessed sophisticated text embeddings [67, 68] processed through refined attention mechanisms, propelling research into more precise control over the generation process [49, 58, 62, 19]. Notably, ControlNet [104] facilitates fine-grained control over attributes such as depth, edges, and poses by embedding timestep-specific control features into the diffusion U-Net architecture. Additional control signals have also been explored, including camera motion [90, 35, 94, 28], objective motion [86, 96], and trajectory control [100, 91], among others [59, 15]. [106] analyze the video in-context learning in autoregressive transformers. Building on [45], we propose a unified framework that consolidates these diverse controls through concatenation, generating video content using both textual prompts and masking operation.



Prompt: Four video storyboards. [1] The video captures a dressage event where a rider is mounted on a dark brown horse with a black mane and tail. [2] The video captures a woman riding a black horse in an indoor equestrian arena. [3] The video captures a dressage horse and rider in an indoor arena. [4] The video captures a dressage event where a rider and a horse are performing.



Prompt: Four video storyboards. [1] The video captures an aerial view of a large, grass-covered hill with a prominent shadow cast upon it, indicating the sun is shining from the upper left corner of the frame. [2] The video showcases an aerial view of a large, dormant volcano with a prominent crater at its peak. [3] The video showcases an aerial view of a large, dormant volcano with a prominent crater. [4] The video showcases an aerial view of a vast, grassy landscape with a prominent hill in the foreground.

Figure 3: **Examples of in-context generalist applied to inpainting and outpainting tasks.** A sub-video, enclosed within a red box, is generated based on remaining video clips using a masking operation. This process ensures a consistent style and subjective maintained across all videos within each set.

3 Methodology

3.1 Task Formulation

The generation of long-duration multi-scene videos is typically framed as the creation of a set of $n \geq 1$ videos, conditioned on another set of $m \geq 0$ videos and $(n + m)$ text prompts. This formulation also encompasses a wide variety of controllable video generation tasks, including video translation, style transfer, pose transfer, and subject-driven generation, as well as practical applications such as storyboard video generation. The relationships between the conditional and generated videos are implicitly steered through the individual video-specific prompts.

To achieve this goal, we use a slight modification to the conventional video diffusion transformers by utilizing a single, consolidated prompt template for the entire set of videos, not touching the network structure itself. This unified prompt begins with an overarching description of the entire video set, followed by specific prompts for each individual video. This design is compatible with existing text-to-video models and ensures that the overall description effectively communicates the task’s intended objectives.

3.2 In-Context Generation

We begin with the premise that through large-scale video pretraining, video diffusion transformer inherently understand the cross-frame video representation [46], i.e., existing text-to-video models are able to possess some level of in-context generation capability across a range of tasks, albeit with varying quality. Leveraging this insight, we aim to activate the model’s in-context generation potential through the use of meticulously curated, high-quality text-video sets. Simultaneously, we seek to maintain the integrity of the original text-to-video architecture, avoiding any structural modifications. Following [45], we propose the use of a single prompt that encompasses descriptions of multiple videos from one source, thereby enabling the desired consistent functionality within the existing framework.

Our proposed design generates a set of videos concurrently by concatenating them into a single video clip in tempera or spacial dimension during the training phase. The corresponding captions for these videos are integrated into a unified prompt template, which includes both an overarching description and specific guidance for each sub video clips. Once the video set is generated, we partition the large video into separate panels. Additionally, we apply Lora [42] to a selected subset of high-quality text-video data to enhance the capacity of models. To facilitate conditioning on an additional set of videos, we modify the inpainting scripts from image diffusion models². This training-free masking operation allows us to inpaint or outpaint the target video parts based on a partially masked video set, all of which are concatenated into the same large video.

4 Experiments

4.1 Implementation Details

We leverage CogvideoX-5b text-to-video model³ as the foundation and specifically train an LoRA tailored to the unique requirements of specific tasks. We focus on a diverse set of practical applications, including multi-scene video generation, visual identity design, and portrait photography, among others. For each task, we curate a dataset of approximately 100 to 200 high-quality video sequences, sourced either from the internet or publicly available datasets. These video sets are then concatenated into composite videos, either along the spatial or temporal dimensions, and accompanied by detailed captions generated using Qwen2-VL⁴. The training process is carried out on 8 NVIDIA A100 GPUs, with 5000 optimization steps of $1e-5$ learning rate, a batch size of 128, and a LoRA rank of 32. For inference, we adopt 50 sampling steps with a guidance scale set to 6, in accordance with the default settings of the CogVideoX-5b in Factory⁵. For controllable video-conditional generation, we

²<https://huggingface.co/docs/diffusers/using-diffusers/inpaint>

³<https://huggingface.co/THUDM/CogVideoX-5b>

⁴<https://github.com/QwenLM/Qwen2-VL>

⁵<https://github.com/a-r-r-o-w/cogvideox-factory>

predict masked patches that facilitate inpainting or outpainting by utilizing surrounding contextual information at each frame.

4.2 Results

We finally provide qualitative results to illustrate the adaptability and performance of video diffusion transformers equipped with in-context learning capabilities across diverse tasks.

Reference-free Video-Set Generation. In this scenario, video sets are created exclusively from textual prompts, without reliance on any input videos. Illustrative examples spanning various applications, such as multi-scene composition, portrait photography, and style transfer, are depicted in Figures 1 and 2. The proposed approach consistently produces outputs of exceptional quality.

Reference-based Video-Set Generation. In this configuration, video sets are synthesized using a combination of a textual prompt and a set of conditional videos, which must include at least one reference video. Masking techniques are applied to certain videos, enabling either inpainting or outpainting by leveraging information from the remaining frames. Results showcasing video-conditioned generation are provided in Figure 3.

References

- [1] Fan Bao, Shen Nie, Kaiwen Xue, Yue Cao, Chongxuan Li, Hang Su, and Jun Zhu. All are worth words: A vit backbone for diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 22669–22679, 2023.
- [2] Yuxiang Bao, Di Qiu, Guoliang Kang, Baochang Zhang, Bo Jin, Kaiye Wang, and Pengfei Yan. Latentwarp: Consistent diffusion latents for zero-shot video-to-video translation. *arXiv preprint arXiv:2311.00353*, 2023.
- [3] Andreas Blattmann, Tim Dockhorn, Sumith Kulal, Daniel Mendelevitch, Maciej Kilian, Dominik Lorenz, Yam Levi, Zion English, Vikram Voleti, Adam Letts, et al. Stable video diffusion: Scaling latent video diffusion models to large datasets. *arXiv preprint arXiv:2311.15127*, 2023.
- [4] Andreas Blattmann, Robin Rombach, Huan Ling, Tim Dockhorn, Seung Wook Kim, Sanja Fidler, and Karsten Kreis. Align your latents: High-resolution video synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 22563–22575, 2023.
- [5] Tom B Brown. Language models are few-shot learners. *arXiv preprint arXiv:2005.14165*, 2020.
- [6] Nicolas Carion, Francisco Massa, Gabriel Synnaeve, Nicolas Usunier, Alexander Kirillov, and Sergey Zagoruyko. End-to-end object detection with transformers. In *ECCV*, 2020.
- [7] Junsong Chen, Jincheng Yu, Chongjian Ge, Lewei Yao, Enze Xie, Yue Wu, Zhongdao Wang, James Kwok, Ping Luo, Huchuan Lu, et al. Pixart-a: Fast training of diffusion transformer for photorealistic text-to-image synthesis. *arXiv preprint arXiv:2310.00426*, 2023.
- [8] Xinyuan Chen, Yaohui Wang, Lingjun Zhang, Shaobin Zhuang, Xin Ma, Jiashuo Yu, Yali Wang, Dahua Lin, Yu Qiao, and Ziwei Liu. Seine: Short-to-long video diffusion model for generative transition and prediction. In *The Twelfth International Conference on Learning Representations*, 2023.
- [9] Aidan Clark, Jeff Donahue, and Karen Simonyan. Adversarial video generation on complex datasets. *arXiv preprint arXiv:1907.06571*, 2019.
- [10] Qingxiu Dong, Lei Li, Damai Dai, Ce Zheng, Jingyuan Ma, Rui Li, Heming Xia, Jingjing Xu, Zhiyong Wu, Tianyu Liu, et al. A survey on in-context learning. *arXiv preprint arXiv:2301.00234*, 2022.

- [11] Alexey DOSOVITSKIY. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020.
- [12] Patrick Esser, Robin Rombach, and Bjorn Ommer. Taming transformers for high-resolution image synthesis. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 12873–12883, 2021.
- [13] Patrick Esser, Sumith Kulal, Andreas Blattmann, Rahim Entezari, Jonas Müller, Harry Saini, Yam Levi, Dominik Lorenz, Axel Sauer, Frederic Boesel, et al. Scaling rectified flow transformers for high-resolution image synthesis. In *Forty-first International Conference on Machine Learning*, 2024.
- [14] Zach Evans, Julian D Parker, CJ Carr, Zack Zukowski, Josiah Taylor, and Jordi Pons. Stable audio open. *arXiv preprint arXiv:2407.14358*, 2024.
- [15] Haopeng Fang, Di Qiu, Binjie Mao, Pengfei Yan, and He Tang. Motioncharacter: Identity-preserving and motion controllable human video generation. *arXiv preprint arXiv:2411.18281*, 2024.
- [16] Zheng-cong Fei. Fast image caption generation with position alignment. *arXiv preprint arXiv:1912.06365*, 2019.
- [17] Zhengcong Fei. Partially non-autoregressive image captioning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 1309–1316, 2021.
- [18] Zhengcong Fei, Xu Yan, Shuhui Wang, and Qi Tian. Deecap: Dynamic early exiting for efficient image captioning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 12216–12226, 2022.
- [19] Zhengcong Fei, Mingyuan Fan, and Junshi Huang. Gradient-free textual inversion. In *Proceedings of the 31st ACM International Conference on Multimedia*, pages 1364–1373, 2023.
- [20] Zhengcong Fei, Mingyuan Fan, and Junshi Huang. A-jepa: Joint-embedding predictive architecture can listen. *arXiv preprint arXiv:2311.15830*, 2023.
- [21] Zhengcong Fei, Mingyuan Fan, Li Zhu, Junshi Huang, Xiaoming Wei, and Xiaolin Wei. Masked auto-encoders meet generative adversarial networks and beyond. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 24449–24459, 2023.
- [22] Zhengcong Fei, Mingyuan Fan, and Junshi Huang. Music consistency models. *arXiv preprint arXiv:2404.13358*, 2024.
- [23] Zhengcong Fei, Mingyuan Fan, Changqian Yu, and Junshi Huang. Flux that plays music. *arXiv preprint arXiv:2409.00587*, 2024.
- [24] Zhengcong Fei, Mingyuan Fan, Changqian Yu, and Junshi Huang. Scalable diffusion models with state space backbone. *arXiv preprint arXiv:2402.05608*, 2024.
- [25] Zhengcong Fei, Mingyuan Fan, Changqian Yu, Debang Li, and Junshi Huang. Diffusion-rwkv: Scaling rwkv-like architectures for diffusion models. *arXiv preprint arXiv:2404.04478*, 2024.
- [26] Zhengcong Fei, Mingyuan Fan, Changqian Yu, Debang Li, and Junshi Huang. Scaling diffusion transformers to 16 billion parameters. *arXiv preprint arXiv:2407.11633*, 2024.
- [27] Zhengcong Fei, Mingyuan Fan, Changqian Yu, Debang Li, Youqiang Zhang, and Junshi Huang. Dimba: Transformer-mamba diffusion models. *arXiv preprint arXiv:2406.01159*, 2024.
- [28] Wanquan Feng, Jiawei Liu, Pengqi Tu, Tianhao Qi, Mingzhen Sun, Tianxiang Ma, Songtao Zhao, Siyu Zhou, and Qian He. I2vcontrol-camera: Precise video camera control with adjustable motion strength. *arXiv preprint arXiv:2411.06525*, 2024.

- [29] Rinon Gal, Yuval Alaluf, Yuval Atzmon, Or Patashnik, Amit H Bermano, Gal Chechik, and Daniel Cohen-Or. An image is worth one word: Personalizing text-to-image generation using textual inversion. *arXiv preprint arXiv:2208.01618*, 2022.
- [30] Peng Gao, Le Zhuo, Ziyi Lin, Chris Liu, Junsong Chen, Ruoyi Du, Enze Xie, Xu Luo, Longtian Qiu, Yuhang Zhang, et al. Lumina-t2x: Transforming text into any modality, resolution, and duration via flow-based large diffusion transformers. *arXiv preprint arXiv:2405.05945*, 2024.
- [31] Xavier Garcia, Yamini Bansal, Colin Cherry, George Foster, Maxim Krikun, Melvin Johnson, and Orhan Firat. The unreasonable effectiveness of few-shot learning for machine translation. In *International Conference on Machine Learning*, pages 10867–10878. PMLR, 2023.
- [32] Rohit Girdhar, Mannat Singh, Andrew Brown, Quentin Duval, Samaneh Azadi, Sai Saketh Rambhatla, Akbar Shah, Xi Yin, Devi Parikh, and Ishan Misra. Emu video: Factorizing text-to-video generation by explicit image conditioning. *arXiv preprint arXiv:2311.10709*, 2023.
- [33] Rohit Girdhar, Mannat Singh, Andrew Brown, Quentin Duval, Samaneh Azadi, Sai Saketh Rambhatla, Akbar Shah, Xi Yin, Devi Parikh, and Ishan Misra. Emu video: Factorizing text-to-video generation by explicit image conditioning. *arXiv preprint arXiv:2311.10709*, 2023.
- [34] Shuyang Gu, Dong Chen, Jianmin Bao, Fang Wen, Bo Zhang, Dongdong Chen, Lu Yuan, and Baining Guo. Vector quantized diffusion model for text-to-image synthesis. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10696–10706, 2022.
- [35] Hao He, Yinghao Xu, Yuwei Guo, Gordon Wetzstein, Bo Dai, Hongsheng Li, and Ceyuan Yang. Cameractrl: Enabling camera control for text-to-video generation. *arXiv preprint arXiv:2404.02101*, 2024.
- [36] Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. Masked autoencoders are scalable vision learners. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 16000–16009, 2022.
- [37] Yingqing He, Tianyu Yang, Yong Zhang, Ying Shan, and Qifeng Chen. Latent video diffusion models for high-fidelity video generation with arbitrary lengths. *arXiv preprint arXiv:2211.13221*, 2022.
- [38] Roberto Henschel, Levon Khachatryan, Daniil Hayrapetyan, Hayk Poghosyan, Vahram Tadevosyan, Zhangyang Wang, Shant Navasardyan, and Humphrey Shi. Streamingt2v: Consistent, dynamic, and extendable long video generation from text. *arXiv preprint arXiv:2403.14773*, 2024.
- [39] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *Advances in neural information processing systems*, 33:6840–6851, 2020.
- [40] Jonathan Ho, William Chan, Chitwan Saharia, Jay Whang, Ruiqi Gao, Alexey Gritsenko, Diederik P Kingma, Ben Poole, Mohammad Norouzi, David J Fleet, et al. Imagen video: High definition video generation with diffusion models. *arXiv preprint arXiv:2210.02303*, 2022.
- [41] Wenyi Hong, Ming Ding, Wendi Zheng, Xinghan Liu, and Jie Tang. Cogvideo: Large-scale pretraining for text-to-video generation via transformers. *arXiv preprint arXiv:2205.15868*, 2022.
- [42] Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. *arXiv preprint arXiv:2106.09685*, 2021.
- [43] Wenbo Hu, Xiangjun Gao, Xiaoyu Li, Sijie Zhao, Xiaodong Cun, Yong Zhang, Long Quan, and Ying Shan. Depthcrafter: Generating consistent long depth sequences for open-world videos. *arXiv preprint arXiv:2409.02095*, 2024.

- [44] Zhihao Hu and Dong Xu. Videocontrolnet: A motion-guided video-to-video translation framework by using diffusion model with controlnet. *arXiv preprint arXiv:2307.14073*, 2023.
- [45] Lianghua Huang, Wei Wang, Zhi-Fan Wu, Yupeng Shi, Huanzhang Dou, Chen Liang, Yutong Feng, Yu Liu, and Jingren Zhou. In-context lora for diffusion transformers. *arXiv preprint arXiv:2410.23775*, 2024.
- [46] Minyoung Huh, Brian Cheung, Tongzhou Wang, and Phillip Isola. The platonic representation hypothesis. *arXiv preprint arXiv:2405.07987*, 2024.
- [47] Alexander Kirillov, Kaiming He, Ross Girshick, Carsten Rother, and Piotr Dollár. Panoptic segmentation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 9404–9413, 2019.
- [48] Dan Kondratyuk, Lijun Yu, Xiuye Gu, José Lezama, Jonathan Huang, Rachel Hornung, Hartwig Adam, Hassan Akbari, Yair Alon, Vighnesh Birodkar, et al. Videopoet: A large language model for zero-shot video generation. *arXiv preprint arXiv:2312.14125*, 2023.
- [49] Ming Li, Taojiannan Yang, Huafeng Kuang, Jie Wu, Zhaoning Wang, Xuefeng Xiao, and Chen Chen. Controlnet
++
: Improving conditional controls with efficient consistency feedback. In *European Conference on Computer Vision*, pages 129–147. Springer, 2025.
- [50] Tianle Li, Xueguang Ma, Alex Zhuang, Yu Gu, Yu Su, and Wenhu Chen. Few-shot in-context learning for knowledge base question answering. *arXiv preprint arXiv:2305.01750*, 2023.
- [51] Haozhe Liu, Shikun Liu, Zijian Zhou, Mengmeng Xu, Yanping Xie, Xiao Han, Juan C Pérez, Ding Liu, Kumara Kahatapitiya, Menglin Jia, et al. Mardini: Masked autoregressive diffusion for video generation at scale. *arXiv preprint arXiv:2410.20280*, 2024.
- [52] Huadai Liu, Rongjie Huang, Xuan Lin, Wenqiang Xu, Maozong Zheng, Hong Chen, Jinzheng He, and Zhou Zhao. Vit-tts: visual text-to-speech with scalable diffusion transformer. *arXiv preprint arXiv:2305.12708*, 2023.
- [53] Ze Liu, Yutong Lin, Yue Cao, Han Hu, Yixuan Wei, Zheng Zhang, Stephen Lin, and Baining Guo. Swin transformer: Hierarchical vision transformer using shifted windows. In *ICCV*, 2021.
- [54] Ze Liu, Jia Ning, Yue Cao, Yixuan Wei, Zheng Zhang, Stephen Lin, and Han Hu. Video swin transformer. In *CVPR*, 2022.
- [55] Haoyu Lu, Guoxing Yang, Nanyi Fei, Yuqi Huo, Zhiwu Lu, Ping Luo, and Mingyu Ding. Vdt: General-purpose video diffusion transformers via mask modeling. *arXiv preprint arXiv:2305.13311*, 2023.
- [56] Xin Ma, Yaohui Wang, Gengyun Jia, Xinyuan Chen, Ziwei Liu, Yuan-Fang Li, Cunjian Chen, and Yu Qiao. Latte: Latent diffusion transformer for video generation. *arXiv preprint arXiv:2401.03048*, 2024.
- [57] Yasmin Moslem, Rejwanul Haque, John D Kelleher, and Andy Way. Adaptive machine translation with large language models. *arXiv preprint arXiv:2301.13294*, 2023.
- [58] Chong Mou, Xintao Wang, Liangbin Xie, Yanze Wu, Jian Zhang, Zhongang Qi, and Ying Shan. T2i-adapter: Learning adapters to dig out more controllable ability for text-to-image diffusion models. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 4296–4304, 2024.
- [59] Muyao Niu, Xiaodong Cun, Xintao Wang, Yong Zhang, Ying Shan, and Yinqiang Zheng. Mofa-video: Controllable image animation via generative motion field adaptations in frozen image-to-video diffusion model. *arXiv preprint arXiv:2405.20222*, 2024.
- [60] William Peebles and Saining Xie. Scalable diffusion models with transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4195–4205, 2023.

- [61] William Peebles and Saining Xie. Scalable diffusion models with transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4195–4205, 2023.
- [62] Bohao Peng, Jian Wang, Yuechen Zhang, Wenbo Li, Ming-Chang Yang, and Jiaya Jia. Controlnext: Powerful and efficient control for image and video generation. *arXiv preprint arXiv:2408.06070*, 2024.
- [63] Adam Polyak, Amit Zohar, Andrew Brown, Andros Tjandra, Animesh Sinha, Ann Lee, Apoorv Vyas, Bowen Shi, Chih-Yao Ma, Ching-Yao Chuang, et al. Movie gen: A cast of media foundation models. *arXiv preprint arXiv:2410.13720*, 2024.
- [64] Chengwei Qin, Aston Zhang, Chen Chen, Anirudh Dagar, and Wenming Ye. In-context learning with iterative demonstration selection. *arXiv preprint arXiv:2310.09881*, 2023.
- [65] Alec Radford, Karthik Narasimhan, Tim Salimans, and Ilya Sutskever. Improving language understanding with unsupervised learning. *Technical report, OpenAI*, 2018.
- [66] Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9, 2019.
- [67] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision, 2021.
- [68] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer, 2019.
- [69] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of machine learning research*, 21(140):1–67, 2020.
- [70] Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen. Hierarchical text-conditional image generation with clip latents. *arXiv preprint arXiv:2204.06125*, 2022.
- [71] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10684–10695, 2022.
- [72] Olaf Ronneberger, Philipp Fischer, and Thomas Brox. U-net: Convolutional networks for biomedical image segmentation. In *Medical image computing and computer-assisted intervention—MICCAI 2015: 18th international conference, Munich, Germany, October 5-9, 2015, proceedings, part III 18*, pages 234–241. Springer, 2015.
- [73] Nataniel Ruiz, Yuanzhen Li, Varun Jampani, Yael Pritch, Michael Rubinstein, and Kfir Aberman. Dreambooth: Fine tuning text-to-image diffusion models for subject-driven generation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 22500–22510, 2023.
- [74] Chitwan Saharia, William Chan, Huiwen Chang, Chris Lee, Jonathan Ho, Tim Salimans, David Fleet, and Mohammad Norouzi. Palette: Image-to-image diffusion models. In *ACM SIGGRAPH 2022 Conference Proceedings*, pages 1–10, 2022.
- [75] Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily L Denton, Kamyar Ghasemipour, Raphael Gontijo Lopes, Burcu Karagol Ayan, Tim Salimans, et al. Photorealistic text-to-image diffusion models with deep language understanding. *Advances in Neural Information Processing Systems*, 35:36479–36494, 2022.
- [76] Masaki Saito, Eiichi Matsumoto, and Shunta Saito. Temporal generative adversarial nets with singular value clipping. In *Proceedings of the IEEE international conference on computer vision*, pages 2830–2839, 2017.
- [77] Jiaming Song, Chenlin Meng, and Stefano Ermon. Denoising diffusion implicit models. *arXiv preprint arXiv:2010.02502*, 2020.

- [78] Robin Strudel, Ricardo Garcia, Ivan Laptev, and Cordelia Schmid. Segmenter: Transformer for semantic segmentation. In *ICCV*, 2021.
- [79] Zhenxiong Tan, Xingyi Yang, Songhua Liu, and Xinchao Wang. Video-infinity: Distributed long video generation. *arXiv preprint arXiv:2406.16260*, 2024.
- [80] Hugo Touvron, Matthieu Cord, Matthijs Douze, Francisco Massa, Alexandre Sablayrolles, and Hervé Jégou. Training data-efficient image transformers & distillation through attention. In *ICML*, 2021.
- [81] Sergey Tulyakov, Ming-Yu Liu, Xiaodong Yang, and Jan Kautz. Mocogan: Decomposing motion and content for video generation. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 1526–1535, 2018.
- [82] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need, 2017.
- [83] Ruben Villegas, Mohammad Babaeizadeh, Pieter-Jan Kindermans, Hernan Moraldo, Han Zhang, Mohammad Taghi Saffar, Santiago Castro, Julius Kunze, and Dumitru Erhan. Phenaki: Variable length video generation from open domain textual descriptions. In *International Conference on Learning Representations*, 2022.
- [84] Carl Vondrick, Hamed Pirsiavash, and Antonio Torralba. Generating videos with scene dynamics. *Advances in neural information processing systems*, 29, 2016.
- [85] Fu-Yun Wang, Wenshuo Chen, Guanglu Song, Han-Jia Ye, Yu Liu, and Hongsheng Li. Gen-l-video: Multi-text to long video generation via temporal co-denoising. *arXiv preprint arXiv:2305.18264*, 2023.
- [86] Jiawei Wang, Yuchen Zhang, Jiaxin Zou, Yan Zeng, Guoqiang Wei, Liping Yuan, and Hang Li. Boximator: Generating rich and controllable motions for video synthesis. *arXiv preprint arXiv:2402.01566*, 2024.
- [87] Lean Wang, Lei Li, Damai Dai, Deli Chen, Hao Zhou, Fandong Meng, Jie Zhou, and Xu Sun. Label words are anchors: An information flow perspective for understanding in-context learning. *arXiv preprint arXiv:2305.14160*, 2023.
- [88] Wenhai Wang, Enze Xie, Xiang Li, Deng-Ping Fan, Kaitao Song, Ding Liang, Tong Lu, Ping Luo, and Ling Shao. Pyramid vision transformer: A versatile backbone for dense prediction without convolutions. In *ICCV*, 2021.
- [89] Wenhai Wang, Enze Xie, Xiang Li, Deng-Ping Fan, Kaitao Song, Ding Liang, Tong Lu, Ping Luo, and Ling Shao. Pvt v2: Improved baselines with pyramid vision transformer. *Computational Visual Media*, 2022.
- [90] Zhouxia Wang, Ziyang Yuan, Xintao Wang, Tianshui Chen, Menghan Xia, Ping Luo, and Ying Shan. Motionctrl: A unified and flexible motion controller for video generation. *arXiv preprint arXiv:2312.03641*, 2023.
- [91] Weijia Wu, Zhuang Li, Yuchao Gu, Rui Zhao, Yefei He, David Junhao Zhang, Mike Zheng Shou, Yan Li, Tingting Gao, and Di Zhang. Draganything: Motion control for anything using entity representation. In *European Conference on Computer Vision*, pages 331–348. Springer, 2025.
- [92] Enze Xie, Wenhai Wang, Zhiding Yu, Anima Anandkumar, Jose M Alvarez, and Ping Luo. Segformer: Simple and efficient design for semantic segmentation with transformers. *Advances in Neural Information Processing Systems*, 34:12077–12090, 2021.
- [93] Jinheng Xie, Weijia Mao, Zechen Bai, David Junhao Zhang, Weihao Wang, Kevin Qinghong Lin, Yuchao Gu, Zhijie Chen, Zhenheng Yang, and Mike Zheng Shou. Show-o: One single transformer to unify multimodal understanding and generation. *arXiv preprint arXiv:2408.12528*, 2024.

- [94] Dejia Xu, Weili Nie, Chao Liu, Sifei Liu, Jan Kautz, Zhangyang Wang, and Arash Vahdat. Camco: Camera-controllable 3d-consistent image-to-video generation. *arXiv preprint arXiv:2406.02509*, 2024.
- [95] Wilson Yan, Yunzhi Zhang, Pieter Abbeel, and Aravind Srinivas. Videogpt: Video generation using vq-vae and transformers. *arXiv preprint arXiv:2104.10157*, 2021.
- [96] Shiyuan Yang, Liang Hou, Haibin Huang, Chongyang Ma, Pengfei Wan, Di Zhang, Xiaodong Chen, and Jing Liao. Direct-a-video: Customized video generation with user-directed camera movement and object motion. *arXiv preprint arXiv:2402.03162*, 2024.
- [97] Shuai Yang, Yifan Zhou, Ziwei Liu, and Chen Change Loy. Rerender a video: Zero-shot text-guided video-to-video translation. In *SIGGRAPH Asia 2023 Conference Papers*, pages 1–11, 2023.
- [98] Zhuoyi Yang, Jiayan Teng, Wendi Zheng, Ming Ding, Shiyu Huang, Jiazheng Xu, Yuanming Yang, Wenyi Hong, Xiaohan Zhang, Guanyu Feng, et al. Cogvideox: Text-to-video diffusion models with an expert transformer. *arXiv preprint arXiv:2408.06072*, 2024.
- [99] Danah Yatim, Rafail Fridman, Omer Bar-Tal, Yoni Kasten, and Tali Dekel. Space-time diffusion features for zero-shot text-driven motion transfer. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8466–8476, 2024.
- [100] Shengming Yin, Chenfei Wu, Jian Liang, Jie Shi, Houqiang Li, Gong Ming, and Nan Duan. Dragnuwa: Fine-grained control in video generation by integrating text, image, and trajectory. *arXiv preprint arXiv:2308.08089*, 2023.
- [101] Shengming Yin, Chenfei Wu, Huan Yang, Jianfeng Wang, Xiaodong Wang, Minheng Ni, Zhengyuan Yang, Linjie Li, Shuguang Liu, Fan Yang, et al. Nuwa-xl: Diffusion over diffusion for extremely long video generation. *arXiv preprint arXiv:2303.12346*, 2023.
- [102] Sihyun Yu, Jihoon Tack, Sangwoo Mo, Hyunsu Kim, Junho Kim, Jung-Woo Ha, and Jinwoo Shin. Generating videos with dynamics-aware implicit generative adversarial networks. *arXiv preprint arXiv:2202.10571*, 2022.
- [103] Sihyun Yu, Kihyuk Sohn, Subin Kim, and Jinwoo Shin. Video probabilistic diffusion models in projected latent space. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18456–18466, 2023.
- [104] Lvmin Zhang and Maneesh Agrawala. Adding conditional control to text-to-image diffusion models. *arXiv preprint arXiv:2302.05543*, 2023.
- [105] Richard Zhang, Phillip Isola, and Alexei A Efros. Colorful image colorization. In *Computer Vision—ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part III 14*, pages 649–666. Springer, 2016.
- [106] Wentao Zhang, Junliang Guo, Tianyu He, Li Zhao, Linli Xu, and Jiang Bian. Video in-context learning. *arXiv preprint arXiv:2407.07356*, 2024.
- [107] Yabo Zhang, Yuxiang Wei, Dongsheng Jiang, Xiaopeng Zhang, Wangmeng Zuo, and Qi Tian. Controlvideo: Training-free controllable text-to-video generation. *arXiv preprint arXiv:2305.13077*, 2023.
- [108] Canyu Zhao, Mingyu Liu, Wen Wang, Jianlong Yuan, Hao Chen, Bo Zhang, and Chunhua Shen. Moviedreamer: Hierarchical generation for coherent long visual sequence. *arXiv preprint arXiv:2407.16655*, 2024.
- [109] Sixiao Zheng, Jiachen Lu, Hengshuang Zhao, Xiatian Zhu, Zekun Luo, Yabiao Wang, Yanwei Fu, Jianfeng Feng, Tao Xiang, Philip HS Torr, et al. Rethinking semantic segmentation from a sequence-to-sequence perspective with transformers. In *CVPR*, 2021.
- [110] Yupeng Zhou, Daquan Zhou, Ming-Ming Cheng, Jiashi Feng, and Qibin Hou. Storydiffusion: Consistent self-attention for long-range image and video generation. *arXiv preprint arXiv:2405.01434*, 2024.