

Robust Recognition of Persian Isolated Digits in Speech using Deep Neural Network

Ali Nasr-Esfahani¹, Mehdi Bekrani^{1*}, Roozbeh Rajabi^{1,2}

¹Faculty of Electrical and Computer Engineering, Qom University of Technology, Khodakaram Blvd, Qom, Iran.

²DITEN Department, University of Genoa, Via All'Opera Pia, 11, Genoa, Italy.

*Corresponding author(s). E-mail(s): bekrani@qut.ac.ir;
Contributing authors: nasresfahani.a@qut.ac.ir; roozbeh.rajabi@unige.it;

Abstract

In recent years, artificial intelligence (AI) has advanced significantly in speech recognition applications. Speech-based interaction with digital systems, particularly AI-driven digit recognition, has emerged as a prominent application. However, existing neural network-based methods often neglect the impact of noise, leading to reduced accuracy in noisy environments. This study tackles the challenge of recognizing the isolated spoken Persian numbers (zero to nine), particularly distinguishing phonetically similar numbers, in noisy environments. The proposed method, which is designed for speaker-independent recognition, combines residual convolutional neural network and bidirectional gated recurrent unit in a hybrid structure for Persian number recognition. This method employs word units as input instead of phoneme units. Audio data from 51 speakers of FARSDIGIT1 database are utilized after augmentation using various noises, and the Mel-Frequency Cepstral Coefficients (MFCC) technique is employed for feature extraction. The experimental results show the proposed method efficacy with 98.53%, 96.10%, and 95.9% recognition accuracy for training, validation, and test, respectively. In the noisy environment, the proposed method exhibits an average performance improvement of 26.88% over phoneme unit-based LSTM method for Persian numbers. In addition, the accuracy of the proposed method is 7.61% better than that of the Mel-scale Two Dimension Root Cepstrum Coefficients (MTDRCC) feature extraction technique along with MLP model in the test data for the same dataset.

Keywords: Spoken Digit Recognition, Data Augmentation, Convolutional Neural Network, Bidirectional Gated Recurrent Unit

1 Introduction

With the rapid advancement of technology, artificial intelligence (AI) has found its applications in various signal processing fields, including audio and speech processing, image processing, and machine vision [1–3]. One of the most natural and intuitive ways for humans to communicate is through alphabets and numbers. Numbers hold significant importance in everyday speech, such as in financial transactions, phone numbers, reservation systems, and credit card passwords. To enhance human interaction with digital systems, AI has been leveraged to recognize spoken numbers, eliminating the need for physical inputs such as pressing number keys. Consequently, AI-based speech and digit recognition, has garnered considerable attention.

Numerous research studies have been conducted in the field of spoken number recognition. Homayounpour et al. [4] presented a comprehensive review in 2003, exploring methods based on hidden Markov models (HMMs) and MLP neural networks, and their combinations to recognize Persian numbers for both continuous and discrete cases. The best recognition accuracy was achieved using the HMM-based neural network, with 99.1% for discrete numbers and 83.7% for continuous numbers in the FARSDIGIT1 database [5].

In 2008, the application of Hierarchical Temporal Memory (HTM), traditionally used in the image processing, was explored for automatic isolated digit recognition [6]. The results, including a 8.57% Word Error Rate (WER), demonstrate an initial promise. Also, in [7], researchers introduced a novel voice recognition system for Arabic digits to facilitate the use of special electronic reading devices for individuals with limited or no visual ability. This system, based on a Gaussian mixture model (GMM) classifier and Delta-Delta Mel-Frequency Cepstral Coefficients (MFCC) for feature extraction, achieved a digit recognition accuracy of %99.3.

In recent years, speech recognition powered by deep neural networks (DNN) has gained significant interest. Danashri et al. [8] presented a discrete number recognition system in 2016 based on a DNN, initializing it with a Deep Belief Neural Network (DBN). The system achieved recognition accuracy of 86.06% on English data from the TIDIGIT database [9]. In 2020, a Convolutional Neural Network (CNN) was employed to recognize Pashto discrete numbers [10]. The method employed the MFCC technique to generate feature vectors from audio data and constructed a neural network architecture with four deep convolutional layers using the ReLU activation function and a maximum pooling layer. The average recognition accuracy of 84.17% was reported for Pashto numbers.

While these DNN-based methods have demonstrated substantial progress, an aspect that was not received sufficient attention is the impact of noise on the speech recognition accuracy. In [11], an LSTM-based network was presented that investigates the effect of noise on the number recognition. The method categorizes discrete numbers into groups with similar phonetic characteristics and trains an LSTM neural network for each class, independently. The quality of number recognition is 91.7% in noise-free conditions, but it drops to an average of 69.22% when various noises are added to the audio data.

Recently in 2022, the combination of multi layer perceptron (MLP) and Mel-scale Two Dimension Root Cepstrum Coefficients (MTDRCC) feature extraction method

was used for number recognition in the noisy conditions [12]. The method of the MTDRCC feature extraction includes pre-processing, audio segmentation, Hamming window, discrete Fourier transform, Gaussian filter, cosine transform and inverse Fourier transform, respectively. The recognition accuracy of this method for Persian numbers was reported 98.85% in noise-free conditions and 88.49% in noisy conditions.

Building on the capabilities of neural networks, Viriri et al. [13] combined a recurrent neural network (RNN) and an LSTM, in 2022, achieving an impressive accuracy of 99% on English numbers data. Similarly, Sotisna et al. [14], utilized transfer learning networks, like AlexNet and GoogleNet, for speech recognition, reporting recognition accuracies of 72% for AlexNet and 66% for GoogleNet.

In a more recent development in 2023, a deep CNN architecture was proposed for isolated spoken digit recognition in Bengali [15]. This model, utilizing a unique hybrid feature extraction, including MFCC, Spectral Sub-band Energy (SSE), and Log Spectral Sub-band Energy (LSSE), achieved a test accuracy of 98.52%.

On the other hand, to tackle the challenge of limited data for many non-English languages, the data augmentation has been found as an effective approach. Lunas et al. [16] employed data augmentation techniques, including adding white noise and changing the sound's length, to increase the number of input data. They used the Markov model for recognition after applying their augmentation methods to 100 raw data. Tom Ko et al. [17] also worked on data augmentation by incorporating noise and room simulation techniques to expand their input dataset. Their approach involved increasing an original 300-hour dataset to 900 hours and using MFCC and BiLSTM for audio recognition.

In this paper, we introduce a novel approach for Persian digit recognition. Our work focuses on the challenges posed by the Persian language, particularly in recognizing digits. The significant aspects of our proposed method are as follows:

- **Data Augmentation for Robustness:** We employ data augmentation techniques to increase the robustness of our system, even with limited inputs.
- **MFCC Technique for Feature Extraction:** The MFCC technique is utilized for effective feature extraction.
- **Word Unit usage:** Instead of traditional phoneme units, we use word units as input. This choice aims to decrease the effect of similar phonemes, leading to a better recognition accuracy.
- **Hybrid Network Architecture:** We propose a hybrid network architecture that combines Residual CNN and bidirectional gated recurrent unit (GRU), using the strengths of both architectures to improve the overall performance in Persian digit recognition.

In addition to addressing the problem of digit recognition in the Persian language, our method investigates the effects of various noises, including monotonous horns, nature sounds, vehicle movement sounds, humming sounds, and factory sounds, on the speech recognition performance.

The rest of this paper is organized as follows: Section 2 describes the audio data generation method used for training and testing the proposed DNN. Section 3 delves into the architecture of the DNN used in the study and implementation of the proposed

method. Section 4 presents the results of the experiments, which are analyzed in detail. Finally, Section 5 concludes by providing summaries and key takeaways from the study.

2 Datasets

The audio data used in this research, consists of recordings from 51 speakers in the FARSDIGIT1 database [5]. This database contains both discrete and continuous Persian numbers ranging from zero to nine. The recordings were made using a telephone system, with a signal-to-noise ratio (SNR) of approximately 8.8 dB. The audio files were prepared using telephone software and a sound card with a sampling rate of 11025 Hz. The conversations were recorded over normal telephone lines, both intra-city and inter-city (long distance). The recordings used were from 31 male speakers with ages ranging from 12 to 61 years, and 20 female speakers with ages between 14 to 52 years. Each speaker recorded the numbers zero to nine discretely, in one to two sessions, with a time interval of 7 to 30 days. There are 10 repetitions of each number from each speaker, resulting in a total of 510 audio data samples for each number.

To prevent the overfitting of the neural network, in this work, we do the data augmentation on the dataset. To this end, several data augmentation methods are employed, including:

- Changing Sound Speed [16]: The speed of sound is decreased or increased.
- Reverb Filter [17]: A reverb filter is applied to simulate different acoustic environments.
- Background Noise [18]: Various background noises are added to the audio data.
- Hall Environment Simulation [19]: The hall environment is simulated to introduce additional variations.

The data augmentation methods were applied with different probabilities: 70% for applying the noise, 15% for changing the sound speed, 7.5% for applying the reverb filter, and 7.5% for simulating the hall environment.

The selected noises added to the input data encompassed horn noise, nature sounds, car and engine sounds, buzzing sounds, and industrial center sounds. For each type of the noise, 10 samples with SNRs of 0, 5, 10, 15, and 20 dB were used.

Specific considerations drive the selection of probabilities for applying various data augmentation methods. A 70% probability for applying noise was chosen to introduce diversity in background noise levels, allowing for a broad range of Signal-to-Noise Ratios (SNR). Setting a 15% probability for changing sound speed aimed to explore variations in audio characteristics. Additionally, a 7.5% probability for applying the reverb filter and another 7.5% for simulating the hall environment were selected based on the similarity in their shape features. This deliberate distribution ensures a proper division of augmentation techniques, contributing to a comprehensive exploration of diverse audio scenarios in the dataset.

After applying the data augmentation techniques, the number of input data samples increased by a factor of 5. Consequently, the augmented dataset consisted of 2550 data samples for each digit, leading to a total of 25,500 data samples. Figure 1 shows the abundance chart of the resulting data augmentation.

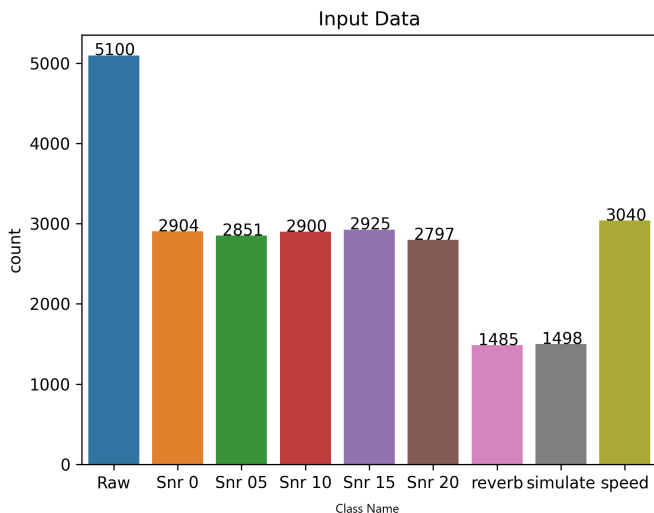


Fig. 1 Input data count after data augmentation.

This augmented dataset allows for more robust training of the DNN, taking into account various real-world scenarios and challenging noise situations that can occur during the spoken digit recognition.

3 The Proposed Spoken Digit Recognition Method

The proposed method includes three main stages:

- Data augmentation technique described in Section 2.
- Speech feature extraction using the MFCC technique.
- The proposed neural network architecture.

3.1 Speech Feature Extraction using the MFCC Technique

Feature extraction is a crucial step in the speech recognition process. Raw audio data is not directly used in the model training process due to the presence of noise and other unnecessary parameters that can affect the model's accuracy [20].

A list of feature extraction techniques commonly employed in speech recognition are as follows [21]:

1. **Mel-Frequency Cepstral Coefficients (MFCCs):** Widely used, MFCCs effectively capture both spectral and temporal characteristics of speech.
2. **Perceptual Linear Prediction (PLP):** Similar to MFCCs, PLP incorporates a non-linear step to better approximate human auditory perception.
3. **Mel-Frequency Discrete Wavelet Coefficients (MF-DWC):** MF-DWC applies discrete wavelet transform to the speech signal in the mel-frequency domain for feature extraction.

4. **Spectrogram:** This 2D representation displays how frequencies change over time in the audio signal.

The MFCCs stand as the primary choice for speech feature extraction. This preference stems from their remarkable capacity to closely emulate human auditory perception. MFCCs excel in capturing both spectral and temporal characteristics of speech, while reducing the dimensionality of the data, thus offering an efficient representation of speech signals. Their resilience to noise, versatility across various applications, and extensive research backing are other reasons for this choice [21].

In the proposed method, features are extracted from the input data, instead of using raw audio signals. To extract spectral frames from speech signals, the widely used MFCC technique is employed. To account for and mitigate the impact of facet similarities on the recognition rate, the input data is first separated based on words and numbers and the MFCC technique is subsequently used to extract features from the speech signals for further processing.

Figure 2 shows the block diagram of the MFCC technique. As shown in the figure, the MFCC structure involves several steps in audio signal processing. Initially, the input audio signal goes through a pre-emphasis filter to enhance high-frequency components. Next, it is divided into overlapping frames, and a window function is applied to each frame to minimize the spectral leakage.

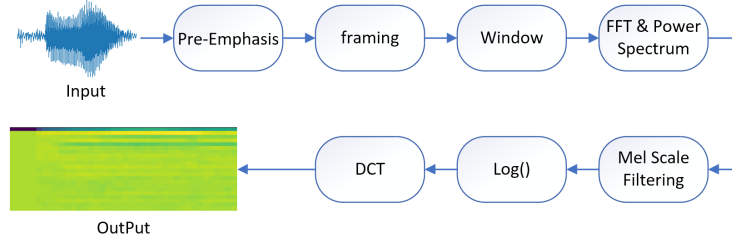


Fig. 2 MFCC block diagram [21].

Following frame segmentation, a Short-Time Fourier Transform (STFT) is applied to each frame to calculate the power spectrum. Subsequently, a filter bank is constructed to represent the signal’s frequency content in a manner that mimics human auditory perception. This involves filtering the power spectrum through a set of triangular filter banks.

To obtain the actual MFCCs, a Discrete Cosine Transform (DCT) is applied to the log-filter bank energies. The DCT decorates the filter bank coefficients and retains a selected number of resulting coefficients, typically discarding higher-order coefficients as they contain less perceptually relevant information. Finally, the MFCCs are mean-normalized to ensure that they have a consistent scale across different audio samples [20].

In this paper, MFCC is configured with an α -parameter for pre-emphasis [21], set to 0.97, a sample rate of 16,000 Hz, a frame size of 25 milliseconds, and an NFFT (Number of Fast Fourier Transform points) of 512, tailoring MFCC to the specific

characteristics of the audio data. To capture crucial acoustic information, the number of the MFCC coefficients was set to 13, and the number of cepstral coefficients was set to 13, ensuring a comprehensive representation of the spectral content.

3.2 The Proposed DNN Architecture

The architecture of DNN in the proposed digit recognition method is derived with inspiration from the DeepSpeech2 model [22] with tailored modifications to address the challenges of recognizing Persian digits. The proposed DNN architecture consists of the CNN layer, residual CNN blocks, the Fully Connected (FC) layer, and Bidirectional GRU (BiGRU) blocks, as shown in Figure 3. Each section plays a crucial role in the learning process and adapting to the Persian language.

Following the DeepSpeech2 architecture, the CNN layer [3] is employed to extract features and transform input audio data into a feature vector while simultaneously adjusting the dimensions of the input matrix. Subsequently, residual CNN blocks [23], serving as powerful mechanisms for delving into finer details of the audio data, are utilized three times to obtain sufficient features. It is noted that word units are employed instead of phoneme units in the proposed method. Except the number of residual CNN blocks, another notable difference from DeepSpeech2 lies in the choice of the loss function. Instead of the Connectionist Temporal Classification (CTC) loss function used in DeepSpeech2, we opted for the Cross-Entropy Loss function. Following these modifications, the FC layer [24] is introduced to adjust the dimensions of the feature matrix generated by the preceding layers. This layer, added specifically for the loss function, constitutes another difference from the DeepSpeech2 architecture. As opposed to the LSTM architecture used in DeepSpeech2, the proposed method employs BiGRU blocks [25]. This modification is motivated by GRU's advantage of having fewer parameters than that of the LSTM, resulting in a reduction in the network weights and the computational resource consumption while often achieving superior performance. In addition, the BiGRU's configuration enables the network to process each frame by considering data from both previous and next frames, leading to more accurate predictions. These blocks are used five times to classify the features. At the end, two FC layers with the softmax function are used to select the result.

Overall, the proposed DNN architecture reflects innovative modifications on DeepSpeech2 for refining and optimizing this architecture for robust Persian digit recognition in real-world, noisy environments. Subsequently, we will delve into four critical sections with detailed explanations, including CNN, residual CNN Blocks, the FC layer, and BiGRU blocks.

3.2.1 CNN Layer

The CNN layer is utilized to transform the input audio data into the original feature vector and adjust the dimensions of the input matrix.

The CNN layer plays a crucial role in the initial processing of input audio data. We employ a single CNN layer to extract features from the raw audio input. The configuration of this CNN layer involves one input channel, reflective of the audio data, and 32 output channels. The choice of the output channels enables the network to

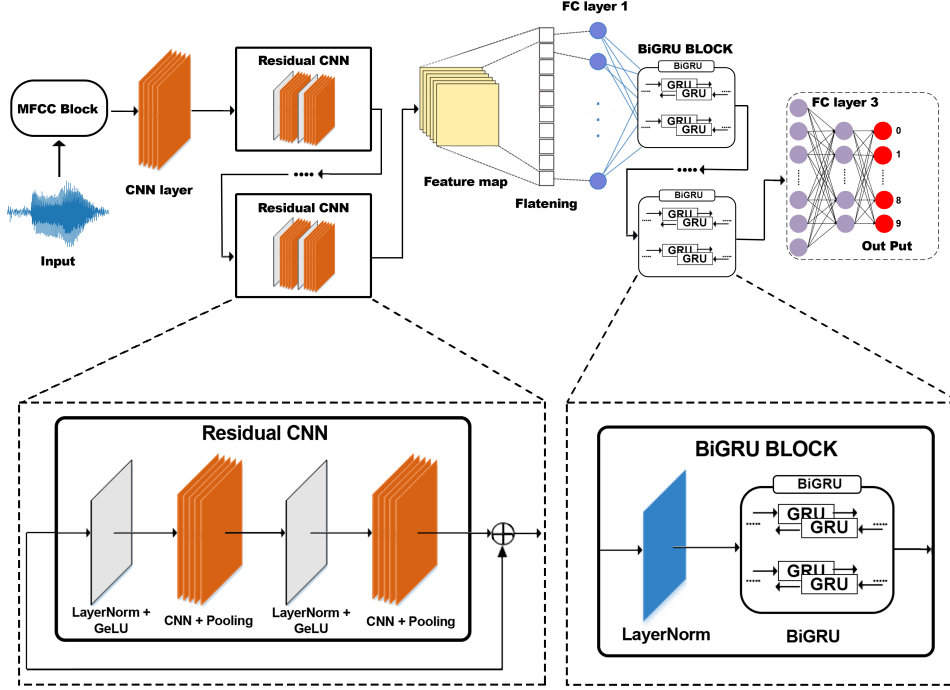


Fig. 3 Block diagram of the proposed DNN.

capture diverse and relevant features in the initial convolutional stage, enhancing its ability to detect complex patterns. To reinforce feature extraction, a kernel size of 3 is utilized. In addition, incorporating a stride of 2 facilitates down-sampling, effectively reducing computational complexity while retaining essential information.

3.2.2 Residual CNN Blocks [23]

Three residual CNN blocks are employed to learn audio features. This iterative application of the residual CNN block significantly contributes to the depth and complexity of the neural network, ultimately enhancing its ability to capture and recognize complex patterns and details in spoken Persian digits, even in challenging and noisy environments.

Within each residual CNN block, two normalization layers with a normalized shape of 20 are used. These layers are used to stabilize and accelerate the training process by normalizing the input data. Additionally, two Gaussian Error Linear Unit (GELU) activation functions are added, known for their ability to capture complex patterns and contribute to the non-linearity of the model. Furthermore, two CNN layers are employed, each with both input and output channels set to 32, plus a kernel size of 3, a stride of 1, and padding of 1. Crucially, the output from these layers is summed with the input to form the final result of the Residual CNN block. This design choice

enables the network to retain essential information from the input while incorporating the features extracted through the normalization and convolutional layers.

3.2.3 FC Layer [24]

In this neural network architecture, one of the FC layers bridges the residual CNN blocks and the BiGRU. Positioned after the flattening process, this layer optimizes the features for input into the subsequent BiGRU layer. This FC layer is configured with an input size of 25,600 and an output size of 512, compressing the information extracted from the residual CNN blocks. Moreover, two additional fully connected layers are introduced for classification, each incorporating dropout regularization, GELU, and softmax activation functions. The first FC layer takes 1,024 inputs and produces 512 outputs, providing fewer groups to classify easily. The subsequent FC layer accepts 512 inputs and produces 10 outputs. The activation function of this layer is softmax that transforms the network’s output into probability scores across 10 classes, aligning with the 10 classes corresponding to the spoken Persian digits. This configuration allows for effective classification and prediction, contributing to the overall accuracy of our neural network in recognizing spoken Persian digits.

3.2.4 BiGRU Block [25]

In this architecture, the BiGRU block represents a component that is iteratively applied five times. Each instance of this block is designed to capture temporal dependencies in the input data, contributing to the network’s ability to recognize spoken Persian digits. Within each BiGRU block, we incorporate layer normalization with a parameter of 512. This normalization technique ensures stable and efficient training by normalizing the inputs across the time steps, mitigating the vanishing gradient problem often associated with recurrent neural networks. Additionally, a GELU activation function is applied, introducing non-linearity to the model and enhancing its capacity to capture complex patterns. The core of the BiGRU block lies in the bidirectional gated recurrent unit itself, configured with an input size of 512 and a hidden layer size of 512. This bidirectional architecture enables the network to process input sequences in both forward and backward directions, capturing contextual information from both past and future time steps.

4 Results and Discussion

To implement the proposed method, the data mentioned in the previous section is divided into three categories: training, validation, and testing. The frequency graphs of each class of numbers in the training, validation, and testing categories are shown in Figures 4, 5, and 6, respectively.

The data division is performed after shuffling all numbers with their respective labels. The MFCC technique is used to extract the feature matrix of the input data. For training the neural network, Google’s Colab service was utilized, which provides a Tesla T4 graphics card with 15.1 GB of RAM, 78.19 GB of internal memory, and 12.68 GB of RAM for processing. All the codes utilized are produced using the Python

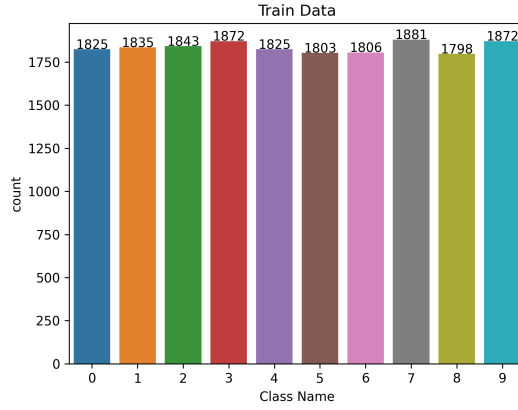


Fig. 4 Frequency chart of each class in Train data.

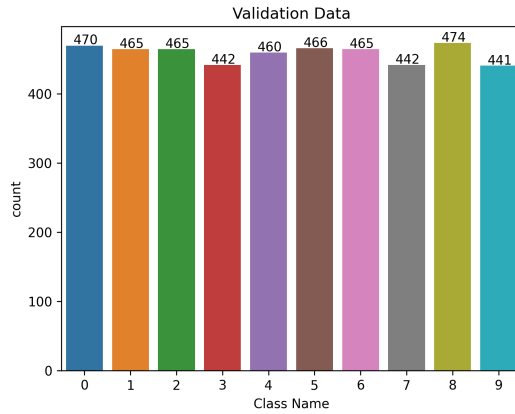


Fig. 5 Frequency chart of each class in the Validation data.

programming language. Moreover, the library used to create and train the model is PyTorch.

Initially, simpler networks such as the CNN and the GRU neural network are evaluated. However, due to the small size of the networks, they struggle to effectively learn from the noisy data, resulting in validation accuracies of 83.22% and 78.76%, respectively. Subsequently, the performance of the LSTM neural network is tested, and it achieves an accuracy of 87.86%, surpassing the previous two networks.

Figure 7 shows the accuracy of the proposed network in train, test, and validation stages per epochs. As depicted in Figure 7, after testing the proposed neural network on the data prepared with 25 training sessions, an impressive accuracy of 98.53% is achieved for the training data, and 96.10% accuracy is obtained for the validation data. Moreover, the network exhibits an accuracy of 95.92% on the test data. Table 1 compares the accuracy of the proposed neural network with the above mentioned networks. As can be seen, the proposed network outperforms other networks in the accuracy of all training, test, and validation phases.

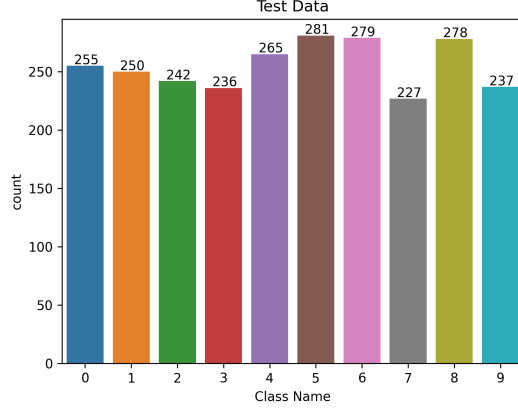


Fig. 6 Frequency chart of each class in the Test data.

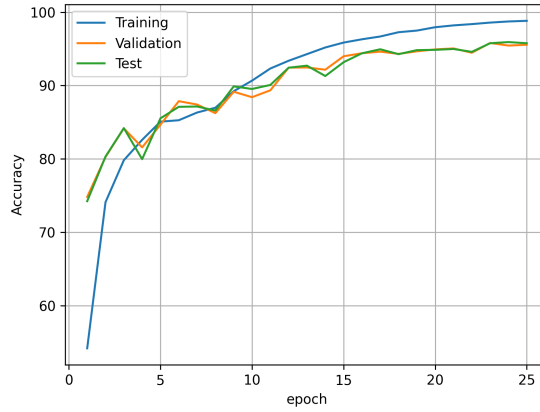


Fig. 7 Recognition accuracy chart on training, validation, and testing data.

Table 1 Comparison of accuracy of LSTM, CNN, GRU, and the proposed network on the prepared data.

Network Name	Training Data	Validation Data	Test Data
LSTM	91.16%	87.45%	86.82%
GRU	76.05%	83.22%	83.49%
CNN	82.90%	80.34%	80.59%
Proposed Network	98.53%	96.10%	95.92%

Figure 8 shows the network confusion matrix in the last period of the test data. This figure highlights that the network encounters errors on the data that have facet similarities. However, the error rate is significantly lower compared to phonologically based networks.

Table 2 compares the accuracy of the proposed method with some related works. As can be seen, our method achieves 7.61% more accuracy compared to the MTDRC

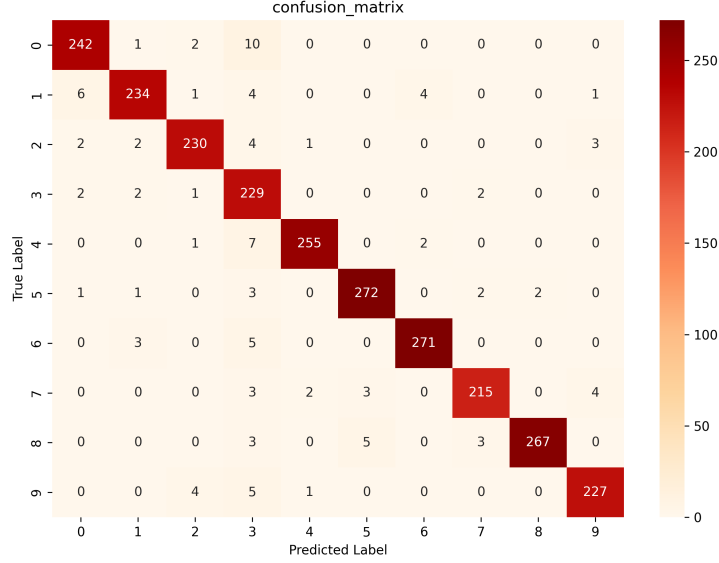


Fig. 8 Confusion matrix for the test set.

along with MLP method and an average performance improvement of 26.88% over phoneme unit-based LSTM method for Persian numbers, both in the noisy conditions.

Table 2 Comparison of accuracy parameter of our method and related works.

Reference	Method	Reported results (accuracy %)
2003 [4]	Combination of HMM and MLP in noise-free condition	83.7% for continuous num 99.1% for a discrete num
2016 [8]	Using DBN	86.06% in validation
2020 [10]	Using MFCC and CNN	84.17% in validation
2021 [11]	LSTM in noisy and noise-free condition	91.7% (noise-free), 69.2% (noisy) for validation
2022 [12]	Using MTDGCC and MLP	98.85% in noise-free, 88.49% in noisy conditions
2022 [13]	Combining RNN and LSTM in noise-free condition	99% in validation
2022 [14]	Using transfer learning like AlexNet and GoogleNet	72% for AlexNet 66% for GoogleNet
Our Method	Residual CNN and BiGRU in noisy condition	98.53% in training 96.10% in validation

5 Conclusion

In this paper, a deep neural network (DNN) is proposed for Persian spoken digit recognition, which utilizes CNN, residual CNN, and BiGRU neural networks along

with fully connected layers. By employing the word unit instead of the phoneme unit, the proposed DNN effectively deals with facet similarities of numbers, leading to a better feature extraction and impressive recognition performance, particularly in noisy conditions. The experimental results demonstrate that the proposed DNN outperforms phoneme-based and LSTM-based methods in noisy environments. The proposed word unit-based deep learning technique provides a strong solution for accurate and robust spoken digit recognition. This work contributes to the advanced speech recognition technology and holds potential for various real-world applications.

6 Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

7 Data availability

The datasets generated during and/or analysed during the current study are available from the corresponding author on reasonable request.

References

- [1] Dhanjal, A.S., Singh, W.: A comprehensive survey on automatic speech recognition using neural networks. *Multimedia Tools and Applications* (2023) <https://doi.org/10.1007/s11042-023-16438-y>
- [2] Kavand, A., Bekrani, M.: Speckle noise removal in medical ultrasonic image using spatial filters and DnCNN. *Multimedia Tools and Applications* (2023) <https://doi.org/10.1007/s11042-023-17374-7>
- [3] Shahidi Zandi, M., Rajabi, R.: Deep learning based framework for Iranian license plate detection and recognition. *Multimedia Tools and Applications* **81**(11), 15841–15858 (2022)
- [4] Homayounpour, M.M., Kabudian, J., Bashiri, H., Ahmadpour, Z.: Recognition of Farsi number over telephone: A comparison of statistical neural and hybrid approaches. *Amirkabir* **14**(56), 1045–1065 (2003)
- [5] Homayounpour, M.M.: FarsDigits database. In: Technical Report, Laboratory for Intelligent Sound and Speech Processing (2005). Amirkabir University of Technology
- [6] Van Doremalen, J., Boves, L.: Spoken digit recognition using a hierarchical temporal memory. In: *Interspeech*, pp. 2566–2569 (2008)
- [7] Hammami, N., Bedda, M., Farah, N., Lakehal-Ayat, R.O.: Spoken Arabic digits recognition based on (GMM) for e-Quran voice browsing: Application for blind

- category. In: International Conference on Advances in Information Technology for the Holy Quran and Its Sciences, pp. 123–127 (2013)
- [8] Dhanashri, D., Dhonde, S.: Isolated word speech recognition system using deep neural networks. In: International Conference on Data Engineering and Communication Technology: ICDECT 2016, Vol. 1, pp. 9–17 (2017)
- [9] Leonard, R., Doddington, G.: TIDIGITS dataset. Linguistic Data Consortium, Philadelphia (1993)
- [10] Zada, B., Ullah, R.: Pashto isolated digits recognition using deep convolutional neural network. *Heliyon* **6**(2) (2020)
- [11] Tabibian, S.: Robust Persian isolated digit recognition based on LSTM and speech spectral features. *Iranian Journal of Electrical and Computer Engineering* **86**(19), 1–17 (2021)
- [12] Hoseini, S.M.: Recognition of Persian digits from zero to nine using acoustic images based on Mel capstrum coefficients and neural network. *International Journal of Mechatronics, Electrical and Computer Technology* **42**(11), 5059–5064 (2020)
- [13] Oruh, J., Viriri, S., Adegun, A.: Long short-term memory recurrent neural network for automatic speech recognition. *IEEE Access* **10**, 30069–30079 (2022)
- [14] Amadeus, C., Syafalni, I., Sutisna, N., Adiono, T.: Digit-number speech-recognition using spectrogram-based convolutional neural network. In: International Symposium on Electronics and Smart Devices (ISESD), pp. 1–6 (2022)
- [15] Paul, B., Phadikar, S.: A hybrid feature-extracted deep CNN with reduced parameters substitutes an end-to-end CNN for the recognition of spoken Bengali digits. *Multimedia Tools and Applications*, 1–24 (2023)
- [16] Lounnas, K., Lichouri, M., Abbas, M.: Analysis of the effect of audio data augmentation techniques on phone digit recognition for Algerian Arabic dialect. In: International Conference on Advanced Aspects of Software Engineering (ICAASE), pp. 1–5 (2022)
- [17] Ko, T., Peddinti, V., Povey, D., Seltzer, M.L., Khudanpur, S.: A study on data augmentation of reverberant speech for robust speech recognition. In: IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), pp. 5220–5224 (2017)
- [18] Hartmann, W., Ng, T., Hsiao, R., Tsakalidis, S., Schwartz, R.M.: Two-stage data augmentation for low-resourced speech recognition. In: Interspeech, pp. 2378–2382 (2016)

- [19] Park, D.S., Chan, W., Zhang, Y., Chiu, C.-C., Zoph, B., Cubuk, E.D., Le, Q.V.: Specaugment: A simple data augmentation method for automatic speech recognition. arXiv preprint arXiv:1904.08779 (2019)
- [20] Muda, L., Begam, M., Elamvazuthi, I.: Voice recognition algorithms using mel frequency cepstral coefficient (MFCC) and dynamic time warping (DTW) techniques. arXiv preprint arXiv:1003.4083 (2010)
- [21] Dave, N.: Feature extraction methods LPC, PLP and MFCC in speech recognition. International journal for advance research in engineering and technology **1**(6), 1–4 (2013)
- [22] Amodei, D., Ananthanarayanan, S., Anubhai, R., Bai, J., Battenberg, E., Case, C., Casper, J., Catanzaro, B., Cheng, Q., Chen, G., *et al.*: Deep speech 2: End-to-end speech recognition in English and Mandarin. In: International Conference on Machine Learning, pp. 173–182 (2016)
- [23] He, K., Zhang, X., Ren, S., Sun, J.: Deep residual learning for image recognition. In: IEEE Conference on Computer Vision and Pattern Recognition, pp. 770–778 (2016)
- [24] Basha, S.S., Dubey, S.R., Pulabaigari, V., Mukherjee, S.: Impact of fully connected layers on performance of convolutional neural networks for image classification. Neurocomputing **378**, 112–119 (2020)
- [25] Tao, Q., Liu, F., Li, Y., Sidorov, D.: Air pollution forecasting using a deep learning model based on 1D convnets and bidirectional GRU. IEEE Access **7**, 76690–76698 (2019)