Hierarchical Control of Emotion Rendering in Speech Synthesis

Sho Inoue^{1,3}, Kun Zhou⁴, Shuai Wang^{1,2,3†}, and Haizhou Li^{1,3}

¹School of Data Science, The Chinese University of Hong Kong, Shenzhen (CUHK-Shenzhen), China

²Key Laboratory of Artificial Intelligence, Ministry of Education, Shanghai, China

³Shenzhen Research Institute of Big Data, Shenzhen, China

⁴Alibaba Group, Singapore

shoinoue@link.cuhk.edu.cn

Abstract-Emotional text-to-speech synthesis (TTS) aims to generate realistic emotional speech from input text. However, quantitatively controlling multi-level emotion rendering remains challenging. In this paper, we propose a diffusion-based emotional TTS framework with a novel approach for emotion intensity modeling to facilitate fine-grained control over emotion rendering at the phoneme, word, and utterance levels. We introduce a hierarchical emotion distribution (ED) extractor that captures a quantifiable ED embedding across different speech segment levels. Additionally, we explore various acoustic features and assess their impact on emotion intensity modeling. During TTS training, the hierarchical ED embedding effectively captures the variance in emotion intensity from the reference audio and correlates it with linguistic and speaker information. The TTS model not only generates emotional speech during inference, but also quantitatively controls the emotion rendering over the speech constituents. Both objective and subjective evaluations demonstrate the effectiveness of our framework in terms of speech quality, emotional expressiveness, and hierarchical emotion control.

Index Terms—Emotional text-to-speech, hierarchical emotion control

I. INTRODUCTION

Eural text-to-speech (TTS) systems have significantly improved the naturalness of synthesized speech but still face challenges in accurately synthesizing human-like emotional expressions [1], [2]. This difficulty outlines the focus of emotional TTS research, which seeks to produce realistic emotional speech from text input. Emotional TTS has become a vital technology in enhancing human-computer interactions [3], [4], providing more responsive and natural communication. Its application spans virtual assistants, customer support systems, and interactive gaming [5].

The major challenge of emotional TTS is the modeling of the one-to-many function. Unlike traditional TTS systems, which primarily focus on capturing phonetic variations across speakers [6], [7], emotional TTS aims to render diverse

The research is supported by National Natural Science Foundation of China (Grant No. 62271432); Shenzhen Science and Technology Program ZDSYS20230626091302006; Open Project of the Key Laboratory of Artificial Intelligence, Ministry of Education (No. AI202405); and CCF-NetEase ThunderFire Innovation Research Funding (No. CCF-Netease 202302).

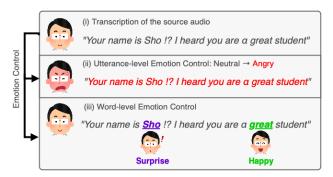


Fig. 1: An example of hierarchical emotion rendering control shows that emotions can be applied either across the entire utterance (ii) or vary at the level of individual words (iii).

emotional styles over text [8]. As a form of speech expressiveness, speech emotion not only correlates to multiple prosodic features including pitch, energy and speech rate [9]–[11], but also varies among individuals and languages [12]–[14]. Emotional TTS studies have benefited from advances in emotional representation learning, evolving from hand-crafted features in tools like OpenSMILE [15] to deep emotional features [16] and self-supervised learning (SSL) representations [17], [18]. The improved generalizability of these features enhances the performance of emotionalTTS systems. However, controlling the emotion rendering still remains a challenging topic.

Previous emotional TTS frameworks typically treat emotion as a global speech attribute [19], [20]. However, these approaches often lead to synthesized voices with average emotional styles, providing limited control over emotion. Few studies have focused on controlling emotion intensities by manipulating emotion embedding through interpolation or scaling [21]–[24]. Recent research proposes to model emotion as a relative attribute [25] by comparing neutral and emotional speech pairs [26]–[31]. This method allows for more precise control of emotion intensity [26], [27] and facilitates the creation of mixed emotional styles [28]. However, the above studies are designed to handle emotions primarily at the utterance level, which does not sufficiently accommodate the finer nuances of emotion that can vary significantly within a single utterance due to context, phrasing, or individual words.

[†] Correspondence to Shuai Wang: wangshuai@cuhk.edu.cn

The hierarchical structure of speech emotions, characterized by prosodic patterns at the phoneme, word, and utterance levels [32], [33], includes global prosodic elements such as tempo and speaker traits [34], as well as local factors like pitch and lexical emphasis [35]–[40]. These elements are crucial for conveying the subtleties of emotional nuances. Therefore, a quantitative approach to controlling multi-level emotion rendering is essential.

In this paper, motivated by prior studies that emphasize the hierarchical nature of speech emotions [32], [34], [35], we introduce a novel emotional TTS framework that explicitly adopts hierarchical emotion modelling and futher enhance the run-time emotion control. We enable users to flexibly adjust not only the style and intensity of emotions, but also their modulation at the phoneme, phrase, or sentence level. Our approach focuses on capturing and controlling the complex emotional layers and transitions that naturally occur in human speech. During training, the framework leverages reference audio to learn hierarchical emotional variations and correlates them with linguistic and speaker information, allowing a finegrained and quantifiable control over emotion rendering during inference. Our novel contributions are summarized as below:

- We introduce a diffusion-based emotional TTS framework that facilitates fine-grained and quantitative control over emotion rendering at the phoneme, word, and utterance levels;
- We design a hierarchical emotion distribution (ED) extraction module, which captures quantifiable ED embeddings across different speech segments. This ED embedding not only guides the TTS system to recover the reference emotion during training but also provides users with a fine-grained interface to adjust the emotion variance across the speech constituents;
- We conduct comprehensive experiments and explore different acoustic representations and emotion intensity modeling methods, evaluating their effectiveness in emotion intensity modeling and their impact on emotion control.

The rest of this paper is organized as follows: In Section 2, we introduce related works. Section 3 describes our proposed methodology. In Section 4, we introduce our experiment setup. In section 5, we analyze the results and Section 6 concludes our study. We placed speech demos on the project page¹.

II. RELATED WORKS

In this section, we briefly introduce related studies to set the stage for our research and highlight the novelty of our contributions. We first discuss the hierarchical structure of speech emotions, which motivates our use of multi-level representations to better capture emotional nuances. Next, we review related studies on prosody modelling and emotion intensity control in TTS, both of which aim to synthesize speech that varies naturally in pitch, rhythm, and emotional strength. Finally, we highlight how diffusion models have recently been integrated into TTS, inspiring our use in this research.

A. Speech Emotion and Its Hierarchical Structure

2

Speech emotions manifest in a hierarchical nature, characterized by distinct features at the utterance, word, and phoneme levels. At the utterance level, emotions are typically conveyed through global prosodic patterns such as pitch features (including contour, range, mean, and intonation), tempo, and rhythm [34]. At the word level, lexical information contributes to the emotional tone of a word [35], where emphasis on words with emotional valence can amplify emotional intensity [36]. A study [37] shows that listeners are more likely to rely on prosodic cues when there is a conflict between perceived lexical and prosodic emotions, highlighting the need to assign unexpected emotions to words for comprehensive emotion control. At the phoneme level, emotion is expressed through the prosodic features of individual speech sounds, such as pitch, energy, and duration [32]. Various studies have demonstrated the existence of emotion at the phoneme level [38]-[40]. This hierarchical emotion structure underscores the importance of considering multi-level emotional information for effective emotion modeling and control.

B. Prosody Modelling in TTS

Research in expressive Text-to-Speech (TTS) synthesis has demonstrated the effectiveness of multi-level prosody modeling in enhancing speech expressiveness. Some studies utilize a reference encoder, such as Global Style Tokens (GST) [41] and Emotion-enhanced GST [19] to improve emotionrelated prosody modeling. These frameworks have been further advanced through semi-supervised training to link GST tokens with emotion labels [20], alongside other methods for improving expressive TTS quality [42]-[44]. Particularly, He et al. [42] addressed the limitation of emotional dataset scarcity through semi-supervised training of graph neural networks. Several studies adopt multi-level prosodic features to enhance the performance in TTS. For example, phone-Level contentstyle disentanglement [45] and multi-resolution VAEs [46] have been successful applied to generate multi-scale style embeddings, which are then integrated into TTS models based on VAE [47], Vision Transformers (VITs) [48], [49], or diffusion-based models [50]. Research efforts [51], [52] have further refined this approach by modeling hierarchical prosody at both phoneme and word levels.

C. TTS with Emotion Intensity Control

Recent advancements in emotional TTS have significantly enhanced emotion expressiveness, yet challenges remain in controlling emotion rendering in an interpretable way. Considerable efforts are being directed towards refining the control over emotion intensity in speech. Most emotional TTS systems treat speech emotion as a global feature, where emotion intensity control is typically achieved by manipulating emotion representations or controllable emotional attributes derived from the reference audio. For instance, [22] enables utterance-level emotion intensity control using a speech mixer that predicts pseudo-labels and modulates features like pitch, duration, and energy. Emotion control can also be achieved

¹Project Page: https://github.com/shinshoji01/HED-project-page

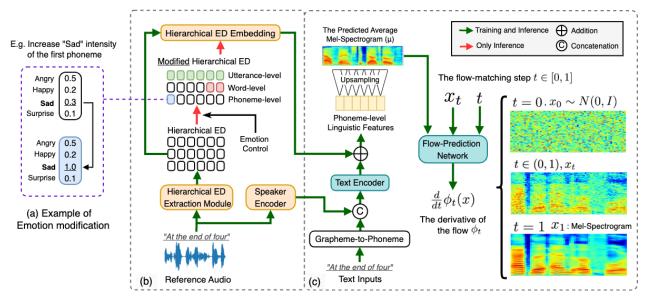


Fig. 2: The overall diagram of the proposed TTS framework. (a) An example of emotion modification (b) The style conditioning of the TTS framework including Hierarchical Emotion Distribution (ED) and Speaker Embedding. (c) The diffusion-based speech generation framework including a text encoder, duration adaptation module, and flow-prediction network.

by manipulating speaker-disentangled emotion representations in cross-speaker scenarios [23], [24]. Recent studies have explored the use of relative attributes [25] to represent emotion intensity, facilitating utterance-level emotion intensity control [26], [27]. Additionally, EmoDiff [53] leverages classifier guidance [54] for emotion intensity control. Similarly, [55] utilizes an attention network with a sigmoid function to adjust utterance-level emotion intensity, while [56] employs a speech emotion recognizer (SER) and a prosody factor generator (PFG) for prosodic modifications. Previous approaches to controlling mixed emotions include manipulating relative attributes [57], incorporating noise mixing in diffusion models [58] and leveraging continuous emotional representations [59]. In contrast, EmoSphere-TTS [60], [61] proposes a spherical emotion vector representation, modeling emotional complexity—such as mixed states—through Cartesian-spherical transformations. In [62], the TTS system incorporates computational paralinguistic-based text prompts to improve its emotional expressiveness.

To enable fine-grained emotion control, several studies have explored the use of segmental-level representations. For example, MsEmoTTS [29] employs a global emotion label and modulates phoneme-level intensity using relative attributes. EmoQ-TTS [63] utilizes a distance-based method to quantify emotion intensity. The research in [64] investigates both interand intra-class distances to refine control over intensity variations. Meanwhile, CASEIN [65] leverages Speech Emotion Recognition (SER) to predict phoneme-level emotion distributions. Some studies have introduced multi-level emotion intensity control through Hierarchical Emotion Distributions (ED) [30], [31]. This approach encompasses emotion distributions at the utterance, word, and phoneme levels, employing a pretrained ranking function from a linear SVM [66] to systematically generate hierarchical ED.

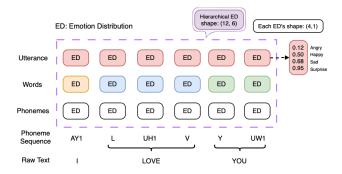


Fig. 3: An example of hierarchical emotion distribution (ED), composed of EDs at levels of utterance, words, and phonemes.

D. Diffusion-based TTS Model

Denoising Diffusion Probabilistic Models (DDPMs) belong to a class of generative networks that synthesize data by progressively reducing noise from Gaussian distributions through a reverse Markov process, transforming random noise into structured outputs similar to the training data [67]. Originally applied to images, this method was later extended to audio [68]-[70] and text-to-speech (TTS) synthesis [71]-[73]. DiffTTS [72] was a pioneer in applying DDPMs to the TTS field, followed by Grad-TTS [73], which modeled the diffusion as a stochastic differential equation (SDE), which combines Denoising Diffusion with GANs [74] to accelerate the decoding process, FastDiff [75], which employs a noise scheduling algorithm [76] to reduce steps, and MatchaTTS [77] which utilizes optimal-transport conditional flow matching (OT-CFM) [78] to enhance synthesis speed, aim to improve efficiency. In our experiments, we adopt MatchaTTS as the backbone model due to its lightweight framework design and state-of-the-art performance among neural TTS systems.

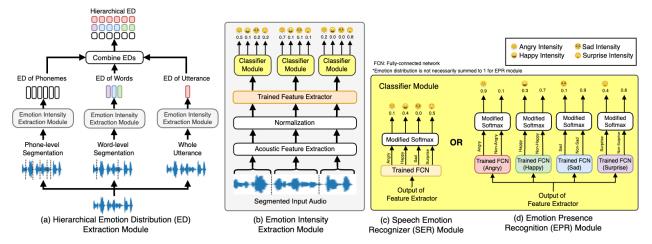


Fig. 4: Diagrams of (a) Hierarchical ED Extraction Module; (b) Emotion Intensity Extraction Module; (c) SER classifier module; (d) EPR classifier module. Hierarchical ED extraction module consists of the three identical emotion intensity extraction modules, which are applied to the phoneme, word, and utterance levels, respectively.

III. METHODOLOGY

Our proposed framework comprises a text encoder, a speaker encoder, a hierarchical Emotion Distribution (ED) extractor, and a flow-prediction network. Given an audio input and its transcript, the hierarchical Emotion Distribution (ED) extractor produces a hierarchical ED, which can be modified according to the user's intentions. The speaker encoder, built using Resemblyzer² [79], extracts speaker embeddings. The text encoder generates linguistic embeddings from the input text. Together with the speaker and hierarchical ED embeddings, these embeddings serve as conditions for the flow-prediction network, which iteratively predicts the melspectrogram using diffusion approach. During TTS training, the hierarchical ED serves as 'soft labels' to the flow-prediction model, guiding the model to learn fine-grained emotional information in a quantifiable and hierarchical manner.

A. Hierarchical Emotion Distribution (ED) Extraction

The hierarchical ED extraction module comprises speech segmentation and three identical emotion intensity extractors for each segment, as illustrated in Fig.4 (a). Given input audio and transcription, the hierarchical ED extraction module yields the emotion distribution for any segment. The extractor is applied at the phoneme, word, and utterance levels, with the resulting features concatenated to create the hierarchical ED. As shown in Fig.4(b), the emotion intensity extraction module comprises an acoustic feature extraction module, a normalization layer, a trained feature extractor, and a classifier module. The acoustic features are derived from the raw input audio using the acoustic feature extraction modules such as OpenSMILE [15] or self-supervised learning (SSL) encoders (like WavLM [17] and Hubert [18]). Acoustic features are standardized across audio samples in the training dataset. The feature extractor comprises two fully connected layers separated by a ReLU activation layer. After feature extraction,

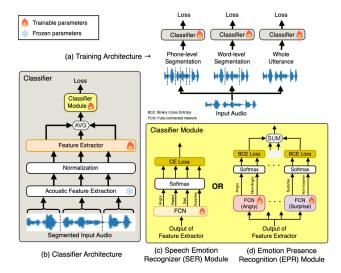


Fig. 5: Training diagrams emotion intensity extractors (a) Whole diagram; (b) Classification for each segment; (c) SER classifier module; (d) EPR classifier module.

the classifier module determines the classification probability, which we regard as emotion intensity.

We develop two types of classifier modules: Speech Emotion Recognizer (SER) and Emotion Presence Recognizer (EPR). The SER, a single fully-connected network (FCN), predicts emotion and has an output size of four, corresponding to the four emotions. In contrast, each FCN in the EPR predicts whether the input corresponds to a specific emotion. For instance, the red FCN in Fig.4(d) identifies whether the input is Angry or Non-Angry. We adjusted the softmax function's temperature to prevent excessive confidence in emotion prediction, which skews probability values close to 0.0 or 1.0. We employ a modified Softmax function, denoted as $s(z_i) = \frac{\alpha^{z_i}}{\sum_{j=1}^K \alpha^{z_j}}$, where α is the constant value to control entropy in the softmax distribution, $i, j \in \{0, 1, ..., K-1\}$ are the indices of the output layer's nodes, and K is the number of classes (emotions).

²Resemblyzer: https://github.com/resemble-ai/Resemblyzer

Varying α from 1.1 to 3.0 in 0.1 increments, we calculated the KL divergence between the uniform distribution and the emotion intensity distribution of training samples. We then selected the α with the lowest KL divergence score to smooth the distribution of emotion intensities. For each audio sample, we apply emotion intensity extraction at utterance, word, and phoneme levels. The combination of these intensities is shown in Fig.3. The utterance-level intensity is replicated to phoneme length, and the word-level one is adjusted to match the corresponding phonemes.

B. Training Diagram

Fig. 5 presents the training diagram for the emotion intensity model. As illustrated in Fig. 5(a), we segment each audio sample into utterance, word, and phoneme segments, with a single model classifying all segments. During training, as depicted in Fig. 5(b), we freeze the parameters of the acoustic feature extraction module and train only the feature extractor and classifier modules. The model averages the feature extractor's outputs and classifies them using either the SER (Fig. 5(c)) or EPR (Fig. 5(d)) modules. We then extracted the hierarchical emotion distribution by segmenting and applying our trained emotion intensity extractor.

In TTS training, reference audio and its transcription serve as inputs. From the audio, we extract hierarchical ED and speaker embedding, which are then concatenated with linguistic embedding. This embedding is expanded based on phoneme-level duration to compute the predicted average melspectrogram, μ . This μ conditions the diffusion decoding process in a flow-prediction network [77], taking inputs from flow-matching steps $t \in [0,1]$ and datum x_t ; where $x_0 \sim N(0,I)$ and x_1 represents the target mel-spectrogram.

C. Hierarchical Emotion Control

During inference, our framework supports hierarchical, user-driven control over emotion rendering in any given utterance ("emotion transfer"), as illustrated in Fig. 2(a), one can increase the intensity of a "Sad" emotion for a single phoneme, thereby achieving fine-grained emotion control.

Given any unseen {audio, text} inputs, we begin by extracting a hierarchical Emotion Distribution (ED) from the input audio. Building on the hierarchical emotion modelling principles, our framework allows users to ajust the ED at three segmental levels - phoneme, phrase, and sentence to fine-tune emotional rendering. These user modifications to the ED are then combined with linguistic embeddings from the text encoder, guiding the generative process within our diffusion-based framework. Conditioned on the average melspectrogram μ , the flow-prediction network iteratively refines a noise-initialized sample into a mel-spectrogram that reflects the user's chosen emotional adjustments. In the experimental sections, we will demonstrate how these manual, hierarchical manipulations translate into practical, quantifiable emotional changes in the synthesized speech, showcasing the flexibility and effectiveness of our approach.

IV. EXPERIMENT SETUP

We conducted all the experiments with the Emotional Speech Dataset (ESD) [80], [81], which consists of over 29 hours of Chinese and English emotional speech categorized into five emotions: Neutral, Angry, Happy, Sad, and Surprise. We exclusively use the English subset from ESD, all sampled at 16 kHz. For each speaker and emotion, we used 300, 20, and 30 speech samples to the training, validation, and test datasets, respectively, following the division used in the ESD dataset. We sampled random noise x_0 from the Gaussian distribution several times to generate speech samples under the same condition. We generated five samples per test case from 200 samples in the ESD dataset for experiments on speech intelligibility and expressiveness, resulting in 1000 evaluation samples. For other experiments, each of the 50 samples was generated twice, totaling 100 samples.

A. Model Architecture

We adopted MatchaTTS [77] as our backbone TTS framework, which consists of a text encoder, a duration predictor, and a decoder. The text encoder, built on a transformer network [82], converts phoneme sequences into linguistic embeddings. The duration predictor, comprising two convolutional layers followed by a projection layer, estimates the required frame count for each phoneme. The decoder is a U-Net architecture with 1D convolutional residual blocks that perform both downsampling and upsampling, with a Transformer block following each residual block. The TTS system is trained using optimal-transport conditional flow matching (OT-CFM) [78]. We also made two key modifications to the original MatchaTTS: (1) phoneme alignment was derived from Montreal Forced Alignment (MFA) [83] to reduce computational demand; and (2) the decoder's parameter set was increased from 16M to 160M to accommodate emotion conditioning, multiple speakers, and an expanded output of mel-spectrogram dimension from 80 to 100.

To enable multi-speaker scenarios, we integrated speaker embeddings into the output of the linguistic encoder, using Resemblyzer [84] for speaker encoding. To enhance speaker disentanglement during training, we extracted speaker embeddings from different audio samples corresponding to the same speaker as in the reference audio. A fully connected layer was then used to process these speaker embeddings along with hierarchical emotion distributions, ensuring alignment with the text encoder's output size. For vocoding, we employed Vocos [85], which synthesizes audio signals from melspectrograms. The Mel-spectrogram is configured with 100 dimensions, an FFT size of 1024, and a hop length of 256. The audio samples were downsampled to 16kHz.

B. Training Configuration

We first trained classifiers for the hierarchical Emotion Distribution (ED) extraction module and then used the extracted hierarchical ED to train the emotion Text-to-Speech (TTS) system. For the emotion classifier, we employed the Adam optimizer [86] with an initial learning rate of 0.001, set the

TABLE I: Objective Evaluation Result for Speech Intelligibility, Expressiveness, and Speaker Similarity: MCD, Pitch, and Energy denote mel cepstral, pitch, and energy distortions, respectively. The green and the red colors indicate the best and the worst values among models, respectively.

	WER (↓)		Expressiveness	SEG	CS (†)	
	Whisper	MCD	Pitch (10 ¹)	Energy (10 ⁻²)	WavLM	WeSpeaker
MsEmoTTS (Baseline) [29]	9.967	6.468 ± 0.134	3.521 ± 0.136	7.290 ± 0.628	0.761	0.221
SVM-based HED (Baseline) [30]	9.933	5.314± 0.126	2.226 ± 0.101	7.144 ± 0.681	0.865	0.488
Proposed w/ SER	10.73	5.704 ± 0.138	2.336 ± 0.104	6.119 ± 0.562	0.873	0.506
Proposed w/ EPR	9.133	5.311 ± 0.128	2.175 ± 0.106	5.665 ± 0.478	0.871	0.511

batch size to 16, and utilized a scheduler that reduces the learning rate by 0.8 every five steps. The loss function used was cross-entropy, with loss weights adjusted based on the segment count.

To remove the speaker and the gender information from the emotion intensity, we integrated an adversarial classifier with a Gradient Reversal Layer (GRL) [87]. This classifier uses the averaged outputs from the feature extractor to predict the speaker or gender. We set the GRL's scaling parameter to 0.5. We selected the model that achieved the highest validation accuracy in emotion classification and approached random classification accuracy (e.g., 0.2 for a five-label classification) in speaker/gender prediction. To ensure stability in GRL training, we fixed the feature extractor and trained only the classifier for 100 epochs, followed by an evaluation of the validation datasets.

For TTS training, we employed the Adam optimizer [86] with a learning rate set to 0.0001 and a batch size 16. We disabled the length-cropping technique from Grad-TTS, previously implemented for memory efficiency, recognizing that entire utterances carry crucial emotional features, and cropping may result in the loss of subtle emotional nuances.

C. Model Comparison

We provide a thorough comparison between various baseline models and the proposed models under different configurations. We incorporated MsEmoTTS [29] ("Baseline MsEmoTTS") and SVM-based Hierarchical Emotion Distribution [30], [31] ("SVM-based HED") into MatchaTTS [77] as baseline models. Note that both baseline models utilize OpenS-MILE to extract 88-dimensional acoustic features and relative attributes [25] for quantifying emotion intensity. "Baseline MsEmoTTS" uses a global emotion label and phoneme-level intensity as conditioning for the backbone TTS framework, whereas "SVM-based HED" employs a hierarchical emotion distribution across phone, word, and utterance levels.

As for our proposed models, we first compare two classifier modules settings: Speech Emotion Recognizer (SER) ("Proposed w/ SER") and Emotion Presence Recognizer (EPR) ("Proposed w/ EPR"). In terms of acoustic features, the proposed framework combined OpenSMILE and WavLM to enhance both global and local representations. Specifically, WavLM was employed to extract utterance-level emotion distribution, and OpenSMILE was used for words and phonemes.

TABLE II: Emotion Controllability Results: The "Positive" metric represents the average correlation values between the same emotion pairs of emotion intensity and the SER prediction; The "Negative" metric averages misaligned emotion pairs. The "Score" is derived by subtracting "Negative" from "Positive".

	Positive (†)	Negative (↓)	Score (†)
SVM-based HED (Baseline) [30]	0.156	0.036	0.120
Proposed w/ SER	0.261	0.007	0.254
Proposed w/ EPR	0.382	0.013	0.369

TABLE III: MUSHRA test results, where a higher value represents better performance in naturalness or emotional similarity.

	Naturalness	Emotional Similarity
Ground Truth	62.23± 2.710	-
Vocoder Resynthesis	59.70± 2.810	-
MsEmoTTS (Baseline) [29]	47.98 ± 2.670	34.26± 2.760
SVM-based HED (Baseline) [30]	46.92 ± 2.320	58.40± 2.610
Proposed w/ SER	47.89 ± 2.540	55.12 ± 2.800
Proposed w/ EPR	48.91 ± 2.360	59.41 ± 2.460

V. RESULTS

A. Objective Evaluation

We first report the results of objective evaluation to assess the performance in terms of speech expressiveness, emotion controllability, speaker similarity and speech intelligibility.

- 1) Emotional Similarity: We assessed emotion similarity by measuring the prosodic differences between the synthesized and the reference audio. We employ three objective metrics: (a) Mel-Cepstral Distortion (MCD) [28], [88] for spectral similarity, (b) Pitch, and (c) Energy Distortion for prosody alignment. The results are summarized in Table I. We observe that our proposed framework with emotion presence recognizer ("Proposed w/ EPR") outperformed other models. In the meanwhile, "Baseline MsEmoTTS" consistently achieves the worst performance among all the frameworks. These results suggest that our proposed framework with emotion presence recognizer ("Proposed w/ EPR") could achieve better performance in terms of the emotional similarity with the reference emotion.
- 2) Emotion Controllability: We evaluated utterance-level emotion controllability with a pre-traiend speech emotion

TABLE IV: BWS Test Results for Evaluating Emotion Controllability at Utterance and Word Levels: The value represents evaluator preferences (%), with blue and orange indicating the heatmap for audio samples selected as the least and the most expressive, respectively. 'Ang', 'Hap', 'Sad', 'Sur', 'Avg' are abbreviations for 'Angry', 'Happy', 'Sad', 'Surprise', 'Average', respectively.

		SVM-based HED (Baseline) [30]						Proposed w/ SER				Proposed w/ EPR					
			Ang	Hap	Sad	Sur	Avg	Ang	Hap	Sad	Sur	Avg	Ang	Hap	Sad	Sur	Avg
		0.0	47	59	41	88	59	44	38	47	62	48	69	72	62	66	67
	Least	0.5	28	12	25	6	18	25	50	34	12	30	19	6	25	19	17
Utterance-Level		1.0	19	22	28	0	17	25	6	12	19	16	6	16	6	9	9
		0.0	16	16	53	3	22	19	12	6	16	13	3	6	6	16	8
	Most	0.5	25	44	25	28	30	19	19	22	22	20	12	34	6	16	17
		1.0	53	34	16	62	41	56	62	66	56	60	78	53	81	62	69
		0.0	66	59	72	84	70	91	47	72	97	77	94	62	91	97	86
	Least	0.5	28	19	22	6	19	6	25	3	3	9	3	38	9	3	13
Word-Level		1.0	6	22	6	9	11	3	28	25	0	14	3	0	0	0	1
		0.0	12	19	9	3	11	0	41	12	0	13	0	6	0	0	2
	Most	0.5	12	12	31	25	20	12	12	38	25	22	16	9	19	31	19
		1.0	75	69	59	72	69	88	47	50	75	65	84	84	81	69	80

recoginzer (SER). We trained the SER model [89] on the ESD dataset, with data augmentation of Gaussian noise and time and frequency masking strategy [90]–[94].

We used a Speech Emotion Recognition (SER) system to evaluate synthesized audio samples, where we varied the intensity of one target emotion from 0.0 to 1.0 with an increment of 0.2. All other emotions were kept at a constant intensity. To analyze the SER predictions, we calculated three metrics: "Positive", "Negative", and "Score". "Positive" represents how well the SER system's predictions match the intended emotion. It measures the average correlation between the target emotion's intensity and the SER's prediction for the same emotion. For example, if we increase the intensity of "Angry", the SER should increase its "Angry" prediction accordingly. "Negative" represents how much the SER system confuses the target emotion with other emotions. We assign zero to any negative correlations to emphasize when the SER makes incorrect predictions. "Score" is a final metric we calculate by subtracting the Negative value from the Positive value. It reflects the overall accuracy of the SER in predicting the target emotion while avoiding confusion with other emotions.

As shown in Table II, the baseline model, "SVM-based HED", consistently demonstrates the worst performance across all three metrics. In contrast, the "Proposed w/ EPR" model outperforms the others in both the Positive and Negative metrics. This suggests that the our proposed approach with EPR provides strong control over emotional expression in synthesized audio, yielding both higher accuracy and fewer errors. Meanwhile, the "Proposed w/ SER" model achieves the best performance on the Negative metric, indicating superior handling of misaligned emotions.

3) Speaker Similarity: In this experiment, we use pretrained speaker verification models to assess the speaker similarity between the synthesized and reference speech. We employ two models: WeSpeaker³ [95] and WavLM Base with X-vector⁴ [17]. We then calculate the Speaker Encoding

4) Speech Intelligibility: We further conduct objective evaluation to assess the intelligibility of synthesized speech. We employ Whisper⁵ [96] to generate the transcriptions from the synthesized speech and calculate word error rate (WER) with the ground-truth transcriptions. For both baseline and proposed models, we derived the emotion representation from the reference audio. We also compare WER using different reference speakers to assess the impact of speaker leakage on speech intelligibility. We present the results into Table I. "Proposed w/ EPR" model outperformed other models when using the original speaker. Interestingly, when using different speakers, the WER scores of our model remained comparable to those obtained with the original speaker, unlike the baseline (SVM+HED). This performance underscores the effectiveness of our speaker disentanglement approach in maintaining speech intelligibility across different speakers.

B. Subjective Evaluation

We conducted two subjective evaluations: MUSHRA Test and Best Worst Scaling (BWS) Test with 20 English speakers. Each speaker listens to 386 synthesized samples in total.

1) Speech Naturalness and Emotion Similarity: In our MUSHRA Test, evaluators rated each audio sample from 0 to 100 on speech naturalness and emotion similarity. Participants are asked to focus on the speech naturalness and the emotional style similarity between the reference speech, respectively. The Results are summarized in Table III indicate that "Proposed w/ EPR" outperformed the others in speech naturalness and emotion similarity.

Cosine Similarity (SECS), as reported in Table I. We observe that proposed models outperform the two baseline models in both speaker verification models as shown in Table I. The SECS scores for "Proposed w/ SER" and "Proposed w/ EPR" show only minor differences, suggesting that the hierarchical encoder-decoder (ED) generated by our method contribute to superior speaker disentanglement performance.

³WeSpeaker: https://github.com/wenet-e2e/wespeaker

 $^{^4} https://hugging face.co/microsoft/wavlm-base-plus-sv\\$

⁵Whisper: https://github.com/openai/whisper

		WER		Expressivene	ss	S	SER	
		Whisper	MCD	Pitch (10 ¹)	Energy (10 ⁻²)	WavLM	WeSpeaker	Score
	Combination	8.747	5.311± 0.128	2.175 ± 0.106	5.665± 0.478	0.871	0.511	0.369
Sec. V-C1	WavLM	15.41	5.967 ± 0.148	2.486 ± 0.105	6.911 ± 0.617	0.867	0.508	0.314
	OpenSMILE	9.067	5.380 ± 0.131	2.298 ± 0.103	5.877 ± 0.499	0.871	0.506	0.218
Sec. V-C2	EPR	9.067	5.380± 0.131	2.298± 0.103	5.877± 0.499	0.871	0.506	0.218
	SER	9.253	5.725 ± 0.149	2.393 ± 0.104	6.135 ± 0.551	0.869	0.501	0.193
	SVM	10.21	5.314 ± 0.126	2.226 ± 0.101	7.144 ± 0.681	0.865	0.488	0.120
	EPR w/ GRL	8.747	5.311± 0.128	2.175± 0.106	5.665 ± 0.478	0.871	0.511	0.369
Sec. V-C3	EPR w/o GRL	9.787	5.318 ± 0.135	2.119 ± 0.089	5.804 ± 0.505	0.870	0.505	0.278
sec. v-cs	SER w/ GRL	10.77	5.704 ± 0.138	2.336 ± 0.104	6.119 ± 0.562	0.873	0.506	0.254
	SER w/o GRL	11.84	5.630 ± 0.134	2.325 ± 0.104	6.430 ± 0.554	0.866	0.497	0.207
	C-WavLM	8.747	5.311± 0.128	2.175 ± 0.106	5.665 ± 0.478	0.871	0.511	0.369
Sec. V-C4	C-Hubert	8.133	5.295 ± 0.127	2.191 ± 0.093	5.823 ± 0.504	0.873	0.520	0.285
	WavLM	15.41	5.967 ± 0.148	2.486 ± 0.105	6.911 ± 0.617	0.867	0.508	0.314
	Hubert	11.60	5.648 ± 0.148	2.322 ± 0.110	6.892 ± 0.641	0.868	0.507	0.222

TABLE V: Result of Ablation Study: Each separated row indicates a different ablation study.

TABLE VI: BWS Test Result (ablation study): The value represents evaluator preferences (%), with blue and orage indicating the heatmap for audio samples selected as the least and the most expressive, respectively. 'Ang', 'Hap', 'Sad', 'Sur', 'Avg' are abbreviations for 'Angry', 'Happy', 'Sad', 'Surprise' and 'Average', respectively.

			EPR+OpenSMILE (V-C1&V-C2)						EPR+W	/avLM	(V-C1)		SER+OpenSMILE (V-C2)				
			Ang	Hap	Sad	Sur	Avg	Ang	Hap	Sad	Sur	Avg	Ang	Hap	Sad	Sur	Avg
		0.0	66	78	69	53	66	62	34	81	62	60	53	31	47	88	55
	Least	0.5	16	12	19	0	12	22	19	9	19	17	19	16	34	3	18
Utterance		1.0	12	3	6	41	16	9	41	3	12	16	22	47	12	3	21
		0.0	16	3	12	19	12	12	28	3	16	15	28	44	19	3	23
	Most	0.5	25	28	16	38	27	28	44	12	22	27	31	25	6	47	27
		1.0	53	62	66	38	55	53	22	78	56	52	34	25	69	44	43
		0.0	94	78	62	88	80	62	75	69	69	69	69	28	84	94	69
	Least	0.5	3	19	38	9	17	25	12	16	19	18	22	34	9	6	18
Word _		1.0	3	3	0	3	2	12	12	16	12	13	9	38	6	0	13
		0.0	0	16	3	0	5	16	6	3	0	6	6	22	9	6	11
	Most	0.5	19	25	9	25	20	19	47	56	22	36	6	38	25	41	27
		1.0	81	59	88	75	76	66	47	41	78	58	88	41	66	53	62

2) Emotion Controllability: We performed the BWS test to assess the controllability of emotion at both word and utterance levels. We randomly selected the audio sample from the test dataset and edited the emotion intensities to three values (0.0, 0.5, 1.0) to synthesize audio samples with low, normal, and high emotion intensities. Then, we instructed human evaluators to identify the least and the most expressive samples among the three. At the word level, we adjusted the intensity for three words with the longest phoneme sequences. We summarized the BWS test results in Table IV. Our proposed model with EPR produced the most distinguishable outcomes across all four emotions (Angry, Happy, Sad and Surprise), with listeners consistently identifying the least expressive sample at the lowest intensity and the most expressive at the highest, especially at the utterance level. These findings highlight the effectiveness of our method in controlling emotion intensity across different speech segmental levels.

C. Ablation Study

We conducted ablation studies to validate the effectiveness of each component in our proposed system. Table V displays comprehensive objective evaluation results from these studies, encompassing metrics such as Word Error Rate (WER), speech expressiveness, speaker similarity, and emotion controllability. Additionally, Table VI presents results from the Best Worst Scaling (BWS) test, specifically assessing the emotion controllability of models within the ablation study framework.

- 1) Impact of Acoustic Features: Acoustic features play a pivotal role in our system, particularly the combined use of OpenSMILE and WavLM in our main experiment, referred to as "Combination". We evaluated the effectiveness of "Combination" compared to the individual use of "OpenSMILE" and "WavLM". According to objective evaluations and the BWS results, "Combination" outperformed the individual features across most metrics (Tables V and VI). Interestingly, while "WavLM" surpassed "OpenSMILE" in utterance-level emotion controllability, "OpenSMILE" was more effective than "WavLM" at capturing word-level perceived emotion intensity. This highlights the synergistic benefit of combining two acoustic features in enhancing the overall system performance.
- 2) Impact of Emotion Intensity Extraction Methods: We explored various methods for extracting emotion intensities, including our proposed Emotion Presence Recognition (EPR) model and the Speech Emotion Recognition (SER) model, and

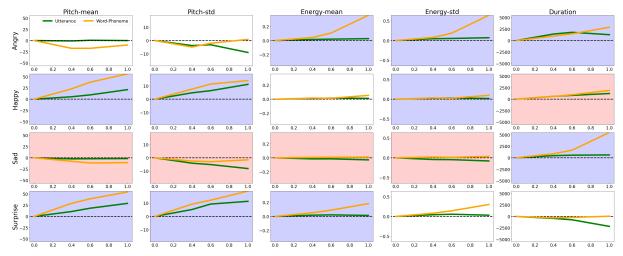


Fig. 6: The illustration of prosodic variants with changes in intensity. A red background indicates the expected negative trend, while blue represents the expected positive trend, as analyzed from the ESD dataset.

compared them against a baseline Support Vector Machine (SVM) model used for hierarchical emotion detection [30], [31]. To ensure a fair comparison, all models utilized the same acoustic feature set, OpenSMILE. Our findings show that "EPR" outperforms in metrics such as Word Error Rate (WER), speaker similarity, and utterance-level emotion control. Conversely, "SVM" excels in speech expressiveness. In the Best Worst Scaling (BWS) test, both "EPR" and "SER" significantly outperformed "SVM", as documented in Tables IV and VI.

3) Impact of Gradient Reverse Layers: We investigate the use of Gradient Reverse Layer (GRL) [87] to enhance speaker disentanglement. We tested 4 different settings into our proposed framework: "EPR w/o GRL", "EPR w/ GRL", "SER w/o GRL", and "SER w/ GRL". The results indicated that EPR-based models consistently outperformed SER-based models across all metrics. Notably, the inclusion of GRL generally enhanced the performance of the models, particularly contributing to improvements in the Speaker Emotion Classification Score (SECS). This underscores the effectiveness of GRL in facilitating speaker disentanglement.

4) Impact of Different Self-Supervised Learning Features: We further explored the effects of different self-supervised learning (SSL) features including WavLM and Hubert [18]. Additionally, we evaluated the performance of combining these SSL features with OpenSMILE features, resulting in combinations such as "C-WavLM" and "C-HuBERT," similar to the approach used in our proposed methods. In this context, "C" denotes the integration of emotion distributions derived from each SSL feature at the utterance level, combined with OpenSMILE features applied at the phoneme and word levels. As shown in the Figure V, we observe that SSL features, when combined using our proposed method, consistently outperform those using single features. Specifically, C-HuBERT demonstrates superior performance in WER, SECS, and SER, while C-WavLM excels in capturing emotional expressiveness. Our findings demonstrate that combined acoustic features consistently outperform the individual SSL features. Both WavLM and Hubert showed comparable performance across most metrics. We opted to employ WavLM in our systems primarily due to its superior emotion controllability.

VI. DISCUSSION

A. Analysis on Emotion Controllability

We further analyzed our model's controllability over both global and local emotional variations, evaluating it at the utterance and word levels. In line with our previous setup, the emotional intensity of words and phonemes remained consistent. At the word level, we adjusted the emotional intensities for the three words with the longest phonemes, while keeping the utterance intensity constant. We gradually increased the emotion intensity from 0.0 to 1.0, measuring various prosodic features, including duration, pitch (mean and standard deviation), and energy (mean and standard deviation), as illustrated in Fig.6. These prosodic attributes are strongly correlated with speech emotion, as noted in previous studies [97]. For example, anger often manifests in a slower speaking rate and higher values for energy mean/standard deviation.

We analyzed the relationship between acoustic features and various emotions, as illustrated in Figure 6 using color to represent positive and negative correlations. A red background indicates an expected negative trend, while a blue background signifies a positive trend with increasing intensity, based on our data analysis from the ESD dataset. For example, anger is typically associated with a slower speaking rate and higher values in both the mean and standard deviation of energy. Our findings show that the synthesized emotional speech closely follows the anticipated trends in most prosodic features. Specifically, we observed a positive correlation between happiness intensity and mean pitch, as well as a positive correlation between anger and both the mean and standard deviation of energy. These results demonstrate that our model effectively adjusts acoustic features in response to varying levels of emotional intensity.

Fig. 7 shows the spectrograms of synthesized audio samples with varying emotion intensities. Pitch and energy contours

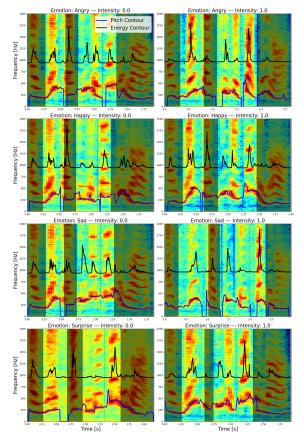


Fig. 7: Spectrograms of synthesized audio samples across different emotion intensities with pitch (blue) and energy (black) contours: the y-axis for energy contours are not relevant.

are represented by blue and black lines, respectively. Note that the y-axis for the energy contours is not relevant. Each row corresponds to a different emotion, with the first column depicting acoustic features at an emotion intensity of 0.0, and the second column at 1.0. The three highlighted areas indicate regions where the intensity has been modified. For anger, we observe more pronounced energy spikes, especially in the first and third words, at higher intensities. In happiness, pitch and energy patterns are similar, with higher pitch values at an intensity of 1.0. Sadness is marked by a longer duration and a decline in the pitch contour as intensity increases. For surprise, we note a rise in pitch contours along with a slight energy spike. This demonstrates that our model can effectively manipulate pitch and energy contours in response to changes in emotion intensity.

B. Future Works

In future work, we aim to achieve emotion intensity control using naturalistic emotional speech data to better mimic spontaneous emotional expressions. Additionally, we plan to explore state-of-the-art speech emotion recognition and diarization techniques to enhance emotion intensity control. For instance, integrating speech emotion diarization [98] could improve frame-level emotion awareness.

VII. CONCLUSION

In this paper, we present a diffusion-based emotional text-to-speech framework that incorporates hierarchical emotion intensity control. We develop a quantifiable and hierarchical emotion distribution embedding, enabling fine-grained control over emotion rendering at the phoneme, word, and utterance levels. Additionally, we investigate the impact of different acoustic features and intensity extractor architectures. During inference, users can adjust emotion rendering at various levels of granularity in real time. Both subjective and objective evaluations demonstrate the effectiveness of our model in delivering high speech quality, expressiveness, and emotion controllability into synthesized speech.

REFERENCES

- A. Triantafyllopoulos, B. W. Schuller, G. İymen, M. Sezgin, X. He, Z. Yang, P. Tzirakis, S. Liu, S. Mertes, E. André et al., "An overview of affective speech synthesis and conversion in the deep learning era," Proceedings of the IEEE, 2023.
- [2] D. Schuller and B. W. Schuller, "The age of artificial emotional intelligence," *Computer*, vol. 51, no. 9, pp. 38–46, 2018.
- [3] J. Pittermann, A. Pittermann, and W. Minker, Handling emotions in human-computer dialogues. Springer, 2010.
- [4] Z. Kun, "Emotion modelling for speech generation," Phd Thesis, 2022.
- [5] A. Triantafyllopoulos, B. Schuller, G. Jymen, M. T. Sezgin, X. He, Z. Yang, P. Tzirakis, S. Liu, S. Mertes, E. Andr'e, R. Fu, and J. Tao, "An overview of affective speech synthesis and conversion in the deep learning era," *Proceedings of the IEEE*, vol. 111, pp. 1355–1381, 2022. [Online]. Available: https://api.semanticscholar.org/CorpusID: 252762216
- [6] Y. Ren, C. Hu, X. Tan, T. Qin, S. Zhao, Z. Zhao, and T.-Y. Liu, "Fastspeech 2: Fast and high-quality end-to-end text to speech," 2022.
- [7] K. Zhou, S. Zhao, Y. Ma, C. Zhang, H. Wang, D. Ng, C. Ni, T. H. Nguyen, J. Q. Yip, and B. Ma, "Phonetic enhanced language modeling for text-to-speech synthesis," in *Interspeech* 2024, 2024, pp. 3440–3444.
- [8] M. Schröder, "Emotional speech synthesis: A review," in Seventh European Conference on Speech Communication and Technology, 2001.
- [9] X. Tan, T. Qin, F. Soong, and T.-Y. Liu, "A survey on neural speech synthesis," arXiv preprint arXiv:2106.15561, 2021.
- [10] J. Hirschberg, "Pragmatics and intonation," The handbook of pragmatics, pp. 515–537, 2004.
- [11] M. Belyk and S. Brown, "Perception of affective and linguistic prosody: an ale meta-analysis of neuroimaging studies," *Social cognitive and affective neuroscience*, vol. 9, no. 9, pp. 1395–1403, 2014.
- [12] P. Laukka, Vocal Communication of Emotion. Cham: Springer International Publishing, 2017, pp. 1–6. [Online]. Available: https://doi.org/10.1007/978-3-319-28099-8_562-1
- [13] K. Zhou, B. Sisman, and H. Li, "Vaw-gan for disentanglement and recomposition of emotional elements in speech," in 2021 IEEE Spoken Language Technology Workshop (SLT). IEEE, 2021, pp. 415–422.
- [14] K. Zhou, B. Sisman, M. Zhang, and H. Li, "Converting anyone's emotion: Towards speaker-independent emotional voice conversion," *Proc. Interspeech* 2020, pp. 3416–3420, 2020.
- [15] F. Eyben, M. Wöllmer, and B. Schuller, "opensmile the munich versatile and fast open-source audio feature extractor," 01 2010, pp. 1459–1462.
- [16] Z. Ma, Z. Zheng, J. Ye, J. Li, Z. Gao, S. Zhang, and X. Chen, "emotion2vec: Self-supervised pre-training for speech emotion representation," 2023.
- [17] S. Chen, C. Wang, Z. Chen, Y. Wu, S. Liu, Z. Chen, J. Li, N. Kanda, T. Yoshioka, X. Xiao, J. Wu, L. Zhou, S. Ren, Y. Qian, M. Zeng, and F. Wei, "Wavlm: Large-scale self-supervised pre-training for full stack speech processing," *IEEE Journal of Selected Topics in Signal Processing*, vol. 16, pp. 1505–1518, 2021. [Online]. Available: https://api.semanticscholar.org/CorpusID:239885872
- [18] W.-N. Hsu, B. Bolte, Y.-H. H. Tsai, K. Lakhotia, R. Salakhutdinov, and A. Mohamed, "Hubert: Self-supervised speech representation learning by masked prediction of hidden units," 2021.
- [19] X. Cai, D. Dai, Z. Wu, X. Li, J. Li, and H. Meng, "Emotion controllable speech synthesis using emotion-unlabeled dataset with the assistance of cross-domain speech emotion recognition," 2021.

- [20] P. fei Wu, Z. hua Ling, L. juan Liu, Y. Jiang, H. chuan Wu, and L. rong Dai, "End-to-end emotional speech synthesis using style tokens and semi-supervised training," 2019.
- [21] T. Li, S. Yang, L. Xue, and L. Xie, "Controllable emotion transfer for end-to-end speech synthesis," 2020.
- [22] Y. Oh, J. Lee, Y. Han, and K. Lee, "Semi-supervised learning for continuous emotional intensity controllable speech synthesis with disentangled representations," 2023.
- [23] G. Zhang, Y. Qin, W. Zhang, J. Wu, M. Li, Y. Gai, F. Jiang, and T. Lee, "iemotts: Toward robust cross-speaker emotion transfer and control for speech synthesis based on disentanglement between prosody and timbre," 2023.
- [24] T. Li, X. Wang, Q. Xie, Z. Wang, and L. Xie, "Cross-speaker emotion disentangling and transfer for end-to-end speech synthesis," 2022.
- [25] D. Parikh and K. Grauman, "Relative attributes," in 2011 International Conference on Computer Vision. IEEE, 2011, pp. 503–510.
- [26] K. Zhou, B. Sisman, R. Rana, B. W. Schuller, and H. Li, "Emotion intensity and its control for emotional voice conversion," *IEEE Transactions on Affective Computing*, vol. 14, no. 1, pp. 31–48, 2023.
- [27] X. Zhu, S. Yang, G. Yang, and L. Xie, "Controlling emotion strength with relative attribute for end-to-end speech synthesis," in 2019 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU), 2019, pp. 192–199.
- [28] K. Zhou, B. Sisman, R. Rana, B. W. Schuller, and H. Li, "Speech synthesis with mixed emotions," *IEEE Transactions on Affective Computing*, vol. 14, no. 4, pp. 3120–3134, 2023.
- [29] Y. Lei, S. Yang, X. Wang, and L. Xie, "Msemotts: Multi-scale emotion transfer, prediction, and control for emotional speech synthesis," 2022.
- [30] S. Inoue, K. Zhou, S. Wang, and H. Li, "Hierarchical emotion prediction and control in text-to-speech synthesis," in ICASSP 2024-2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 2024, pp. 10601–10605.
- [31] _____, "Fine-grained quantitative emotion editing for speech generation," 2024.
- [32] S. R. Krothapalli and S. G. Koolagudi, Emotion Recognition Using Prosodic Information. New York, NY: Springer New York, 2013, pp. 79–91. [Online]. Available: https://doi.org/10.1007/978-1-4614-5143-3_5
- [33] K. Zhou, B. Sisman, and H. Li, "Transforming spectrum and prosody for emotional voice conversion with non-parallel training data," in *Proc.* Odyssey 2020 The Speaker and Language Recognition Workshop, 2020, pp. 230–237.
- [34] E. Rodero, "Intonation and emotion: Influence of pitch levels and contour type on creating emotions," *Journal of Voice*, vol. 25, no. 1, pp. e25–e34, 2011. [Online]. Available: https://www.sciencedirect. com/science/article/pii/S0892199710000378
- [35] A. Warriner, V. Kuperman, and M. Brysbaert, "Norms of valence, arousal, and dominance for 13,915 english lemmas," *Behavior research methods*, vol. 45, 02 2013.
- [36] J. Hirschberg and G. Ward, "The influence of pitch range, duration, amplitude and spectral features on the interpretation of the rise-fall-rise intonation contour in english," *Journal of Phonetics*, vol. 20, no. 2, pp. 241–251, 1992. [Online]. Available: https://www.sciencedirect.com/science/article/pii/S0095447019306254
- [37] J. Snedeker and J. Trueswell, "Using prosody to avoid ambiguity: Effects of speaker awareness and referential context," *Journal of Memory and Language*, vol. 48, pp. 103–130, 01 2003.
- [38] C. Busso, S. Lee, and S. Narayanan, "Analysis of emotionally salient aspects of fundamental frequency for emotion detection," *IEEE Trans*actions on Audio, Speech, and Language Processing, vol. 17, no. 4, pp. 582–596, 2009.
- [39] M. El Ayadi, M. S. Kamel, and F. Karray, "Survey on speech emotion recognition: Features, classification schemes, and databases," *Pattern Recognition*, vol. 44, no. 3, pp. 572–587, 2011. [Online]. Available: https://www.sciencedirect.com/science/article/pii/S0031320310004619
- [40] L. Leinonen, T. Hiltunen, I. Linnankoski, and M.-L. Laakso, "Expression of emotional-motivational connotations with a one-word utterance," *Journal of the Acoustical Society of America*, vol. 102, no. 3, pp. 1853–1863, 1997. [Online]. Available: https://doi.org/10.1121/1.420109
- [41] Y. Wang, D. Stanton, Y. Zhang, R. Skerry-Ryan, E. Battenberg, J. Shor, Y. Xiao, F. Ren, Y. Jia, and R. A. Saurous, "Style tokens: Unsupervised style modeling, control and transfer in end-to-end speech synthesis," 2018.
- [42] J. He, C. Gong, L. Wang, D. J. 0001, X. Wang, J. Xu, and J. Dang, "Improve emotional speech synthesis quality by learning explicit and implicit representations with semi-supervised training." in *INTERSPEECH*, 2022, pp. 5538–5542.

- [43] C. Lu, X. Wen, R. Liu, and X. Chen, "Multi-speaker emotional speech synthesis with fine-grained prosody modeling," in ICASSP 2021 -2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), 2021, pp. 5729–5733.
- [44] H.-W. Yoon, O. Kwon, H. Lee, R. Yamamoto, E. Song, J.-M. Kim, and M.-J. Hwang, "Language model-based emotion prediction methods for emotional speech synthesis systems," 2022.
- [45] D. Tan and T. Lee, "Fine-grained style modeling, transfer and prediction in text-to-speech synthesis via phone-level content-style disentanglement," in *Interspeech 2021*, ser. interspeech2021. ISCA, Aug. 2021. [Online]. Available: http://dx.doi.org/10.21437/Interspeech. 2021-1129
- [46] Y. Hono, K. Tsuboi, K. Sawada, K. Hashimoto, K. Oura, Y. Nankaku, and K. Tokuda, "Hierarchical multi-grained generative model for expressive speech synthesis," 2021.
- [47] X. Li, C. Song, J. Li, Z. Wu, J. Jia, and H. Meng, "Towards multi-scale style control for expressive speech synthesis," 2021.
- [48] J. Kim, J. Kong, and J. Son, "Conditional variational autoencoder with adversarial learning for end-to-end text-to-speech," 2021.
- [49] W. Zhao and Z. Yang, "An emotion speech synthesis method based on vits," Applied Sciences, vol. 13, p. 2225, 02 2023.
- [50] H. Tang, X. Zhang, N. Cheng, J. Xiao, and J. Wang, "Ed-tts: Multi-scale emotion modeling using cross-domain emotion diarization for emotional speech synthesis," 2024.
- [51] C.-M. Chien and H. yi Lee, "Hierarchical prosody modeling for nonautoregressive speech synthesis," 2021.
- [52] G. Sun, Y. Zhang, R. J. Weiss, Y. Cao, H. Zen, and Y. Wu, "Fully-hierarchical fine-grained prosody modeling for interpretable speech synthesis," 2020.
- [53] Y. Guo, C. Du, X. Chen, and K. Yu, "Emodiff: Intensity controllable emotional text-to-speech with soft-label guidance," 2023.
- [54] P. Dhariwal and A. Nichol, "Diffusion models beat gans on image synthesis," 2021.
- [55] B. Schnell and P. N. Garner, "Improving emotional tts with an emotion intensity input from unsupervised extraction," 11th ISCA Speech Synthesis Workshop (SSW 11), 2021. [Online]. Available: https://api.semanticscholar.org/CorpusID:236317905
- [56] X. Luo, S. Takamichi, T. Koriyama, Y. Saito, and H. Saruwatari, "Emotion-controllable speech synthesis using emotion soft labels and fine-grained prosody factors," in 2021 Asia-Pacific Signal and Information Processing Association Annual Summit and Conference (APSIPA ASC). IEEE, 2021, pp. 794–799.
- [57] K. Zhou, B. Sisman, R. Rana, B. W. Schuller, and H. Li, "Speech synthesis with mixed emotions," 2022.
- [58] H. Tang, X. Zhang, J. Wang, N. Cheng, and J. Xiao, "Emomix: Emotion mixing via diffusion models for emotional speech synthesis," 2023.
- [59] K. Zhou, Y. Zhang, S. Zhao, H. Wang, Z. Pan, D. Ng, C. Zhang, C. Ni, Y. Ma, T. H. Nguyen et al., "Emotional dimension control in language model-based text-to-speech: Spanning a broad spectrum of human emotions," arXiv preprint arXiv:2409.16681, 2024.
- [60] D.-H. Cho, H.-S. Oh, S.-B. Kim, S.-H. Lee, and S.-W. Lee, "Emospheretts: Emotional style and intensity modeling via spherical emotion vector for controllable emotional text-to-speech," in *Interspeech 2024*, 2024, pp. 1810–1814.
- [61] D.-H. Cho, H.-S. Oh, S.-B. Kim, and S.-W. Lee, "Emosphere++: Emotion-controllable zero-shot text-to-speech via emotion-adaptive spherical vector," 2024. [Online]. Available: https://arxiv.org/abs/2411. 02625
- [62] X. Jing, K. Zhou, A. Triantafyllopoulos, and B. W. Schuller, "Enhancing emotional text-to-speech controllability with natural language guidance through contrastive learning and diffusion models," arXiv preprint arXiv:2409.06451, 2024.
- [63] C.-B. Im, S.-H. Lee, S.-B. Kim, and S.-W. Lee, "Emoq-tts: Emotion intensity quantization for fine-grained controllable emotional text-tospeech," in ICASSP 2022 - 2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), 2022, pp. 6317– 6321.
- [64] S. Wang, J. Guonason, and D. Borth, "Fine-grained emotional control of text-to-speech: Learning to rank inter- and intra-class emotion intensities," in ICASSP 2023 - 2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), 2023, pp. 1–5.
- [65] Y. Cui, X. Wang, Z. Zhao, W. Zhou, and H. Chen, "Casein: Cascading explicit and implicit control for fine-grained emotion intensity regulation," 2023.
- [66] C. Cortes and V. Vapnik, "Support-vector networks," Machine learning, vol. 20, no. 3, pp. 273–297, 1995.

- [67] J. Ho, A. Jain, and P. Abbeel, "Denoising diffusion probabilistic models," 2020
- [68] N. Chen, Y. Zhang, H. Zen, R. J. Weiss, M. Norouzi, and W. Chan, "Wavegrad: Estimating gradients for waveform generation," 2020.
- [69] Z. Kong, W. Ping, J. Huang, K. Zhao, and B. Catanzaro, "Diffwave: A versatile diffusion model for audio synthesis," 2021.
- [70] N. Chen, Y. Zhang, H. Zen, R. J. Weiss, M. Norouzi, N. Dehak, and W. Chan, "Wavegrad 2: Iterative refinement for text-to-speech synthesis," 2021.
- [71] Z. Liu, Y. Guo, and K. Yu, "Diffvoice: Text-to-speech with latent diffusion," ICASSP 2023 - 2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), pp. 1–5, 2023. [Online]. Available: https://api.semanticscholar.org/CorpusID: 258298279
- [72] M. Jeong, H. Kim, S. J. Cheon, B. J. Choi, and N. S. Kim, "Diff-tts: A denoising diffusion model for text-to-speech," 2021.
- [73] V. Popov, I. Vovk, V. Gogoryan, T. Sadekova, and M. Kudinov, "Gradtts: A diffusion probabilistic model for text-to-speech," 2021.
- [74] I. J. Goodfellow, J. Pouget-Abadie, M. Mirza, B. Xu, D. Warde-Farley, S. Ozair, A. Courville, and Y. Bengio, "Generative adversarial networks," 2014.
- [75] R. Huang, Y. Ren, Z. Jiang, C. Cui, J. Liu, and Z. Zhao, "FastDiff 2: Revisiting and incorporating GANs and diffusion models in high-fidelity speech synthesis," in *Findings of the Association* for Computational Linguistics: ACL 2023, A. Rogers, J. Boyd-Graber, and N. Okazaki, Eds. Toronto, Canada: Association for Computational Linguistics, Jul. 2023, pp. 6994–7009. [Online]. Available: https://aclanthology.org/2023.findings-acl.437
- [76] M. W. Y. Lam, J. Wang, D. Su, and D. Yu, "Bddm: Bilateral denoising diffusion models for fast and high-quality speech synthesis," 2022.
- [77] S. Mehta, R. Tu, J. Beskow, Éva Székely, and G. E. Henter, "Matcha-tts: A fast tts architecture with conditional flow matching," 2024.
- [78] Y. Lipman, R. T. Q. Chen, H. Ben-Hamu, M. Nickel, and M. Le, "Flow matching for generative modeling," 2023.
- [79] L. Wan, Q. Wang, A. Papir, and I. L. Moreno, "Generalized end-to-end loss for speaker verification," 2020.
- [80] K. Zhou, B. Sisman, R. Liu, and H. Li, "Seen and unseen emotional style transfer for voice conversion with a new emotional speech dataset," in ICASSP 2021-2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 2021, pp. 920–924.
- [81] ——, "Emotional voice conversion: Theory, databases and esd," *Speech Communication*, vol. 137, pp. 1–18, 2022.
- [82] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, L. Kaiser, and I. Polosukhin, "Attention is all you need," 2017.
- [83] J. Kim, S. Kim, J. Kong, and S. Yoon, "Glow-tts: A generative flow for text-to-speech via monotonic alignment search," 2020.
- [84] L. Wan, Q. Wang, A. Papir, and I. L. Moreno, "Generalized end-to-end loss for speaker verification," 2020.
- [85] H. Siuzdak, "Vocos: Closing the gap between time-domain and fourier-based neural vocoders for high-quality audio synthesis," 2023.
- [86] D. P. Kingma and J. Ba, "Adam: A method for stochastic optimization," 2017.
- [87] Y. Ganin and V. Lempitsky, "Unsupervised domain adaptation by backpropagation," 2015.
- [88] R. Kubichek, "Mel-cepstral distance measure for objective speech quality assessment," in *Proceedings of IEEE Pacific Rim Conference on Communications Computers and Signal Processing*, vol. 1, 1993, pp. 125–128 vol.1.
- [89] M. Chen, X. He, J. Yang, and H. Zhang, "3-d convolutional recurrent neural networks with attention model for speech emotion recognition," *IEEE Signal Processing Letters*, vol. 25, no. 10, pp. 1440–1444, 2018.
- [90] U. Tiwari, M. Soni, R. Chakraborty, A. Panda, and S. K. Kopparapu, "Multi-conditioning and data augmentation using generative noise model for speech emotion recognition in noisy conditions," in ICASSP 2020 -2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), 2020, pp. 7194–7198.
- [91] P. Heracleous, K. Yasuda, F. Sugaya, M. Hashimoto, and A. Yoneyama, "Speech emotion recognition in noisy and reverberant environments," 10 2017.
- [92] B. R, T. V. Muni, R. K. Tata, J. Narasimharao, M. Kalipindi, and H. Arora, "Deep learning techniques for speech emotion recognition," 11 2022, pp. 1–5.
- [93] H. M, K. Polat, and S. Yaacob, "Improved emotion recognition using gaussian mixture model and extreme learning machine in speech and glottal signals," *Mathematical Problems in Engineering*, vol. 2015, pp. 1–13, 03 2015.


- [94] D. S. Park, W. Chan, Y. Zhang, C.-C. Chiu, B. Zoph, E. D. Cubuk, and Q. V. Le, "Specaugment: A simple data augmentation method for automatic speech recognition," in *Interspeech*, 2019. [Online]. Available: https://api.semanticscholar.org/CorpusID:121321299
- [95] H. Wang, C. Liang, S. Wang, Z. Chen, B. Zhang, X. Xiang, Y. Deng, and Y. Qian, "Wespeaker: A research and production oriented speaker embedding learning toolkit," in *ICASSP 2023 2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2023, pp. 1–5.
- [96] A. Radford, J. W. Kim, T. Xu, G. Brockman, C. McLeavey, and I. Sutskever, "Robust speech recognition via large-scale weak supervision," 2022. [Online]. Available: https://arxiv.org/abs/2212.04356
- [97] B. W. Schuller, "Speech emotion recognition: Two decades in a nutshell, benchmarks, and ongoing trends," *Communications of the ACM*, vol. 61, no. 5, pp. 90–99, 2018.
- [98] Y. Wang, M. Ravanelli, A. Nfissi, and A. Yacoubi, "Speech emotion diarization: Which emotion appears when?" 2023 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU), pp. 1– 7, 2023. [Online]. Available: https://api.semanticscholar.org/CorpusID: 259224719

VIII. BIOGRAPHY SECTION



Sho Inoue (Student Member, IEEE) received his B. Eng. degree in Electrical Engineering and M.S. in Computer Science at Sophia University, Tokyo, Japan in 2020 and 2022. He is currently a PhD student at the Chinese University of Hong Kong, Shenzhen (CUHK-Shenzhen) in China. His research interests mainly focus on building a speech generation model with free control of paralinguistic features such as emotions, accents, and conversation traits. He has published two conference papers in ICASSP 2024 and APSIPA 2024, with his APSIPA

paper being shortlisted for the best paper award.



Kun Zhou (Member, IEEE) received his B.Eng. degree from the School of Information and Communication Engineering, University of Electronic Science and Technology of China, Chengdu, China, in 2018, and his M.Sc. and Ph.D. degrees in electrical engineering from National University of Singapore, Singapore, in 2019 and 2023, respectively. He is currently a Research Engineer with the Tongyi Speech Team at Alibaba Group. During his doctoral studies, he was a visiting Ph.D. student at the University of Texas at Dallas, United States, in 2022, and the

University of Bremen, Germany, in 2023. He has served on the organizing committees of several international conferences, including IEEE ASRU 2019, SIGDIAL 2021, and ICASSP 2022. He is also an active reviewer for multiple leading conferences and journals, such as INTERSPEECH, ICASSP, NeurIPS, SLT, ASRU, IEEE Signal Processing Letters, Speech Communication, IEEE Transactions on Affective Computing, and IEEE/ACM Transactions on Audio, Speech, and Language Processing.



Shuai Wang (Member, IEEE) obtained his Ph.D. from Shanghai Jiao Tong University (SJTU), in 2020. Currently, he serves as a research scientist at the Shenzhen Research Institute of Big Data (SRIBD). He is also an adjunct assistant professor at School of Data Science, Chinese University of Hong Kong, Shenzhen (CUHK-SZ). Prior to that, Dr. Wang worked at Tencent as a senior application scientist, leading a group working on speaker recognition, voice conversion and speech synthesis. Dr. Wang has published more than 40 papers on

the topic of speaker modeling. He was the recipient of IEEE Ganesh N. Ramaswamy Memorial Student Grant Award (ICASSP2018). He was also the main contributor to the winning systems of VoxSRC 2019 and DIHARD 2019. He is a member of ISCA, SPS and IEEE, searving as a regular reviewer for conferences and journals including ICASSP, INTERSPEECH, ASRU, TASLP and CSL. He initiated the popular "WeSpeaker" and "WeSep" projects, utilized by numerous research groups across academia and industry.



Haizhou Li (Fellow, IEEE) received the B. Sc., M. Sc., and Ph.D degree in electrical and electronic engineering from South China University of Technology, Guangzhou, China in 1984, 1987, and 1990 respectively. He is currently a Presidential Chair Professor and the Executive Dean of the School of Data Science, The Chinese University of Hong Kong, Shenzhen, China. He is also an Adjunct Professor with the Department of Electrical and Computer Engineering, National University of Singapore, Singapore. Prior to that, he taught with The University

of Hong Kong, Hong Kong, during 1988-1990, and South China University of Technology, during 1990-1994. He was a Visiting Professor with CRIN, France, during 1994-1995, Research Manager with the AppleISS Research Centre during 1996-1998, the Research Director with Lernout & Hauspie Asia Pacific during 1999-2001, Vice President with InfoTalk Corporation Ltd. during 2001-2003, and Principal Scientist and Department Head of human language technology with the Institute for Infocomm Research, Singapore, during 2003-2016. His research interests include automatic speech recognition, speaker and language recognition, natural language processing. Dr. Li was the Editor-in-Chief of IEEE/ACM TRANSACTIONS ON AUDIO , SPEECH AND LANGUAGE PROCESSING during 2015-2018, an elected Member of IEEE Speech and Language Processing Technical Committee during 2013-2015, the President of the International Speech Communication Association during 2015-2017, President of Asia Pacific Signal and Information Processing Association during 2015-2016, and President of Asian Federation of Natural Language Processing during 2017-2018. Since 2012, he has been a Member of the Editorial Board of Computer Speech and Language. He was the General Chair of ACL 2012, INTERSPEECH 2014, ASRU 2019 and ICASSP 2022. Dr. Li is a Fellow of the ISCA, and a Fellow of the Academy of Engineering Singapore. He was the recipient of the National Infocomm Award 2002, and President's Technology Award 2013 in Singapore. He was named one of the two Nokia Visiting Professors in 2009 by the Nokia Foundation, and U Bremen Excellence Chair Professor in 2019.