

iPrOp: Interactive Prompt Optimization for Large Language Models with a Human in the Loop

Jiahui Li and Roman Klinger

Fundamentals of Natural Language Processing, University of Bamberg, Germany
{jiahui.li, roman.klinger}@uni-bamberg.de

Abstract

Prompt engineering has made significant contributions to the era of large language models, yet its effectiveness depends on the skills of a prompt author. Automatic prompt optimization can support the prompt development process, but requires annotated data. This paper introduces *iPrOp*, a novel Interactive Prompt Optimization system, to bridge manual prompt engineering and automatic prompt optimization. With human intervention in the optimization loop, *iPrOp* offers the flexibility to assess evolving prompts. We present users with prompt variations, selected instances, large language model predictions accompanied by corresponding explanations, and performance metrics derived from a subset of the training data. This approach empowers users to choose and further refine the provided prompts based on their individual preferences and needs. This system not only assists non-technical domain experts in generating optimal prompts tailored to their specific tasks or domains, but also enables to study the intrinsic parameters that influence the performance of prompt optimization. Our evaluation shows that our system has the capability to generate improved prompts, leading to enhanced task performance.

1 Introduction

With the advancement of large language models (LLMs), prompt engineering emerged for instructing these models to generate responses that align with users' requirements. Prompting allows LLMs to perform user-specified tasks, including tasks in previously unseen scenarios or particular domains (Devlin et al., 2019; Raffel et al., 2020; Mishra et al., 2022).

However, prompt-based natural language processing (NLP) has demonstrated limited robustness across domains, instances, or label schemes (Plaza-del Arco et al., 2022; Yin et al., 2019; Zhou

et al., 2022). It is also challenging to develop reliable methods for evaluation of LLMs that factor in prompt brittleness (Ceron et al., 2024). The question of how to design a well-crafted prompt has received an increasing amount of attention. Although there exists research on analyzing which prompts are more effective for tasks like classification and question answering (Liu et al., 2022; Lu et al., 2022; Xu et al., 2022), the need to efficiently identify high-quality prompts has sparked increased attention into automatic prompt optimization (Shin et al., 2020; Pryzant et al., 2023). However, there is a lack of studies that combines user-guided prompt optimization with data-driven prompt optimization. Given that the user constitutes the ultimate authority to develop prompts that satisfy the varying trade-offs across different aspects of a specific task, we consider this an important research gap.

Combining prompt optimization with a user in the loop comes with the potential for a more guided engineering process, from which any user may benefit. Two examples are particularly prominent: (1) Laypeople may require help with prompt development for dedicated tasks. (2) Manual prompt engineering may lead to biased configurations. Prior research has demonstrated the role of human-in-the-loop methodologies in building robust systems across a variety of tasks, including debugging text classifiers (Lertvittayakumjorn et al., 2020), hate speech classification (Kotarcic et al., 2022), and question answering chatbot (Afzal et al., 2024).

To achieve the goal of a system that supports users in their prompt development process, we hypothesize that a set of prompt properties is important to decide if a prompt p is considered better than another prompt p' . These are (a) the performance of a prompt on some annotated data, for instance measured by F_1 (we focus in this paper on text classification tasks); (b) The readability and interpretability of the prompt; (c) The quality of an explanation of the predictions of the prompt; and

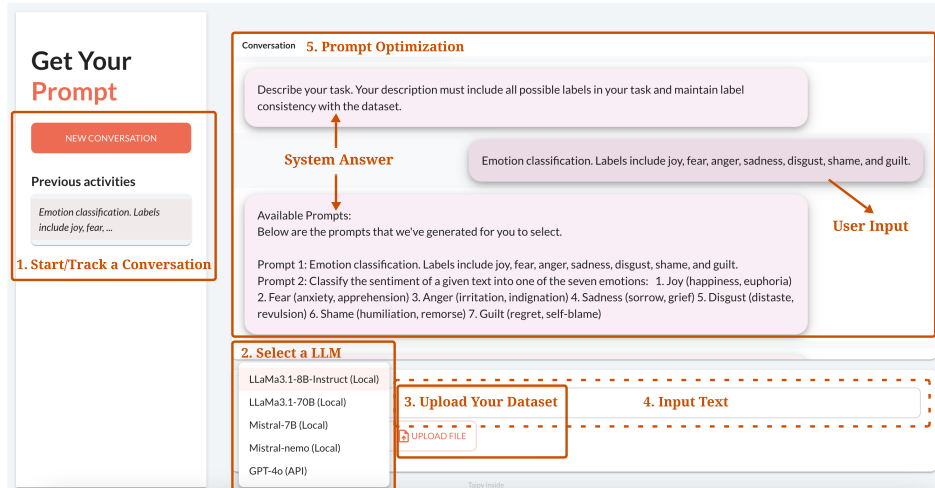


Figure 1: Screenshot of the *iProp* Web application, where key components are annotated.

(d), the alignment of the annotations with the users expectations. We therefore propose an interactive prompt optimization approach with a human-in-the-loop that considers all these aspects. The proposed platform enables studies on the interaction between these various parameters in the spirit of an iterative optimization in which the automatic evaluation of an objective function is supported by a human. We further envision that some decisions may be made automatically, while others require the human to decide on the prompt quality. Such collaborative decision process helps to maintain the high quality of the prompts, while limiting the required user interactions to those of particularly high value.

The repository of the system and an explanation video is available at <https://www.uni-bamberg.de/nlproc/ressourcen/iprop/>. A screenshot of the user interface is shown in Figure 1.

2 Related Work

2.1 Prompt Engineering for LLMs

Prompt engineering is the process of designing and optimizing prompts to guide a language model for effective results on a downstream task. Liu et al.’s (2023) survey categorizes previous works in prompt shapes and human-designed prompt templates. While the former category includes techniques such as cloze prompts (Cui et al., 2021) and prefix prompts (Li and Liang, 2021), the latter focuses on manually crafted prompts (Brown et al., 2020) and automated prompt templating processes (Shin et al., 2020). Our work is derived from the latter case with the addition of human interventions.

The output of an LLM is influenced by the quality of prompts (Lu et al., 2022). Prompts need to be adapted to particular domains (Karmaker Santu and Feng, 2023; Wei et al., 2021), and for different LLMs (Chen et al., 2023). Previous work therefore attempted to search through paraphrases of prompts (Jiang et al., 2020), by compiling prompts based on templates and class-triggering tokens (Shin et al., 2020), or by learning soft prompts (Qin and Eisner, 2021). Another approach is to combine gradient descent method with hard prompts (Wen et al., 2023; Pryzant et al., 2023). In contrast, our framework focuses on multiple factors such as task selection, choice of LLM, and user-provided feedback as external parameters. Further, we exploit the capabilities of LLMs as prompt engineers (Zhou et al., 2023; Ye et al., 2024; Fernando et al., 2024; Menchaca Resendiz and Klinger, 2025).

2.2 Cooperative Artificial Intelligence

This work is related to the field of cooperative artificial intelligence, which touches upon topics of human-machine interaction and efficient protocols of information exchange, enabling humans to solve tasks collaboratively with machines. Such methods also influenced NLP tasks, such as question answering (Benamara and Saint Dizier, 2003), information retrieval (Manning et al., 2008), and chatbot interactions (Hancock et al., 2019). More recent papers draw their attention on collaborative annotation processes and model direct manipulation (Baur et al., 2020; Wang et al., 2021). However, we introduce “human in the loop” via replacing the automatic evaluation of an objective function by a human.

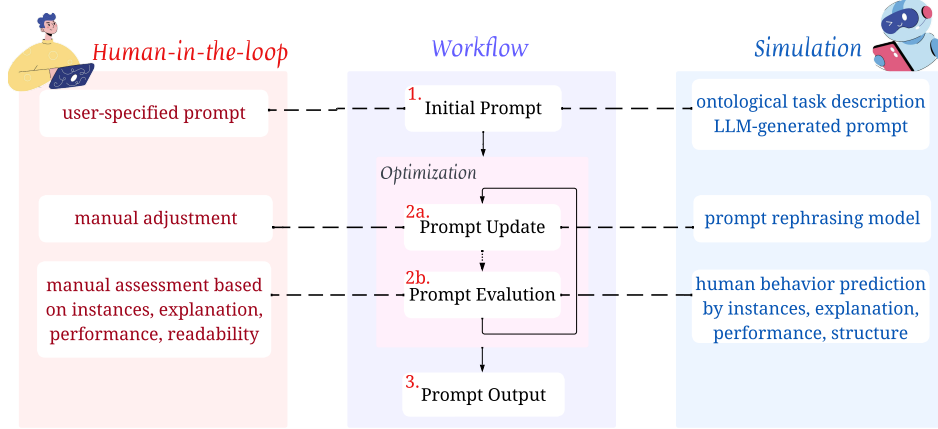


Figure 2: The conceptual workflow of our *iPrOp* system. The general workflow is shown in the middle. The left part shows potential human interaction in the various modules. To limit the amount of user interactions, each module can be supported by a simulated interaction.

2.3 Explainable Artificial Intelligence

Users which manually change properties of a system benefit from a good understanding of the model’s decisions. This task is approached by explainable artificial intelligence (XAI) techniques (Roscher et al., 2020). One prominent work that introduced the interaction between model intervention and XAI is Teso and Kersting (2019). Another study combines explanatory interactive machine-learning methods with fair machine learning for the bias-mitigation problem (Heidrich et al., 2023). They both integrate interpretability methods for machine learning models, such as SHAP (Lundberg and Lee, 2017), LIME (Ribeiro et al., 2016), and Anchors (Ribeiro et al., 2018).

Although these tools offer intuitive explanations for classifiers, their reliance on perturbations makes them computationally expensive to apply to LLMs because of the high-dimensional nature and complexity of LLMs. An alternative is to leverage the inherent explainability of LLMs (Mavrepis et al., 2024). Wu et al.’s (2024) analyse of strategies to enhance the transparency of LLMs. Bills et al. (2023) demonstrate that LLMs are able to explain individual neurons in LLMs. This work motivate our attempt to prompt LLMs for the explanations of their predictions.

3 Methods

Figure 2 visualizes the conceptual workflow of our *iPrOp* system. The workflow begins with an initial seed prompt and proceeds through iterations of prompt updates and evaluations, led by informative

samples, explanations, and data evaluation with performance metrics. To reduce human workload, each step can, in principle, be performed by either the user or the system. To simplify the implementation of our current web interface, the user provides the initial prompt and performs prompt selection, while the system handles the remaining steps.

We formalize the process of the workflow as follows. The user is presented prompts in iterations and selects the preferred prompt p^* based on their assessment H :

$$p^* = \arg \max_{p \in P \cup M(P)} H(I(p_i)),$$

Here, $M(P)$ is a prompt paraphrasing model that varies the prompts P from the previous iteration. $I(p_i)$ is a presentation of prompt properties to the user, which consists of

$$I(p_i) = (p_i, T_\alpha^{p_i}, E(T_\alpha, p_i), F_1(T_\beta^{p_i})).$$

The user provides a (potentially small) training set T for their task, from which we sample two subsets $T_\alpha \subseteq T$ and $T_\beta \subseteq T$ according to strategies α, β . $T_\alpha^{p_i}$ consists of instances to be shown to the user together with model based explanations $E(T_\alpha, p_i)$. T_β serves to calculate an evaluation score $F_1(T_\beta^{p_i})$ (we focus on text classification tasks for simplicity).

This procedure is also visualized in Figure 2. The initialization of seed prompts ((1) in Figure 2) requires users to describe the task. In simulation scenarios, this process can be substituted with an ontological task description or prompts generated automatically by LLMs. Subsequently, the initial

Prompt 1	Prompt 2	
Classification task with labels: joy and sadness.	Classify the emotion of text into joy and sadness.	
Text	Prompt 1	Prompt 2
I like watching TV. (joy) Work is challenging. (sadness) The food was fine. (sadness)	joy + Exp. sadness + Exp. joy + Exp.	joy + Exp. joy + Exp. sadness + Exp.
Performance Metrics (e.g. F1)		
Prompt 1	Prompt 2	
0.46	0.53	
Which prompt is better? <input type="checkbox"/> Prompt 1 <input type="checkbox"/> Prompt 2		

Figure 3: User interface prototype for an emotion analysis example during the interactive prompt optimization process. "Exp." refers to explanations for why a specific label is predicted by the model.

prompts are passed to the optimization modules. In the prompt update module (2a), prompts are paraphrased. As an example, this paraphrasing of ‘Classification task with labels: joy and sadness.’ with a meta-prompt of an LLM ‘Rephrase the following prompt’ may lead to ‘Classify the emotion of text into joy and sadness.’¹ In the prompt evaluation stage (2b), the human in the loop assesses the prompt quality, as described above. Figure 3 further provides a prototypical display of the relevant information for two prompts to be chosen from. The optimization process is terminated once the user is satisfied (3).

4 System Design and Implementation

The demonstration system includes a web interface for single-label text classification. The architecture of the web interface, as illustrated in Figure 4, is divided into the frontend and the backend modules. The prompt undergoes optimization through multiple iterations between the two modules.

4.1 Frontend

The frontend is implemented using Taipy², with a customized interface extending from their LLM Chatbot Demo³. It receives as user inputs an uploaded dataset, the selection of LLMs, and text describing the task, and displays relevant information about available prompts as outputs.

LLM Selection. The *iPrOp* interface allows users to select an LLM, including those accessible via

¹Our current web interface does not yet support manual prompt adjustments.

²<https://docs.taipy.io/en/latest/>

³<https://github.com/Avaiga/demo-chatbot>

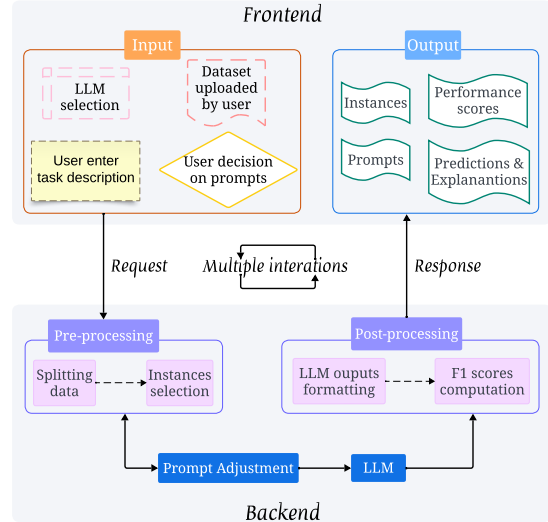


Figure 4: The architecture of our *iPrOp* system composed of the frontend module and the backend module.

remote API services, such as GPT-4o (OpenAI, 2023) and Claude (Anthropic, 2024), as well as local models, such as Llama3 (Dubey et al., 2024) and Mistral (Jiang et al., 2023). Support for local models is provided through the Ollama server⁴ and the LangChain Community⁵.

Dataset Upload. To accommodate users’ needs for searching optimal prompts across various domains, the web interface requires users to upload their datasets. The dataset must include a minimum of two columns: one for text and another for the corresponding annotated label. Accepted file formats are *.csv*, *.json*, and *.jsonl*.

User Interaction. The user enters and sends a textual task description to the system as an initial prompt. This description must include the names of all possible labels for the task, ensuring consistency with the label values in the uploaded dataset. To select the preferred prompt, they enter the presented prompt id.

System Response. The user bases the information about the prompt, its explanation on a subset of the training data, the performance score, and example labels. This information is shown as a textual answer in a dialogue manner. The system shows two available prompts with the additional information.

4.2 Backend

The backend generates predictions by prompting an LLM, integrating pre- and post-processing steps

⁴<https://github.com/ollama/ollama>

⁵<https://github.com/langchain-ai/langchain>

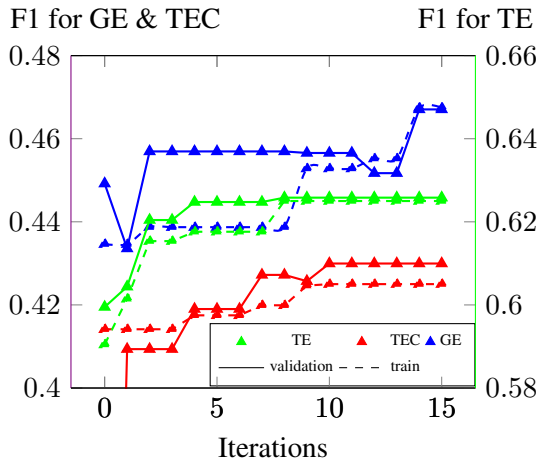


Figure 5: F1 scores for three datasets, shown separately on training and validation data. The abbreviations GE, TEC, and TE correspond to the GROUNDED-EMOTIONS (blue), TEC (red), and TALES-EMOTION (green) datasets, respectively. The left violet y-axis corresponds to GROUNDED-EMOTIONS and TEC. The right green y-axis corresponds to TALES-EMOTION.

prior to and following the LLM interaction.

Pre-processing. The user-uploaded dataset is divided into training, validation, and testing splits using stratified sampling. Instances shown to users and a subset of data to calculate performance metrics are randomly selected.

Tapping into LLM. The chosen LLM is used in multiple steps during each iteration. First, the LLM is tasked with adjusting or improving prompts, which are subsequently incorporated into the next iteration. Second, it generates label predictions for text samples. Third, explanations on predicted labels of instances are provided by the LLM.

Post-processing. Despite specifying in the LLM requests that only the necessary information is to be provided, redundant text and slight format variations may exist. We postprocess the output in a rule-based manner to filter out extraneous content in the LLM output for rephrased prompts and predicted labels. Particularly, we identify true labels in the processed outputs.

5 Evaluation

We envision our system to enable future research on the interaction of the various aspects to consider when humans make preference decisions on particular prompts under the available information. To validate the principled feasibility of our *iPrOp* system, we run experiments on three emotion classification datasets using the llama3.1:8b-instruct-fp16

model⁶ (Dubey et al., 2024). In this experiment, we only consider automated classification performance scores and leave an automated evaluation of the other measures or a user study for future work. In this simulation, the prompt is selected corresponding to the weighted F1 score over a fixed subset of the training data. We expect to demonstrate a rising trend during the optimization process to verify the effectiveness of our system.

Datasets. We select three datasets for single labeled emotion classification task from Bostan and Klinger (2018), namely TEC, which covers general topics on tweets (Mohammad, 2012); GROUNDED-EMOTIONS, which focuses on event-related topics on tweets; and TALES-EMOTION, which is built upon fairytales (Alm and Sproat, 2005).

Result. Figure 5, illustrates the F1 scores over 15 iterations. We observe an overall increasing trend in both training and validation data.

6 Conclusions and Future Work

In this paper, we proposed an interactive prompt optimization system that incorporates human intervention for finding well-performing prompts, based on various information that is distilled from the prompt and its performance on some user-provided data. With this system, we suggested to aggregate information that may be relevant for users to decide on prompt preferences. In our evaluation, we focused on the performance of the predictions alone, but the important aspect of this work is that it enables future research on the interaction of explanations, prompt performance, example predictions, and the prompt readability. These studies need to be performed both from an automated angle as well as in user studies.

The proposed system has revealed several challenges that deserve further investigation. There is a need to explore more effective methodologies for enhancing the diversity of rephrased prompts. It is important to limit the numbers of instances shown to the user, and that selection requires methods to do so. It is essential to optimize the various meta-prompts in the system. Additionally, the optimization algorithm is essential to improving the efficiency and user-friendliness of our system.

⁶<https://ollama.com/library/llama3.1:8b-instruct-fp16>

Acknowledgments

This paper is supported by the project INPROMPT (Interactive Prompt Optimization with the Human in the Loop for Natural Language Understanding Model Development and Intervention, funded by the German Research Foundation, KL 2869/13-1, project number 521755488).

Limitations

Although the *iPrOp* system offers a convenient web interface for non-technical users to attain suitable prompts, it has several limitations that warrant consideration in the future enhancement. First, because of the system’s inherent design as a guidance tool for prompt optimization, it does not exhibit the open interactivity of a chatbot. Instead, users are expected to adhere closely to the system’s instructions throughout the optimization process. Second, as a primary web interface for presenting our system, we do not provide any tools of user account or data management, while only simple data storage is integrated. Third, developing an effective strategy to address problems related to train-validation-test splitting for user-provided datasets of varying sizes remains an ongoing challenge. Lastly, the development of prompt optimization iterations partially depends on the quality and variability of prompt rephrasing. This implies that rephrased prompts may occasionally retain low quality across multiple iterations. Furthermore, we observe that certain datasets exhibit limited sensitivity to divergent prompts, allowing a simple or even naive initial prompt to achieve superior performance.

Ethical Considerations

Our system is designed with careful attention to ethical standards in data usage, privacy, and compliance with the ACL Code of Ethics. Our method does not contribute to the republication or redistribution of any datasets. The datasets used for testing and evaluation are publicly available and we ensure that they have been collected according to ethical standards before using them. To safeguard user privacy, all data provided by users is stored exclusively on their local machines. While potential risks associated with the underlying LLMs could result in the exposure of user-provided datasets, we aim to mitigate these risks by offering more secure local models. In addition, our system cannot guarantee that the optimal prompts identified are state

of the art for specific tasks. Furthermore, individual preferences may introduce biases, which could potentially mislead users. We are committed to continuously monitoring and improving the ethical performance of our system.

References

- Anum Afzal, Alexander Kowsik, Rajna Fani, and Florian Matthes. 2024. [Towards optimizing and evaluating a retrieval augmented QA chatbot using LLMs with human-in-the-loop](#). In *Proceedings of the Fifth Workshop on Data Science with Human-in-the-Loop (DaSH 2024)*, pages 4–16, Mexico City, Mexico. Association for Computational Linguistics.
- Cecilia Ovesdotter Alm and Richard Sproat. 2005. [Emotional sequencing and development in fairy tales](#). In *Affective Computing and Intelligent Interaction, First International Conference, ACII 2005, Beijing, China, October 22-24, 2005, Proceedings*, volume 3784 of *Lecture Notes in Computer Science*, pages 668–674. Springer.
- Anthropic. 2024. [The claude 3 model family: Opus, sonnet, haiku](#).
- Tobias Baur, Alexander Heimerl, Florian Lingens, Johannes Wagner, Michel F. Valstar, Björn W. Schuller, and Elisabeth André. 2020. [explainable cooperative machine learning with NOVA](#). *Künstliche Intell.*, 34(2):143–164.
- Farah Benamara and Patrick Saint Dizier. 2003. [WEB-COOP: A cooperative question answering system on the web](#). In *10th Conference of the European Chapter of the Association for Computational Linguistics*, Budapest, Hungary. Association for Computational Linguistics.
- Steven Bills, Nick Cammarata, Dan Mousing, Henk Tillman, Leo Gao, Gabriel Goh, Ilya Sutskever, Jan Leike, Jeff Wu, and William Saunders. 2023. [Language models can explain neurons in language models](#). Online: <https://openaipublic.blob.core.windows.net/neuron-explainer/paper/index.html>.
- Laura-Ana-Maria Bostan and Roman Klinger. 2018. [An analysis of annotated corpora for emotion classification in text](#). In *Proceedings of the 27th International Conference on Computational Linguistics*, pages 2104–2119, Santa Fe, New Mexico, USA. Association for Computational Linguistics.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess,

- Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. [Language models are few-shot learners](#). *CoRR*, abs/2005.14165.
- Tanise Ceron, Neele Falk, Ana Barić, Dmitry Nikolaev, and Sebastian Padó. 2024. [Beyond prompt brittleness: Evaluating the reliability and consistency of political worldviews in LLMs](#). *Transactions of the Association for Computational Linguistics*, 12:1378–1400.
- Yuyan Chen, Zhihao Wen, Ge Fan, Zhengyu Chen, Wei Wu, Dayiheng Liu, Zhixu Li, Bang Liu, and Yanghua Xiao. 2023. [MAPO: Boosting large language model performance with model-adaptive prompt optimization](#). In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 3279–3304, Singapore. Association for Computational Linguistics.
- Leyang Cui, Yu Wu, Jian Liu, Sen Yang, and Yue Zhang. 2021. [Template-based named entity recognition using BART](#). In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 1835–1845, Online. Association for Computational Linguistics.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, Anirudh Goyal, Anthony Hartshorn, Aobo Yang, Archi Mitra, Archie Sravankumar, Artem Korenev, Arthur Hinsvark, Arun Rao, Aston Zhang, Aurélien Rodriguez, Austen Gregerson, Ava Spataru, Baptiste Rozière, Bethany Biron, Binh Tang, Bobbie Chern, Charlotte Caucheteux, Chaya Nayak, Chloe Bi, Chris Marra, Chris McConnell, Christian Keller, Christophe Touret, Chunyang Wu, Corinne Wong, Cristian Canton Ferrer, Cyrus Nikolaidis, Damien Allonsius, Daniel Song, Danielle Pintz, Danny Livshits, David Esiobu, Dhruv Choudhary, Dhruv Mahajan, Diego Garcia-Olano, Diego Perino, Dieuwke Hupkes, Egor Lakomkin, Ehab AlBadawy, Elina Lobanova, Emily Dinan, Eric Michael Smith, Filip Radenovic, Frank Zhang, Gabriel Synnaeve, Gabrielle Lee, Georgia Lewis Anderson, Graeme Nail, Grégoire Mialon, Guan Pang, Guillem Cucurell, Hailey Nguyen, Hannah Korevaar, Hu Xu, Hugo Touvron, Iliyan Zarov, Imanol Arrieta Ibarra, Isabel M. Kloumann, Ishan Misra, Ivan Evtimov, Jade Copet, Jaewon Lee, Jan Geffert, Jana Vranes, Jason Park, Jay Mahadeokar, Jeet Shah, Jelmer van der Linde, Jennifer Billock, Jenny Hong, Jenya Lee, Jeremy Fu, Jianfeng Chi, Jianyu Huang, Jiawen Liu, Jie Wang, Jiecao Yu, Joanna Bitton, Joe Spisak, Jongsoo Park, Joseph Rocca, Joshua Johnstun, Joshua Saxe, Junteng Jia, Kalyan Vasuden Alwala, Kartikeya Upasani, Kate Plawiak, Ke Li, Kenneth Heafield, Kevin Stone, and et al. 2024. [The llama 3 herd of models](#). *CoRR*, abs/2407.21783.
- Chrisantha Fernando, Dylan Banarse, Henryk Michalewski, Simon Osindero, and Tim Rocktäschel. 2024. [Promptbreeder: Self-referential self-improvement via prompt evolution](#). In *Forty-first International Conference on Machine Learning, ICML 2024, Vienna, Austria, July 21-27, 2024*. OpenReview.net.
- Braden Hancock, Antoine Bordes, Pierre-Emmanuel Mazare, and Jason Weston. 2019. [Learning from dialogue after deployment: Feed yourself, chatbot!](#) In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 3667–3684, Florence, Italy. Association for Computational Linguistics.
- Louisa Heidrich, Emanuel Slany, Stephan Scheele, and Ute Schmid. 2023. [Faircaipi: A combination of explanatory interactive and fair machine learning for human and machine bias reduction](#). *Mach. Learn. Knowl. Extr.*, 5(4):1519–1538.
- Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de Las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, Léo Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timothée Lacroix, and William El Sayed. 2023. [Mistral 7b](#). *CoRR*, abs/2310.06825.
- Zhengbao Jiang, Frank F. Xu, Jun Araki, and Graham Neubig. 2020. [How can we know what language models know?](#) *Transactions of the Association for Computational Linguistics*, 8:423–438.
- Shubhra Kanti Karmaker Santu and Dongji Feng. 2023. [TELeR: A general taxonomy of LLM prompts for benchmarking complex tasks](#). In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 14197–14203, Singapore. Association for Computational Linguistics.
- Ana Kotarcic, Dominik Hangartner, Fabrizio Gilardi, Selina Kurer, and Karsten Donnay. 2022. [Human-in-the-loop hate speech classification in a multilingual context](#). In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 7414–7442, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Piyawat Lertvittayakumjorn, Lucia Specia, and Francesca Toni. 2020. [FIND: Human-in-the-Loop Debugging Deep Text Classifiers](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 332–348, Online. Association for Computational Linguistics.

- Xiang Lisa Li and Percy Liang. 2021. [Prefix-tuning: Optimizing continuous prompts for generation](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 4582–4597, Online. Association for Computational Linguistics.
- Jiachang Liu, Dinghan Shen, Yizhe Zhang, Bill Dolan, Lawrence Carin, and Weizhu Chen. 2022. [What makes good in-context examples for GPT-3?](#) In *Proceedings of Deep Learning Inside Out (DeeLIO 2022): The 3rd Workshop on Knowledge Extraction and Integration for Deep Learning Architectures*, pages 100–114, Dublin, Ireland and Online. Association for Computational Linguistics.
- Pengfei Liu, Weizhe Yuan, Jinlan Fu, Zhengbao Jiang, Hiroaki Hayashi, and Graham Neubig. 2023. [Pre-train, prompt, and predict: A systematic survey of prompting methods in natural language processing](#). *ACM Comput. Surv.*, 55(9):195:1–195:35.
- Yao Lu, Max Bartolo, Alastair Moore, Sebastian Riedel, and Pontus Stenetorp. 2022. [Fantastically ordered prompts and where to find them: Overcoming few-shot prompt order sensitivity](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 8086–8098, Dublin, Ireland. Association for Computational Linguistics.
- Scott M. Lundberg and Su-In Lee. 2017. [A unified approach to interpreting model predictions](#). In *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA*, pages 4765–4774.
- Christopher D. Manning, Prabhakar Raghavan, and Hinrich Schütze. 2008. *Introduction to information retrieval*. Cambridge University Press.
- Philip Mavrepis, Georgios Makridis, Georgios Fatouros, Vasileios Koukos, Maria Margarita Separdani, and Dimosthenis Kyriazis. 2024. [XAI for all: Can large language models simplify explainable ai?](#) *CoRR*, abs/2401.13110.
- Yarik Menchaca Resendiz and Roman Klinger. 2025. [Mopo: Multi-objective prompt optimization for affective text generation](#). In *Proceedings of the 31st International Conference on Computational Linguistics*, Abu Dhabi, UAE. International Committee on Computational Linguistics.
- Swaroop Mishra, Daniel Khashabi, Chitta Baral, and Hannaneh Hajishirzi. 2022. [Cross-task generalization via natural language crowdsourcing instructions](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3470–3487, Dublin, Ireland. Association for Computational Linguistics.
- Saif Mohammad. 2012. [#emotional tweets](#). In **SEM 2012: The First Joint Conference on Lexical and Computational Semantics – Volume 1: Proceedings of the main conference and the shared task, and Volume 2: Proceedings of the Sixth International Workshop on Semantic Evaluation (SemEval 2012)*, pages 246–255, Montréal, Canada. Association for Computational Linguistics.
- OpenAI. 2023. [GPT-4 technical report](#). *CoRR*, abs/2303.08774.
- Flor Miriam Plaza-del Arco, María-Teresa Martín-Valdivia, and Roman Klinger. 2022. [Natural language inference prompts for zero-shot emotion classification in text across corpora](#). In *Proceedings of the 29th International Conference on Computational Linguistics*, pages 6805–6817, Gyeongju, Republic of Korea. International Committee on Computational Linguistics.
- Reid Pryzant, Dan Iter, Jerry Li, Yin Lee, Chenguang Zhu, and Michael Zeng. 2023. [Automatic prompt optimization with “gradient descent” and beam search](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 7957–7968, Singapore. Association for Computational Linguistics.
- Guanghui Qin and Jason Eisner. 2021. [Learning how to ask: Querying LMs with mixtures of soft prompts](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5203–5212, Online. Association for Computational Linguistics.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2020. [Exploring the limits of transfer learning with a unified text-to-text transformer](#). *J. Mach. Learn. Res.*, 21:140:1–140:67.
- Marco Túlio Ribeiro, Sameer Singh, and Carlos Guestrin. 2016. ["why should I trust you?": Explaining the predictions of any classifier](#). In *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, San Francisco, CA, USA, August 13-17, 2016*, pages 1135–1144. ACM.
- Marco Túlio Ribeiro, Sameer Singh, and Carlos Guestrin. 2018. [Anchors: High-precision model-agnostic explanations](#). In *Proceedings of the Thirty-Second AAAI Conference on Artificial Intelligence (AAAI-18), the 30th innovative Applications of Artificial Intelligence (IAAI-18), and the 8th AAAI Symposium on Educational Advances in Artificial Intelligence (EAAI-18), New Orleans, Louisiana, USA, February 2-7, 2018*, pages 1527–1535. AAAI Press.
- Ribana Roscher, Bastian Bohn, Marco F. Duarte, and Jochen Garcke. 2020. [Explainable machine learning for scientific insights and discoveries](#). *IEEE Access*, 8:42200–42216.

- Taylor Shin, Yasaman Razeghi, Robert L. Logan IV, Eric Wallace, and Sameer Singh. 2020. [AutoPrompt: Eliciting Knowledge from Language Models with Automatically Generated Prompts](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 4222–4235, Online. Association for Computational Linguistics.
- Stefano Teso and Kristian Kersting. 2019. [Explanatory Interactive Machine Learning](#). In *Proceedings of the 2019 AAAI/ACM Conference on AI, Ethics, and Society*, pages 239–245, Honolulu, HI, USA. ACM.
- Zijie J. Wang, Dongjin Choi, Shenyu Xu, and Diyi Yang. 2021. [Putting humans in the natural language processing loop: A survey](#). In *Proceedings of the First Workshop on Bridging Human–Computer Interaction and Natural Language Processing*, pages 47–52, Online. Association for Computational Linguistics.
- Colin Wei, Sang Michael Xie, and Tengyu Ma. 2021. [Why do pretrained language models help in downstream tasks? an analysis of head and prompt tuning](#). In *Advances in Neural Information Processing Systems 34: Annual Conference on Neural Information Processing Systems 2021, NeurIPS 2021, December 6-14, 2021, virtual*, pages 16158–16170.
- Yuxin Wen, Neel Jain, John Kirchenbauer, Micah Goldblum, Jonas Geiping, and Tom Goldstein. 2023. [Hard prompts made easy: Gradient-based discrete optimization for prompt tuning and discovery](#). In *Advances in Neural Information Processing Systems 36: Annual Conference on Neural Information Processing Systems 2023, NeurIPS 2023, New Orleans, LA, USA, December 10 - 16, 2023*.
- Xuansheng Wu, Haiyan Zhao, Yaochen Zhu, Yucheng Shi, Fan Yang, Tianming Liu, Xiaoming Zhai, Wenlin Yao, Jundong Li, Mengnan Du, and Ninghao Liu. 2024. [Usable XAI: 10 strategies towards exploiting explainability in the LLM era](#). *CoRR*, abs/2403.08946.
- Lei Xu, Yangyi Chen, Ganqu Cui, Hongcheng Gao, and Zhiyuan Liu. 2022. [Exploring the universal vulnerability of prompt-based learning paradigm](#). In *Findings of the Association for Computational Linguistics: NAACL 2022*, pages 1799–1810, Seattle, United States. Association for Computational Linguistics.
- Qinyuan Ye, Mohamed Ahmed, Reid Pryzant, and Fereshte Khani. 2024. [Prompt engineering a prompt engineer](#). In *Findings of the Association for Computational Linguistics: ACL 2024*, pages 355–385, Bangkok, Thailand. Association for Computational Linguistics.
- Wenpeng Yin, Jamaal Hay, and Dan Roth. 2019. [Benchmarking zero-shot text classification: Datasets, evaluation and entailment approach](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 3914–3923, Hong Kong, China. Association for Computational Linguistics.
- Chunting Zhou, Junxian He, Xuezhe Ma, Taylor Berg-Kirkpatrick, and Graham Neubig. 2022. [Prompt consistency for zero-shot task generalization](#). In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 2613–2626, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Yongchao Zhou, Andrei Ioan Muresanu, Ziwen Han, Keiran Paster, Silviu Pitis, Harris Chan, and Jimmy Ba. 2023. [Large language models are human-level prompt engineers](#). In *The Eleventh International Conference on Learning Representations, ICLR 2023, Kigali, Rwanda, May 1-5, 2023*. OpenReview.net.