Your Next State-of-the-Art Could Come from Another Domain: A Cross-Domain Analysis of Hierarchical Text Classification

Nan Li^{1*}, Bo Kang¹ and Tijl De Bie¹

¹IDLab, Ghent University, Ghent, 9052, Belgium.

*Corresponding author(s). E-mail(s): nan.li@ugent.be; Contributing authors: bo.kang@ugent.be; tijl.debie@ugent.be;

Abstract

Text classification with hierarchical labels is a prevalent and challenging task in natural language processing. Examples include assigning ICD codes to patient records, tagging patents into IPC classes, assigning EUROVOC descriptors to European legal texts, and more. Despite its widespread applications, a comprehensive understanding of state-of-the-art methods across different domains has been lacking. In this paper, we provide the first comprehensive cross-domain overview with empirical analysis of state-of-the-art methods. We propose a unified framework that positions each method within a common structure to facilitate research. Our empirical analysis yields key insights and guidelines, confirming the necessity of learning across different research areas to design effective methods. Notably, under our unified evaluation pipeline, we achieved new state-of-the-art results by applying techniques beyond their original domains.

Keywords: Hierarchical Multi-label Text Classification, Cross-domain Analysis, Label Hierarchy, Dataset Characteristics, Large Language Models, Survey, Benchmark

1 Introduction

Text classification with hierarchical labels is a fundamental challenge in natural language processing, where the goal is to assign one or more labels from a hierarchically-organized label set to each text input. This problem appears across diverse domains, such as medical coding that assigns International Classification of Diseases (ICD) codes to patient records (Edin et al., 2023), patent classification that predicts International Patent Classification (IPC) codes for patent documents (Kamateri, Salampasis, & Perez-Molina, 2024), and extreme multi-label classification tasks in legal, wikipedia, and e-commerce domains (Bhatia et al., 2016). While these applications may seem distinct, they share a common core: classifying text with labels that have inherent hierarchical relationships.

Despite this commonality, current research is largely confined within individual domains. Methods are typically developed and evaluated only on domain-specific datasets, with minimal cross-domain analysis or comparison. This domain-centric approach has led to three significant knowledge gaps in the research literature: (1) how methods that excel in one domain compare to domain-specific approaches in others; (2) which architectural components (to which we refer as *submodules*, such as text encoders, label encoders, and prediction mechanisms) are truly domain-specific versus universally effective; and (3) how dataset characteristics, rather than domain origin, influence method performance.

To address these gaps, we present the first comprehensive cross-domain analysis of hierarchical text classification. Our work makes several key contributions:

- **Cross-Domain Survey:** We present the first comprehensive cross-domain survey of hierarchical text classification methods, dissecting 32 representative methods and abstracting common elements that bridge different domains.
- Unified Framework: We propose the first domain agnostic framework that decomposes hierarchical text classification methods into nine essential submodules, enabling systematic comparison of approaches across different domains. This framework particularly highlights how different methods utilize hierarchical label information.
- **Cross-Domain Analysis:** We conduct the first large-scale cross-domain evaluation of hierarchical text classification methods (with necessary re-implementations and unified evaluation codebase), analyzing eight state-of-the-art methods across five domains on eight curated datasets.
- Enhanced Datasets: We make several dataset contributions: (1) a cleaned version of EurLex with recovered taxonomy and restored original text; (2) a new dataset derived from EurLex, EurLex-DC-410, labeled with directory codes; and (3) a carefully curated selection of eight datasets across five domains, with necessary adaptations to enable fair cross-domain evaluation, publicly available at https://github.com/aida-ugent/cross-domain-HTC.
- New State-of-the-Art Results: We achieved new state-of-the-art results¹ on NYT-166, SciHTC-83, USPTO2M-632, and MIMIC3-3681 by applying methods from other domains or combining submodules across domains.
- Empirical Insights: Our findings through extensive experiments reveal that dataset characteristics and architectural design choices, rather than domain specificity, primarily determine method effectiveness. We encourage researchers and practitioners to look beyond their specific domains, as state-of-the-art performance can often be achieved by leveraging methods and innovations from other fields.

¹These state-of-the-art results are based on our unified evaluation framework. While we carefully reproduced previous methods following their original implementations, some results may differ from those reported in original papers due to differences in preprocessing, evaluation settings, or implementation details.

²

The rest of the paper is organized as follows: Section 2 reviews existing surveys and benchmarks, highlighting the need for cross-domain analysis. Section 3 presents our unified framework and formal problem definition, analyzing how different methods utilize label hierarchical information. Section 4 details our cross-domain evaluation, including dataset selection, method descriptions, and experimental results. Section 5 provides in-depth analysis of our findings, discussing the cross-domain performances of different methods, impact of several key factors and lessons for practitioners. Section 6 summarizes key findings and discusses the limitations and future research directions.

2 Related Work

Section 2.1 presents the surveys and benchmarks for the general problem of multilabel text classification, while Section 2.2 focuses on domain-specific surveys and benchmarks.

2.1 General surveys/benchmarks

An overview of multi-label text classification is provided by X. Chen et al. (2022), which systematically categorizes methods by data efficiency, feature extraction, and label correlation modeling, but focuses on flat classification without exploring hierarchical structures or cross-domain analysis. An empirical comparison across benchmark datasets is presented in Bogatinovski, Todorovski, Džeroski, and Kocev (2022), examining how model performance relates to dataset characteristics, but primarily examines non-textual domains with small label spaces. The work of Wei, Mao, Shi, Li, and Zhang (2022) focuses on extreme multi-label learning challenges and collects datasets and tools, but does not address hierarchical structures or provide empirical validation. Similarly, Bhatia et al. (2016) maintains a widely cited repository of extreme multilabel classification methods and datasets spanning e-commerce, wikipedia and legal domains, though many datasets only contain preprocessed feature vectors without original texts, limiting their applicability for pretrained language models.

Various aspects of multi-label classification are covered in recent surveys: multiple modalities (Han, Wu, Chen, Li, & Zhang, 2023), label imbalance (Tarekegn, Giacobini, & Michalak, 2021), and deep learning architectures (Tarekegn, Ullah, & Cheikh, 2024), but none comprehensively address text datasets, hierarchical structures, or cross-domain analysis. A review of hierarchical multi-label text classification methods is presented by Liu et al. (2023), categorizing them into tree-based, embedding-based and graph-based approaches, but it covers limited domains and lacks empirical validation.

Most recently, Bertalis et al. (2024) compares hierarchical text classification (HTC) and extreme multi-label classification (XML), evaluating two methods on three datasets from each of these domains. While their observation about XML methods' adaptability to HTC tasks aligns with one aspect of our findings, our work provides the first comprehensive cross-domain analysis spanning five domains, evaluating eight state-of-the-art methods on eight diverse datasets, with a unified framework for analyzing method components and in-depth empirical analyses of their effectiveness.

2.2 Domain-specific surveys/benchmarks

For automatic medical coding, Edin et al. (2023) benchmarks state-of-the-art models on cleaned MIMIC datasets, providing an open-source evaluation pipeline. For patent classification, Kamateri et al. (2024) surveys classification complexities, reviews key datasets, and evaluates Deep Learning and large language models' potentials, highlighting domain-specific challenges. For legal documents, Chalkidis, Fergadiotis, Malakasiotis, Aletras, and Androutsopoulos (2019) establishes a benchmark by introducing EurLex-57K and conducting comparisons of several neural architectures, demonstrating that BiGRU-based models consistently outperform CNN-based approaches on legal text classification tasks.

To summarize, while these surveys provide excellent domain-specific insights, our work differs by offering the first cross-domain survey and benchmark evaluation, encompassing a comprehensive coverage of datasets and methods.

3 A cross-domain overview of text classification with hierarchical labels

In this section, we provide the first cross-domain overview of text classification with hierarchical labels. We begin with a formal problem formulation in Section 3.1. Then, Section 3.2 presents recent methods from different domains. We analyze these methods within our proposed unified framework (Section 3.3), focusing on their common submodules (architectural components) and their utilization of label information.

3.1 Problem formulation

Conceptually, text classification with hierarchical labels is the task of assigning one or more relevant labels to a given text input, where these labels are organized in a hierarchical structure. The challenge lies both in understanding the text content and utilizing the relations between labels. The labeling scheme can vary across datasets: some use leaf-only labels (only the most specific labels), some require complete paths (including all ancestors), and some allow partial paths (labels at any level). The prediction task should match the labeling scheme of the dataset.²

Formally, the goal of text classification with hierarchical labels is to learn a function $f: X \to Y^*$, where X is the sample space of all possible text sequences and Y^* is the power set of L (the label set), so that for any given sample $x \in X, f(x)$ outputs one or more labels most relevant to x. The label space can be organized in a hierarchy, defined as a tuple (L, E, ρ) with L being a set of labels, $E \subseteq L \times L$ being a set of edges forming a directed acyclic graph (though mostly a tree), and $\rho \in L$ being a unique root node. The hierarchy (L, E, ρ) satisfies: (1) there are no cycles, (2) each node except ρ has at least one parent, and (3) ρ has no parents.

This hierarchical structure distinguishes the task from flat multi-label classification, where labels have no structures to be exploited. The hierarchy can be either given as a

 $^{^{2}}$ For example, given a hierarchy where A.1.1 is a leaf node under A.1, which is under A, a document could be labeled as: (1) A.1.1 in a leaf-only scheme, (2) A, A.1, A.1.1 in a full-path scheme, or (3) A, A.1.1 in a flexible scheme. For simplicity, we do not consider the impact of these labeling schemes on data preprocessing or model design.

⁴

taxonomy or learned from the training data via label co-occurrence patterns or other features. The hierarchy provides additional information about label relationships that can be exploited during model training and inference, though the extent and manner of utilizing this information varies across methods.

3.2 Method selection

We analyzed 32 representative methods published between 2019 and 2024 across multiple domains. While an exhaustive review is beyond our scope, the selected methods encompass diverse approaches and variations, enabling us to identify common patterns and key differences, and to ultimately develop a unified framework.

We started with the recent surveys in Section 2 and collected the frequently cited papers, following their citations to find their most related predecessors. We further searched papers published after 2023 from Google Scholar using keywords "hierarchical text classification", "multi-label text classification", "patent classification", "medical coding" and "extreme multi-label classification". We also included papers that cited the benchmark datasets from Google Scholar and PapersWithCode. To limit the scope, we exclude methods published before 2019, unsupervised methods, and those primarily focused on non-textual datasets.


3.3 A unified framework of common submodules

From the surveyed methods, we abstract a framework constituted by commonly seen architectural components, shown as the nine submodules in Figure 1a. The framework *begins* with optional preprocessing steps: data augmentation (A) and long document handling (B). The *core processing pipeline* starts with parallel encoding of text and labels: a text encoder (C) transforms input text into embeddings using shallow, deep, or pre-trained models, while a label encoder (D) converts discrete labels into continuous representations, optionally incorporating hierarchical information. These representations are then integrated through text-label information fusion (E), which can occur at representational, architectural, or parameterization levels. For large label spaces, *output space segmentation* (F) may be employed for efficiency. The training process is guided by various training objectives (G), including classification losses and other custom objectives. Finally, the model makes *inferences* through score prediction (H), followed by optional prediction refinement (I) to enhance raw outputs using label correlations or ranking mechanisms.


Utilizing our proposed framework, we locate each method³ by their specific instantiations of the submodules in the framework as shown in Figure 1b. We further emphasize that label hierarchy in the current problem setting can refer to either a given taxonomy or a learned structure, meaning that the usage of label hierarchy can be explicit (using the given taxonomy directly) or implicit (learning a label structure from the data via co-occurrence or other features). Since not all submodules in existing methods utilize label hierarchy information, we explicitly note such usage both in the following discussion and in Figure 1a.

 $^{^{3}}$ HiAGM has two variants that differ in text-label fusion, and we select HiAGM-TP for benchmark evaluation. We rename PatentBERT to FlatBERT to reflect its architecture that processes labels without hierarchical information.

⁵

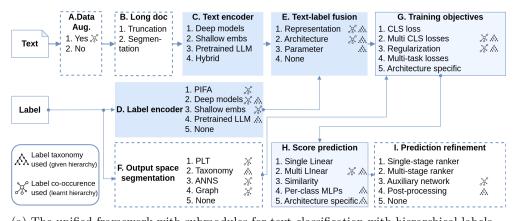

(a) The unified framework with submodules for text classification with hierarchical labels. The pictogram $\stackrel{()}{\longrightarrow}$ represents that methods use the given taxonomy directly in the corresponding submodule, and $\stackrel{()}{\longrightarrow}$ represents that methods learn a label structure from the data via co-occurrence or other features and use that information in the corresponding submodule. Abbreviations: *Data Aug.*: data augmentation, *Long Doc*: long document handling, *LLM*: large language model, *CLS loss*: classification loss, e.g. binary cross-entropy, *PIFA*: positive instance feature aggregation, *PLT*: probabilistic label trees, *ANNS*: approximate nearest neighbor search.

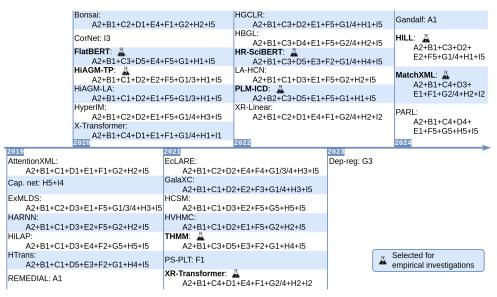

(b) Methods with submodule combinations in chronological order. Each color block represents a method, followed by the combinations of its submodule design choices, where capital letters with numbers (e.g., C1, D2) indicate specific design choices within each submodule defined in Figure 1a, for example, C2 represents shallow embeddings in the text encoder module.

Fig. 1: Our framework and methods with submodule combinations.

We now discuss each submodule in detail, highlighting how different methods implement them and utilize label hierarchical information when applicable.

A. Data Augmentation

Two methods address data imbalance through label information: REMEDIAL (Charte, Rivera, del Jesus, & Herrera, 2019) balances label distribution by decoupling frequent and rare label co-occurrences using the SCUMBLE metric (Charte, Rivera, del Jesus, & Herrera, 2014), while Gandalf (Kharbanda et al., 2024) leverages label co-occurrence graphs to generate soft targets as additional training data.

Label info utilization: Current methods only utilize label co-occurrence patterns.

B. Long document handling

While most methods simply truncate long documents, PLM-ICD (C.-W. Huang, Tsai, & Chen, 2022) employs a more sophisticated approach by segmenting text into smaller parts with pre-defined lengths for later information aggregation.

Label info utilization: Current methods do not explicitly use label information here.

C. Text encoder

This essential submodule transforms text into embeddings for input. It has evolved from shallow embeddings to deep learning models, and finally to pre-trained LLMs.

Shallow embeddings	TF-IDF features: Bonsai (Khandagale, Xiao, & Babbar, 2020), ECLARE (Mittal et al., 2021), ExMLDS (Gupta et al., 2019) Hyperbolic embeddings: HyperIM (B. Chen, Huang, Xiao, Cai, & Jing, 2020)
Deep learning models	CNN: HiLAP (Mao, Tian, Han, & Ren, 2019) LSTM: AttentionXML (You et al., 2019), HARNN (W. Huang et al., 2019), LA-HCN (X. Zhang, Xu, Soh, & Chen, 2022) GRU: HTrans (Banerjee, Akkaya, Perez-Sorrosal, & Tsioutsiouliklis, 2019) Hybrid CNN-RNN: HiAGM (Zhou et al., 2020), HCSM (B. Wang, Hu, Li, & Philip, 2021) GCN: HVHMC (Xu et al., 2021) Fixed pre-trained embeddings: GalaXC (Saini et al., 2021)
Pre-trained LLMs	BERT-family: HILL (Zhu et al., 2024), PLM-ICD (CW. Huang et al., 2022), PatentBERT (Lee & Hsiang, 2020), THMM (Pujari, Friedrich, & Strötgen, 2021), HGCLR (Z. Wang, Wang, Huang, Sun, & Wang, 2022), HBGL (Jiang et al., 2022)
Hybrid approaches	LLM + TF-IDF: X-Transformer (Chang, Yu, Zhong, Yang, & Dhillon, 2020), XR-Transformer (J. Zhang, Chang, Yu, & Dhillon, 2021), MatchXML (Ye, Sunderraman, & Ji, 2024) LLM + BM25/GraphSAGE: PARL (D. Li et al., 2024)

Label info utilization: Label information is not directly used in this module, as we separate text-label fusion into its own submodule.

D. Label encoder

This submodule transforms discrete labels into embeddings. Methods vary from implicit relationship modeling (PIFA) to explicit structure encoding (GNNs), with LLM-based approaches offering a middle ground through semantic understanding.

Positive Instance Feature AggregationXR-Transformer (J. Zhang et al., 2021), X-Transformer (Chang et al., 2020) AttentionXML (You et al., 2019), Bonsai (Khandagale et al., 2020)

(Continued on next page.)

Shallow embeddings	Label2Vec: MatchXML (Ye et al., 2024), HCSM (B. Wang et al., 2021), ExMLDS (Gupta et al., 2019) Hyperbolic embeddings: HyperIM (B. Chen et al., 2020)
Deep learning models	Graph neural networks: HiAGM (Zhou et al., 2020), HVHMC (Xu et al., 2021), HGCLR (Z. Wang et al., 2022), GalaXC (Saini et al., 2021), ECLARE (Mittal et al., 2021), HGCLR (Z. Wang et al., 2022) Tree-based models: HiAGM (Zhou et al., 2020), HILL (Zhu et al., 2024)
Pre-trained LLMs	Label text encoding: PARL (D. Li et al., 2024) Custom pretraining: HBGL (Jiang et al., 2022)

Label info utilization: Label hierarchies are either directly encoded through specialized architectures (GNNs, tree models) or used to guide the pre-training process.

E. Text-Label information fusion

This submodule integrates text and label information at three distinct levels. While simple concatenation is the most straightforward approach, learnable fusion mechanisms are more popular since they can adapt to different types of label hierarchies.

Representational level	Simple concatenation: HVHMC (Xu et al., 2021) Custom attention: HBGL (Jiang et al., 2022), PLM-ICD (CW. Huang et al., 2022), AttentionXML (You et al., 2019), LA-HCN (X. Zhang et al., 2022), HiAGM-LA (Zhou et al., 2020) Embedding alignment: MatchXML (Ye et al., 2024), PARL (D. Li et al., 2024), HyperIM (B. Chen et al., 2020), ExMLDS (Gupta et al., 2019) Label-informed positive pairs generation: HGCLR (Z. Wang et al., 2022)
Architectural level	Graph-based: HiAGM-TP (Zhou et al., 2020), GalaXC (Saini et al., 2021) RNN-based: HiAGM-TP (Zhou et al., 2020), HARNN (W. Huang et al., 2019), HILL (Zhu et al., 2024), HCSM (B. Wang et al., 2021) Capsule networks: HCSM (B. Wang et al., 2021)
Parameterization level	Hierarchy-aware parameters sharing or initialization: THMM (Pujari et al., 2021), HR-SciBERT-mt (Sadat & Caragea, 2022), HTrans (Banerjee et al., 2019)

Label info utilization: Hierarchical label information is used to guide attention mechanisms, embedding alignments, and parameter settings, enhancing the fusion of text and label data.

F. Output space segmentation

This submodule re-structures the prediction space, crucial for reducing huge label sets.

PLT^1	XR-Transformer (J. Zhang et al., 2021), MatchXML (Ye et al., 2024), X-Transformer (Chang et al., 2020), AttentionXML (You et al., 2019), Bonsai (Khandagale et al., 2020)
$ANNS^2$	GalaXC (Saini et al., 2021)
$Taxonomy^3$	THMM (Pujari et al., 2021), HTrans (Banerjee et al., 2019), HiLAP (Mao et al., 2019)
Graph-based	ECLARE (Mittal et al., 2021)

¹PLT: Probabilistic Label Trees partition the label space into a tree structure for efficient prediction. ²ANNS: Approximate Nearest Neighbor Search uses similarity search to reduce the candidate label space. ³Taxonomy: Direct usage of the given hierarchical structure for label space segmentation.

Taxonomy: Direct usage of the given hierarchical structure for label space segmentation. Label info utilization: Hierarchical label structures are leveraged to segment the output

space, improving efficiency and scalability in large label environments.

G. Training objectives

This submodule witnesses various loss functions and training strategies, from simple classification losses to sophisticated approaches that capture both semantic relationships and hierarchical structure.

Classification loss	Binary cross entropy: basic building blocks of most methods				
Multiple classification losses	Multi-stage: XR-Transformer (J. Zhang et al., 2021), MatchXML (Ye et al., 2024), X-Transformer (Chang et al., 2020), AttentionXML (You et al., 2019), Bonsai (Khandagale et al., 2020) Multi-level: HVHMC (Xu et al., 2021), HARNN (W. Huang et al., 2019), LA-HCN (X. Zhang et al., 2022), HBGL (Jiang et al., 2022)				
Regularization	Hierarchical constraints: HiAGM (Zhou et al., 2020) Label co-occurrence: ExMLDS (Gupta et al., 2019)				
Multi-task learning	Label-prediction pretraining: HBGL (Jiang et al., 2022) Keyword prediction: HR-SciBERT-mt (Sadat & Caragea, 2022) Contrastive learning: XR-Transformer (J. Zhang et al., 2021), MatchXML (Ye et al., 2024), X-Transformer (Chang et al., 2020) Embedding refinement: MatchXML (Ye et al., 2024), HILL (Zhu et al., 2024), HGCLR (Z. Wang et al., 2022), ExMLDS (Gupta et al., 2019), GalaXC (Saini et al., 2021), ECLARE (Mittal et al., 2021)				
Architecture-specific	Reinforcement learning rewards: HiLAP (Mao et al., 2019) Capsule network margin loss: HCSM (B. Wang et al., 2021) Ranking loss: PARL (D. Li et al., 2024)				

Label info utilization: Label hierarchical information guides both loss function design and regularization strategies, particularly in multi-stage and multi-task approaches.

H. Score Prediction

This submodule transforms model outputs into label predictions, showing different approaches to the task: basic linear layers treat each label as an independent binary decision, approaches with multiple classifiers each handle labels differently to capture their relationships, while similarity-based methods exploit learned embedding spaces.

Linear	Basic approach: a single linear layer followed by optional sigmoid activation.
Multiple Linear	Multi-stage: XR-Transformer (J. Zhang et al., 2021), MatchXML (Ye et al., 2024), X-Transformer (Chang et al., 2020), AttentionXML (You et al., 2019) Multi-resolution: HVHMC (Xu et al., 2021), HARNN (W. Huang et al., 2019), LA-HCN (X. Zhang et al., 2022), HBGL (Jiang et al., 2022)
Similarity-based	HyperIM (B. Chen et al., 2020), ExMLDS (Gupta et al., 2019), GalaXC (Saini et al., 2021), ECLARE (Mittal et al., 2021)
Per-class MLPs	A separate network for each label: THMM (Pujari et al., 2021), HR-SciBERT-mt (Sadat & Caragea, 2022)
Architecture-specific	Capsule networks: HCSM (B. Wang et al., 2021) Policy networks: HiLAP (Mao et al., 2019) Learning-to-rank: PARL (D. Li et al., 2024)

Label info utilization: Label hierarchical information influences prediction strategies through multi-stage architectures, label-specific networks, and specialized prediction mechanisms.

I. Prediction refinement

This optional submodule enhances raw predictions through post-processing.

Single-stage ranking	X-Transformer (Chang et al., 2020)
Multi-stage ranking	Hierarchical rankers: XR-Transformer (J. Zhang et al., 2021), MatchXML (Ye et al., 2024), X-Transformer (Chang et al., 2020)
Auxiliary networks	After-prediction network to utilize label relationships: CorNet (Xun, Jha, Sun, & Zhang, 2020)
Post-processing	Data-specific refinement: HCSM (B. Wang et al., 2021)

Label info utilization: While CorNet and post-processing rules explicitly leverage label structure, ranking-based approaches focus primarily on computational efficiency for large label spaces rather than hierarchical relationships.

Each method discussed in this paper can be characterized by whether and how it instantiates each submodule in the framework, as illustrated chronologically in Figure 1b. While methods may utilize the same types of submodules, their specific choices and implementations within each submodule can vary significantly, with detailed comparisons provided in Table A1.

4 Cross-domain Evaluation

In this section, we conduct a comprehensive cross-domain evaluation by selecting representative datasets (Section 4.1) and methods (Section 4.2) from different domains. We evaluate each method's performance across all datasets using precision and recall metrics (Section 4.4), aiming to understand their generalization capabilities beyond their original domains. Section 4.5 briefly discusses the general trends and observations.

4.1 Datasets

We begin by introducing datasets from various domains that are widely used for hierarchical text classification. We present the key characteristics of the datasets and detail noteworthy data cleaning and preprocessing procedures to ensure fair comparisons.

4.1.1 Selection

We consider datasets from five domains for cross-domain evaluation: legal, scientific, news, medical, and patent classification, as these represent the most common and well-established applications of hierarchical text classification. Our selection criteria focus on datasets with gold-standard taxonomies, textual descriptions, and manageable label spaces (fewer than 4,000 labels), resulting in eight representative datasets: EurLex-3985, EurLex-DC-410, WOS-141, NYT-166, SciHTC-83, SciHTC-800, MIMIC3-3681, and USPTO2M-632. The naming format of the datasets is Dataset-N, where N is the number of labels.

4.1.2 Characteristics of datasets

To facilitate systematic comparison, we characterize each dataset along multiple dimensions: domain, document length statistics, label space properties (cardinality, hierarchy depth), and data distribution metrics (number of labels per sample, number of samples per label). Table 1 presents these detailed statistics.

				•				
Dataset	Domain	Avg. Len.	#Labels	Avg/Max/Min #Labels per sample	Avg/Max/Min #Samples per label	Max Depth	$_{\rm +Dev}^{\#\rm Train}$	#Test
EurLex-3956	Legal	2635	3956	5.3/24/1	26.0/1253/1	2	15449	3865
EurLex-3985*	Legal	2635	3985	12.8/38/3	62.02/8479/1	2	15444	3862
EurLex-DC-410*	Legal	2635	410	1.3/7/1	61.0/1909/1	2	15472	3868
WOS-141	Sci.	200	141	2/2/2	666.5/14625/1	2	37588	9397
NYT-166	News	606	166	7.6/38/1	1665.1/24554/143	8	29209	7262
SciHTC-83	Sci.	145	83	1.8/2/1	4091.2/32854/156	6	167544	18616
SciHTC-800*	Sci.	145	800	1.6/2/1	369.8/17166/5	6	167544	18616
MIMIC3-3681	Med.	1514	3681	15.6/65/1	223.2/20046/10	0(+3)	43978	8734
USPTO2M-632	Patent	117	632	1.3/18/1	4239.6/281876/1	0(+2)	1948508	49900
USPTO10k-632**	Patent	116	"	1.89/18/1	178.8/10433/1	"	10000	"
USPTO100k-632**	Patent	116	"	1.77/18/1	418.8/23895/1	"	100000	"

Table 1: Summary of Datasets

*New variant of the dataset introduced for this study.

**Subset created for ablation studies. " indicates same value as USPTO2M-632.

(+n) in Max Depth indicates that n additional levels were added to the originally flat label annotation to meet the hierarchy requirements for some methods.

4.1.3 Data preparation

While we maintain consistency with established preprocessing procedures where possible, several datasets required specific handling to ensure compatibility with our evaluation framework, and we also created new versions of some datasets for evaluation.

- 1. EurLex-3956/3985: Introduced by Loza Mencía and Fürnkranz (2008) and known as EurLex-4k (Bhatia et al., 2016) in the literature, it contains European legal documents sourced from the EUR-Lex repository⁴.
 - (a) Label processing: The original dataset is annotated with 3956 labels of EUROVOC descriptors, describing a wide range of EU-related topics. But the labels are raw text and not mapped to any existing taxonomy. We mapped them to the EUROVOC taxonomy⁵ using an ensemble of string similarity metrics⁶ and manual verification, resulting in 3890 mapped labels. We then enriched the labels by adding parent codes, yielding a final label set of size 3985. We maintain both versions: EurLex-3956 for literature comparison and EurLex-3985 as our cleaned version for evaluation.

⁴https://eur-lex.europa.eu/homepage.html

⁵https://op.europa.eu/en/web/eu-vocabularies

⁶The similarity metrics include simple Levenshtein distance ratio, best partial string matching, Levenshtein distance ratio after sorting words and that ratio between unique sorted word intersections.

¹¹

- (b) Text processing: We extracted the original text from HTML sources⁷ rather than using the existing tokenized version from the AttentionXML repository⁸ or BOW features from the repository maintained by Bhatia et al. (2016), enabling optimal tokenization for different pretrained language models.
- 2. EurLex-DC-410: Using the original EurLex corpus, we created a new dataset annotated with the Directory Codes (DC). These codes represent classes used in the Directory of Community Legislation in Force. The hierarchy consists of 20 top-level chapter headings with up to four levels of subdivisions. After filtering documents to retain only those with valid DC annotations, the final dataset contains 410 labels.
- 3. WOS-141: Introduced by Kowsari et al. (2017), it contains scientific article abstracts from the Web of Science. The labels represent a hierarchical taxonomy of scientific categories and subcategories, with a total number of 141. We obtained the data from the original source⁹.
- 4. NYT-166: Originating from the New York Times Annotated Corpus (Sandhaus, 2008), this dataset consists of news articles spanning diverse topics. The 166 labels form a hierarchical taxonomy representing thematic categories from general subjects down to more fine-grained topics.¹⁰
- 5. SciHTC-83: Introduced by Sadat and Caragea (2022), this dataset comprises scientific abstracts from multiple research fields. The 83 labels represent a selection of the most frequently occurring subject categories, structured hierarchically to capture broad domains down to more specialized subfields. We use the same processed version provided by Sadat and Caragea (2022).
- 6. SciHTC-800: We build SciHTC-800 from the original SciHTC dataset by adding the second-level codes and correcting the inconsistent codes, resulting in a dataset with 800 labels.
- 7. MIMIC3-3681: The MIMIC-III clinical database (Johnson et al., 2016) consists of de-identified hospital discharge summaries annotated with International Classification of Diseases (ICD) codes. These codes span broad medical domains, covering both diagnoses and procedures. We use the MIMIC3-clean variant introduced by Edin et al. (2023), which provides a refined version of the dataset optimized for clinical classification tasks.
- 8. USPTO2M-632: Introduced by S. Li, Hu, Cui, and Hu (2018), this dataset is derived from United States Patent and Trademark Office (USPTO) documents. It contains patent abstracts annotated with hierarchical patent classification codes, reflecting technological fields and subfields. We obtained the data from the original source¹¹.

Data adaptation for methods across domains

Since all datasets have given taxonomies, we handle them differently based on each method's requirements:

⁷https://tudatalib.ulb.tu-darmstadt.de/handle/tudatalib/2937

⁸https://github.com/yourh/AttentionXML/tree/master#datasets

⁹https://github.com/kk7nc/HDLTex ¹⁰The repository of NYT-166 https://catalog.ldc.upenn.edu/LDC2008T19 is not maintained at the time of our experiment, we contacted the authors who have conducted the experiments on this dataset to obtain the data. ¹¹https://github.com/JasonHoou/USPTO-2M

- 1. For methods that utilize the given taxonomies (e.g., THMM, HILL, HiAGM), we follow their specific preprocessing procedures to incorporate the taxonomies.
- 2. For methods that don't use the given taxonomies (e.g., XR-Transformer), we simply preprocess the text according to their requirements while ignoring the taxonomies.

Two datasets required special handling due to their flat label annotation structures. MIMIC3-3681 contains only the most specific diagnostic and procedure codes (3681 flat labels), so we expanded its hierarchy by including upper-level codes to create a three-level structure compatible with THMM/HILL/HiAGM. Similarly, USPTO2M-632 contains only subclass labels (632 flat labels), so we added parent and grandparent labels to create a two-level hierarchy. For fair comparison, evaluations on both datasets were still conducted using only the original flat labels.

4.2 Methods

We carefully select representative methods for cross-domain evaluation, focusing on those that effectively utilize or can be adapted to use label hierarchies. Our selection process balances comprehensive coverage with practical resource constraints.

4.2.1 Selection

Resource limitations prevent us from experimenting with all 32 methods surveyed above, therefore we select representative methods based on three criteria:

- 1. Performance: We prioritize methods that achieved state-of-the-art results on their respective datasets, identified through recent surveys (Section 2) and 2024 publications.
- 2. Label hierarchy utilization: We focus on methods that either integrate label hierarchical information into their main architecture or can be readily adapted to do so, excluding augmentation or post-processing components. Exception is made for PatentBERT/FlatBERT, which serves as a baseline model without label hierarchy information used anywhere.
- 3. Implementation adaptability: For reproducibility and extensibility, we prioritize methods with clear architectures that are easy to implement and modify. We exclude ensemble methods to maintain architectural clarity, facilitate potential improvements, and manage computational resources.

4.2.2 Selected methods for benchmark

Based on these criteria, we selected eight representative methods covering 5 domains: Legal Domain: The current state-of-the-art on EurLex-3956, MatchXML (2024), extends XR-Transformer by incorporating advanced label encoding mechanisms. Its predecessor, XR-Transformer (2021), remains a widely-cited baseline for hierarchical text classification.¹²

 $^{^{12}}$ Originally developed for extreme multi-label classification tasks, MatchXML and XR-Transformer are evaluated on textual datasets with large number of labels, including legal domain, wikipedia, and e-commerce.



Scientific and News Domains: In these domains, HILL (2024) advances the stateof-the-art on both WOS-141 and NYT-166 through novel hierarchy learning, text-label fusion mechanisms, and contrastive learning objectives. Its predecessor, HiAGM-TP (2020), established the foundation for graph-based label hierarchy modeling. HR-SciBERT-mt (2022) achieves state-of-the-art performance on SciHTC-83, a dataset introduced alongside the model, through multi-task learning and hierarchical classifiers.

Medical Domain: For medical text classification, **PLM-ICD** (2022) achieves stateof-the-art performance on MIMIC3-3681 by addressing long document handling and incorporating label-aware attention mechanisms.

Patent Domain: In patent classification, PatentBERT/FlatBERT (2020) demonstrates that fine-tuning pretrained language models, such as BERT, with a simple classification head can achieve state-of-the-art performance on USPTO2M-632. THMM (2021) takes a different approach, achieving state-of-the-art results on their own sampled dataset USPTO70k through hierarchical classifier architectures.

Note that some methods face computational and architectural **constraints**. HiAGM-TP and HILL require complete label hierarchies and substantial memory resources for large label spaces. THMM encounters similar limitations in both hierarchical structure requirements and memory usage. HR-SciBERT-mt presents additional requirements, needing keyword annotations and significant computational resources, particularly for large-scale datasets.

4.3 Evaluation Metrics

We evaluate the selected methods using precision @k and recall @k, the most widely used metrics for multi-label classification tasks. For a given instance, precision @k is the number of true positive labels in the top-k predictions divided by k, while recall @kis the number of true positive labels in the top-k predictions divided by the total number of true labels for that instance. These metrics are then averaged across all test instances. We also report the ranks of the methods on each dataset.

4.4 Results

We evaluate each method on each dataset. The precision@1 and recall@1 scores are presented in Tables 2 and 3, respectively, along with the ranks of each method on each dataset. Precision/Recall@3, 5, 8, 10 scores show similar patterns and are presented in Appendix B. General trends and high-level observations are discussed in the following Section 4.5, while in-depth analysis is provided later in Section 5.

All experiments were conducted using PyTorch (Paszke et al., 2019) on a single NVIDIA A40 GPU, including our re-implementations of FlatBERT and THMM. We maintained consistent dataset processing and train/test splits across all methods while adhering to each method's specific requirements. For each method-dataset combination, we conducted hyperparameter tuning using a validation set randomly sampled from the training data, with limited search ranges closely following the original papers. All reported results are averages across five random seeds.

To manage computational resources, we established uniform constraints for each experimental run (defined as training one method on one dataset with one random seed using the default epoch count from the original papers). These constraints include a maximum GPU memory usage of 40GB and a time limit of 36 hours. Experiments exceeding these limits are denoted as "EM" (exceeds memory) or "ET" (exceeds time) in our results.¹³

Caveat: While we carefully reproduced all methods following their original implementations and validated against reported results where possible, our evaluation setup may differ from the original papers. For methods reporting the same metrics, our reproduced results closely match published numbers (see the following paragraph on reproduced results). However, many papers use different evaluation metrics, making direct comparisons impossible. Therefore, the performance numbers reported in this section reflect results under our unified evaluation framework, which enables fair comparisons but may not exactly match previously published results.

Table 2: Cross-Domain Precision@1 Scores and Ranks

Method	WOS -141	NYT -166	EurLex -3985	EurLex-DC -410	SciHTC -83	SciHTC -800	MIMIC3 -3681	USPTO2M -632
MatchXML	86.30 - 6	96.27 - 2	97.26 - 2	89.88 - 1	61.70 - 1	41.28 - 1	86.33 - 3	82.28 - 1
XR-Transformer	86.49 - 5	96.64 - 1	97.51 - 1	89.77 - 2	61.53 - 3	40.69 - 2	86.88 - 2	80.99 - 4
HILL	90.30 - 1	95.02 - 4	94.59 - 4	86.12 - 4	57.70 - 7	35.04 - 7	80.12 - 4	ET
HiAGM-TP	89.75 - 3	89.44 - 7	90.76 - 5	85.19 - 5	57.68 - 8	37.57 - 6	EM	ET
PLM-ICD	89.88 - 2	96.03 - 3	94.77 - 3	87.36 - 3	61.40 - 4	38.40 - 5	90.77 - 1	80.73 - 5
FlatBERT	82.65 - 7	90.95 - 6	44.43 - 7	10.08 - 7	60.45 - 5	38.63 - 4	25.84 - 5	81.36 - 3
THMM	89.04 - 4	93.84 - 5	69.94 - 6	49.74 - 6	61.64 - 2	39.17 - 3	EM	81.83 - 2
HR-SciBERT-mt	ET	ET	ET	ET	59.46 - 6	ET	ET	ET

ET indicates that the method exceeded the time limit. EM indicates that the method exceeded the memory limit. Same for the following tables.

Method	WOS -141	NYT -166	EurLex -3985	EurLex-DC -410	SciHTC -83	SciHTC -800	-3681	USPTO2M -632
MatchXML	43.15 - 6	22.78 - 2	8.06 - 2	78.89 - 1	36.33 - 2	27.84 - 1	7.17 - 3	55.53 - 1
XR-Transformer	43.25 - 5	22.93 - 1	8.09 - 1	78.88 - 2	36.29 - 3	27.43 - 2	7.22 - 2	54.75 - 4
HILL	45.15 - 1	22.45 - 4	7.80 - 4	75.64 - 4	33.89 - 7	23.48 - 7	6.59 - 4	ET
HiAGM-TP	44.88 - 3	21.21 - 7	7.49 - 5	74.91 - 5	33.80 - 8	24.77 - 6	EM	ET
PLM-ICD	44.94 - 2	22.76 - 3	7.84 - 3	76.64 - 3	36.28 - 4	25.24 - 5	7.63 - 1	54.45 - 5
FlatBERT	41.33 - 7	21.45 - 6	3.31 - 7	9.30 - 7	35.78 - 5	25.82 - 3	1.76 - 5	54.92 - 3
THMM	44.52 - 4	22.09 - 5	5.68 - 6	44.77 - 6	36.37 - 1	25.56 - 4	EM	55.26 - 2
HR-SciBERT-mt	ET	ET	ET	ET	34.63 - 6	ET	ET	ET

Table 3: Cross-Domain Recall@1 Scores and Ranks

 13 We made exceptions for two cases that were completed before establishing these limits: HR-SciBERTmt on SciHTC-83 and HiAGM-TP on EurLex-3985, both requiring over a week of training time. Their results are included for completeness.

Results not included in main comparisons

For literature comparison, we validated our implementations against the original EurLex-3956 dataset (also known as EurLex-4k) before using our cleaned version EurLex-3985. Our reproduced precision@1/recall@1 scores (MatchXML: 87.89/17.84, XR-Transformer: 87.83/17.82) closely match reported results (88.12/-, 87.22/- respectively), confirming implementation fidelity.

Analysis of precision and recall scores at higher k values reveals expected precisionrecall trade-offs across all datasets: precision decreases while recall increases as k grows. The magnitude of this trade-off varies by dataset: WOS shows dramatic precision drops (\sim 70 percentage points from k = 1 to k = 10), while MIMIC3-3681 exhibits more gradual degradation (\sim 25 points). Notably, most model rankings remain stable. A more detailed analysis and the numerical results are provided in Appendix B.1.

4.5 General observations

Here, we report our high-level observations based on the main cross-domain results, focusing on patterns and insights that emerge from evaluating the methods in their original proposed forms. In the following Section 5, we will conduct more systematic analyses and ablation studies to examine the effects of specific design choices and further dissect the observed trends. Figure 2 visualizes three main trends:

Label space complexity strongly influences model performance, as shown in Fig. 2(a). Methods achieve higher scores on datasets with fewer labels (under 500), while performance declines as label count increases. Additionally, as seen from Tables 1 and 3, high per-sample label cardinality (MIMIC3-3681 with 15.6 labels/sample and EurLex-3985 with 12.8 labels/sample) presents challenges, with methods generally achieving lower recall scores on such datasets.

Model architecture plays a crucial role, as illustrated in Fig. 2(b). Models using large language models as text encoders consistently outperform others, particularly when incorporating advanced learning strategies such as contrastive losses or regularization terms in their training objectives.

Text-label interaction mechanisms prove important, demonstrated in Fig. 2(c). Methods that effectively combine text and label information through sophisticated mechanisms, such as embedding alignment or label-aware attention, show marked improvements over simpler approaches.

Beyond these salient general trends, some more nuanced patterns emerge across datasets and methods, which are presented in Appendix B.2.

5 Analysis & Lessons

Our cross-domain evaluation reveals several key insights about hierarchical text classification methods. To better understand these findings, we conduct in-depth analysis and extensive additional experiments investigating: the surprising effectiveness of methods outside their original domains (Section 5.1), the potential of combining submodules across domains (Section 5.2), and the impact of various design choices through controlled experiments, including domain-specific language models (Section 5.3), document length handling strategies (Section 5.4), training data size variations (Section

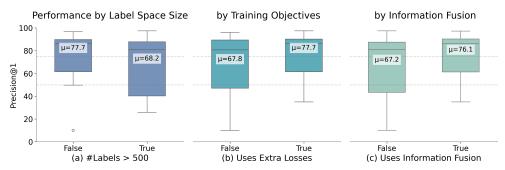


Fig. 2: General trends in model performance across different datasets. (a) Label space complexity: Performance decreases with larger label sizes. (b) Model architecture: LLM-based models with advanced learning strategies outperform simpler architectures. (c) Text-label information fusion: Sophisticated mechanisms for combining text and label information yield better results than basic approaches.

5.5), and label hierarchy initialization methods (Section 5.6). Through these systematic analyses and ablation studies, we aim to provide practical guidance for selecting and adapting methods across different domains.

5.1 State-of-the-art performance often comes from other domains

Our cross-domain evaluation reveals interesting patterns in how methods perform beyond their original domains as shown in Table 4:

Dataset	Domain	SOTA claimed (Status	s) N	lew Top Perforn	ners
		× ×	1	2	3
WOS-141	Scientific	HILL ^{SN} (Y)	HILL ^{SN}	$PLM-ICD^M$	$\operatorname{HiAGM-TP}^{SN}$
NYT-166	News	$HILL^{SN}$ (N)	$XR-Trans^{L}$	$MatchXML^{L}$	$PLM-ICD^M$
EurLex-3985	Legal	$MatchXML^{L}(Y)$	$XR-Trans^{L}$	$MatchXML^{L}$	$PLM-ICD^M$
EurLex-DC-410	Legal	-	$MatchXML^{L}$	XR-Trans ^L	$PLM-ICD^M$
SciHTC-83	Scientific	$HR-SciBERT^{SN}(N)$	$MatchXML^{L}$	$THMM^{P}$	XR-Trans ^L
SciHTC-800	Scientific	-	$MatchXML^{L}$	XR-Trans ^L	$THMM^{P}$
MIMIC3-3681	Medical	PLM-ICD ^M (Y)	$PLM-ICD^M$	XR-Trans ^L	$MatchXML^{L}$
USPTO2M-632	Patent	$\mathrm{THMM}^{P}(\mathbf{N})$	$\mathrm{MatchXML}^{L}$	THMM^{P}	$FlatBERT^{P}$

Table 4: Summary of SOTA methods and cross-domain top-performer changes.

Y: SOTA maintained.

N: SOTA lost. $^{\rm SN}$ Methods originally evaluated on Scientific or News domain.

^L Methods originally evaluated on Legal domain.

^M Medical domain methods.

^P Patent domain methods.

WOS-141: HILL maintains its leading position, but the top three performers now include PLM-ICD, originally designed for medical coding. NYT-166: Methods from the legal domain, XR-Transformer and MatchXML, have surpassed the previous

leader, HILL. PLM-ICD from the medical domain also ranks among the top performers. **EurLex-***: MatchXML and XR-Transformer continue to excel in their native legal domain. Notably, PLM-ICD, from the medical domain, consistently ranks third, indicating that document handling techniques from medical texts can enhance legal document classification. **SciHTC-***: The original leader, HR-SciBERT-mt, has been overtaken by methods from other domains, including MatchXML and XR-Transformer from the legal domain, THMM from the patent domain. **MIMIC3-3681**: PLM-ICD retains its top status in the medical domain, while legal domain methods, XR-Transformer and MatchXML, achieve competitive performance. **USPTO2M-632**: MatchXML, a method from the legal domain, surpasses the previous leader, THMM.

Hybrid dominance in rankings

The top-3 performers for each dataset all span multiple domains, suggesting that effective hierarchical text classification strategies are often domain-agnostic. Methods originally designed for extreme multi-label classification (MatchXML, XR-Transformer) show particularly strong cross-domain generalization, while medical domain innovations in document handling (PLM-ICD) prove valuable across various technical domains.

Dataset characteristics matter more than domain specificity

To understand what truly drives model performance, we analyzed correlations between dataset features (e.g., document length, labels per sample, training size) and model performance metrics (mean, max, and min precision@1 across models). Figure 3 shows correlations with absolute values above 0.3.

The results show interesting patterns. Document length shows a strong divergent effect (r = +0.535 for max precision@1, r = -0.657 for min precision@1). Advanced models excel with longer documents, while baseline models perform poorly. Similarly, label size shows divergent effect (r = +0.329 for max precision@1, r = -0.423 for min precision@1). Per-sample label cardinality demonstrates consistent positive impact for above-average models. The average, maximum, and minimum number of labels per sample positively correlate with maximum precision@1 and mean precision@1. Label density significantly benefits weak models. The average, maximum and minimum number of samples per label positively correlate with minimum precision@1 (r = 0.549 between avg samples per label and min precision@1). Hierarchical depth negatively impacts top performers (r = -0.410 for max precision@1).

These findings challenge the common practice of developing and evaluating methods within single domains. It also highlights the need for thorough cross-domain testing and unified evaluation to improve hierarchical text classification.

5.2 Combining submodules across domains creates new and better models.

Both dataset characteristics and limitations of existing methods can guide the combination of submodules across domains to create new and better models. We showcase one such example here.




Fig. 3: Correlations between dataset characteristics and model performance (precision@1). Only correlations with absolute values greater than 0.3 are shown, with features sorted top-down by absolute correlation values.

The y-axis shows dataset features, where "#labels" refer to the total number of distinct classes, "Max/Min/Avg #labels" refers to statistics about how many labels each document has, i.e., mean, max, min number of labels per document and similarly "Max/Min/Avg #samples" refers to statistics about how many training examples each label has. Different colored bars show three performance metrics: mean, maximum, and minimum precision@1 scores across all models.

While PLM-ICD performs strongly across datasets, it lacks label semantic understanding. We hypothesize that incorporating label semantics could improve its performance, particularly for rare label combinations where training data is sparse. To test this, we augment PLM-ICD with Label2Vec (L2V) from MatchXML. The default LLM encoder is bert-base-uncased (Devlin, 2018), and we also test PLM-ICD's originally used RoBERTa-pm (Lewis, Ott, Du, & Stoyanov, 2020) on MIMIC3-3681. Table 5 shows that adding L2V improves performance across most datasets, with exceptions for SciHTC-83. Note that the original PLM-ICD with RoBERTa-pm already performs well on MIMIC3-3681, so the improvement is marginal. Nonetheless, we still observe a new state-of-the-art performance.

We investigate the results by analyzing datasets using the following two metrics based on *label patterns*, i.e. unique sets of labels assigned to individual samples.

- 1. Average pattern IDF: IDF(p) = $\frac{1}{|P|} \sum_{p \in P} \log \frac{N}{f_p + 1}$ where N is number of total samples, f_p is frequency of pattern p, and P is the set of unique label patterns. Higher values indicate more diverse label combinations.
- 2. Tail pattern coverage: $\frac{\sum_{p:f_p \leq \theta} f_p}{\sum_{p \in P} f_p}$ where $\theta = 3$, measuring the proportion of samples with rare label combinations.




Fig. 4: Performance changes from PLM-ICD to PLM-ICD+Label2Vec plotted against dataset characteristics. It shows that augmenting PLM-ICD with label semantic information is beneficial for datasets containing *diverse and rare label combinations*. The x-axis shows the average pattern IDF (measuring label combination diversity, see definition 1), and the y-axis shows tail pattern coverage (proportion of samples with rare label combinations, see definition 2). Each point represents a dataset, with larger improvements (shown by point size) occurring in datasets with both high IDF and tail coverage. MIMIC3-3681 results are shown for both BERT (B) and RoBERTa-pm (R) encoders, where RoBERTa-pm is the original text encoder used by PLM-ICD.

Table 5: Precision@1 comparison of PLM-ICD and PLM-ICD+L2V.

Method	WOS -141	EurLex -3985	EurLex-DC -410	SciHTC -83	SciHTC -800	-3681	MIMIC3 -3681 RoBERTa-pm	10k	USPTO 100k -632
PLM-ICD +L2V		94.77 95.57	$\begin{array}{c} 87.36\\ 88.08\end{array}$	$\begin{array}{c} 61.40\\ 61.14\end{array}$	$38.40 \\ 38.85$	$87.13 \\ 89.12$	90.77 91.01 *	$\begin{array}{c} 60.74 \\ 63.76 \end{array}$	$73.21 \\ 73.27$


*New state-of-the-art result on MIMIC3-3681.

The improvements positively correlate with both measurements. Figure 4 visualizes such correlations. Larger performance gains occur in datasets with both high IDF and tail coverage, suggesting our new method is particularly effective for datasets with many rare label combinations.

This finding demonstrates how combining architectural innovations from different domains, e.g. PLM-ICD's label-aware attention and long-document handling with MatchXML's label semantics, can create more robust models, especially for challenging scenarios with sparse label patterns.

5.3 Domain specific LLMs are beneficial, especially for simpler models and low-resource settings

Among methods using language models as text encoders, most use bert-base-uncased (Devlin, 2018) by default, while PLM-ICD and THMM employ domain-specific models (RoBERTa-PM (Lewis et al., 2020) and SciBERT (Beltagy, Lo, & Cohan, 2019)) on their respective domains, following the original papers. Given PLM-ICD's superior performance on MIMIC3-3681, we investigate whether this advantage comes from its architecture or its domain-specific encoder, as well as the impact of domain-specific LLMs on other methods, with results shown in Figure 5.

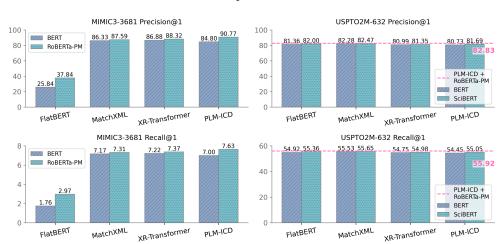

Performance Changes: BERT vs. Domain LLMs

Fig. 5: P/R@1 changes from BERT to domain-specific LLMs on MIMIC3-3681 and USPTO2M-632. The paired bars show performance improvements when switching from BERT to domain-specific LLMs. Larger gains are seen on MIMIC3-3681 compared to USPTO2M-632, especially for simpler architectures like FlatBERT. The horizontal dashed line indicates a *new state-of-the-art* achieved by PLM-ICD using RoBERTa-PM (a medical LLM) on USPTO2M-632 (patent), surprisingly outperforming SciBERT (a scientific LLM).

All methods using domain-specific LLMs outperform the default bert-base-uncased encoder, and the performance gap is more significant for FlatBERT and MIMIC3-3681. Two conclusions can be drawn: (1) simpler architectures like FlatBERT benefit more from careful language model selection than complex ones, and (2) the impact of language model choice may diminish with larger training datasets, as evidenced by the smaller performance changes on USPTO2M-632.

PLM-ICD's performance drops significantly when switching from RoBERTa-PM to BERT on MIMIC3-3681, losing its status as state of the art. This indicates that the

domain-specific encoder plays a crucial role in its superior performance, while using SciBERT on USPTO2M-632 shows slight improvements.

A surprising new state of the art with a 'mismatched' cross-domain LLM In a surprising cross-domain application, using RoBERTa-PM (a medical domain LLM) for PLM-ICD on USPTO2M-632 (a patent dataset) improves performance (80.73/54.45 to 82.83/55.92) even more than using SciBERT (a scientific domain LLM), surpassing the original SOTA from MatchXML. This counter-intuitive success of using a medical LLM for patent classification suggests the improvement may stem from RoBERTa-PM's larger vocabulary rather than domain-specific knowledge. This finding hints at potential benefits of cross-domain LLM applications. Nonetheless, the confirmation of this hypothesis is left as future work.

5.4 Long document handling is crucial for medical text

Text encoders generally face challenges with long documents, whether due to memory constraints in RNNs or token length limitations in pretrained language models (e.g., 512 tokens for BERT-family models). While most methods simply truncate documents to handle these limitations, our experiments on MIMIC3-3681 reveal the significant impact of long document handling strategies on model performance, shown in Table 6.

Table 6: Impact of document handling strategies on MIMIC3-3681. PLM-ICD's full document processing outperforms truncation, while naive mean pooling over 512-token segments in XR-Transformer underperforms simple truncation, suggesting effective long document handling requires sophisticated design.

Method	Change	Performance $(P@1/R@1)$ Change
PLM-ICD XR-Transformer	full doc \rightarrow truncated truncated \rightarrow mean pool	90.77/7.63 ↓ -4.48/-0.46 86.29/7.17 88.32/7.37 ↓ -1.94/-0.19 86.38/7.18

PLM-ICD's sophisticated handling of full documents proves beneficial, while our attempt to enhance XR-Transformer beyond its default truncation by averaging embeddings across 512-token segments actually hurts performance. This counter-intuitive result suggests that averaging across document segments may dilute important signals, and effective long document strategies need careful design, potentially incorporating domain knowledge and label-aware mechanisms.

5.5 Simple models are good enough sometimes, but more easily affected by the data size

Our cross-domain evaluation shows that FlatBERT performs poorly on most datasets but achieves competitive results on USPTO2M-632. We hypothesize this exception is due to USPTO2M's large training set (1.9M samples), which compensates for Flat-BERT's simple architecture. To test this hypothesis, we created two smaller versions of the dataset: **USPTO100k-632** with 100k samples and **USPTO10k-632** with 10k

samples, both obtained via stratified sampling while maintaining the original test set. Table 7 shows the results.

Table 7: Precision/Recall@1 for varied training sizes of USPTO*-632. Simple models like FlatBERT suffer catastrophic drops with reduced data, while sophisticated architectures like XR-Transformer maintain reasonable performance.

Method	2M	100k	10k
MatchXML	82.28/55.53	76.23/51.38 (-6.05/-4.15)	65.05/43.71 (-11.18/-7.67)
XR-Transformer	80.99/54.75	74.94/50.60 (-6.05/-4.15)	66.34/44.57 (-8.60/-6.03)
HILL	ET	74.59/50.25	65.30/43.95 (-9.29/-6.30)
HiAGM-TP	ET	71.19/47.90	58.06/39.04 (-13.13/-8.86)
PLM-ICD	80.73/54.45	73.21/49.32 (-7.52/-5.13)	60.74/40.76 (-12.47/-8.56)
FlatBERT	82.00/55.36	69.34/46.54 (-12.66/-8.82)	17.93/11.78 (-51.41/-34.76)
THMM	81.83/55.26	72.00/48.37 (-9.83/-6.89)	36.98/23.81 (-35.02/-24.56)

The results confirm our hypothesis: FlatBERT's performance drops dramatically with reduced training data, from competitive (82.00/55.36) to catastrophic (17.93/11.78). In contrast, methods with more sophisticated architectures like XR-Transformer maintain reasonable performance even with only 10k samples. This explains FlatBERT's inconsistent performance across datasets: it requires large-scale training data to compensate for its simple architecture.

5.6 Prior knowledge of label hierarchy for Probabilistic Label Tree is somewhat beneficial

We investigate the impact of different initialization methods for the Probabilistic Label Tree (PLT) in XR-Transformer, which controls how the output space is initially segmented. We compare three approaches: PIFA (the original method using hierarchical clustering based on training samples), Gold (using the ground-truth taxonomy tree), and random initialization. Our experiments show minimal differences between PIFA and Gold, though random initialization leads to decreased performance (see precision and recall details in Tables B10 and B11). These results suggest that while prior knowledge of label hierarchies may provide some benefit, the advantage may be modest.

6 Conclusion

This paper proposes a unified framework for hierarchical multi-label text classification and conducts a comprehensive cross-domain analysis of state-of-the-art methods. Our evaluation reveals several important **insights**. *First*, top performance often comes from methods developed for other domains, challenging the common practice of domainspecific method development. This is evidenced by our achievement of new state-ofthe-art results on NYT-166, SciHTC-83, and USPTO2M-632 using methods from other domains. *Second*, the effectiveness of methods depends more on dataset characteristics (e.g., label patterns, document length, training size) than on the domain it comes from. *Third*, combining architectural innovations from different domains can create more robust models and even new state-of-the-art results, as demonstrated by our experiments in Sec. 5.2.

Other key **findings** include: domain-specific language models significantly improve performance, especially for simpler architectures and challenging datasets; sophisticated document handling is crucial for long texts like medical records; simple architectures can achieve competitive performance but require substantial training data; and prior knowledge of label hierarchies provides modest benefits.

Our study has several **limitations** that highlight opportunities for future research. On the resource side, computational constraints limited our evaluation to a subset of available methods and datasets, potentially missing valuable insights from other approaches. This also affected our hyperparameter optimization, possibly underestimating some methods' full potential. Our unified evaluation framework, while enabling fair comparisons across methods, may yield results that differ from those reported in original papers due to standardized preprocessing and evaluation settings. Regarding methodological scope, our focus on end-to-end architectures excluded standalone components like data augmentation or post-processing methods that could provide complementary benefits. Additionally, methods for semi-supervised, unsupervised, or zero-shot approaches remain to be explored.

Several promising research **directions** emerge from our findings. *First*, the success of combining PLM-ICD with Label2Vec suggests potential in systematically exploring other cross-domain architectural combinations. *Second*, the significant impact of document handling strategies on medical texts indicates a need for more sophisticated approaches that can effectively process long documents while maintaining computational efficiency. *Third*, developing methods that can maintain performance with limited training data or computational resources would increase practical applicability across domains. *Fourth*, recent advances in large language models suggest opportunities for effective zero-shot and few-shot classification with minimal domain-specific training data. *Lastly*, extending evaluation to emerging domains like skill tagging (N. Li, Kang, & De Bie, 2023a, 2023b) could reveal additional insights about method generalization and domain-specific challenges.

Looking ahead, the key take-away of our study is that it is valuable for researchers and practitioners to consider possibilities beyond domain boundaries in hierarchical text classification. Rather than defaulting to domain-specific solutions, we should explore methods that have succeeded elsewhere. This shift in approach could accelerate progress and lead to more robust and effective classification systems across all domains.

Acknowledgments

The research leading to these results has received funding from the Special Research Fund (BOF) of Ghent University (BOF20/IBF/117), from the Flemish Government under the "Onderzoeksprogramma Artificiële Intelligentie (AI) Vlaanderen" programme, from the FWO (project no. G0F9816N, 3G042220, G073924N). Funded by the European Union (ERC, VIGILIA, 101142229). Views and opinions expressed are however those of the author(s) only and do not necessarily reflect those of the European

Union or the European Research Council Executive Agency. Neither the European Union nor the granting authority can be held responsible for them.

References

- Banerjee, S., Akkaya, C., Perez-Sorrosal, F., Tsioutsiouliklis, K. (2019). Hierarchical transfer learning for multi-label text classification. *Proceedings of the 57th annual* meeting of the association for computational linguistics (pp. 6295–6300).
- Beltagy, I., Lo, K., Cohan, A. (2019). Scibert: A pretrained language model for scientific text. arXiv preprint arXiv:1903.10676, ,
- Bertalis, N., Granse, P., Gül, F., Hauss, F., Menkel, L., Schüler, D., ... Scherp, A. (2024). Hierarchical text classification (htc) vs. extreme multilabel classification (xml): Two sides of the same medal. arXiv preprint arXiv:2411.13687, ,
- Bhatia, K., Dahiya, K., Jain, H., Kar, P., Mittal, A., Prabhu, Y., Varma, M. (2016). The extreme classification repository: Multi-label datasets and code. Retrieved from http://manikvarma.org/downloads/XC/XMLRepository.html
- Bogatinovski, J., Todorovski, L., Džeroski, S., Kocev, D. (2022). Comprehensive comparative study of multi-label classification methods. *Expert Systems with Applications*, 203, 117215,
- Chalkidis, I., Fergadiotis, E., Malakasiotis, P., Aletras, N., Androutsopoulos, I. (2019). Extreme multi-label legal text classification: A case study in eu legislation. Proceedings of the natural legal language processing workshop 2019 (pp. 78–87).
- Chang, W.-C., Yu, H.-F., Zhong, K., Yang, Y., Dhillon, I.S. (2020). Taming pretrained transformers for extreme multi-label text classification. *Proceedings of the 26th* acm sigkdd international conference on knowledge discovery & data mining (pp. 3163–3171).
- Charte, F., Rivera, A., del Jesus, M.J., Herrera, F. (2014). Concurrence among imbalanced labels and its influence on multilabel resampling algorithms. *Hybrid artificial intelligence systems: 9th international conference, hais 2014, salamanca,* spain, june 11-13, 2014. proceedings 9 (pp. 110–121).
- Charte, F., Rivera, A.J., del Jesus, M.J., Herrera, F. (2019). Dealing with difficult minority labels in imbalanced mutilabel data sets. *Neurocomputing*, 326, 39–53,
- Chen, B., Huang, X., Xiao, L., Cai, Z., Jing, L. (2020). Hyperbolic interaction model for hierarchical multi-label classification. *Proceedings of the aaai conference on*

artificial intelligence (Vol. 34, pp. 7496–7503).

- Chen, X., Cheng, J., Liu, J., Xu, W., Hua, S., Tang, Z., Sheng, V.S. (2022). A survey of multi-label text classification based on deep learning. *International conference* on adaptive and intelligent systems (pp. 443–456).
- Devlin, J. (2018). Bert: Pre-training of deep bidirectional transformers for language understanding. arXiv preprint arXiv:1810.04805, ,
- Edin, J., Junge, A., Havtorn, J.D., Borgholt, L., Maistro, M., Ruotsalo, T., Maaløe, L. (2023). Automated medical coding on mimic-iii and mimic-iv: a critical review and replicability study. *Proceedings of the 46th international acm* sigir conference on research and development in information retrieval (pp. 2572–2582).
- Gupta, V., Wadbude, R., Natarajan, N., Karnick, H., Jain, P., Rai, P. (2019). Distributional semantics meets multi-label learning. *Proceedings of the aaai conference on artificial intelligence* (Vol. 33, pp. 3747–3754).
- Han, M., Wu, H., Chen, Z., Li, M., Zhang, X. (2023). A survey of multi-label classification based on supervised and semi-supervised learning. *International Journal* of Machine Learning and Cybernetics, 14(3), 697–724,
- Huang, C.-W., Tsai, S.-C., Chen, Y.-N. (2022). Plm-icd: Automatic icd coding with pretrained language models. arXiv preprint arXiv:2207.05289, ,
- Huang, W., Chen, E., Liu, Q., Chen, Y., Huang, Z., Liu, Y., ... Wang, S. (2019). Hierarchical multi-label text classification: An attention-based recurrent network approach. *Proceedings of the 28th acm international conference on information* and knowledge management (pp. 1051–1060).
- Jiang, T., Wang, D., Sun, L., Chen, Z., Zhuang, F., Yang, Q. (2022). Exploiting global and local hierarchies for hierarchical text classification. *Proceedings of* the 2022 conference on empirical methods in natural language processing (pp. 4030–4039).
- Johnson, A.E., Pollard, T.J., Shen, L., Lehman, L.-w.H., Feng, M., Ghassemi, M., ... Mark, R.G. (2016). Mimic-iii, a freely accessible critical care database. *Scientific data*, 3(1), 1–9,
- Kamateri, E., Salampasis, M., Perez-Molina, E. (2024). Will ai solve the patent classification problem? World Patent Information, 78, 102294,

- Khandagale, S., Xiao, H., Babbar, R. (2020). Bonsai: diverse and shallow trees for extreme multi-label classification. *Machine Learning*, 109(11), 2099–2119,
- Kharbanda, S., Gupta, D., Schultheis, E., Banerjee, A., Hsieh, C.-J., Babbar, R. (2024). Gandalf: Learning label-label correlations in extreme multi-label classification via label features. *Proceedings of the 30th acm sigkdd conference on* knowledge discovery and data mining (pp. 1360–1371).
- Kowsari, K., Brown, D.E., Heidarysafa, M., Meimandi, K.J., Gerber, M.S., Barnes, L.E. (2017). Hdltex: Hierarchical deep learning for text classification. 2017 16th ieee international conference on machine learning and applications (icmla) (pp. 364–371).
- Lee, J.-S., & Hsiang, J. (2020). Patent classification by fine-tuning bert language model. World Patent Information, 61, 101965,
- Lewis, P., Ott, M., Du, J., Stoyanov, V. (2020). Pretrained language models for biomedical and clinical tasks: understanding and extending the state-of-the-art. *Proceedings of the 3rd clinical natural language processing workshop* (pp. 146– 157).
- Li, D., Yadav, V., Zhu, Z.L., Fard, M.M., Afzal, Z., Tsatsaronis, G. (2024). Scalable patent classification with aggregated multi-view ranking. Proceedings of the 2024 joint international conference on computational linguistics, language resources and evaluation (lrec-coling 2024) (pp. 14336–14346).
- Li, N., Kang, B., De Bie, T. (2023a). Llm4jobs: Unsupervised occupation extraction and standardization leveraging large language models. arXiv preprint arXiv:2309.09708, ,
- Li, N., Kang, B., De Bie, T. (2023b). Skillgpt: a restful api service for skill extraction and standardization using a large language model. arXiv preprint arXiv:2304.11060, ,
- Li, S., Hu, J., Cui, Y., Hu, J. (2018). Deeppatent: patent classification with convolutional neural networks and word embedding. *Scientometrics*, 117(2), 721–744,
- Liu, R., Liang, W., Luo, W., Song, Y., Zhang, H., Xu, R., ... Liu, M. (2023). Recent advances in hierarchical multi-label text classification: A survey. arXiv preprint arXiv:2307.16265, ,

- Loza Mencía, E., & Fürnkranz, J. (2008). Efficient pairwise multilabel classification for large-scale problems in the legal domain. Joint european conference on machine learning and knowledge discovery in databases (pp. 50–65).
- Mao, Y., Tian, J., Han, J., Ren, X. (2019). Hierarchical text classification with reinforced label assignment. Proceedings of the 2019 conference on empirical methods in natural language processing and the 9th international joint conference on natural language processing (emnlp-ijcnlp) (pp. 445–455).
- Mittal, A., Sachdeva, N., Agrawal, S., Agarwal, S., Kar, P., Varma, M. (2021). Eclare: Extreme classification with label graph correlations. *Proceedings of the web* conference 2021 (pp. 3721–3732).
- Paszke, A., Gross, S., Massa, F., Lerer, A., Bradbury, J., Chanan, G., ... others (2019). Pytorch: An imperative style, high-performance deep learning library. Advances in neural information processing systems, 32, ,
- Pujari, S.C., Friedrich, A., Strötgen, J. (2021). A multi-task approach to neural multi-label hierarchical patent classification using transformers. Advances in information retrieval: 43rd european conference on ir research, ecir 2021, virtual event, march 28-april 1, 2021, proceedings, part i 43 (pp. 513-528).
- Sadat, M., & Caragea, C. (2022). Hierarchical multi-label classification of scientific documents. Proceedings of the 2022 conference on empirical methods in natural language processing (pp. 8923–8937).
- Saini, D., Jain, A.K., Dave, K., Jiao, J., Singh, A., Zhang, R., Varma, M. (2021). Galaxc: Graph neural networks with labelwise attention for extreme classification. *Proceedings of the web conference 2021* (pp. 3733–3744).
- Sandhaus, E. (2008). The new york times annotated corpus. Linguistic Data Consortium, Philadelphia, 6(12), e26752,
- Tarekegn, A.N., Giacobini, M., Michalak, K. (2021). A review of methods for imbalanced multi-label classification. *Pattern Recognition*, 118, 107965,
- Tarekegn, A.N., Ullah, M., Cheikh, F.A. (2024). Deep learning for multi-label learning: A comprehensive survey. arXiv preprint arXiv:2401.16549, ,
- Wang, B., Hu, X., Li, P., Philip, S.Y. (2021). Cognitive structure learning model for hierarchical multi-label text classification. *Knowledge-Based Systems*, 218, 106876,

- Wang, Z., Wang, P., Huang, L., Sun, X., Wang, H. (2022). Incorporating hierarchy into text encoder: a contrastive learning approach for hierarchical text classification. Proceedings of the 60th annual meeting of the association for computational linguistics (volume 1: Long papers) (pp. 7109–7119).
- Wei, T., Mao, Z., Shi, J.-X., Li, Y.-F., Zhang, M.-L. (2022). A survey on extreme multi-label learning. arXiv preprint arXiv:2210.03968, ,
- Xu, L., Teng, S., Zhao, R., Guo, J., Xiao, C., Jiang, D., Ren, B. (2021). Hierarchical multi-label text classification with horizontal and vertical category correlations. *Proceedings of the 2021 conference on empirical methods in natural language* processing (pp. 2459–2468).
- Xun, G., Jha, K., Sun, J., Zhang, A. (2020). Correlation networks for extreme multi-label text classification. Proceedings of the 26th acm sigkdd international conference on knowledge discovery & data mining (pp. 1074–1082).
- Ye, H., Sunderraman, R., Ji, S. (2024). Matchxml: An efficient text-label matching framework for extreme multi-label text classification. *IEEE Transactions on Knowledge and Data Engineering*, ,
- You, R., Zhang, Z., Wang, Z., Dai, S., Mamitsuka, H., Zhu, S. (2019). Attentionxml: Label tree-based attention-aware deep model for high-performance extreme multi-label text classification. Advances in neural information processing systems, 32, ,
- Zhang, J., Chang, W.-C., Yu, H.-F., Dhillon, I. (2021). Fast multi-resolution transformer fine-tuning for extreme multi-label text classification. Advances in Neural Information Processing Systems, 34, 7267–7280,
- Zhang, X., Xu, J., Soh, C., Chen, L. (2022). La-hcn: label-based attention for hierarchical multi-label text classification neural network. *Expert Systems with Applications*, 187, 115922,
- Zhou, J., Ma, C., Long, D., Xu, G., Ding, N., Zhang, H., ... Liu, G. (2020). Hierarchyaware global model for hierarchical text classification. *Proceedings of the 58th* annual meeting of the association for computational linguistics (pp. 1106–1117).
- Zhu, H., Wu, J., Liu, R., Hou, Y., Yuan, Z., Li, S., ... Xu, K. (2024). Hill: Hierarchyaware information lossless contrastive learning for hierarchical text classification. Proceedings of the 2024 conference of the north american chapter of the association for computational linguistics: Human language technologies (volume 1:

Long papers) (pp. 4731–4745).

Appendix A Details of the submodules used in recent methods

Table A1 shows the submodules used in recent methods.

Appendix B Additional experiment results

B.1 Impact of Different k Values

While the main text focuses on Precision/Recall@1, analyzing model behaviors at k=3, 5, 8, 10 reveals additional insights into multi-label prediction capabilities (Tables B2, B3, B4, B5, B6, B7, B8, B9)

Precision-Recall Trade-offs

All datasets show precision decreases and recall increases as k grows, but with notably different magnitudes. WOS shows dramatic precision drops (\sim 70 percentage points from k = 1 to k = 10, e.g., HILL: 90.81 \rightarrow 19.31) due to its having only two labels per document. MIMIC3 exhibits more gradual degradation (\sim 25 points, e.g., PLM-ICD: 90.77 \rightarrow 67.11) for its high label cardinality. EurLex-3985 demonstrates the most stable precision metrics with only \sim 6-7 point drops from k = 1 to k = 5 (XR-Transformer: 97.67 \rightarrow 90.91).

Model Ranking Changes

Analysis of model rankings across k = 1, 3, 5, 8, 10 reveals several consistent patterns and notable shifts. Some models maintain stable leadership positions: XR-Transformer consistently ranks first on NYT-166 and EurLex-3985, HILL maintains first place on WOS-141, and PLM-ICD leads on MIMIC3-3681 across all k values. However, significant ranking changes emerge on certain datasets. PLM-ICD shows marked improvement on SciHTC-83, climbing from rank 4 (k=1) to rank 1 (k=8,10), while HILL demonstrates similar improvement on EurLexDC-410, advancing from rank 4 to rank 1. Conversely, some models experience performance degradation at higher k values: MatchXML drops from rank 1 to rank 5 on SciHTC-83, and XR-Transformer declines from rank 3 to rank 7 on the same dataset. The most stable rankings across k values are observed for XR-Transformer on NYT-166, EurLex-3985, and USPTO2M-632, HILL on WOS-141, and PLM-ICD on MIMIC3-3681.

B.2 Dataset- and Method-Specific Patterns

Hierarchy depth strongly influences the performance of certain methods. Shallow hierarchies (like in WOS-141) are better handled by HILL, HiAGM-TP, and THMM than datasets with deeper hierarchies (EurLex-*, SciHTC-*). *Document length* and label structure are key factors because datasets with long documents and flat label structures (MIMIC3-3681, USPTO2M-632) seem to require specialized text processing approaches, which PLM-ICD handles effectively. Datasets with *label sparsity*, i.e. with low average samples per label (EurLex-*), benefit from robust label-aware mechanisms,

where MatchXML, XR-Transformer, and PLM-ICD excel. *Sample abundance* can compensate for other complexities. For example, datasets with high sample counts per label (like SciHTC-83) enable even simpler methods to perform well, as demonstrated by THMM's unexpected success.

On the method side, the *baseline* FlatBERT lags behind other methods but shows competitive results with sufficient training data (USPTO2M-632). *Transformer-based* methods (MatchXML, XR-Transformer) excel with large label spaces but show limitations in exploiting label redundancy. *Per node classification* methods face scalability issues, as HR-SciBERT-mt usually exceeds time limits.

B.3 XR-Transformer Tree Initialization Variations

The results (B10, B11) demonstrate that tree initialization methods have a small but consistent impact on XR-Transformer's performance. Random initialization consistently performs slightly worse than both PIFA and Gold methods across most datasets, with performance gaps of 0.1-0.5 percentage points in both precision and recall. Gold initialization generally achieves the best results (e.g., 97.67% precision on EurLex-3985), followed closely by PIFA, while Random initialization ranks last. This suggests that leveraging either Gold or PIFA tree structures is beneficial, though the performance differences are modest.

Method	Text Encoder	Label Encoder	Out space seg	Text-Label info fusion	Training objectives	Score Prediction 1	Score Prediction Prediction Refinement
XR-Transformer	LLM ⁰ &TF-IDF	PIFA	PLT	ı	(Multi-stage) CLS loss ¹ + Contrastive (MAN+TFN)	MS Linear	MS ranker
MatchXML	LLM ⁰ &TF-IDF	Label2Vec	\mathbf{PLT}	Embedding alignment	(Muuti-stage) CLD 1088 + Contrastive (MAN+TFN) + Alignment loss	MS Linear	MS ranker
HILL	LLM^{0}	Coding Tree	,	Structure encoder ²	CLS loss + NT-Xent contrastive loss	Linear	,
HIAGM-TP	GRU + CNN	Tree-LSTM/GCN		Structure encoder ³	CLS loss with regularization	Linear	
	TIND + CMM			Segmented text			
L LIM-TOU	UTTT		1	with label-aware attn	1055	LILIEAL	1
$FlatBERT^4$	LLM ^U				CLS loss	Linear	
THMM	LLM ⁰		Original taxonomy	representation concatenation		An MLP per class	
HR-SciBERT-mt	LLM^{0}		Original taxonomy	Parent-kid parameter sharing	Keywc	An MLP per class	ı
X-Transformer	LLM & TF-IDF	PIFA	PLT		CLS loss + Contrastive (MAN+TFN)	Linear	1-stage ranker
XR-Linear	TF-IDF	PIFA	PLT		MS CLS loss + Contrastive (MAN+TFN)	MS Linear	MS ranker
AttentionXML	LSTM	PIFA	PLT	label attn	(Multi-Stage) CLS	MS Linear	
Bonsai	TF-IDF	PIFA	PLT		(Multi-Stage) CLS	MS Linear	ı
HVHMC	GCN (word-doc)	GCN(label-word) inter+intra level dependency		repr concat	global CLS	level-wise + all cat	
HGCLR	LLM	Graphnomer	,	label guided	NT Yort CLS +	Linear	
нвст	L.T.M	I.I.M with custom metraining tack	,	Repr concat +	Multi-stage CLS +	laval-wise	
15 AT	WITH	ween Shim brentanning wash		custom attn mask	label mask pretraining	Der Alan	I
HARNN	LSTM	dense vec		HAM	local + global CLS	level-wise + all cat	
HTrans	GRU + modified outputs		Original taxonomy	Parent-kid parameter sharing	CLS	An MLP per class	
PARL	GraphSAGE+ BM25	FLM		Bi-enc + Cross-enc	Ranknet loss	L2R	T
HyperIM	Hyperbolic	Hyperbolic	·	Label-aware doc repr	CLS loss + Contrastive	emb sim	
LA-HCN	LSTM	dense vec	,	Level-wise label attn+ label-component assoc.	local + global CLS	combine local+global	ı
HCSM	CNN+LSTM	w2v	ı	HBICaps	Margin loss	1 cap for 1 class	
HiLAP	CNN	dense vec	Original taxonomy		Neg discounted cum rewards CLS +	Policy network	
ExMLDS	TF-IDF+ ADMM projection	sk SPPM	,	ADMM projection	skig-gram neg+ label co-occurance reg	emb similarity	·
Gala X C	Fixed pre-trained	GNN + label attention	ANNS	Joint doc-label graph	CLS loss + neg Contrastive	emb sim	·
EcLARE	TF-IDF	GCN + label attention	Graph-Assisted Multi-label Expansion (GAME)	ı	CLS loss + neg Contrastive + spectral reg	emb sim	ı

 Table A1: Submodules used in recent methods

33

DepReg Adds dependency regularization term to training objectives Itable Space Processing Endel Space Processing to the propensity scoring for better label space segmentation Prodiction Refinement: Capsule Net Replaces standard prediction with capsule network + label correlation restrictions CorNet Adds correlation-based prediction refinement layer

Data Augmentation: GANDALF G1 REMIDIAL D2

Graph-based data augmentation for long-tail labels Data augmentation through label correlation patterns

⁰LLM: Large Language Model, e.g. BERT, RoBERTa, etc. Specifically, we use BERT as the default LLM encoder except for the following cases: RoBERTa-PM for PLM-ICD on MIMIC3-3681 and SciBERT for THMM on USPT02M-632 following the original papers.

⁴ Classification loss for multi-label classification, depending on the specific loss function used, most commonly the binary cross-entropy loss.

² A custom defined structure encoder that propagates information from the leaf nodes to the root node of the coding tree.

³ Tree-LSTM or GCN, corresponding to the label encoder. ⁴ PatentBERT in the original paper due to its application in patent classification. We rename it as FlatBERT for generalization.

Table B2: Cross-Domain Precision@3 Scores and Ranks

Method	WOS -141	NYT -166	EurLex -3985	EurLexDC -410	SciHTC -83	SciHTC -800	MIMIC3 -3681	USPTO2M -632
MatchXML	57.28 - 5	84.67 - 2	94.36 - 2	38.92 - 2	39.90 - 1	25.79 - 1	79.42 - 3	44.22 - 3
XR-Transformer	57.65 - 4	85.16 - 1	94.67 - 1	39.02 - 1	39.35 - 5	25.15 - 2	80.04 - 2	42.75 - 4
HILL	60.23 - 1	81.83 - 4	92.27 - 3	37.94 - 3	36.56 - 8	21.84 - 7	71.31 - 4	ET
HiAGM-TP	60.10 - 2	73.76 - 7	87.19 - 5	37.19 - 5	36.93 - 7	23.35 - 6	ET	ET
PLM-ICD	59.17 - 3	84.04 - 3	91.37 - 4	37.81 - 4	39.65 - 3	24.04 - 4	85.64 - 1	44.57 - 2
FlatBERT	34.81 - 7	75.23 - 6	42.53 - 7	6.55 - 7	38.99 - 6	23.95 - 5	19.46 - 5	44.85 - 1
THMM	57.24 - 6	81.74 - 5	54.32 - 6	22.17 - 6	39.83 - 2	24.63 - 3	ET	ET
HR-SciBERT-mt	ET	ET	ET	ET	39.44 - 4	ET	ET	ET

 Table B3:
 Cross-Domain Recall@3 Scores and Ranks

Method	WOS -141	NYT -166	EurLex -3985	EurLexDC -410	SciHTC -83	SciHTC -800	MIMIC3 -3681	USPTO2M -632
MatchXML	85.93 - 5	53.97 - 2	23.36 - 2	93.28 - 2	66.70 - 1	50.30 - 1	19.22 - 3	78.23 - 3
XR-Transformer	86.47 - 4	54.36 - 1	23.46 - 1	93.62 - 1	65.83 - 4	48.94 - 2	19.38 - 2	76.19 - 4
HILL	90.34 - 1	51.33 - 5	22.79 - 3	91.62 - 3	60.98 - 8	42.26 - 7	17.01 - 4	ET
HiAGM-TP	90.16 - 2	47.09 - 6	21.49 - 5	89.89 - 5	61.41 - 7	45.05 - 6	ET	ET
PLM-ICD	88.75 - 3	53.45 - 3	22.60 - 4	90.96 - 4	66.34 - 3	46.44 - 5	20.94 - 1	78.70 - 2
FlatBERT	52.22 - 7	46.08 - 7	9.87 - 7	18.40 - 7	65.41 - 6	47.27 - 4	4.15 - 5	79.04 - 1
THMM	85.86 - 6	51.42 - 4	12.82 - 6	56.37 - 6	66.54 - 2	47.59 - 3	ET	ET
HR-SciBERT-mt	ET	ET	ET	ET	65.78 - 5	ET	ET	ET

Table B4: Cross-Domain Precision@5 Scores and Ranks

Method	WOS -141	NYT -166	EurLex -3985	EurLexDC -410	SciHTC -83	SciHTC -800	MIMIC3 -3681	USPTO2M -632
MatchXML	36.29 - 5	72.24 - 2	90.69 - 2	23.87 - 2	27.73 - 4	18.52 - 1	72.77 - 3	29.75 - 3
XR-Transformer	36.67 - 4	72.58 - 1	90.91 - 1	24.01 - 1	27.30 - 6	17.93 - 3	73.32 - 2	28.60 - 4
HILL	37.53 - 1	69.69 - 5	88.94 - 3	23.70 - 3	25.75 - 8	15.97 - 7	64.29 - 4	ET
HiAGM-TP	37.39 - 2	61.81 - 7	82.97 - 5	23.22 - 5	26.47 - 7	17.11 - 6	ET	ET
PLM-ICD	37.10 - 3	71.89 - 3	87.11 - 4	23.40 - 4	27.97 - 2	17.80 - 4	80.02 - 1	30.46 - 2
FlatBERT	23.77 - 7	64.12 - 6	37.70 - 7	4.15 - 7	27.56 - 5	17.52 - 5	14.38 - 5	30.71 - 1
THMM	35.73 - 6	69.73 - 4	47.55 - 6	14.79 - 6	28.05 - 1	18.05 - 2	ET	ET
HR-SciBERT-mt	ET	ET	ET	ET	27.95 - 3	ET	ET	ET

 Table B5:
 Cross-Domain Recall@5 Scores and Ranks

Method	WOS -141	NYT -166	EurLex -3985	EurLexDC -410	SciHTC -83	SciHTC -800	MIMIC3 -3681	USPTO2M -632
MatchXML	90.72 - 5	66.57 - 2	37.20 - 2	94.74 - 2	76.71 - 4	59.79 - 1	28.58 - 3	84.44 - 3
XR-Transformer	91.67 - 4	66.88 - 1	37.31 - 1	95.31 - 1	75.53 - 6	57.67 - 3	28.80 - 2	81.97 - 4
HILL	93.83 - 1	63.00 - 5	36.39 - 3	94.20 - 3	71.33 - 8	51.54 - 7	24.94 - 4	ET
HiAGM-TP	93.48 - 2	57.34 - 6	33.81 - 5	92.76 - 5	73.01 - 7	55.22 - 6	ET	ET
PLM-ICD	92.75 - 3	66.04 - 3	35.67 - 4	93.08 - 4	77.41 - 2	57.43 - 4	31.67 - 1	85.93 - 2
FlatBERT	59.41 - 7	56.46 - 7	14.53 - 7	18.99 - 7	76.40 - 5	57.35 - 5	5.19 - 5	86.40 - 1
THMM	89.33 - 6	63.77 - 4	18.61 - 6	61.25 - 6	77.58 - 1	58.17 - 2	ET	ET
HR-SciBERT-mt	ET	ET	ET	ET	77.21 - 3	ET	ET	ET

 Table B6:
 Cross-Domain Precision@8 Scores and Ranks

Method	WOS -141	NYT -166	EurLex -3985	EurLexDC -410	SciHTC -83	SciHTC -800	MIMIC3 -3681	USPTO2M -632
MatchXML	23.36 - 5	60.60 - 2	83.40 - 2	15.07 - 3	19.03 - 5	13.10 - 1	63.90 - 3	19.83 - 3
XR-Transformer	23.56 - 4	61.04 - 1	83.55 - 1	15.16 - 2	18.67 - 6	12.63 - 4	64.22 - 2	19.02 - 4
HILL	23.96 - 1	58.32 - 4	82.18 - 3	15.19 - 1	17.91 - 8	11.56 - 7	55.18 - 4	ET
HiAGM-TP	23.82 - 2	50.89 - 7	75.94 - 5	14.84 - 5	18.64 - 7	12.43 - 6	ET	ET
PLM-ICD	23.74 - 3	60.53 - 3	79.29 - 4	14.90 - 4	19.52 - 1	12.95 - 3	72.07 - 1	20.60 - 2
FlatBERT	16.84 - 7	54.00 - 6	31.73 - 7	2.63 - 7	19.19 - 4	12.61 - 5	8.99 - 5	20.79 - 1
THMM	23.02 - 6	58.14 - 5	39.24 - 6	10.21 - 6	19.43 - 3	13.04 - 2	ET	ET
HR-SciBERT-mt	ET	ET	ET	ET	19.50 - 2	ET	ET	ET

 Table B7:
 Cross-Domain Recall@8 Scores and Ranks

Method	WOS -141	NYT -166	EurLex -3985	EurLexDC -410	SciHTC -83	SciHTC -800	MIMIC3 -3681	USPTO2M -632
MatchXML	93.42 - 5	78.53 - 2	54.08 - 2	95.50 - 3	83.87 - 5	67.32 - 1	38.82 - 3	88.08 - 3
XR-Transformer	94.24 - 4	79.02 - 1	54.18 - 1	96.09 - 2	82.29 - 6	64.73 - 5	39.01 - 2	85.43 - 4
HILL	95.83 - 1	74.47 - 5	53.21 - 3	96.13 - 1	79.13 - 8	59.69 - 7	33.24 - 4	ET
HiAGM-TP	95.27 - 2	67.05 - 7	48.92 - 5	94.46 - 5	82.03 - 7	64.26 - 6	ET	ET
PLM-ICD	94.97 - 3	78.18 - 3	51.30 - 4	94.47 - 4	86.11 - 1	66.85 - 3	44.03 - 1	90.54 - 2
FlatBERT	67.38 - 7	68.51 - 6	19.65 - 7	19.14 - 7	84.71 - 4	65.83 - 4	5.19 - 5	91.03 - 1
THMM	92.09 - 6	75.55 - 4	24.37 - 6	66.87 - 6	85.68 - 3	67.07 - 2	ET	ET
HR-SciBERT-mt	ET	ET	ET	ET	85.92 - 2	ET	ET	ET

 Table B8:
 Cross-Domain Precision@10 Scores and Ranks

Method	WOS -141	NYT -166	EurLex -3985	EurLexDC -410	SciHTC -83	SciHTC -800	-3681	USPTO2M -632
MatchXML	18.86 - 5	54.61 - 2	78.01 - 2	12.10 - 3	15.75 - 5	10.98 - 3	58.77 - 3	16.21 - 3
XR-Transformer	19.01 - 4	55.01 - 1	78.14 - 1	12.17 - 2	15.43 - 7	10.58 - 5	58.92 - 2	15.55 - 4
HILL	19.31 - 1	52.40 - 4	77.13 - 3	12.25 - 1	14.89 - 8	9.84 - 7	50.25 - 4	ET
HiAGM-TP	19.20 - 2	45.79 - 7	70.91 - 5	11.98 - 5	15.60 - 6	10.58 - 5	ET	ET
PLM-ICD	19.17 - 3	54.55 - 3	73.61 - 4	12.01 - 4	16.21 - 1	10.99 - 2	67.11 - 1	16.94 - 2
FlatBERT	14.54 - 7	48.22 - 6	28.70 - 7	2.20 - 7	15.95 - 4	10.71 - 4	7.19 - 5	17.08 - 1
THMM	18.63 - 6	52.08 - 5	35.56 - 6	8.52 - 6	16.14 - 2	11.06 - 1	ET	ET
HR-SciBERT-mt	ET	ET	ET	ET	16.14 - 2	ET	ET	ET

 Table B9:
 Cross-Domain Recall@10 Scores and Ranks

	Tuble D	0. 0105	5 Donna.	in rectance	10 5001	b and n	ams	
Method	WOS -141	NYT -166	EurLex -3985	EurLexDC -410	SciHTC -83	SciHTC -800	MIMIC3 -3681	USPTO2M -632
MatchXML	94.29 - 5	83.87 - 2	62.67 - 2	95.74 - 3	86.62 - 5	70.39 - 3	43.90 - 3	89.34 - 3
XR-Transformer	95.05 - 4	84.38 - 1	62.79 - 1	96.34 - 2	84.91 - 7	67.64 - 6	43.99 - 2	86.68 - 4
HILL	96.53 - 1	79.70 - 5	61.91 - 3	96.72 - 1	82.17 - 8	63.50 - 7	37.26 - 4	ET
HiAGM-TP	96.01 - 2	71.85 - 7	56.67 - 5	95.10 - 4	85.78 - 6	68.27 - 5	ET	ET
PLM-ICD	95.84 - 3	83.58 - 3	59.03 - 4	95.07 - 5	89.23 - 1	70.82 - 2	50.25 - 1	92.13 - 2
FlatBERT	72.70 - 7	72.93 - 6	22.13 - 7	19.99 - 7	87.89 - 4	69.73 - 4	5.19 - 5	92.61 - 1
THMM	93.13 - 6	80.65 - 4	27.56 - 6	69.44 - 6	88.81 - 3	70.99 - 1	ET	ET
HR-SciBERT-mt	ET	ET	ET	ET	88.83 - 2	ET	ET	ET

Init Tree	WOS-141	NYT-166	EurLex-3956	EurLex-3985	EurLexDC	$\rm SciHTC-83$	SciHTC-800	MIMIC3-3681 (512) USPTO2M-632
PIFA	86.49	96.64	87.83	97.51	89.80	61.53	40.69	88.32	80.99
Gold	86.39	96.70	88.06	97.67	89.86	61.58	40.76	88.03	81.19
Random	86.40	96.71	86.77	97.48	89.79	61.37	40.68	87.69	80.82

Table B10: XR-Transformer tree initialization variations precision@1

 Table B11: XR-Transformer tree initialization variations recall@1

Init Tree	WOS-141	NYT-166	EurLex-3956	EurLex-3985	EurLexDC	SciHTC-83	SciHTC-800	MIMIC3-3681 (512)	USPTO2M-632
PIFA	43.25	22.93	17.82	8.09	78.91	36.29	27.43	7.37	54.75
Gold	43.20	22.94	17.88	8.10	78.96	36.32	27.49	7.35	54.90
Random	43.20	22.95	17.62	8.08	78.91	36.21	27.42	7.31	54.66