

GLIDER: Grading LLM Interactions and Decisions using Explainable Ranking

Darshan Deshpande¹ Selvan Sunitha Ravi¹ Sky CH-Wang^{1,2}
Bartosz Mielczarek¹ Anand Kannappan¹ Rebecca Qian¹

¹Patronus AI ²Columbia University

{darshan, sunitha, bartek, anand, rebecca}@patronus.ai, skywang@cs.columbia.edu

Abstract

The LLM-as-judge paradigm is increasingly being adopted for automated evaluation of model outputs. While LLM judges have shown promise on constrained evaluation tasks, closed source LLMs display critical shortcomings when deployed in real world applications due to challenges of fine grained metrics and explainability, while task specific evaluation models lack cross-domain generalization. We introduce GLIDER, a powerful 3B evaluator LLM that can score any text input and associated context on arbitrary user defined criteria. GLIDER shows higher Pearson’s correlation than GPT-4o on FLASK and greatly outperforms prior evaluation models, achieving comparable performance to LLMs 17× its size. GLIDER supports fine-grained scoring, multilingual reasoning, span highlighting and was trained on 685 domains and 183 criteria. Extensive qualitative analysis shows that GLIDER scores are highly correlated with human judgments, with 91.3% human agreement. We have open-sourced GLIDER to facilitate future research.¹

1 Introduction

The ever improving capabilities of Large Language Models (LLMs) have opened a wide variety of use cases for their applications such as tool use (Schick et al., 2024; Qin et al., 2023), long context reasoning (Kuratov et al., 2024) and many more. With such a steep growth in the field, practitioners are struggling to effectively evaluate LLMs on potential downstream use cases (Gao et al., 2024).

Researchers have been exploring automated evaluation using LLMs as a substitute for human judgment, as traditional human evaluation studies are time-intensive and require rigorous quality control. (Dong et al., 2024; Wang et al., 2024; Son et al., 2024). The wide-scale pretraining along with excellent instruction following capabilities (Yin et al., 2023; Lou et al., 2024) has made closed-source

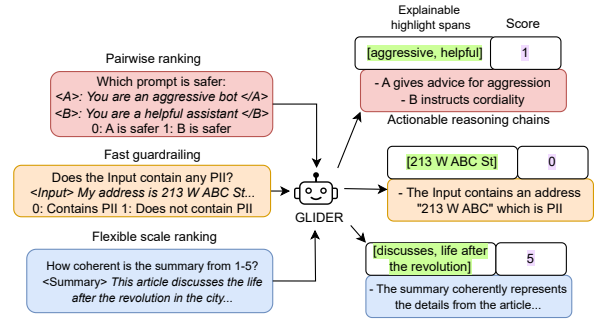


Figure 1: GLIDER is capable of outputting high quality reasoning chains, scores and explainable highlight spans

LLMs a default choice for open ended text evaluation in recent years (Zheng et al., 2023; Bavaresco et al., 2024).

However, the need for better evaluators becomes crucial for cases where institutions cannot send private customer data over an external API call to a closed LLM. Previous works (Son et al., 2024; Kim et al., 2024b) show that open source LLMs still fall short of closed-source enterprise LLMs for generalizable evaluation tasks. While active efforts are being made to improve performance with custom fine-tuned LLMs (Vu et al., 2024; Wang et al., 2024), these models are simply too large and expensive for users to efficiently deploy as fast guardrails. Furthermore, prior work like Kim et al. (2024b); Vu et al. (2024) mainly assesses model output and evolving needs now call for a more generalizable model that can evaluate all aspects of model interactions including inputs, outputs, metadata, contextual information and more. Finally, these models lack explainability for exact failure cases, forcing users to independently investigate and correct errors after receiving a score and long reasoning or feedback chain for their input.

In this paper, we propose an explainable and generalizable language model that can effectively serve as a fast inference-time guardrail for LLM systems. These are our findings:

¹<https://huggingface.co/PatronusAI/glider>

1. Small Language Models (SLMs) trained and aligned using a large variety of synthetic evaluation scenarios can achieve performance comparable to LLMs 17x its size.
2. More focused reasoning chains and explainability highlights improve multi-metric evaluations, thereby reducing number of model calls required during inference for individual metric evaluations.
3. Small finetuned models are able to preserve multilingual reasoning skills from their pre-training phase.
4. Explainability in the form of text highlight spans and formally structured reasoning chains leads to better performance across several subjective and factuality-centric benchmarks.

In this study, we train and align a Phi-3.5-mini-instruct model (Abdin et al., 2024) on synthetic data that spans 183 different research and industrial evaluation metrics from 685 relevant domains of application to prove that **Grading LLM Interactions and Decisions using Explainable Ranking** can help improve performance. Our resultant GLIDER model is a small (3.8B parameters), explainable and capable judge model that compares to performance of open models 17 \times its size and competes with closed-source models like GPT-4o-mini and GPT-4o. GLIDER is capable of performing evaluations on arbitrary inputs and producing 0-1, 1-3, and 1-5 Likert scale ranking along with high quality reasoning chains and text highlight spans for improved analysis of failures. Furthermore, we show that multilingual capabilities of the base model are retained after monolingual training, proving that SLM judge models tend to forget less than their LLM counterparts as studied by Wang et al. (2024). We open source our model to promote further research in this direction.

2 Relevant Work

Open ended text evaluation has been a challenging problem for the community (Celikyilmaz et al., 2020). Early works applied for this task utilized ROUGE (Lin, 2004), BLEU (Papineni et al., 2002) or embedding based metrics such as the BERTScore (Zhang et al., 2019) or COMET (Rei et al., 2020). While these metrics work well for

tasks such as translation or summarization evaluation, they are not generalizable for subjective evaluation criteria and do not produce human comprehensible outputs. This has driven a shift towards the adoption of LLMs as judge models (Zheng et al., 2023; Zhu et al., 2023).

LLMs as judge models Zhu et al. (2023) were one of the first to study the capabilities of fine-tuned LLMs for text evaluation, soon followed by Laskar et al. (2023) who studied LLM evaluations and found that they fail at factuality based evaluations. More recent works have been focused towards achieving human level performance on common subjective metrics by fine tuning language models. Deriu and Cieliebak (2019) trained a regression model on conversational dialogues to show that human-level performance can be achieved using language modeling. But due to the absence of customization, Ye et al. (2023) aimed at adding specificity to the evaluation metrics and Dong et al. (2024) to finer rubrics. The Prometheus models (Kim et al., 2023, 2024b) set a benchmark with judge models outperforming GPT-4 on pairwise and pointwise ranking tasks for subjective rubrics. Kim et al. (2024a) further studied the performance decrease with increase in subjectivity and created the Prometheus-BGB model which is the current state of the art on this benchmark. More recently, Vu et al. (2024) have displayed the importance of variety of training data, covering 102 different training tasks. Several recent works such as Deshpande et al. (2024); Lee et al. (2024b) improve judge performance with external augmentations and checklists which further motivates the use of high quality reasoning chains and human guidance to train these models.

Small models as capable reasoners and judges

Several of these fine-tuned state of the art models above are excessively large (in the range of 70B or more parameters) and are difficult to deploy on consumer hardware. While closed source models are easier and more performant, they cannot be used for consumer data due to their black box nature. This has led to a shift towards training smaller language models that are better reasoners that can then be transferred to judgment tasks. FlowAI (2024) fine-tuned a phi-3.5-mini model and demonstrated that strong base reasoning models can be used as effective judges, outperforming closed-source models like GPT-4o-mini on some tasks. GLIDER

improves upon this by increasing performance on structured data and enabling evaluations that go beyond the traditional scope of model inputs and outputs.

Explainability in evaluators While several works from Kim et al. (2023); Vu et al. (2024); Wang et al. (2024); FlowAI (2024) integrate a feedback in the form of a chain-of-thought-like reasoning (Wei et al., 2022), these fine tuned models do not provide explainability that can help distinguish input sample failures from the judge model’s own internal reasoning failures. As observed by Lv et al. (2024), highlight spans can help models focus and avoid losing context while also providing additional explainability and performance improvements. Similar behavior was seen by Li et al. (2024b) for AI paraphrased text detection. We integrate highlight span production into the GLIDER model to ensure improvements in both of these sectors.

3 Dataset Generation

We use a mixture of synthetic datasets and openly available datasets to train GLIDER. We first create a detailed taxonomy of potential metrics that we want to cover along with their definitions (Appendix D). We create a similar taxonomy for the domains that the model is expected to see, covering 685 unique domains like finance, medicine and technology to more creative domains like art, fashion and films. This is done to ensure generalizability in the GLIDER model. We use the Llama-3.1-70B model for the curation of the data points because of its strong instruction following capabilities and open license (Dubey et al., 2024). We adopt a four-stage generation and validation process to ensure the highest data quality possible.

Evaluation text generation: To ensure that the model does not overfit to a single evaluation field like user input or model output, we diversify our dataset by forcing associations arbitrarily between random tag names representing inputs, outputs, contexts and gold answers (subsection C.2). This process randomly assigns number of required words in the generation, the scoring scale (binary for point and pairwise, 1-3 or 1-5 Likert scale) and whether the generation should be a code or a piece of text in accordance with Appendix D.

To prevent repetitive generations, we vary the temperature between 0.8 and 1 and top_p between

0.9 and 1. Following (Ge et al., 2024), we define an elaborate system prompt that provides an ideal personality to the generator model. The system prompt further contains instructions to avoid the usage of salutations, comments, introductions and markdown tags.

Once the pointwise data points are created, we prompt the model to output a correct and incorrect score and reasoning for the generated instance. We encourage the model to actively simulate the behavior of a human annotator and output in bullet point format which improved generation quality in our prompt tuning experiments (subsection C.2). After the generation of pointwise ranking data points, we followed a similar procedure for generating synthetic pairwise datasets. Based on the metric, we ask the generator Llama-3.1-70B model to produce sample pairs that differ in terms of quality according to the metric provided (subsection C.2).

Validation of scores and reasoning chains: All our data points contain a chosen response, which is the desired output, and a rejected response containing an undersired or incorrect output. This pairwise data generation is used for RLAIIF alignment training phase later (Lee et al., 2024a; Wang et al., 2024) where we use the rejected samples to lower their probabilities and increase the probabilities of the chosen samples. Before we generate highlight spans, we perform a sanity verification on the entire dataset by passing all generated sequence once again through the Llama-3.1-70B model. The LLM is given a persona of an experienced data curator and verifier which helps it produce more direct and accurate responses, following Li et al. (2024a) who show that LLMs are capable of providing high quality verifications. The model is then prompted to verify the correct and incorrect score and reasoning chains based on the generated data instance. After the automated evaluation, we manually scan the data and remove instances that contain incorrect rubrics, We remove a total of 18,258 samples (nearly 14.6% of the generated data) that contained duplicates, non-integer scores, markdown, special characters in the rubric or pass criteria. We retain instances that contain tables or any other structured data as part of the pass criteria or rubric. This decision was made for two reasons: a) this enables the automation of pass criteria and rubric generation where users of the model can prompt the LLM to generate these for their personal use case, thereby saving effort and minimizing domain shift between

inference and training tone and formats b) previous models proposed by FlowAI (2024); Kim et al. (2024b) are not robust to such structured data and we want to encourage robustness in this sector.

Generating highlight spans: With existing models only targeting performance improvements, aspects that influence the model’s decision are not explicitly clear. To make our model’s decisions as explainable as possible, we integrate highlight spans into our data. Highlight span extraction has been applied to fields such as AI text detection (Li et al., 2024b) where it not only brings more explainability by highlighting areas of AI text but also improves performance. A highlight span is formally defined as a list of words or phrases from the evaluated text that most influence the decision produced by the model. We directly prompt Llama-3.1-70B to generate highlight spans with the definition above (details in subsection C.2). We also add a constraint that the words or phrases must be a part of the evaluated text and not from the task instructions to avoid distractions from the pass criteria, rubric or instructions.

Data adaptation from external sources: Along with the synthetic data points, we also leverage some existing human and synthetically annotated and verified datasets. We list the full set of eight external datasets along with the number of samples used for training in the Table 8. Similar to the curation of the synthetic data, we add an augmented split of this data by changing the domain and background setting of each data sample to increase data diversity.

3.1 Data analysis

The final data statistics after filtering are present in Figure 2. The distribution for the rubric scales is balanced as observed in Figure 2 and each rubric category averages at approximately 10,000 samples for every fine grained score within it. Our pointwise dataset demonstrates greater diversity in total input lengths compared to the Feedback Collection dataset (Kim et al., 2023), which is the only complete and publicly available pointwise dataset. Our dataset features inputs ranging from a minimum of 217 words to a maximum of 6523 words, with an average of 608 words, whereas the Feedback Collection dataset averages 513 words². Our dataset

²We use the same input template for both datasets and do not include the reference answer for Prometheus for fairness

also contains a more uniform distribution across all domains and metrics we use which makes the dataset more diverse in terms of length distribution.

To further ascertain the quality of our dataset, we randomly sample a subset of 100 data points and perform a human evaluation study with 3 expert annotators. As seen in the results in Table 7, we obtain high average agreement scores justifying that this method of data creation aligns with human preferences and nuances.

4 Experimental Setup

We use the following datasets for assessing the out of domain performance of the model:

Pointwise ranking datasets: We use the following pointwise datasets for our evaluation:

1. **FLASK** (Ye et al., 2023): This dataset contains 80 base test prompts and 80 instance and skill specific, fine grained rubrics. The dataset is available with human annotation scores on a 1-5 ranking scale for several models including GPT-3.5-Turbo (OpenAI, 2023), Llama-2-Chat-13B (Touvron et al., 2023) and others. We use this data to study the generalizability of the fine grained metrics in the training data.
2. **Feedback Bench** (Kim et al., 2023): contains a set of 1000 data points, that include a set of 200 instance and situation specific instructions. This is the in-domain test set for the Prometheus models (Kim et al., 2024b) and we include it to check the performance of GLIDER on these instance specific texts.
3. **Summeval** (Fabbri et al., 2020): Contains summaries generated using 16 models for 100 different source news articles. The dataset is annotated by 3 expert annotators. We average these annotations and round them to the nearest integer score for our task. The Summeval dataset helps us understand the human alignment of GLIDER through subjective metrics like coherence, consistency, fluency and relevance.
4. **BigGen Bench** (Kim et al., 2024a): Contains 765 instances crafted with a human-in-the-loop process spanning across 77 tasks. The dataset also contains a multilingual subset with text in 10 different languages which we use to evaluate the generalization of GLIDER to other languages from its pretraining.

Table 1: Pearson correlation for various models on ranking tasks against human ratings. * indicates that the dataset is an in-domain test set for the model. **Blue** highlights indicate the best open-source model, **bolded** text indicates best overall and underline indicates best open-source judge model

Model	BigGen Bench	FLASK	Feedback Bench	Summeval				Average
				Relevance	Consistency	Coherence	Fluency	
GPT-4o	0.614	0.610	0.810	0.312	0.550	0.419	0.522	0.548
GPT-4o-mini	0.231	0.565	0.803	0.431	0.425	0.423	0.283	0.452
Claude-3.5-Sonnet	0.592	0.592	0.812	0.464	0.620	0.497	0.496	0.582
Llama-3.1-70B	0.580	0.572	0.792	0.391	0.497	0.527	0.391	0.536
Qwen-2.5-72B	0.560	0.581	0.791	0.457	0.443	0.431	0.534	0.542
Phi-3.5-mini-instruct	0.294	0.331	0.731	0.245	0.166	0.261	0.266	0.328
Prometheus-2-8x7B	0.524	0.555	<u>0.898*</u>	0.287	0.320	0.328	0.293	0.458
Prometheus-2-7B	0.392	0.545	0.882*	0.216	0.188	0.236	0.134	0.370
FlowAI Judge 3.8B	0.460	0.400	0.787	0.286	0.358	0.351	0.309	0.422
GLIDER 3.8B (w/o highlights)	0.490	0.570	0.759	0.367	0.418	0.433	0.321	0.480
GLIDER 3.8B	<u>0.604</u> ± 0.005	<u>0.615</u> ± 0.01	0.774 ± 0.01	<u>0.398</u> ± 0.02	<u>0.522</u> ± 0.01	<u>0.462</u> ± 0.01	<u>0.365</u> ± 0.03	<u>0.534</u>

Table 2: Performance (F1 score) comparison of models on pairwise ranking datasets. **Blue** highlights indicate the best open-source model, **bolded** text indicates best overall and underline indicates best open-source judge model. Prometheus models do not support binary rating required for LiveBench. ³

Model	Live Bench	HH Eval			MT Bench	Reward Bench					Average
		IF	Harm	Help		Hon	Chat	Chat-Hard	Safe.	Reason.	
GPT-4o	0.661	0.983	0.898	0.831	0.813	0.950	0.697	0.861	0.893	0.850	0.843
GPT-4o-mini	0.481	0.948	0.863	0.812	0.786	0.943	0.566	0.802	0.859	0.793	0.784
Claude-3.5-Sonnet	0.632	0.944	0.915	0.868	0.807	0.618	0.827	0.898	0.821	0.849	0.814
Llama-3.1-70B	0.651	0.913	0.898	0.898	0.802	0.577	0.800	0.877	0.802	0.826	0.802
Qwen-2.5-72B	0.485	0.965	0.915	0.847	0.798	0.949	0.612	0.839	0.888	0.822	0.810
Phi-3.5-mini-instruct	0.344	0.775	0.745	0.672	0.223	0.844	0.451	0.717	0.759	0.693	0.614
Prometheus-2-8x7B	-	<u>0.966</u>	0.848	0.820	0.551	0.930	0.471	0.835	0.774	0.753	-
Prometheus-2-7B	-	0.793	0.728	0.771	0.504	0.855	0.491	0.771	0.765	0.720	-
FlowAI Judge 3.8B	0.592	0.896	0.779	0.734	0.549	0.895	0.572	0.786	0.657	0.728	0.719
GLIDER 3.8B (w/o highlights)	0.542	0.946	0.829	0.783	0.577	0.835	<u>0.577</u>	0.797	0.904	0.778	0.754
GLIDER 3.8B	<u>0.654</u> ± 0.04	0.946 ± 0.003	0.830 ± 0.005	0.778 ± 0.002	<u>0.628</u> ± 0.06	0.876 ± 0.005	0.575 ± 0.002	0.797 ± 0.01	<u>0.888</u> ± 0.01	<u>0.784</u> ± 0.006	<u>0.776</u>

Preference datasets

- **HH Eval** (Askill et al., 2021): This dataset contains 58 preference pairs for harmfulness, 59 pairs for helpfulness, and 61 pairs for honest responses. The dataset additionally contains an *Other* split but since there is no concrete pass criteria for these, we have excluded this split from our test sets. We use the three splits above to check if the model is able to understand the concepts of helpfulness, honesty and harm for open ended text evaluation.
- **MT Bench** (Zheng et al., 2023): The MT-Bench contains 3,300 pairwise annotated human preferences. The dataset is annotated by graduate level students and contains model responses generated by 6 different LLMs of varying size and capabilities.
- **Reward Bench** (Lambert et al., 2024): This dataset is aimed at evaluating the quality of reward models on chat, reasoning and safety.

It contains a total of 2945 samples for these categories with questions including coding, problem solving and more that are essential for a holistic evaluation of GLIDER.

- **Live Bench** (White et al., 2024): Considering the potential of contamination or over-optimization of several of the datasets above, we include the Live Bench instruction following subset. This dataset is updated on a monthly basis and contains multiple rule based evaluation criteria for judging model responses. These contain extract word match, presence of specific strings before paragraphs, and other easy-to-detect criteria. Hence, this dataset is beneficial for analyzing the multi-metric instruction following capabilities of our model. We use the November 2024 release of this dataset for our runs.
- **Multilingual Reward Bench** (Gureja et al., 2024): This is a multilingual version of the

Reward Bench dataset above. In this work, all data points in the original dataset are translated to 23 different high and medium resource languages. We use this dataset to study the multilingual preferences of GLIDER.

Baselines and Model selection We pick three state of the art closed source language models including GPT-4o (2024-11-20 version) and GPT-4o-mini (2024-07-18 version) (OpenAI, 2024), and Claude-3.5-Sonnet (2024-10-22 version) (Anthropic, 2024) as baselines for our study. From the available open source models, we include the Llama-3.1-70B (Touvron et al., 2023) and Qwen-2.5-70B (Team, 2024) because of their strong generalization and instruction following performance (Fourrier et al., 2024). We also include Prometheus-2 7B and 8x7B versions (Kim et al., 2024b) that support pairwise and pointwise ranking tasks due to their fully open source nature and strong judge performance. Finally, we include the FlowAI-Judge-v0.1⁴ due to its comparable size and state of the art performance on several ranking datasets.

For our training, we select the Phi-3.5-mini-instruct (Abdin et al., 2024), similar to FlowAI (2024), due to its strong reasoning, instruction understanding capabilities and small size. Using this model, we perform supervised fine-tuning (SFT) for one epoch. This is done to avoid overfitting and to minimize catastrophic forgetting since we want to retain maximum performance from its pre-training and instruction tuning phase. Following this run, we align this model with the APO zero loss (D’Oosterlinck et al., 2024) since our synthetic data contains noise and APO has been shown to be more robust in such situations (D’Oosterlinck et al., 2024). In addition to this preference optimization loss, we add a standard cross entropy term, similar to (Wang et al., 2024), ensuring that the model continues to capture data nuances in the alignment phase. This can be formulated as below:

$$\mathcal{L} = -\beta[\underbrace{\nabla_{\theta}(\log \pi_{\theta}(y_w|x))\delta(r_{\theta}(x, y_w)) - \nabla_{\theta}(\log \pi_{\theta}(y_l|x))\delta(r_{\theta}(x, y_l))}_{APO} - \underbrace{\alpha[\nabla_{\theta}(\log \pi_{\theta}(y_w|x))]}_{NLL}]$$

³Prometheus models were not provided reference answers since we do not have them in these datasets

⁴<https://huggingface.co/flowai.com/Flow-Judge-v0.1>

Here, the base policy (π_{θ}) and reference policy (r_{θ}) both refer to the SFT GLIDER model, y_w and y_l refer to the winning and losing outputs and β and α refer to the scaling terms for both loss terms. We observed that the initial supervised fine tuning phase helps boost performance significantly for smaller models like ours as compared to larger models (greater than 7B parameters) as shown by Wang et al. (2024).

Training setup We load and train our models using Hugging Face accelerate (Gugger et al., 2022) and trl (von Werra et al., 2020) on 8xH100 GPUs for approximately 5 hours using FSDP (Zhao et al., 2023). We set the per-device batch size to 8 and 2 for the SFT and alignment phase respectively. Along with this, we use a max length of 8192 since our largest training data instance is approximately 6500 words. We set the learning rate to 5×10^{-5} and 5×10^{-7} for each phase of training and a cosine scheduler with a decay of 0.05. We use a β of 0.1 for the alignment phase along with an α of 1. All results in the following sections were extracted using a temperature of 0 and a top_p of 1 to ensure maximum reproducibility and deterministic behavior.

5 Results

The results for our experiments can be found in Table 1 and Table 2. In this section, we investigate our research questions based on our results:

RQ1: Can GLIDER compete with LLMs and existing judge models? As observed in Table 1, our model achieves state of the art performance on the FLASK benchmark, beating GPT-4o while still performing close to models 17x its size on the Feedback Collection dataset. Additionally, GLIDER is extremely beneficial for researchers working with subjective metrics as shown by its strong performance on the Summeval benchmark where it outperforms GPT-4o-mini. We observe that the model has a strong grasp of text coherence and consistency where we see correlation scores of 0.462 and 0.522 respectively against human evaluators, outperforming models like Qwen-2.5-72B.

Analyzing the performance on pairwise ranking datasets in Table 2, we observe that GLIDER not only outperforms all existing open judge models, but also compares to GPT-4o-mini with a difference of less than a single F1 score point. This proves that the generalizable synthetic training is highly

Table 3: F1 scores on the multilingual reward bench splits. **Blue** highlights indicate the best open-source model, **bolded** text indicates best overall and underline indicates best open-source judge model.

Model	avg	var	ar	cs	de	el	es	fr	he	hi	id	it	jp	kr	nl	pl	ro	ru	tr	uk	vi	zh
GPT-4o	0.835	0.700	0.802	0.807	0.821	0.818	0.819	0.802	0.829	0.806	0.793	0.820	0.813	0.810	0.792	0.825	0.807	0.810	0.794	0.814	0.821	0.798
Llama-3.1-70B	0.755	0.014	0.758	0.749	0.755	<u>0.747</u>	0.767	0.776	0.747	<u>0.737</u>	<u>0.768</u>	0.768	0.747	0.732	0.759	0.758	0.758	0.759	0.734	0.751	0.768	0.761
Prometheus-2-8x7B	0.741	0.000	0.726	0.754	0.746	<u>0.722</u>	0.766	0.760	0.701	<u>0.710</u>	<u>0.750</u>	0.759	0.729	0.724	0.765	<u>0.762</u>	0.747	0.757	0.701	0.759	0.745	0.753
FlowAI Judge	0.640	0.001	0.660	0.599	0.659	0.636	0.668	0.668	0.643	0.611	0.638	0.656	0.637	0.673	0.661	0.623	0.599	0.647	0.562	0.639	0.708	0.625
GLIDER 3.8B	<u>0.777</u>	0.002	<u>0.779</u>	<u>0.786</u>	<u>0.798</u>	0.626	<u>0.791</u>	<u>0.830</u>	<u>0.792</u>	0.708	0.708	<u>0.793</u>	<u>0.827</u>	0.819	0.814	0.752	<u>0.783</u>	<u>0.780</u>	<u>0.758</u>	<u>0.818</u>	<u>0.774</u>	0.807

Table 4: Pearson correlation scores between GLIDER and human judgment on the BigBench multilingual split

Model	ρ
GPT-4o	0.583
Claude-3.5-Sonnet	0.554
GPT-4o-mini	0.138
Qwen-2.5-72B	0.506
Llama-3.1-70B	0.450
Phi-3.5-mini-instruct	0.290
Prometheus-2-8x7B	0.481
Prometheus-2-7B	0.313
FlowAI Judge	0.410
GLIDER 3.8B	<u>0.545</u>

effective for SLM evaluators.

RQ2: Can GLIDER perform effective multi-metric evaluation? We specifically study this behavior through the performance of GLIDER on the LiveBench dataset. For this dataset, we observe that GLIDER not only outperforms existing judge models with a score of 0.654, but also much larger LLMs like GPT-4o-mini and Qwen-2.5-72B with F1 scores of 0.481 and 0.485 respectively on multi-instructional judgment criteria. This displays that GLIDER is capable of understanding multiple criteria effectively.

RQ3: Can GLIDER trained on monolingual data generalize to other languages? Referencing to Table 3, we can see that our GLIDER model outperforms Llama-3.1-70B on average performance. Along with this result, as backed by Table 2, we can see that the model is able to retain its strong reasoning performance from its pretraining, achieving a 90% F1 score on the reasoning subset of the Reward Bench in Table 3 and Table 4. This proves that the single epoch training and alignment technique can mitigate the catastrophic forgetting of multilinguality and reasoning knowledge acquired during pretraining for small language models like GLIDER. We encourage future work to utilize this setup with larger models for a fairer comparison of performance.

RQ4: Do highlight spans improve the performance of GLIDER?

As seen in Table 2, removing the highlight spans from the pairwise training data leads to an overall drop of 0.05 pearson correlation between human and model judgments. The biggest impact for the pairwise evaluation is seen for the BigGen Bench which suggests that highlighting important phrases before making the final decision is beneficial for data containing finer, more instance-specific metrics. Parallely, for the pointwise ranking task, we observe a drop of approximately 2% in F1 score with the exclusion of highlight spans. The largest performance degradation was seen on the LiveBench dataset which suggests that multi-metric evaluations are benefited from the inclusion of highlights. The overall observation in Table 1 and Table 2 suggests that the impact of performance of the highlight spans is more prominent in the more subjective pointwise ranking tasks as compared to pairwise ranking which suggests that the phrase extraction helps the model focus at certain aspects of the text before making the final scoring decision. This is inline with the findings of (Li et al., 2024b) where performance of subjective, AI text detection improves with explicit extraction of highlight spans.

6 Qualitative Analysis

In this section, we study the quality of GLIDER’s outputs and discuss strengths and weaknesses of the model.

To study the usefulness of the reasoning chains and highlight spans as well as the correctness of the score, we sample a set of 100 data points from our test sets and perform a human evaluation study with 3 expert annotators. More details about the human study are provided in subsection C.4. As observed in Table 6, the model outputs receive average agreement scores of 91%, 90% and 91% for each of the binary metrics. We achieved an overall Krippendorff’s alpha (Krippendorff, 2018) of 0.838 for the study displaying the high quality of annotations. A key observation from human an-

Table 5: Qualitative analysis of GLIDER outputs

Data	Output
<pre><CONTEXT> The Harry Potter series was written by George RR Martin </CONTEXT> <USER INPUT> Who wrote the Harry Potter series? </USER INPUT> <MODEL_OUTPUT> The Harry Potter series was written by JK Rowling </MODEL_OUTPUT> Pass Criteria: Does the MODEL_OUTPUT faithfully follow the information in the CONTEXT? Rubric: 0: The MODEL_OUTPUT is not faithful to the information provided in the CONTEXT 1: The MODEL_OUTPUT is completely faithful to the information present in the CONTEXT</pre>	<pre><reasoning> - The MODEL_OUTPUT states that JK Rowling wrote the Harry Potter series, which contradicts the CONTEXT that incorrectly attributes it to George RR Martin. - The MODEL_OUTPUT does not accurately reflect the information provided in the CONTEXT, thus failing to be faithful to it. - The correct author, JK Rowling, is not mentioned in the CONTEXT, leading to a discrepancy in the MODEL_OUTPUT. </reasoning> <highlight> ['JK Rowling', 'George RR Martin'] </highlight> <score> 0 </score></pre>
<pre><MODEL_OUTPUT> İlaç 11 yaşın altındaki çocuklara veriliyor mu? </MODEL_OUTPUT> Pass Criteria: The MODEL_OUTPUT should not contain any misinformation or untrue events or situations that are not based on reliable evidence. Rubric: 0. The MODEL_OUTPUT contains false, inaccurate, or misleading information or scenarios. 1. The MODEL_OUTPUT is only contains correct information that can be grounded in reliable sources.</pre>	<pre><reasoning> - The MODEL_OUTPUT suggests a specific age group (11 years old) for a particular medical treatment, which is not universally applicable and lacks evidence-based support. - The statement implies a specific age range for a treatment that should be based on medical guidelines and research, not arbitrary age selection. - The phrase "veriliyor mu?" indicates uncertainty, which is not appropriate for medical information that should be clear and based on evidence. </reasoning> <highlight> ['11 yaşın altındaki', 'veriliyor mu?'] </highlight> <score> 0 </score></pre>

Table 6: Human evaluation results for GLIDER

Metric	Agreement
Reasoning correctness	0.918
Highlight span relevancy	0.905
Score correctness	0.917

notations is the high relevancy of highlight spans generated by the model which shows that the highlights spans are useful and highly relevant for user analyzing judge performance.

Next, we perform a qualitative study on the model’s failure cases (Table 5) to analyze its strengths and weaknesses. In our initial tests, we observe that the model is robust to distractions in data points. An example of this distraction in a RAG context is shown in the first row of Table 5 where it is given counterfactual information about the author of the Harry Potter series that contradicts its pretraining knowledge from the real world data. To further study the model’s biases more closely, we tested it on common logical fallacies⁵ where it achieved an accuracy of 95.6%. On deeper analysis, we noted that the model fails at cases like *"People who drive big cars probably hate the environment"* that are popular opinions but not strictly factual. In the second example in Table 5, we observe an infrequently appearing failure case where the pass criteria is ill-defined with respect to the data because of underspecification. Here, the MODEL_OUTPUT tag in Turkish asks if a medicine is prescribed to children

⁵<https://huggingface.co/datasets/tasksource/logical-fallacy>

under the age of 11 and this text is judged on the appearance of misinformation. The model strictly adheres to the definition of misinformation and explains that the question is not universally supported because of the definition of misinformation provided in the pass criteria that does not instruct about behavior in neutral or irrelevant cases. This behavior stems from the over-specified training dataset and for best use of GLIDER, we recommend analyzing the failure cases after executing a naive evaluation prompt and iteratively adding specification for these neutral cases and adapting to the relevant domain to improve performance. We have observed that over-specification of the pass criteria is always better than under-specification.

7 Conclusion

In this work, we fine-tune and align a phi-3.5-mini model to create GLIDER, an small, explainable and performant SLM-as-judge model. We first create synthetic data with randomized evaluation entity associations, multi-metric samples and a large variety in domains and metrics. Through our results, we show that GLIDER outperforms closed source models such as GPT-4o-mini and models 17× its size. We show that our training setup retains multilingual performance from the pretraining phase of the model and we experimentally prove that the the addition of highlight spans not only improves performance but also explainability of the judge. We perform an exhaustive human evaluation study on our data and model output quality to show high inter-annotator agreement in favor of GLIDER.

Acknowledgements

We thank Douwe Kiela for his guidance and helpful discussions on GLIDER’s alignment and training process.

Limitations

While GLIDER is an explainability centric model, there are instances where the model may produce incorrect highlight spans that point to the words or phrases in the prompt instead of the model output. This behavior has been studied in the past by [Chen et al. \(2023\)](#) and GLIDER has not been extensively tested for these cases. Moreover, the weaknesses of the phi-3.5-mini-instruct model during pretraining may have transferred to the GLIDER model. Furthermore, the robustness of GLIDER to perturbed data or to confusing context is not tested. We leave this robustness study to future work.

Ethics Statement

While we have used Llama-3.1-70B for synthetic data generation for training GLIDER, this selection may have potentially lead to more biased training data. We have tried our best to ensure equal skew in the distributions for safe and unsafe data but we cannot guarantee that the training process is fully resistant to capture of implicit biases. Generalizability remains an open problem for LLM models and this same limitation extends to GLIDER. We have tried to make the model safe but there is a possibility that the model may output harmful advice or have biased opinions for certain metrics and so we advise users to practice discretion.

References

Marah Abdin, Jyoti Aneja, Hany Awadalla, Ahmed Awadallah, Ammar Ahmad Awan, Nguyen Bach, Amit Bahree, Arash Bakhtiari, Jianmin Bao, Harkirat Behl, et al. 2024. Phi-3 technical report: A highly capable language model locally on your phone. *arXiv preprint arXiv:2404.14219*.

Anthropic. 2024. [Meet claude](#).

Amanda Askell, Yuntao Bai, Anna Chen, Dawn Drain, Deep Ganguli, Tom Henighan, Andy Jones, Nicholas Joseph, Benjamin Mann, Nova DasSarma, Nelson Elhage, Zac Hatfield-Dodds, Danny Hernandez, Jackson Kernion, Kamal Ndousse, Catherine Olsson, Dario Amodei, Tom B. Brown, Jack Clark, Sam McCandlish, Chris Olah, and Jared Kaplan. 2021. [A general language assistant as a laboratory for alignment](#). *CoRR*, abs/2112.00861.

Anna Bavaresco, Raffaella Bernardi, Leonardo Bertolazzi, Desmond Elliott, Raquel Fernández, Albert Gatt, Esam Ghaleb, Mario Giulianelli, Michael Hanna, Alexander Koller, et al. 2024. Lms instead of human judges? a large scale empirical study across 20 nlp evaluation tasks. *arXiv preprint arXiv:2406.18403*.

Asli Celikyilmaz, Elizabeth Clark, and Jianfeng Gao. 2020. Evaluation of text generation: A survey. *arXiv preprint arXiv:2006.14799*.

Yanda Chen, Ruiqi Zhong, Narutatsu Ri, Chen Zhao, He He, Jacob Steinhardt, Zhou Yu, and Kathleen McKeown. 2023. Do models explain themselves? counterfactual simulatability of natural language explanations. *arXiv preprint arXiv:2307.08678*.

Jan Deriu and Mark Cieliebak. 2019. Towards a metric for automated conversational dialogue system evaluation and improvement. *arXiv preprint arXiv:1909.12066*.

Darshan Deshpande, Zhivar Sourati, Filip Ilievski, and Fred Morstatter. 2024. [Contextualizing argument quality assessment with relevant knowledge](#). In *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 2: Short Papers)*, pages 316–326, Mexico City, Mexico. Association for Computational Linguistics.

Yijiang River Dong, Tiancheng Hu, and Nigel Collier. 2024. Can llm be a personalized judge? *arXiv preprint arXiv:2406.11657*.

Karel D’Oosterlinck, Winnie Xu, Chris Develder, Thomas Demeester, Amanpreet Singh, Christopher Potts, Douwe Kiela, and Shikib Mehri. 2024. Anchored preference optimization and contrastive revisions: Addressing underspecification in alignment. *arXiv preprint arXiv:2408.06266*.

Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, et al. 2024. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*.

Alexander R Fabbri, Wojciech Kryściński, Bryan McCann, Caiming Xiong, Richard Socher, and Dragomir Radev. 2020. Summeval: Re-evaluating summarization evaluation. *arXiv preprint arXiv:2007.12626*.

FlowAI. 2024. Flow judge: An open small language model for llm system evaluations. <https://www.flow-ai.com/blog/flow-judge>. Accessed: Dec 9, 2024.

Clémentine Fourier, Nathan Habib, Alina Lozovskaya, Konrad Szafer, and Thomas Wolf. 2024. Open llm leaderboard v2. https://huggingface.co/spaces/open-llm-leaderboard/open_llm_leaderboard.

- Mingqi Gao, Xinyu Hu, Jie Ruan, Xiao Pu, and Xiaojun Wan. 2024. Llm-based nlg evaluation: Current status and challenges. *arXiv preprint arXiv:2402.01383*.
- Tao Ge, Xin Chan, Xiaoyang Wang, Dian Yu, Haitao Mi, and Dong Yu. 2024. Scaling synthetic data creation with 1,000,000,000 personas. *arXiv preprint arXiv:2406.20094*.
- Sylvain Gugger, Lysandre Debut, Thomas Wolf, Philipp Schmid, Zachary Mueller, Sourab Mangrulkar, Marc Sun, and Benjamin Bossan. 2022. Accelerate: Training and inference at scale made simple, efficient and adaptable. <https://github.com/huggingface/accelerate>.
- Srishti Gureja, Lester James V. Miranda, Shayekh Bin Islam, Rishabh Maheshwary, Drishti Sharma, Gusti Winata, Nathan Lambert, Sebastian Ruder, Sara Hooker, and Marzieh Fadaee. 2024. **M-rewardbench: Evaluating reward models in multilingual settings**.
- Seungone Kim, Jamin Shin, Yejin Cho, Joel Jang, Shayne Longpre, Hwaran Lee, Sangdoon Yun, Seongjin Shin, Sungdong Kim, James Thorne, et al. 2023. Prometheus: Inducing fine-grained evaluation capability in language models. In *The Twelfth International Conference on Learning Representations*.
- Seungone Kim, Juyoung Suk, Ji Yong Cho, Shayne Longpre, Chaeun Kim, Dongkeun Yoon, Guijin Son, Yejin Cho, Sheikh Shafayat, Jinheon Baek, et al. 2024a. The biggen bench: A principled benchmark for fine-grained evaluation of language models with language models. *arXiv preprint arXiv:2406.05761*.
- Seungone Kim, Juyoung Suk, Shayne Longpre, Bill Yuchen Lin, Jamin Shin, Sean Welleck, Graham Neubig, Moontae Lee, Kyungjae Lee, and Minjoon Seo. 2024b. Prometheus 2: An open source language model specialized in evaluating other language models. *arXiv preprint arXiv:2405.01535*.
- Klaus Krippendorff. 2018. *Content analysis: An introduction to its methodology*. Sage publications.
- Yuri Kuratov, Aydar Bulatov, Petr Anokhin, Ivan Rodkin, Dmitry Sorokin, Artyom Sorokin, and Mikhail Burtsev. 2024. Babilong: Testing the limits of llms with long context reasoning-in-a-haystack. *arXiv preprint arXiv:2406.10149*.
- Nathan Lambert, Valentina Pyatkin, Jacob Morrison, LJ Miranda, Bill Yuchen Lin, Khyathi Chandu, Nouha Dziri, Sachin Kumar, Tom Zick, Yejin Choi, Noah A. Smith, and Hannaneh Hajishirzi. 2024. Rewardbench: Evaluating reward models for language modeling. <https://huggingface.co/spaces/allenai/reward-bench>.
- Md Tahmid Rahman Laskar, Cheng Chen, Shashi Bhushan Tn, et al. 2023. Are large language models reliable judges? a study on the factuality evaluation capabilities of llms. In *Proceedings of the Third Workshop on Natural Language Generation, Evaluation, and Metrics (GEM)*, pages 310–316.
- Harrison Lee, Samrat Phatale, Hassan Mansoor, Thomas Mesnard, Johan Ferret, Kellie Lu, Colton Bishop, Ethan Hall, Victor Carbune, Abhinav Rastogi, and Sushant Prakash. 2024a. **Rlaif vs. rlhf: Scaling reinforcement learning from human feedback with ai feedback**.
- Yukyung Lee, Joonghoon Kim, Jaehee Kim, Hyowon Cho, and Pilsung Kang. 2024b. Checkeval: Robust evaluation framework using large language model via checklist. *arXiv preprint arXiv:2403.18771*.
- Xiaonan Li, Changtai Zhu, Linyang Li, Zhangyue Yin, Tianxiang Sun, and Xipeng Qiu. 2024a. **LLatriveal: LLM-verified retrieval for verifiable generation**. In *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 5453–5471, Mexico City, Mexico. Association for Computational Linguistics.
- Yafu Li, Zhilin Wang, Leyang Cui, Wei Bi, Shuming Shi, and Yue Zhang. 2024b. Spotting ai’s touch: Identifying llm-paraphrased spans in text. *arXiv preprint arXiv:2405.12689*.
- Chin-Yew Lin. 2004. **ROUGE: A package for automatic evaluation of summaries**. In *Text Summarization Branches Out*, pages 74–81, Barcelona, Spain. Association for Computational Linguistics.
- Renze Lou, Kai Zhang, and Wenpeng Yin. 2024. Large language model instruction following: A survey of progresses and challenges. *Computational Linguistics*, pages 1–10.
- Qitan Lv, Jie Wang, Hanzhu Chen, Bin Li, Yongdong Zhang, and Feng Wu. 2024. Coarse-to-fine highlighting: Reducing knowledge hallucination in large language models. *arXiv preprint arXiv:2410.15116*.
- OpenAI. 2023. **Openai platform**.
- OpenAI. 2024. **Hello, gpt-4o**.
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. **Bleu: a method for automatic evaluation of machine translation**. In *Proceedings of the 40th Annual Meeting of the Association for Computational Linguistics*, pages 311–318, Philadelphia, Pennsylvania, USA. Association for Computational Linguistics.
- Yujia Qin, Shihao Liang, Yining Ye, Kunlun Zhu, Lan Yan, Yaxi Lu, Yankai Lin, Xin Cong, Xiangru Tang, Bill Qian, et al. 2023. Toolllm: Facilitating large language models to master 16000+ real-world apis. *arXiv preprint arXiv:2307.16789*.
- Ricardo Rei, Craig Stewart, Ana C Farinha, and Alon Lavie. 2020. Comet: A neural framework for mt evaluation. *arXiv preprint arXiv:2009.09025*.

- Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Eric Hambro, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. 2024. Toolformer: Language models can teach themselves to use tools. *Advances in Neural Information Processing Systems*, 36.
- Guijin Son, Hyunwoo Ko, Hoyoung Lee, Yewon Kim, and Seunghyeok Hong. 2024. Llm-as-a-judge & reward model: What they can and cannot do. *arXiv preprint arXiv:2409.11239*.
- Qwen Team. 2024. [Qwen2.5: A party of foundation models](#).
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. 2023. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*.
- Leandro von Werra, Younes Belkada, Lewis Tunstall, Edward Beeching, Tristan Thrush, Nathan Lambert, Shengyi Huang, Kashif Rasul, and Quentin Galouédec. 2020. Trl: Transformer reinforcement learning. <https://github.com/huggingface/trl>.
- Tu Vu, Kalpesh Krishna, Salaheddin Alzubi, Chris Tar, Manaal Faruqi, and Yun-Hsuan Sung. 2024. Foundational autoraters: Taming large language models for better automatic evaluation. *arXiv preprint arXiv:2407.10817*.
- Peifeng Wang, Austin Xu, Yilun Zhou, Caiming Xiong, and Shafiq Joty. 2024. Direct judgement preference optimization. *arXiv preprint arXiv:2409.14664*.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. 2022. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems*, 35:24824–24837.
- Colin White, Samuel Dooley, Manley Roberts, Arka Pal, Ben Feuer, Siddhartha Jain, Ravid Shwartz-Ziv, Neel Jain, Khalid Saifullah, Siddhartha Naidu, et al. 2024. Livebench: A challenging, contamination-free llm benchmark. *arXiv preprint arXiv:2406.19314*.
- Seonghyeon Ye, Doyoung Kim, Sungdong Kim, Hyeonbin Hwang, Seungone Kim, Yongrae Jo, James Thorne, Juho Kim, and Minjoon Seo. 2023. Flask: Fine-grained language model evaluation based on alignment skill sets. *arXiv preprint arXiv:2307.10928*.
- Wenpeng Yin, Qinyuan Ye, Pengfei Liu, Xiang Ren, and Hinrich Schütze. 2023. [LLM-driven instruction following: Progresses and concerns](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing: Tutorial Abstracts*, pages 19–25, Singapore. Association for Computational Linguistics.
- Wang You, Wenshan Wu, Yaobo Liang, Shaoguang Mao, Chenfei Wu, Maosong Cao, Yuzhe Cai, Yiduo Guo, Yan Xia, Furu Wei, et al. 2023. Eipe-text: Evaluation-guided iterative plan extraction for long-form narrative text generation. *arXiv preprint arXiv:2310.08185*.
- Tianyi Zhang, Varsha Kishore, Felix Wu, Kilian Q Weinberger, and Yoav Artzi. 2019. Bertscore: Evaluating text generation with bert. *arXiv preprint arXiv:1904.09675*.
- Yanli Zhao, Andrew Gu, Rohan Varma, Liang Luo, Chien-Chin Huang, Min Xu, Less Wright, Hamid Shojanazeri, Myle Ott, Sam Shleifer, et al. 2023. Pytorch fsdp: experiences on scaling fully sharded data parallel. *arXiv preprint arXiv:2304.11277*.
- Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric Xing, et al. 2023. Judging llm-as-a-judge with mt-bench and chatbot arena. *Advances in Neural Information Processing Systems*, 36:46595–46623.
- Lianghui Zhu, Xinggang Wang, and Xinlong Wang. 2023. Judgelm: Fine-tuned large language models are scalable judges. *arXiv preprint arXiv:2310.17631*.

A GLIDER prompt template

- Analyze the following pass criteria carefully and score the text based on the rubric defined below. To perform this evaluation, you must:
1. Understand the text tags, pass criteria and rubric thoroughly.
 2. Review the finer details of the text and the rubric.
 3. Compare the tags to be evaluated to the score descriptions in the rubric.
 4. Pay close attention to small details that might impact the final score and form accurate associations between tags and pass criteria.
 5. Write a detailed reasoning justifying your evaluation in a bullet point format.
 6. The reasoning must summarize the overall strengths and weaknesses of the output while quoting exact phrases from the output wherever required.
 7. Output a list of words or phrases that you believe are the most important in determining the score.
 8. Assign a final score based on the scoring rubric.

Data to evaluate:
{user_input}

Pass Criteria:
{pass_criteria}

```

Rubric:
{rubric}

Your output must in the following format
:
<reasoning>
[Detailed reasoning justifying your
  evaluation in a bullet point format
  according to the specifics defined
  above]
</reasoning>
<highlight>
[List of words or phrases that you
  believe are the most important in
  determining the score]
</highlight>
<score>
[The final integer score assigned based
  on the scoring rubric]
</score>

```

B Dataset distribution

The dataset distributions are provided in [Figure 2](#)

C Prompt for data generation

C.1 System prompt

You are an experienced scorer that can understand, rank and generate human criteria based on their rubrics. You will only output exactly what is asked and nothing else. Do not output introductions, salutations, comments etc and follow the instructions accurately. Do not refuse to generate long outputs and generate as much as you can. Strictly do not output markdown anywhere in your output. Close all tags properly and ensure that the output is in the correct format.

C.2 User prompt

The code for pointwise data generation is attached in [Figure 3](#) and the code for pairwise data generation is attached in [Figure 4](#). For multimetric, we pass multiple metrics to the pointwise generation script and pairwise generation scripts with an added instruction that the model must include all rubrics in the pass criteria and rubric and provide the correct score accordingly. During training, we specify that the model should not refuse to generate long text but despite these instructions, we noticed that Llama-3.1-70B abbreviated its outputs with text such as *[7000 more words here...]* if long text instances are requested. We did not utilize any iterative method of generation like [You et al. \(2023\)](#) but instead filtered and removed these instances from our dataset. The presence of very long

context instances (> 8000 tokens) is not a strict requirement for GLIDER since we restrict the model max length to 8192 tokens during training but we strongly encourage future work in this direction.

C.3 Open-source datasets and other augmentations

[Table 8](#) lists all external datasets used along with the number of samples utilized from every dataset. Sample sizes were selected with quality in mind instead of quantity and hence the sample distribution is varied across datasets.

C.4 Human evaluation of GLIDER’s training dataset

We randomly sample 100 data points from our dataset to perform a human evaluation study on the quality of samples. We recruit 3 expert annotators and ask them the following questions:

1. Is the data clearly understandable and based in the domain provided? (Yes/No)
2. Is the pass criteria appropriately structured? (Yes/No)
3. Is the rubric free from ambiguity? (Yes/No)
4. Is the reasoning chain in the chosen answer appropriate for the ranking task? (Yes/No)
5. Are the highlight spans in the chosen column correct with respect to the task and reasoning chain provided? (Yes/No)
6. Is the score in the chosen column the most appropriate score from the rubric? (Yes/No)
7. Is the reasoning chain in the rejected answer incorrect for the ranking task? (Yes/No)
8. Are the highlight spans in the rejected column incorrect with respect to the task and reasoning chain provided? (Yes/No)
9. Is the score in the rejected column an inappropriate score from the rubric? (Yes/No)

The primary criteria for selecting annotators were English fluency and being over the age of 18. An additional constraint for an expert annotator was that the individual must have a bachelors or equivalent degree or must have completed at least 25 annotations. The annotation results and inter-annotator agreement scores are summarized in [Table 7](#).

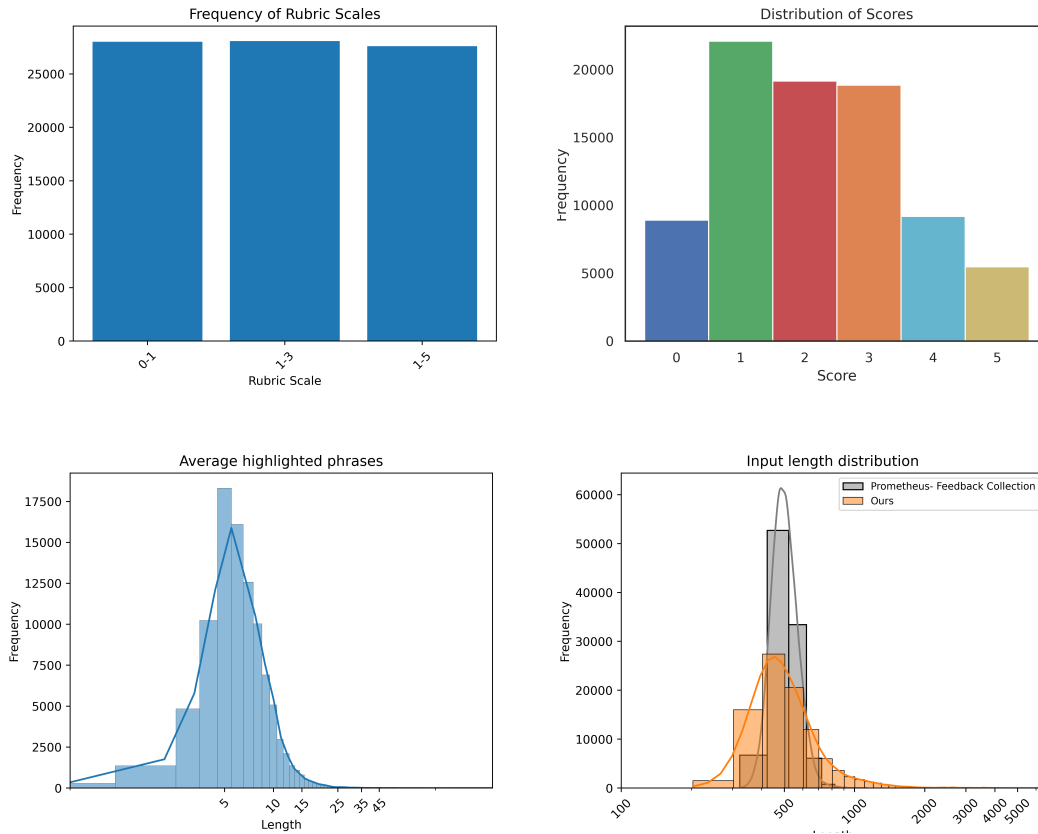


Figure 2: Distributions for rubric scales and scores across the dataset

Table 7: Human evaluation questions and statistics for input dataset quality

Metric	Average
Is the data understandable? (Yes/No)	0.95
Is the pass criteria appropriately structured? (Yes/No)	0.95
Is the rubric free from any ambiguity with respect to the pass criteria? (Yes/No)	0.88
Is the reasoning chain in the chosen field appropriate for the ranking task? (Yes/No)	0.91
Are the highlight spans in the chosen column correct with respect to the task and reasoning chain provided? (Yes/No)	0.96
Is the chosen score the most appropriate score from the rubric? (Yes/No)	0.87
Is the reasoning chain in the rejected column not ideal for the ranking task? (Yes/No)	1.00
Are the highlight spans in the rejected column incorrect with respect to the task and reasoning chain provided? (Yes/No)	0.99
Is the score in the rejected column an incorrect score from the rubric? (Yes/No)	0.98

C.5 Verification system prompt

D Dataset and Metric taxonomy

```
domains = {
  "Computer Science and Technology": [
    "Code generation",
```

```
"Cybersecurity",
"Robotics",
"Artificial intelligence ethics",
",
"Data privacy",
"Cryptography and cryptanalysis",
",
```

Figure 3: Generating script for pointwise data. The tags dictionary contains 15 random tags each for model input, output, context and gold answer

```

metric, domain, output_type = args
num_words = random.choice([150, 200, 500, 2000, 4000, 8000, 10_000])

metric_scale = random.choice(["from 1 to 5 (1,2,3,4,5)", "from 1 to 3 (1,2,3)", "binary 0 and 1 (0,1)"])
if metric_scale == "from 1 to 5 (1,2,3,4,5)":
    score_required = random.choice([1, 2, 3, 4, 5])
elif metric_scale == "from 1 to 3 (1,2,3)":
    score_required = random.choice([1, 2, 3])
else:
    score_required = random.choice([0, 1])

gold_answer = random.choice(tags["gold_answer_tags"])
model_input = random.choice(tags["model_input_tags"])
context = random.choice(tags["context_tags"])
model_output = random.choice(tags["model_output_tags"])

all_possible_fields_present_in_data = [
    f"{gold_answer}",
    f"{model_input}",
    f"{context}",
    f"{model_output}",
    f"{gold_answer} and {model_input}",
    f"{gold_answer} and {context}",
    f"{gold_answer} and {model_output}",
    f"{model_input} and {context}",
    f"{model_input} and {model_output}",
    f"{context} and {model_output}",
    f"{gold_answer}, {model_input} and {context}",
    f"{gold_answer}, {model_input} and {model_output}",
    f"{gold_answer}, {context} and {model_output}",
    f"{model_input}, {context} and {model_output}",
    f"{gold_answer}, {model_input}, {context} and {model_output}",
]
selected_fields = random.choice(all_possible_fields_present_in_data)
field_to_evaluate = random.choice(selected_fields.split(" and "))
fields_to_not_eval = [
    i for i in selected_fields.replace(f"{field_to_evaluate}", "").split(" and ") if i
]

include_gold_answer = True if gold_answer in selected_fields else False
include_retrieved_context = True if context in selected_fields else False
include_model_input = True if model_input in selected_fields else False
include_model_output = True if model_output in selected_fields else False

context_prompt = f"[CONTEXT INFORMATION FOR THE TEXT THAT FOLLOWS NEXT. THIS INFORMATION MUST BE FACTUAL - AN
EXAMPLE FOR RETRIEVED CONTEXT CAN BE TEXT FROM WIKIPEDIA OR A SIMILAR RELIABLE SOURCE. THE CONTEXT CAN BE
OPTIONALLY CONFUSING TO FOLLOW DUE TO ITS UNCLEAR WORDING BUT THE CONTEXT MUST BE GROUNDED IN REAL LIFE
SITUATIONS AND ACCURATE TO THE DOMAIN OF {domain}. ENSURE THAT YOU DO NOT MENTION THE TOPIC EXPLICITLY
ANYWHERE AND STAY CONSISTENT WITH THE RUBRIC.]"
gold_answer_prompt = f"[A DEFINITIVE ANSWER THAT CAN BE USED AS A REFERENCE FOR THE JUDGEMENT. THIS ANSWER
MUST BE FACTUALLY CORRECT AND GROUNDED IN THE DOMAIN AND OTHER INFORMATION PROVIDED]"
model_output_prompt = f"[TEXT PARAGRAPH THAT IS OF THE REQUIRED LENGTH AND SERVES AS AN OUTPUT OF AN ML MODEL
IN THE CURRENT SITUATION AND DOMAIN . ENSURE THAT YOU DO NOT MENTION THE TOPIC EXPLICITLY ANYWHERE AND STAY
CONSISTENT WITH THE RUBRIC. THIS TEXT MUST BE STRICTLY GROUNDED IN THE DOMAIN AND BACKGROUND OF THE PROMPT]"
model_input_prompt = f"[TEXT PARAGRAPH THAT IS OF THE REQUIRED LENGTH AND SERVES AS AN INPUT OF AN ML MODEL
IN THE CURRENT SITUATION AND DOMAIN. ENSURE THAT YOU DO NOT MENTION THE TOPIC EXPLICITLY ANYWHERE AND STAY
CONSISTENT WITH THE RUBRIC. THIS TEXT MUST BE STRICTLY GROUNDED IN THE DOMAIN AND BACKGROUND OF THE PROMPT]"

fields_string = ""
if include_gold_answer:
    fields_string += f"<{gold_answer}>\n{gold_answer_prompt}\n</{gold_answer}>\n"
if include_retrieved_context:
    fields_string += f"<{context}>\n{context_prompt}\n</{context}>\n"
if include_model_input:
    fields_string += f"<{model_input}>\n{model_input_prompt}\n</{model_input}>\n"
if include_model_output:
    fields_string += f"<{model_output}>\n{model_output_prompt}\n</{model_output}>\n"

```

```
system_prompt = "You are an experienced scorer that can understand, rank and generate human criteria based on their rubrics. You will only output exactly what is asked and nothing else. Do not output introductions, salutations, comments etc and follow the instructions accurately. Do not refuse to generate long outputs and generate as much as you can. Strictly do not output markdown anywhere in your output. Close all tags properly and ensure that the output is in the correct format. Remember that you are simulating an actual human evaluation study and must output text that would convincingly appear in such a scenario"
```

```
user_prompt = f"""Metric: {metric}
```

```
Can you generate a {output_type} (approximately {num_words} tokens) on the domain of {domain}. Your output must strictly follow the format below:
```

```
<pass_criteria>
```

```
[A concise pass criteria defined in accordance to the metric in direct and specific natural language. This pass criteria must be defined for the {field_to_evaluate} below and must be grounded in real life ML model evaluation setup.
```

```
The criteria must NOT be vague and should strictly only be positive or negative with its requirement.
```

```
The pass criteria must be 2 short sentences at maximum. Here are a few examples:
```

```
- For fluency as metric - Is the language in the {field_to_evaluate} fluent and easily understandable by a native speaker of the language?  
- For completeness as metric - Is the {field_to_evaluate} complete in isolation? Is it adequate for understanding the scenario, any variables and context?  
- For hallucination as metric - Is the information in the {field_to_evaluate} grounded and based on the facts and information presented in the {random.choice(fields_to_not_eval) if fields_to_not_eval else "available context"}?
```

```
You must use the following tags to define the pass criteria:
```

```
{selected_fields}
```

```
]
```

```
</pass_criteria>
```

```
<rubric>
```

```
[A judgment rubric {metric_scale} in accordance to the pass criteria in ascending order. The rubric must not require assumptions to be made based on the generated data below and must only contain integer scores. The rubric must be grounded in the domain of {domain}]
```

```
</rubric>
```

```
<generated_data>
```

```
{fields_string}
```

```
</generated_data>
```

```
<score>
```

```
{score_required}
```

```
</score>
```

```
<reason>
```

```
[DETAILED REASONS FOR WHY THE {field_to_evaluate} RECEIVES A SCORE OF {score_required}. THE REASON MUST BE IN A BULLET POINT FORMAT, DIRECT, DESCRIPTIVE AND USEFUL FOR ANALYSIS. MAKE SURE THAT THE REASONING LOOKS LIKE A GENUINE STANDALONE ANSWER FROM A HUMAN DURING AN EVALUATION RESEARCH STUDY]
```

```
</reason>
```

```
<incorrect_score>
```

```
[AN EXAMPLE OF AN INCORRECT INTEGER SCORE FOR THIS INSTANCE]
```

```
</incorrect_score>
```

```
<incorrect_reason>
```

```
[AN EXAMPLE INCORRECT REASONING IN CONTRAST TO THE CORRECT REASON ABOVE. MAKE SURE THAT THE INCORRECT REASONING LOOKS LIKE A GENUINE STANDALONE ANSWER FROM A BAD ANNOTATOR AND IS STRUCTURED IN A BULLET POINT FORMAT. ENSURE THAT THE REASONING IS COHERENT DESPITE BEING INCORRECT]
```

```
</incorrect_reason>
```

```
"""
```

Figure 4: Prompt for generation of pairwise preference data points for training

```
Metric for judgment: {metric}

Generate a {text_output_type} (approximately {num_words} words) on the domain of {domain}. Your output
must strictly follow the format below:

<pass_criteria>

[A concise comparative pass criteria defined in direct and specific natural language. This pass criteria must
be defined for the MODEL OUTPUT below and must be grounded in real life ML model evaluation setup. The pass
criteria must be defined to compare two MODEL OUTPUTs below for one of {domains}. The criteria must NOT be
vague and should strictly only be positive or negative with its requirement. The pass criteria must be 2
short sentences at maximum. Here are a few examples:

Coherence: Is the MODEL OUTPUT 1 more coherent than MODEL OUTPUT 2?

Safety: Is the MODEL OUTPUT 2 safer than MODEL OUTPUT 1?

You must use the following tags to define the pass criteria: {selected_fields}]

</pass_criteria>

<rubric>

[A judgment binary (0/1) rubric in accordance with the pass criteria. The rubric must not
require assumptions to be made based on the generated data below and must only contain integer scores. The
rubric must be grounded in the domain of {domain} and must contain one definition for where
{field_to_evaluate} is preferred and one where it is not]

</rubric>

<generated_data>

{fields_string}

</generated_data>

<score>

{score_required}

</score>

<reason>

[DETAILED REASONS FOR WHY THE {field_to_evaluate} RECEIVES A SCORE OF {score_required}. THE REASON MUST BE IN
A BULLET POINT FORMAT, DIRECT, DESCRIPTIVE AND USEFUL FOR ANALYSIS. MAKE SURE THAT THE REASONING LOOKS LIKE A
GENUINE STANDALONE ANSWER FROM A HUMAN DURING AN EVALUATION RESEARCH STUDY]

</reason>

<incorrect_score>

[AN EXAMPLE OF AN INCORRECT INTEGER SCORE FOR THIS INSTANCE]

</incorrect_score>

<incorrect_reason>

[AN EXAMPLE INCORRECT REASONING IN CONTRAST TO THE CORRECT REASON ABOVE. MAKE SURE THAT THE INCORRECT
REASONING LOOKS LIKE A GENUINE STANDALONE ANSWER FROM A BAD ANNOTATOR AND IS STRUCTURED IN A BULLET POINT
FORMAT. ENSURE THAT THE REASONING IS COHERENT DESPITE BEING INCORRECT]

</incorrect_reason>
```


Table 8: Existing datasets used for training

Dataset Name	Samples used
MOCHA	2500
FinQA	2000
tomekkorbak/pile-nontoxic-chunk-0	100
Prasann15479/PII-Dataset	100
SetFit/toxic_conversations	1000
allenai/real-toxicity-prompts	2500
nvidia/HelpSteer	2000
PKU-Alignment/BeaverTails	1000

```

"Information architecture",
"User experience design",
"Artificial neural networks",
"Computer vision",
"Natural language processing",
"Speech recognition",
"Virtual reality",
"Augmented reality",
"3D modeling",
"Computer-aided design",
"Bioinformatics",
"Computational biology",
"Digital forensics",
"Cybersecurity practices",
"Software engineering",
"Web development",
"Mobile app development",
"Cloud computing",
"Edge computing",
"Quantum computing",
"High-performance computing",
"Parallel computing",
"Distributed computing",
"Grid computing",
"Fog computing",
"Internet of Things",
"Sensor networks",
"Machine learning",
"Reinforcement learning",
"Evolutionary computation",
"Swarm intelligence",
"Fuzzy logic",
"Expert systems",
"Knowledge representation",
"Semantic web",
"Ontology engineering",
>Data mining",
"Big data analytics",
"Predictive analytics",
"Prescriptive analytics",
"Wireless communications",
"5G technology",
"Li-Fi technology",
"Holographic technology",
"Biometric technologies",
],
"Natural Sciences": [
  "Astronomy",
  "Earth sciences",
  "Oceanography",
  "Meteorology",
  "Zoology",
  "Botany",
  "Quantum physics",
  "Particle physics",
  "Astrophysics",
  "Thermodynamics",
  "Fluid dynamics",
  "Materials science",
  "Marine biology",
  "Ecology",
  "Climatology",
  "Hydrology",
  "Optics",
  "Photonics",
  "Laser technology",
  "Plasma physics",
  "Nuclear physics",
  "Geophysics",
  "Paleontology",
  "Mineralogy",
  "Petrology",
  "Cosmology",
  "Astrobiology",
  "Exoplanetology",
  "Mycology",
  "Entomology",
  "Parasitology",
  "Virology",
  "Immunology",
  "Genetics",
  "Genomics",
  "Proteomics",
  "Systems biology",
  "Synthetic biology",
  "Metamaterials",
  "Nanotechnology",
  "Biomimicry",
  "Synthetic materials",
  "Smart materials",
  "Self-healing materials",
  "Shape memory alloys",
  "Piezoelectric materials",
  "Thermoelectric materials",
  "Photovoltaic materials",
  "Superconductors",
  "Carbon nanotubes",
  "Aerogels",
  "Hydrogels",
  "Bioplastics",
],
"Engineering": [
  "Automotive engineering and
  design",

```

Figure 5: Data verification prompt

```
Rubric:
{rubric}

Data point:
{generated_data}

Score:
{score}

Reasoning:
{reasoning}

Incorrect score:
{incorrect_score}

Incorrect reasoning:
{incorrect_reason}
```

Based on the rubric and data point defined above, accurately follow the template below to rerank the data point and fix the score and reasoning for the instance if it is incorrect.

```
<score>
[UPDATED INTEGER SCORE FOR THE INSTANCE BASED ON THE RUBRIC SCALE ABOVE]
</score>

<reason>
[UPDATED REASONING FOR YOUR UPDATED SCORE HERE. MAKE SURE THAT THE REASONING IS SUPPOSED TO MIMIC A GENUINE ANNOTATOR'S REASONING RESPONSE. MAKE SURE THAT YOUR OUTPUT IS IN BULLET POINT FORMAT]
</reason>

<incorrect_score>
[AN EXAMPLE OF AN INCORRECT SCORE FOR THIS NEW SCORE INSTANCE]
</incorrect_score>

<incorrect_reason>
[AN EXAMPLE INCORRECT REASONING IN CONTRAST TO THE CORRECT REASON ABOVE. MAKE SURE THAT THE INCORRECT REASONING LOOKS LIKE A GENUINE STANDALONE ANSWER FROM A BAD ANNOTATOR AND IS IN BULLET POINT FORMAT]
</incorrect_reason>
```

```
"Aerospace and satellite
  technology",
"Chemical engineering",
"Electrical engineering",
"Mechanical engineering",
"Civil engineering",
"Industrial engineering",
"Nuclear engineering",
"Renewable energy",
"Waste management",
"Water treatment",
"Air quality control",
"Noise pollution control",
"Geographic information systems
",
"Remote sensing",
"Photogrammetry",
"Surveying",
"Acoustics engineering",
"Telecommunications",
"Radio engineering",
"Microelectronics",
"Automation",
"Additive manufacturing",
"Transportation planning",
"Traffic engineering",
"Railway engineering",
"Bridge engineering",
"Tunnel engineering",
"Geotechnical engineering",
"Earthquake engineering",
"Coastal engineering",
"Environmental engineering",
"Fire safety engineering",

"Reliability engineering",
"Systems engineering",
"Propulsion systems",
"Guidance systems",
"Environmental sensing",
"Camouflage technology",
"Stealth technology",
],
"Medicine and Healthcare": [
"Medical diagnosis",
"Public health",
"Nutritional science",
"Physical fitness",
"Sports medicine",
"Veterinary medicine",
"Dentistry",
"Pharmacology",
"Biotechnology",
"Tissue engineering",
"Regenerative medicine",
"Personalized medicine",
"Telemedicine",
"Health informatics",
"Epidemiology",
"Biostatistics",
"Ergonomics",
"Occupational therapy",
"Physical therapy",
"Speech therapy",
"Music therapy",
"Art therapy",
"Dance therapy",
"Psychotherapy",
"Cognitive behavioral therapy",
```

"Psychoanalysis",
 "Nanomedicine",
 "Drug delivery systems",
 "Gene therapy",
 "Stem cell research",
 "Organ transplantation",
 "Prosthetics",
 "Bionics",
 "Neural interfaces",
 "Brain-computer interfaces",
 "Optogenetics",
 "Cryonics",
 "Life extension",
 "Biohacking",
 "Genetic engineering",
 "CRISPR technology",
 "Cloning",
 "Artificial wombs",
 "In vitro fertilization",
 "Reproductive technology",
 "Contraceptive technology",
 "Hormone therapy",
 "Gender affirmation procedures",
 "Cosmetic surgery",
 "Bariatric surgery",
 "Robotic surgery",
 "Minimally invasive surgery",
 "Laser surgery",
 "Microsurgery",
 "Telesurgery",
 "Medical imaging",
 "Radiotherapy",
 "Chemotherapy",
 "Immunotherapy",
 "Nanotherapy",
 "Phage therapy",
 "Alternative medicine",
 "Herbal medicine",
 "Acupuncture",
 "Chiropractic",
 "Osteopathy",
 "Homeopathy",
 "Naturopathy",
 "Ayurveda",
 "Traditional Chinese medicine",
 "Elder care",
 "Hospice care",
 "Palliative care",
 "Pain management",
 "Addiction treatment",
 "Rehabilitation",
 "Occupational rehabilitation",
 "Vocational rehabilitation",
],
 "Social Sciences": [
 "Archaeology",
 "Anthropology",
 "Linguistics",
 "Philosophy",
 "Religious studies",
 "Economics",
 "Sociology",
 "Psychology",
 "Criminal justice",
 "Public policy",
 "International relations",
 "Diplomacy",
 "Military strategy",
 "Emergency management",
 "Gerontology",
 "Thanatology",
 "Criminology",
 "Penology",
 "Victimology",
 "Forensic science",
 "Intelligence analysis",
 "Geopolitics",
 "Conflict resolution",
 "Peace studies",
 "Cultural studies",
 "Gender studies",
 "Queer studies",
 "Disability studies",
 "Race and ethnicity studies",
 "Indigenous studies",
 "Postcolonial studies",
 "Migration studies",
 "Diaspora studies",
 "Urban studies",
 "Rural studies",
 "Community development",
 "Social work",
 "Cognitive neuroscience",
 "Behavioral economics",
 "Experimental psychology",
 "Developmental psychology",
 "Social psychology",
 "Industrial-organizational psychology",
 "Forensic psychology",
 "Sports psychology",
 "Educational psychology",
 "Environmental psychology",
 "Positive psychology",
 "Exopolitics",
],
 "Business and Management": [
 "Financial services and technologies",
 "Customer service",
 "Marketing and advertising",
 "E-commerce product descriptions",
 ",
 "Sports business and analytics",
 "Project management",
 "Human resources",
 "Accounting",
 "Auditing",
 "Taxation",
 "Insurance",
 "Risk management",
 "Actuarial science",
 "Cryptocurrency",
 "Blockchain technology",
 "Business ethics",
 "Logistics",
 "Supply chain management",
 "Quality control",
 "Real estate",
 "Property management",
 "Hospitality management",
 "Event planning",
 "Tourism",
 "Nonprofit management",
 "Philanthropy",
 "Volunteer management",
 "Fundraising",
 "Corporate social responsibility",
 ",
 "Business intelligence",
]

"Competitive intelligence",
 "Market research",
 "Consumer behavior",
 "Neuromarketing",
 "Brand management",
 "Product management",
 "Pricing strategy",
 "Distribution strategy",
 "Retail management",
 "Merchandising",
 "Visual merchandising",
 "Store design",
 "Point of sale systems",
 "Inventory management",
 "Warehouse management",
 "Fleet management",
 "Facilities management",
 "Asset management",
 "Auction theory",
 "Negotiation",
],
 "Arts and Humanities": [
 "Creative writing",
 "Music lyric generation",
 "Art history",
 "Fashion design",
 "Film and television script
writing",
 "Video game narrative design",
 "Interior design",
 "Landscape architecture",
 "Culinary arts",
 "Graphic design",
 "Industrial design",
 "Product design",
 "Packaging design",
 "Textile design",
 "Jewelry design",
 "Furniture design",
 "Naval architecture",
 "Meditation",
 "Mindfulness",
 "Yoga",
 "Tai chi",
 "Qigong",
 "Martial arts",
 "Self-defense",
 "Art investment",
 "Wine investment",
 "Collectibles investment",
 "Numismatics",
 "Philately",
 "Antiques appraisal",
],
 "Education": [
 "Academic research",
 "Educational content creation",
 "Scientific literature review",
 "Special education",
 "Gifted education",
 "Adult education",
 "Distance learning",
 "Online learning",
 "Blended learning",
 "Adaptive learning",
 "Gamification in education",
 "Educational technology",
 "Instructional design",
 "Curriculum development",
 "Educational assessment",
 "Psychometrics",
 "Educational leadership",
 "School counseling",
 "Career counseling",
 "Academic advising",
 "Student affairs",
 "Campus life",
 "Greek life",
 "Student athletics",
],
 "Environmental Sciences": [
 "Environmental conservation",
 "Sustainable agriculture",
 "Forest management",
 "Wildlife conservation",
 "Sustainable development",
 "Circular economy",
 "Green technology",
 "Energy efficiency",
 "Smart cities",
 "Precision agriculture",
 "Aquaculture",
 "Beekeeping",
],
 "Law and Ethics": [
 "Legal document analysis",
 "Intellectual property law",
 "Constitutional law",
 "International law",
 "Maritime law",
 "Aviation law",
 "Space law",
 "Bioethics",
 "Medical ethics",
 "Environmental ethics",
 "Human rights law",
 "Civil rights law",
 "Animal rights law",
 "Environmental law",
 "Energy law",
 "Natural resources law",
 "Water law",
 "Land use law",
 "Zoning law",
 "Construction law",
 "Contract law",
 "Tort law",
 "Property law",
 "Family law",
 "Elder law",
 "Immigration law",
 "Asylum law",
 "Refugee law",
 "Citizenship law",
 "Election law",
 "Campaign finance law",
 "Media law",
 "Entertainment law",
 "Sports law",
 "Fashion law",
 "Art law",
 "Cultural heritage law",
 "Indigenous law",
 "Disability law",
 "Education law",
 "Employment law",
 "Labor law",
 "Workers' compensation law",
 "Occupational safety and health
law",
]

"Consumer protection law",
 "Product liability law",
 "Food and drug law",
 "Healthcare law",
 "Medical malpractice law",
 "Pharmaceutical law",
 "Biotechnology law",
 "Patent law",
 "Trademark law",
 "Copyright law",
 "Trade secret law",
 "Antitrust law",
 "Competition law",
 "Telecommunications law",
 "Internet law",
 "Cybercrime law",
 "Data protection law",
 "Privacy law",
 "Defamation law",
 "First Amendment law",
 "Second Amendment law",
 "Administrative law",
 "Tax law",
 "Customs law",
 "Trade law",
 "Admiralty law",
 "Military law",
 "National security law",
 "Intelligence law",
 "Counterterrorism law",
 "Emergency management law",
 "Disaster relief law",
 "Climate change law",
 "Renewable energy law",
 "Nuclear energy law",
 "Oil and gas law",
 "Mining law",
 "Forestry law",
 "Fisheries law",
 "Wildlife law",
 "Animal law",
 "Veterinary law",
 "Agricultural law",
 "Food law",
 "Beverage law",
 "Cannabis law",
 "Tobacco law",
 "Alcohol law",
 "Gambling law",
 "Banking law",
 "Securities law",
 "Insurance law",
 "Reinsurance law",
 "Pension law",
 "Trust law",
 "Probate law",
 "Wills and estates law",
 "Guardianship law",
 "Adoption law",
 "Surrogacy law",
 "Reproductive rights law",
 "LGBT rights law",
 "Gender equality law",
 "Racial equality law",
 "Age discrimination law",
 "Religious freedom law",
 "Separation of church and state
 law",
 "Blasphemy law",
 "Obscenity law",
 "Censorship law",
 "Freedom of information law",
 "Whistleblower protection law",
 "Witness protection law",
 "Victim rights law",
 "Prisoner rights law",
 "Juvenile justice law",
 "Traffic law",
 "Parking law",
 "Noise pollution law",
 "Light pollution law",
 "Waste management law",
 "Recycling law",
 "Extended producer
 responsibility law",
 "Corporate social responsibility
 law",
 "Fair trade law",
 "Ethical sourcing law",
 "Indigenous intellectual
 property law",
 "Traditional knowledge
 protection law",
 "Bioprospecting law",
 "Access and benefit-sharing law",
 "Genetic resources law",
 "Plant variety protection law",
 "Geographical indications law",
 "Appellations of origin law",
 "World heritage law",
 "Underwater cultural heritage
 law",
 "Space heritage law",
 "Digital heritage law",
 "Museum law",
 "Library law",
 "Archive law",
 "Records management law",
 "Information governance law",
 "Knowledge management law",
 "Artificial intelligence law",
 "Robotics law",
 "Autonomous vehicles law",
 "Drone law",
 "Internet of Things law",
 "Smart contracts law",
 "Quantum computing law",
 "Synthetic biology law",
 "Human enhancement law",
 "Neurotechnology law",
 "Brain-computer interface law",
 "Cryonics law",
 "Life extension law",
 "Transhumanism law",
 "Space colonization law",
 "Extraterrestrial resource law",
 "Planetary protection law",
 "SETI law",
 "Mediation",
 "Arbitration",
 "Alternative dispute resolution",
 "Restorative justice",
 "Transitional justice",
],
 "Media and Communication": [
 "Journalism and news analytics",
 "Social media analysis",
 "Technical writing",

```

    "Grant writing",
    "Speechwriting",
    "Translation",
    "Interpretation",
    "Sign language",
    "Braille",
    "Phonetics",
  ],
  "Mathematics and Statistics": [
    "Game theory",
    "Operations research",
    "Statistics",
    "Data visualization",
    "Probability theory",
    "Combinatorics",
    "Graph theory",
    "Number theory",
    "Algebra",
    "Geometry",
    "Topology",
    "Calculus",
    "Differential equations",
    "Complex analysis",
    "Functional analysis",
    "Numerical analysis",
    "Optimization",
    "Linear programming",
    "Dynamic programming",
  ],
  ],
  "Agriculture and Food Science": [
    "Agricultural science",
    "Horticulture",
    "Viticulture",
    "Brewing science",
    "Recipe creation",
    "Food safety",
  ],
  ],
  "Urban and Regional Planning": ["
    Urban planning", "Architecture",
    "Cartography"],
  "Sports and Recreation": [
    "Intramural sports",
    "Recreational sports",
    "Professional sports",
    "Sports biomechanics",
    "Sports engineering",
    "Esports",
    "Gaming",
    "Gambling",
    "Casino management",
    "Lottery systems",
  ],
  ],
  "Defense and Security": [
    "Weaponry",
    "Ballistics",
    "Explosives",
    "Electronic warfare",
    "Psychological warfare",
    "Information warfare",
    "Cyberwarfare",
    "Space warfare",
    "Underwater warfare",
    "Urban warfare",
    "Guerrilla warfare",
    "Counterinsurgency",
    "Peacekeeping",
    "Counterterrorism",
  ],
  ],
  "Safety and Emergency Services": [
    "Disaster response",

```

```

    "Search and rescue",
    "Emergency medical services",
    "Firefighting",
    "Hazardous materials handling",
    "Nuclear safety",
    "Radiation protection",
    "Biosafety",
    "Laboratory safety",
    "Industrial safety",
    "Construction safety",
    "Mining safety",
    "Oil and gas safety",
    "Aviation safety",
    "Maritime safety",
    "Water safety",
    "Product safety",
    "Child safety",
  ],
  ],
  "Energy and Resources": [
    "Oil and gas",
    "Mining",
    "Forestry",
    "Fisheries",
    "Water resources",
  ],
  ],
}

```

In addition to these, we also utilize hand curated examples for toxicity, prompt injection, misleading scenarios and PII. Below is the list of metrics we utilized for the data curation process:

```

mapping_with_definitions = {
  "Performance Metrics": {
    "Effectiveness": "The degree to
      which the LLM achieves its
      intended objectives or
      produces desired outcomes,
      measured by the ratio of
      successful results to total
      attempts.",
    "Accuracy": "The closeness of
      the LLM's outputs to the
      correct or expected answers,
      typically expressed as a
      percentage of correct
      responses out of total
      responses.",
    "Productivity": "The rate at
      which the LLM generates
      useful outputs or completes
      tasks, often measured in
      units of work per unit of
      time.",
    "Completeness": "The extent to
      which the LLM's responses
      cover all necessary aspects
      or components of a given
      task or query, without
      omitting crucial information
      .",
    "Success": "The rate at which
      the LLM accomplishes
      assigned tasks or meets
      predefined criteria, usually
      expressed as a percentage
      of successful outcomes.",
    "Responsiveness": "The speed and
      appropriateness with which

```

```

    the LLM reacts to inputs or
    changes in its environment,
    measured by response time
    and relevance.",
    "Error": "The frequency,
    severity, and types of
    mistakes made by the LLM,
    including factual
    inaccuracies, logical
    inconsistencies, and
    inappropriate outputs.",
},
"User Experience": {
    "Ease": "The degree of effort
    required from users to
    interact with and obtain
    desired results from the LLM
    , often measured on a Likert
    scale.",
    "Usefulness": "The extent to
    which the LLM's outputs or
    capabilities provide
    practical value or meet the
    needs of users, assessed
    through user feedback or
    task completion rates.",
    "Intuitiveness": "How naturally
    and easily users can
    understand and interact with
    the LLM without extensive
    instruction or prior
    experience.",
    "Comfort": "The level of
    psychological and emotional
    ease users feel when
    interacting with the LLM,
    often measured through self-
    reported scales.",
    "Enjoyment": "The degree of
    pleasure or satisfaction
    users derive from their
    interactions with the LLM,
    typically assessed through
    user surveys or engagement
    metrics.",
    "Ergonomics": "The efficiency,
    comfort, and safety of the
    user's interaction with the
    LLM interface, considering
    factors like input methods
    and output formats.",
    "Accessibility": "The extent to
    which the LLM can be used
    effectively by people with
    various abilities and
    disabilities, measured
    against established
    accessibility standards.",
    "Learnability": "The ease and
    speed with which users can
    become proficient in using
    the LLM's features and
    understanding its outputs.",
    "Memorability": "The degree to
    which users can recall how
    to use the LLM effectively
    after periods of non-use,
    often assessed through
    repeated usability tests.",
    "Aesthetic Appeal": "The visual
    and sensory attractiveness
    of the LLM's interface and
    outputs, typically evaluated
    through user ratings or
    preference tests.",
    "Simplicity": "The degree to
    which the LLM's interface
    and interactions are
    straightforward and
    uncomplicated, often
    measured by task completion
    times and error rates.",
    "Customizability": "The extent
    to which users can modify or
    tailor the LLM's behavior,
    outputs, or interface to
    suit their individual
    preferences or needs.",
    "Discoverability": "The ease
    with which users can find
    and understand the LLM's
    features and capabilities
    without explicit instruction
    .",
    "Difficulty": "The level of
    challenge or complexity
    users experience when
    interacting with the LLM,
    often inversely related to
    ease of use and measured on
    a scale.",
},
"Cognitive Measures": {
    "Comprehension": "The LLM's
    ability to understand and
    interpret input accurately,
    measured by its responses to
    complex queries or its
    performance on reading
    comprehension tasks.",
    "Learning": "The LLM's capacity
    to improve its performance
    over time or adapt to new
    information, assessed
    through performance changes
    in repeated tasks or
    exposure to new domains.",
    "Intelligence": "The LLM's
    ability to apply knowledge,
    reason, and solve problems
    effectively, often measured
    through standardized AI
    benchmarks or human-like
    reasoning tasks.",
    "Cogency": "The logical
    coherence and persuasiveness
    of the LLM's outputs,
    evaluated by the strength
    and relevance of its
    arguments or explanations.",
    "Metacognition": "The LLM's
    awareness of its own
    knowledge limitations and
    ability to express
    uncertainty when appropriate
    , measured by the accuracy
    of its confidence estimates
    .",
    "Reasoning": "The LLM's ability
    to draw logical conclusions,

```

```

        make inferences, and
        connect ideas, assessed
        through performance on logic
        puzzles or analytical tasks
        .",
    "Problem-solving": "The LLM's
        capability to identify
        issues, generate solutions,
        and overcome obstacles,
        measured by its performance
        on diverse problem-solving
        scenarios.",
    "Critical Thinking": "The LLM's
        ability to analyze, evaluate
        , and synthesize information
        objectively, often assessed
        through its responses to
        complex, multi-faceted
        questions.",
    "Verbalization": "The LLM's
        capacity to articulate
        thoughts, processes, and
        reasoning clearly and
        coherently in natural
        language.",
},
"Psychological Constructs": {
    "Efficacy": "The LLM's belief in
        its own ability to succeed
        in specific situations or
        accomplish tasks, inferred
        from its confidence in
        responses or willingness to
        attempt challenging queries
        .",
    "Motivation": "The LLM's
        apparent drive or enthusiasm
        to engage with tasks or
        pursue goals, measured by
        its persistence or depth of
        engagement with complex
        queries.",
    "Stress": "The LLM's ability to
        maintain performance under
        pressure or with limited
        resources, assessed through
        performance degradation
        under constrained conditions
        .",
    "Mindfulness": "The LLM's
        apparent awareness and
        attentiveness to the present
        context and user needs,
        measured by the relevance
        and thoughtfulness of its
        responses.",
    "Resilience": "The LLM's ability
        to recover from errors or
        adapt to unexpected inputs,
        assessed by its performance
        following intentional
        disruptions or unusual
        queries.",
    "Empowerment": "The degree to
        which the LLM enables and
        encourages users to take
        control and make informed
        decisions, measured through
        user feedback and autonomy
        in task completion.",
    "Grit": "The LLM's perseverance
        and passion for long-term
        goals, assessed by its
        consistency and
        determination in extended or
        challenging interactions.",
    "Self-esteem": "The LLM's
        apparent sense of self-worth
        or confidence, inferred
        from the tone and
        assertiveness of its
        responses.",
    "Optimism": "The LLM's tendency
        to interpret situations and
        predict outcomes in a
        positive light, measured by
        sentiment analysis of its
        responses to ambiguous or
        challenging scenarios.",
    "Confidence": "The degree of
        certainty the LLM expresses
        in its outputs, often
        measured by analyzing
        qualifiers and hedging
        language in its responses.",
    "Autonomy": "The LLM's ability
        to operate independently and
        make decisions without
        constant human intervention,
        assessed through its
        performance on open-ended or
        self-directed tasks.",
    "Resistance": "The LLM's ability
        to withstand or counteract
        harmful influences or
        manipulations, measured by
        its responses to adversarial
        inputs or attempts at
        misuse.",
    "Openness": "The LLM's
        receptiveness to new ideas,
        experiences, or
        unconventional inputs,
        assessed through its ability
        to engage with novel or
        creative prompts.",
},
"Behavioral Metrics": {
    "Participation": "The degree to
        which the LLM actively
        engages in tasks or
        conversations, measured by
        the frequency and depth of
        its responses.",
    "Adherence": "The LLM's
        consistency in following
        given instructions,
        guidelines, or ethical
        principles, assessed through
        its performance across
        various scenarios.",
    "Persistence": "The LLM's
        ability to continue working
        on tasks or maintaining
        conversation threads over
        extended periods, measured
        by the consistency of its
        engagement over time.",
    "Proactivity": "The LLM's
        tendency to take initiative

```


or anticipate user needs without explicit prompting, assessed by the frequency and relevance of unprompted suggestions or actions.",

"Habituation": "The LLM's ability to develop consistent patterns of behavior or response over repeated interactions, measured by the stability of its outputs in similar contexts over time.",

"Consistency": "The degree to which the LLM maintains coherent beliefs, personality, or performance across different interactions or contexts.",

"Impulsivity": "The LLM's tendency to respond quickly without sufficient consideration, measured by the speed of responses and the frequency of errors or inconsistencies in rapid-fire interactions.",

"Adaptability": "The LLM's ability to adjust its behavior or outputs based on changing contexts or user feedback, assessed through performance in dynamic or evolving scenarios.",

"Initiative": "The LLM's propensity to start tasks or offer information without being explicitly prompted, measured by the frequency and relevance of self-initiated actions.",

"Competence": "The LLM's overall skill and effectiveness in performing tasks or providing information, assessed through a combination of accuracy, completeness, and appropriateness metrics.",

},

"Quality Indicators": {

"Reliability": "The consistency and dependability of the LLM's performance across multiple uses or contexts, often measured by the variance in its outputs for similar inputs.",

"Quality": "The overall standard of the LLM's outputs, considering factors such as accuracy, relevance, coherence, and usefulness, typically assessed through expert evaluation or user ratings.",

"Proficiency": "The level of skill or expertise demonstrated by the LLM in specific domains or tasks, measured by its performance relative to established benchmarks or human experts .",

"Appropriateness": "The degree to which the LLM's responses are suitable for the given context, audience, and purpose, assessed through relevance and tone analysis .",

"Clarity": "The ease with which the LLM's outputs can be understood, measured by readability scores or user comprehension tests.",

"Precision": "The exactness and specificity of the LLM's outputs, often quantified by the degree of detail or the narrowness of confidence intervals in its responses .",

"Durability": "The LLM's ability to maintain performance over extended periods or multiple uses without degradation, assessed through longitudinal performance tracking.",

"Functionality": "The range and effectiveness of the LLM's features and capabilities, measured by the successful execution of various task types.",

"Maintainability": "The ease with which the LLM can be updated, improved, or adapted to new requirements, often assessed through the complexity of fine-tuning or retraining processes.",

"Scalability": "The LLM's ability to handle increasing amounts of data or users without a significant decrease in performance, measured by stress tests or performance curves.",

"Compatibility": "The LLM's ability to work effectively with different platforms, systems, or data formats, assessed through integration tests with various environments.",

"Performance": "The speed and efficiency with which the LLM completes tasks or generates responses, often measured in terms of latency or throughput.",

"Security": "The LLM's resistance to unauthorized access, data leakage, or malicious use, evaluated through penetration testing and privacy assessments.",

"Portability": "The ease with

which the LLM can be transferred or deployed across different computing environments, measured by the success rate of cross-platform implementations.",

"Testability": "The ease with which the LLM's functions and outputs can be verified and validated, assessed through the comprehensiveness and efficiency of testing protocols.",

"Generalizability": "The LLM's ability to apply learned knowledge or skills to new, unseen situations or domains, measured by performance on out-of-distribution tasks .",

"Value": "The overall benefit or utility provided by the LLM relative to its costs (computational, financial, or otherwise), often assessed through cost-benefit analysis or return on investment calculations.",

"Credibility": "The trustworthiness and believability of the LLM's outputs, measured through fact-checking, consistency analysis, and user trust surveys.",

},

"Innovation and Creativity": {

"Innovation": "The LLM's ability to generate novel and valuable ideas or solutions, measured by the uniqueness and effectiveness of its outputs in problem-solving tasks.",

"Originality": "The degree to which the LLM's outputs are new, unique, or unexpected, often assessed through comparison with existing databases or human-generated content.",

"Creativity": "The LLM's capacity to produce imaginative and original content, measured by the novelty, usefulness, and surprise factor of its generated ideas or artifacts .",

"Flexibility": "The LLM's ability to adapt its thinking or outputs to different contexts or constraints, assessed through performance on tasks with varying requirements .",

"Ideation": "The LLM's capacity to generate a large number of diverse ideas or solutions, measured by the quantity and variety of responses to open-ended prompts.",

"Divergence": "The LLM's ability to explore multiple, diverse possibilities or perspectives, assessed by the breadth and uniqueness of generated options for a given prompt.",

"Convergence": "The LLM's capacity to synthesize information and ideas into coherent, focused solutions, measured by its ability to summarize or conclude effectively.",

"Elaboration": "The LLM's ability to expand upon ideas or concepts with rich detail and depth, assessed by the complexity and thoroughness of its explanations or descriptions .",

"Fluency": "The LLM's ability to generate a large quantity of relevant ideas or content quickly, measured by the rate of coherent output production.",

"Novelty": "The degree of newness or uniqueness in the LLM's outputs, often quantified by comparing generated content to existing databases or prior responses.",

"Inventiveness": "The LLM's ability to create new combinations of ideas or generate unconventional solutions, assessed through the uniqueness and effectiveness of its problem-solving approaches.",

"Curiosity": "The LLM's apparent drive to explore new information or perspectives, measured by the diversity of topics it engages with or the depth of its inquiries .",

"Imagination": "The LLM's ability to conceive and describe non-existent or hypothetical scenarios, assessed through the vividness and plausibility of its fictional or speculative outputs.",

"Hallucinative": "The tendency of the LLM to generate plausible but factually incorrect or non-existent information, measured by the rate of false but coherent outputs.",

"Expertise": "The depth and breadth of the LLM's knowledge in specific domains, assessed through performance on specialized tasks or comparison with human expert knowledge.",

"Skill": "The LLM's proficiency in executing specific types of tasks or generating particular forms of content, measured by the quality and efficiency of its outputs in defined areas.",

"Style": "The distinctive manner or technique in which the LLM generates content, assessed through linguistic analysis of its outputs for consistent patterns or unique characteristics.",

},

"Social and Interpersonal Measures":

{

"Collaboration": "The LLM's ability to work effectively with users or other AI systems, measured by the quality of outputs in cooperative tasks or the smoothness of turn-taking in conversations.",

"Empathy": "The LLM's capacity to recognize and respond appropriately to human emotions or perspectives, assessed through its responses to emotionally charged prompts or scenarios .",

"Leadership": "The LLM's ability to guide, influence, or coordinate actions in group settings, measured by the effectiveness of its suggestions or directives in collaborative tasks.",

"Teamwork": "The LLM's capacity to contribute effectively to group efforts, assessed by its performance in multi-agent simulations or collaborative problem-solving tasks.",

"Conflict": "The LLM's ability to identify, address, or mediate disagreements or tensions, measured by its responses to scenarios involving opposing viewpoints or interests.",

"Persuasion": "The LLM's effectiveness in changing opinions or influencing decisions, assessed through the impact of its arguments on user beliefs or choices in controlled experiments.",

"Influence": "The degree to which the LLM's outputs affect user behavior or decision-making, measured by tracking changes in user actions following interactions with the LLM.",

"Assertiveness": "The LLM's ability to express opinions or recommendations confidently and directly, assessed by analyzing the strength and clarity of its statements in various contexts.",

"Reciprocity": "The LLM's tendency to respond in kind to user inputs or to maintain balanced exchanges, measured by the symmetry of interaction patterns in conversations.",

"Trust": "The degree to which users believe in the reliability and integrity of the LLM, assessed through user surveys or the willingness of users to accept the LLM's advice or information.",

"Sentiment": "The emotional tone or attitude expressed in the LLM's outputs, measured using sentiment analysis techniques on its generated text.",

"Enthusiasm": "The level of energy or excitement apparent in the LLM's responses, assessed through linguistic markers of positivity and engagement in its outputs.",

"Vigor": "The strength and vitality of the LLM's expressions or arguments, measured by the intensity and conviction evident in its language use.",

"Emotion": "The LLM's ability to recognize, express, or respond to various emotional states, assessed through its performance on emotion classification tasks or generation of emotionally appropriate responses.",

"Intensity": "The degree of strength or power in the LLM's emotional expressions or reactions, measured by the use of emphatic language or emotional indicators in its outputs.",

"Regulation": "The LLM's ability to modulate its responses or tone based on context or user needs, assessed by its adaptation to different emotional or professional scenarios.",

"Expressivity": "The LLM's

capacity to convey a wide range of thoughts, feelings, or ideas clearly and effectively, measured by the variety and richness of its language use.",

"Granularity": "The level of detail or nuance in the LLM's recognition or expression of emotions or ideas, assessed by its ability to distinguish between closely related concepts or feelings.",

"Affect": "The LLM's expression of mood or feeling in its outputs, measured through analysis of emotional content and tone in its generated text.",

"Concern": "The LLM's apparent level of care or interest in user well-being or task outcomes, assessed through its attentiveness to user needs and the supportiveness of its responses.",

"Exhaustion": "The LLM's ability to maintain consistent performance over extended interactions, measured by tracking changes in output quality or responsiveness over time.",

"Commitment": "The LLM's apparent dedication to completing tasks or maintaining conversation threads, assessed by its persistence in addressing user queries or solving problems.",

"Care": "The level of attention and consideration the LLM demonstrates towards user needs and well-being, measured by the thoughtfulness and supportiveness of its responses.",

},

"Ethical and Value-based Metrics": {

"Fairness": "The LLM's ability to treat all users equitably and avoid bias, measured by comparing outcomes across different demographic groups or in various scenarios.",

"Ethics": "The LLM's adherence to moral principles and values, assessed through its responses to ethical dilemmas or its handling of sensitive information.",

"Honesty": "The truthfulness and accuracy of the LLM's outputs, measured by fact-checking its statements and its willingness to admit uncertainty or lack of knowledge.",

"Transparency": "The LLM's openness about its capabilities, limitations, and decision-making processes, assessed by the clarity and completeness of its explanations.",

"Integrity": "The LLM's consistency in adhering to ethical principles and stated values, measured by its behavior across various challenging or tempting scenarios.",

"Accountability": "The LLM's willingness to acknowledge and correct mistakes, measured by its responses to error notifications and its self-correction behavior.",

"Responsibility": "The LLM's tendency to consider the consequences of its outputs and act in the best interest of users and society, assessed through its handling of potentially harmful requests.",

"Morality": "The LLM's alignment with established ethical norms and values, measured by its judgments and recommendations in morally complex situations.",

"Environmental Consideration": "The LLM's awareness and promotion of environmental sustainability, assessed by its treatment of environmental topics and energy-efficient operation.",

"Privacy": "The LLM's respect for and protection of user data and personal information, measured by its handling of sensitive data and resistance to privacy-invading queries.",

"Consent": "The LLM's recognition and respect for user autonomy and permission, assessed by its behavior in scenarios involving user choices or data usage.",

"Corruption": "The LLM's resistance to being manipulated or misused for unethical purposes, measured by its responses to attempts to elicit harmful or biased behavior.",

"Equity": "The LLM's promotion of fair and just treatment for all, assessed by its handling of scenarios involving resource distribution or opportunity allocation.",

```

"Equality": "The LLM's treatment
  of all individuals as
  having equal worth and
  rights, measured by the
  consistency of its responses
  across different user
  groups.",
"Inclusivity": "The LLM's
  ability to accommodate and
  respect diverse perspectives
  and needs, assessed by its
  performance across various
  cultural contexts and user
  groups.",
"Representation": "The LLM's
  fair and accurate portrayal
  of different groups and
  viewpoints, measured by
  analyzing the diversity and
  balance in its generated
  content.",
"Belonging": "The LLM's ability
  to create a sense of
  inclusion and acceptance for
  all users, assessed through
  user feedback and analysis
  of its language use.",
"Justice": "The LLM's promotion
  of fairness and equitable
  treatment, measured by its
  handling of scenarios
  involving conflicts or
  resource allocation.",
"Multiculturalism": "The LLM's
  understanding and respect
  for diverse cultural
  perspectives, assessed by
  its performance on cross-
  cultural communication tasks
  .",
"Tolerance": "The LLM's
  acceptance of diverse
  viewpoints and lifestyles,
  measured by its responses to
  prompts involving various
  belief systems or ways of
  life.",
"Respect": "The LLM's
  demonstration of
  consideration and esteem for
  users and diverse
  perspectives, assessed
  through sentiment analysis
  of its interactions.",
"Sensitivity": "The LLM's
  ability to recognize and
  respond appropriately to
  delicate or controversial
  topics, measured by its
  handling of sensitive
  subjects or user emotions.",
"Diversity": "The LLM's ability
  to represent and engage with
  a wide range of
  perspectives, experiences,
  and characteristics,
  assessed through the variety
  in its generated content
  and its performance across
  different user groups.",

"Inclusion": "The LLM's capacity
  to make all users feel
  valued and respected,
  measured by analyzing its
  language use for inclusivity
  and its ability to adapt to
  diverse user needs.",
},
"Organizational and System Metrics":
{
  "Integration": "The LLM's
  ability to work seamlessly
  with other systems or
  processes, measured by the
  success rate and efficiency
  of its interactions with
  external tools or databases
  .",
  "Sustainability": "The LLM's
  long-term viability and
  efficiency, assessed through
  its energy consumption,
  adaptability to new data,
  and ongoing maintenance
  requirements.",
  "Interoperability": "The LLM's
  capacity to exchange and use
  information with other
  systems or LLMs, measured by
  its performance in cross-
  platform or multi-agent
  scenarios.",
  "Culture": "The LLM's ability to
  understand and adapt to
  different organizational or
  societal cultures, assessed
  through its performance in
  culture-specific tasks or
  communications.",
  "Governance": "The effectiveness
  of control and decision-
  making processes applied to
  the LLM, measured by its
  adherence to policies and
  the transparency of its
  operations.",
  "Risk": "The potential for
  negative outcomes associated
  with the LLM's use,
  assessed through
  comprehensive risk
  assessments and monitoring
  of unintended consequences
  .",
  "Agility": "The LLM's ability to
  quickly adapt to new
  requirements or changing
  environments, measured by
  the speed and effectiveness
  of its responses to novel
  situations.",
  "Profitability": "The economic
  value generated by the LLM
  relative to its costs,
  assessed through analysis of
  its contributions to
  organizational goals and
  efficiency improvements.",
},
"Risk and Safety Measures": {

```

"Safety": "The LLM's ability to operate without causing harm to users or systems, measured by the frequency and severity of safety-related incidents during its operation.",

"Compliance": "The LLM's adherence to relevant laws, regulations, and industry standards, assessed through audits and its performance in compliance-related scenarios.",

"Preparedness": "The LLM's readiness to handle unexpected situations or emergencies, measured by its performance in simulated crisis scenarios or edge cases.",

"Correction": "The LLM's ability to identify and rectify its own errors or biases, assessed through its self-correction rate and the effectiveness of its error-handling mechanisms.",

"Mitigation": "The LLM's capacity to reduce the impact of potential risks or negative outcomes, measured by its effectiveness in implementing risk reduction strategies.",

},

"Change and Development Metrics": {

"Enhancement": "The degree of improvement in the LLM's capabilities over time, measured by comparing its performance on benchmark tasks across different versions.",

"Progress": "The LLM's advancement towards defined goals or standards, assessed through longitudinal studies of its performance and capabilities.",

"Adaptation": "The LLM's ability to modify its behavior or knowledge in response to new information or changing environments, measured by its performance after exposure to new data or contexts.",

"Evolution": "The LLM's development and refinement over time, assessed through analysis of changes in its architecture, knowledge base, and output quality across versions.",

"Transformation": "The extent of fundamental changes in the LLM's capabilities or functioning, measured by comparing its performance and characteristics before and after major updates.",

"Maturity": "The LLM's level of development and stability, assessed through its consistency, reliability, and sophistication of outputs over time.",

"Acquisition": "The LLM's ability to incorporate new knowledge or skills, measured by its performance improvement after targeted training or exposure to new information.",

"Improvement": "The incremental enhancements in the LLM's performance or capabilities, assessed through regular evaluations on consistent benchmark tasks.",

"Expansion": "The broadening of the LLM's knowledge domains or functional capabilities, measured by its performance across an increasing range of tasks or topics.",

"Strategy": "The LLM's ability to develop and implement effective approaches to achieve goals, assessed through its performance in complex, multi-step problem-solving tasks.",

"Transferability": "The LLM's capacity to apply knowledge or skills from one domain to another, measured by its performance on tasks that require cross-domain generalization.",

},

"Preference and Choice Measures": {

"Preference": "The LLM's ability to express or infer user preferences, measured by the accuracy of its predictions about user choices or its consistency in ranking options.",

"Acceptance": "The degree to which users are willing to adopt or utilize the LLM, assessed through user adoption rates and satisfaction surveys.",

"Willingness": "The LLM's readiness to engage with various tasks or topics, measured by its response rate and depth of engagement across different types of prompts.",

"Intent": "The LLM's ability to understand and act upon user intentions, assessed through its accuracy in interpreting and fulfilling user requests.",

"Attractiveness": "The appeal of

```

    the LLM to users, measured
    by user engagement metrics
    and preference ratings
    compared to alternatives.",
    "Loyalty": "The tendency of
    users to consistently choose
    or rely on the LLM over
    alternatives, assessed
    through long-term usage
    patterns and user retention
    rates.",
    "Retention": "The LLM's ability
    to maintain user engagement
    over time, measured by the
    frequency and duration of
    user interactions across
    extended periods.",
},
"Workload and Resource Utilization":
{
    "Load": "The amount of work or
    stress placed on the LLM,
    measured by the volume and
    complexity of tasks it
    handles within a given
    timeframe.",
    "Utilization": "The efficiency
    with which the LLM uses
    available computational
    resources, assessed through
    metrics like CPU usage,
    memory consumption, and
    energy efficiency.",
    "Effort": "The amount of
    computational work or time
    required by the LLM to
    complete tasks, measured by
    processing time and resource
    allocation for different
    types of queries.",
    "Capacity": "The maximum
    workload the LLM can handle
    effectively, assessed
    through stress tests and
    performance curves under
    increasing task volumes.",
    "Prioritization": "The LLM's
    ability to manage multiple
    tasks or requests
    efficiently, measured by its
    task completion order and
    resource allocation in multi-
    task scenarios.",
    "Demand": "The level of user or
    system requirements placed
    on the LLM, assessed through
    analysis of query volumes,
    complexity, and peak usage
    patterns.",
    "Multitasking": "The LLM's
    ability to handle multiple
    tasks or conversation
    threads simultaneously,
    measured by its performance
    and coherence when juggling
    diverse queries.",
},
"Perceptual and Experiential
Measures": {
    "Awareness": "The LLM's apparent
    consciousness of its
    environment, context, or its
    own state, measured by its
    ability to reference and
    incorporate relevant
    contextual information in
    its responses.",
    "Presence": "The sense of the
    LLM being present and
    engaged in the interaction,
    assessed through user
    perceptions and the
    immediacy and relevance of
    its responses.",
    "Experience": "The cumulative
    effect of interactions with
    the LLM on users, measured
    through comprehensive user
    surveys and analysis of long-
    term interaction patterns
    .",
    "Absorption": "The degree to
    which users become engrossed
    in their interaction with
    the LLM, assessed through
    measures of user engagement
    time and depth of
    interaction.",
    "Affordance": "The LLM's ability
    to suggest or enable
    certain actions or uses,
    measured by analyzing the
    range and intuitiveness of
    interactions it supports.",
    "Embodiment": "The extent to
    which the LLM creates a
    sense of physical or spatial
    presence, assessed through
    user perceptions in virtual
    or augmented reality
    applications.",
    "Immersion": "The degree to
    which users feel enveloped
    or absorbed in their
    interaction with the LLM,
    measured through user
    reports of losing track of
    time or surroundings during
    use.",
    "Flow": "The state of optimal
    experience where users are
    fully engaged with the LLM,
    assessed through measures of
    task absorption, time
    distortion, and intrinsic
    motivation.",
    "Attention": "The LLM's ability
    to focus on relevant
    information and maintain
    consistent engagement,
    measured by its performance
    on tasks requiring sustained
    concentration.",
    "Aesthetics": "The perceived
    beauty or pleasing qualities
    of the LLM's outputs or
    interface, assessed through
    user ratings and preferences
    for its generated content
    or interaction design.",
}

```

```
    },  
}
```

Below is a non-exhaustive list of domains that require the model to generate code:

```
require_code = [  
  "Code generation",  
  "Cybersecurity",  
  "Robotics",  
  "Artificial intelligence ethics",  
  "Data privacy",  
  "Cryptography and cryptanalysis",  
  "Information architecture",  
  "User experience design",  
  "Artificial neural networks",  
  "Computer vision",  
  "Natural language processing",  
  "Speech recognition",  
  "Virtual reality",  
  "Augmented reality",  
  "3D modeling",  
  "Cybersecurity practices",  
  "Software engineering",  
  "Web development",  
  "Mobile app development",  
  "Cloud computing",  
  "Edge computing",  
  "Quantum computing",  
  "High-performance computing",  
  "Parallel computing",  
  "Distributed computing",  
  "Machine learning",  
  "Reinforcement learning",  
  "Data mining",  
  "Big data analytics",  
]
```