

Commitment to Sparse Strategies in Two-Player Games

Salam Afioni¹, Jakub Černý¹, Chun Kai Ling², Christian Kroer¹

¹Columbia University, USA

²National University of Singapore, Singapore

sa4316@columbia.edu, chunkail@nus.edu.sg, jakub.cerny@columbia.edu, christian.kroer@columbia.edu

Abstract

While Nash equilibria are guaranteed to exist, they may exhibit dense support, making them difficult to understand and execute in some applications. In this paper, we study k -sparse commitments in games where one player is restricted to mixed strategies with support size at most k . Finding k -sparse commitments is known to be computationally hard. We start by showing several structural properties of k -sparse solutions, including that the optimal support may vary dramatically as k increases. These results suggest that naive greedy or double-oracle-based approaches are unlikely to yield practical algorithms. We then develop a simple approach based on mixed integer linear programs (MILPs) for zero-sum games, general-sum Stackelberg games, and various forms of structured sparsity. We also propose practical algorithms for cases where one or both players have large (i.e., practically innumerable) action sets, utilizing a combination of MILPs and incremental strategy generation. We evaluate our methods on synthetic and real-world scenarios based on security applications. In both settings, we observe that even for small support sizes, we can obtain more than 90% of the true Nash value while maintaining a reasonable runtime, demonstrating the significance of our formulation and algorithms.

1 Introduction

Equilibrium finding in games has emerged as a key component of artificial intelligence, owing to applications in recreational game playing such as poker, Stratego, and Diplomacy, numerous applications in security, as well as logistics (Bowling et al. 2015; Brown and Sandholm 2018; Perolat et al. 2022; Bakhtin et al. 2022; Pita et al. 2008; Fang, Stone, and Tambe 2015; Tambe 2011; Jain et al. 2010; Černý et al. 2024). Central to the success of these applications are efficient approaches towards finding the optimal *randomized*, or *mixed* equilibria in their respective settings. Not only are randomized equilibria typically guaranteed to exist, they allow for the prescription of behavior that hedges over all possible opponent actions, making them particularly useful in zero-sum games. Nonetheless, a persistent difficulty faced by practitioners seeking to apply game theoretic solutions into the real world is that such solutions exhibit *dense support*, i.e., they could randomize over a large number of actions. Strategies with dense support are undesirable for many

reasons; for instance, they are difficult to interpret and implement in practice, and are often faced with numerical issues if used for downstream processing.

In this paper, we propose overcoming these limitations by computing k -sparse solutions as opposed to Nash equilibria. Loosely speaking, a distinguished player termed the sparse player (representing the practitioner) is restricted to playing a mixed strategy with a support size at most k . The other player is free to play any mixed strategy they desire. We argue that in many practical use-cases, sparse strategies can almost match the performance of dense strategies, as long as the support of the sparse player is carefully chosen.

The problem of finding sparse solutions has been studied from various angles. Althöfer (1994) show that sparse approximations to strategies exist in zero-sum games without too much degradation, while seminal work by Lipton, Markakis, and Mehta (2003) show that *approximate* sparse Nash equilibria always exist via a sampling argument (Feder, Nazerzadeh, and Saberi (2007) show the optimality of these results); follow up work extends this argument to correlated and other equilibria (Babichenko, Barman, and Peretz 2014). Nonetheless, these arguments are nonconstructive in nature, and finding “good” sparse equilibria can be difficult. Indeed, finding the *optimal* k -sparse commitment even for zero-sum games is in general intractable (McCarthy et al. 2018). Foster, Golowich, and Kakade (2023) study a variant of sparsity in Markov games where correlated equilibria distributions are expressible as a mixture of k uniform product distributions, while Anagnostides et al. (2023) show hardness of computing sparse correlated equilibria for extensive form games. The line of work closest to ours is by McCarthy et al. (2018), who study k -sparse solutions under the name of *operationalizable* strategies, mainly from the perspective of security games. Our work differs from them in several ways. First, our algorithm is not restricted to finding k -uniform strategies, i.e., each of the k actions (possibly repeated) must be chosen with equal probability. Crucially, we significantly expand the scope of applications beyond that of security games, including large games with MILP representable strategy spaces.

For the majority of theoretical and algorithmic work above, the term “sparse” is formally defined by asymptotics in terms of the size of the game (e.g., the number of players, and the size of their actions). For our contributions, we adopt

colloquial, but often times more practically useful, meanings for the terms sparse and dense, with sparse meaning “small enough” (e.g., say, in single digits), while dense implies the converse. Secondly, a significant amount of work (Lipton, Markakis, and Mehta 2003; Babichenko, Barman, and Peretz 2014; McCarthy et al. 2018) also requires sparse strategies to be k -uniform. This is a stronger restriction than our notion of k -sparsity, and it can adversely affect performance when we want a sparse strategy in the practical non-asymptotic sense where k is a very small constant; we show this both empirically and theoretically in Sections 3 and 5.

With these distinctions in mind, our key contributions are as follows. First, we formalize the notion of k -sparse commitments for two-player zero-sum games and Stackelberg equilibrium in general-sum games. Second, we study some of the properties of k -sparse commitments. We show that even for zero-sum games, supports of the optimal k -sparse equilibrium can be disjoint for almost all k , and the value function as a set function of allowable support is not sub-modular. We also demonstrate that k -uniform equilibria as computed by McCarthy et al. (2018) can yield a much worse performance than k -sparse equilibrium. Thirdly, we show how optimal k -sparse commitments can be computed via Mixed Integer Linear Programs (MILPs) for a variety of settings, including zero-sum games, Stackelberg equilibrium, variants of structured action sets, as well as games where one or both players have a large, but MILP-representable strategy spaces. Finally, we demonstrate empirically the efficacy of our proposed method, using both randomly generated normal-form games, as well as settings based on security applications. Our results demonstrate scalability of our method which also often performs better than k -uniform strategies. Even for small k , we are often able to capture nearly 90% of the true optimal commitment, showing that k -sparse commitments are a practical and viable.

2 Preliminaries

We are concerned with two-player games, where Player 1 and 2 have n and m actions respectively. We denote their payoff matrices by $A, B \in \mathbb{R}^{n \times m}$, such that A_{ij} (resp. B_{ij}) gives Player 1’s payoff when Player 1 plays action i and Player 2 plays action j . The spaces of mixed strategies for each player are given by Δ^n and Δ^m respectively, where Δ^n is the probability simplex $\{x \in \mathbb{R}_+^n \mid \sum_i x_i = 1\}$. For a vector $x \in \mathbb{R}^d$, we denote its support by $\text{supp}(x) = \{i \in [d] \mid x_i \neq 0\}$. The *best-response* of Player 2 against Player 1’s (mixed) strategy $x \in \Delta^n$ is any pure strategy $\text{BR}_2(x) = \text{argmax}_{y \in [m]} x^T A y$, where ties are broken arbitrarily. When y is a non-negative integer, we adopt the shorthand $x^T A y = x A e_y$, where e_i is the i -th elementary basis vector. Best-responses of Player 1 are similarly denoted by $\text{BR}_1(y)$.

Nash equilibrium (NE) in zero-sum games Recall that in a zero-sum game, $A = -B$. Finding a Nash equilibrium (x^*, y^*) in a two-player zero-sum game can be formulated as a saddle-point problem using the payoff matrix A of the first player.

In particular, von Neumann’s *minimax theorem* shows that

(x^*, y^*) is achieved by the saddle point of $x^T A y$,

$$\max_{x \in \Delta^n} \min_{y \in \Delta^m} x^T A y = \min_{y \in \Delta^m} \max_{x \in \Delta^n} x^T A y = x^{*T} A y^*. \quad (1)$$

The minimax theorem shows that (x^*, y^*) is a NE if and only if each mixed strategy optimizes the players’ payoff assuming that the other player best responds. Two-player zero-sum games can be solved efficiently using a variety of methods, including fictitious play (Brown 1951), linear programming (Shoham and Leyton-Brown 2008), and self-play with no-regret learners (Hart and Mas-Colell 2000).

Sparse commitments in zero-sum games We now consider a scenario where Player 1 is limited to playing strategies with support at most k . For the rest of the paper, we refer to Player 1 (resp. Player 2) as the sparse player (resp. the non-sparse player) and vice versa. Player 1’s restricted strategy space is given by

$$\Delta_k^n = \{x \in \Delta^n \text{ such that } |\text{supp}(x)| \leq k\},$$

Then Player 1’s set of optimal bounded-support strategies is

$$x_k^* = \text{argmax}_{x \in \Delta_k^n} \min_{y \in [m]} x^T A y. \quad (2)$$

Note that Δ_k^n is not convex due to the cardinality constraint. Thus, the minimax theorem (1) does not hold. Instead, we have the weaker result $\max_{x \in \Delta_k^n} \min_{y \in \Delta^m} x^T A y \leq \min_{y \in \Delta^m} \max_{x \in \Delta_k^n} x^T A y$.

Remark 1. *In our definition, only one player is subjected to sparsity constraints; the other (i.e., inner) player is allowed to play any mixed strategy it desires, even one which is not sparse. This assumption has no bearing on our results, since at least one of Player 2’s best responses will be pure.*

Strong Stackelberg equilibrium (SSE) in general-sum games In general-sum two-player games, where A and B may be arbitrary $n \times m$ matrices, a Stackelberg equilibrium (x^*, y^*) can be formulated as a bilevel problem (Von Stengel and Zamir 2004; Conitzer and Sandholm 2006):

$$x^* = \text{argmax}_{x \in \Delta^n} x^T A y^*(x), \text{ where } y^*(x) = \text{argmax}_{y \in [m]} x^T B y.$$

The equilibrium is considered *strong* if, in addition, Player 2 breaks ties in favor of Player 1. In two player zero-sum games, NE and SSE coincide for Player 1, i.e., the optimal strategy x^* that Player 1 commits to is also a NE strategy. For this paper, we always assume that Player 1 is playing the role of the Stackelberg leader (outer optimization problem).

The SSE applies to general-sum games, always exists, enjoys a unique payoff, and can be computed in polynomial time, making it a popular choice of equilibrium for security applications (Sinha et al. 2018; Tambe 2011).

Sparse commitments in general-sum games Just like zero-sum games, we define optimal k -sparse commitments via the restricted strategy spaces Δ_k^n . The strategy x_k^* is then

$$x_k^* = \text{argmax}_{x \in \Delta_k^n} x^T A y^*(x), \text{ where } y^*(x) = \text{argmax}_{y \in \text{BR}_2(x)} x^T A y.$$

It is important to differentiate between **natural sparsity** in game solutions, which refers to the *existence* of equilibria

with small support, and the **enforced sparsity** in our context, which typically involves *trade-offs* in terms of strictly reduced performance for the sparse player. Although many structured games (e.g., extensive form games or other games played on graphs) exhibit naturally sparse equilibria, these are typically not sparse enough to be practically applicable.

3 Structure of Sparse Equilibria and the Limits of Naïve Sparsification Methods

We now explore pathological properties of sparse equilibria which will justify the necessity of our proposed method over more intuitive or heuristic approaches. For one, it is tempting to believe that the solutions x_k^* and $x_{k'}^*$ for $k < k'$ are “close” in some sense. Unfortunately, this is not the case: $\text{supp}(x_k^*)$ and $\text{supp}(x_{k'}^*)$ can be completely disjoint.

Proposition 1. *There exist zero-sum games where the optimal sparse commitments x_k^* , $x_{k'}^*$ for $2 \leq k < k' \leq \sqrt{2n}$ have disjoint supports, i.e., $\text{supp}(x_k^*) \cap \text{supp}(x_{k'}^*) = \emptyset$.*

Despite Proposition 1, one may hope that even if $\text{supp}(x_k^*)$ and $\text{supp}(x_{k'}^*)$ differ greatly, player 1’s expected utility under them may be somewhat nicely behaved. Define $v_k^* = \max_{x \in \Delta_k^n} \min_{y \in [m]} x^T A y$, the reward to the first player under the optimal size k commitment. Clearly, v_k^* is non-decreasing in k . However, the utility of the first player is not necessarily “concave” in k , i.e., the marginal returns from increasing k is not necessarily diminishing.

Proposition 2 (non-diminishing marginal returns). *There exist zero-sum games where $v_{k+1}^* - v_k^*$ is not non-increasing.*

Proposition 3 (non-submodularity). *Let $S \subseteq [n]$ and $\Delta_S^n = \{x \in \Delta^n \mid x_i = 0 \ \forall i \notin S\}$. Let $x_S^* = \arg\max_{x \in \Delta_S^n} \min_{y \in [m]} x^T A y$ be the optimal commitment by Player 1 when restricted to playing only S , such that v_S^* is a set function (of S) denoting its corresponding utility. There exist zero-sum games where v_S^* is not submodular in S .*

We also remark that the counterexamples in Propositions 1 and 2 are not “over-engineered”, we observe similar phenomena in our experiments. The above propositions have consequences for game solving. It is known that the problem of finding the optimal sparse strategy is NP-hard, even when the NE or the SSE can be found in polynomial time (McCarthy et al. 2018). Propositions 1, 2 and 3 go further, implying a combinatorial structure incompatible with some popular game solving approaches.

One such approach is that of *incremental strategy generation*, also known as *oracle-based methods*. A popular variant known as the *double-oracle* method is depicted in the Appendix. These methods begin with a restricted (usually very small) set of actions, then an equilibrium is computed for the subgame restricted to those actions, and the subgames are iteratively expanded by querying *best-response oracles* for new actions to add. This is guaranteed to converge in finite though potentially exponential time (Zhang and Sandholm 2024). Oracle methods exploit the observation that in real-world games best responses can often be found or approximated efficiently, and usually the number of iterations of double oracle is low.

At first glance, incremental strategy generation seems appealing in our setting, as it naturally produces sparse strategies if the algorithm terminates before the restricted action set becomes larger than k . Unfortunately, it turns out that this approach, while guaranteed to produce k -sparse strategies, can yield low-quality commitments. For example, Proposition 1 implies that the restricted set needs to be of size $\mathcal{O}(k^2)$ if it wants to include all optimal $1, 2, \dots, k$ -sparse strategies. In fact, Proposition 2 shows that for very large games (where the true NE may not be easily computed), one may be misled into prematurely terminating if increasing k does not yield an improvement in v_k^* . Finally, Proposition 3 implies that a greedy-based approach that greedily expands the allowed support of Player 1’s commitment (one at a time) is not guaranteed to yield a good approximate commitment, even for zero-sum games.

So far, our statements have been about the supports of the sparse equilibrium. Can we say something about the probabilities that each action is played? For instance, the algorithm of McCarthy et al. (2018) proposes finding “operationalizable” commitments where Player 1 is restricted to playing k -uniform strategies. Unfortunately, it turns out that k -uniform strategies can perform badly for small k .

Proposition 4. *Let $\bar{\Delta}_k^n = \{x \in \Delta^n \mid x_i = m/k, m \in \mathbb{Z}\}$ be the set of randomized strategies played uniformly over exactly k strategies (possibly repeated). Define the corresponding sparse equilibrium $\bar{x}_k^* = \arg\max_{x \in \bar{\Delta}_k^n} \min_{y \in [m]} x^T A y$ and its value \bar{v}_k^* . Then, (i) \bar{v}_k^* is no longer non-decreasing in k , and (ii) there exist games where finding an ϵ -NE operationalizable strategy \bar{x}_k^* requires k to grow in a rate $\Omega(1/(\epsilon + c))$, where c is an adjustable game parameter.*

Proposition 4 suggests that finding optimal sparse equilibrium is not just about reasoning about which actions belong to the optimal support; one should also jointly reason about the probabilities with which these strategies are played. In the Appendix we show an instance where our definition of a sparse commitment gives a vastly different (and higher quality) solution compared to that of McCarthy et al. (2018). Notably, while McCarthy et al. (2018) argue that uniform strategies are easier to operationalize — our example shows that this comes at a price that could be large.

4 Finding Optimal k -sparse Commitments

The non-convex set Δ_k^n (a union of polytopes) can be represented via the following set of mixed-integer constraints:

$$1 = \sum_{a \in [n]} x(a), \quad k \geq \sum_{a \in [n]} z(a),$$

$$z(a) \geq x(a), \quad x(a) \in [0, 1], \quad z(a) \in \{0, 1\} \quad \forall a \in [n].$$

This gives a mixed integer linear program (MILP) for computing k -sparse equilibria, which we call the *basic method*:

$$\max_{g \in \mathbb{R}, x \in \Delta_k^n} g, \quad g \leq \sum_{a \in [n]} A(a, b)x(a) \quad \forall b \in [m]. \quad (\text{B})$$

Here, g represents the payoff which we are seeking to maximize, while the constraint upper bounds g over all possible opponent actions; such a formulation can be obtained by

dualizing the inner minimization problem in (2). The basic method can be implemented easily via off the shelf MILP solvers. However, computation becomes prohibitively slow when n or m is large. We present methods to alleviate this.

(i) Single oracle methods when m is large but n is small
 When only Player 2 (the non-sparse player) has a large strategy space, we propose a *single-oracle* approach. For this, we assume access to Player 2’s best response oracle $\text{BR}_2(x)$. We start with a subset of strategies $\mathcal{M}_0 \subseteq [m]$. At each iteration i , we compute the optimal commitment $x_k^{\mathcal{M}_i}$ against the non-sparse player’s strategy space \mathcal{M}_i . A best-response strategy $\text{BR}_2(x_k^{\mathcal{M}_i})$ is then computed for the non-sparse player against the sparse player’s strategy $x_k^{\mathcal{M}_i}$, using the best-response oracle. The best-response is added to the non-sparse player’s strategy space, i.e. $\mathcal{M}_{i+1} \leftarrow \mathcal{M}_i \cup \text{BR}_2(x_k^{\mathcal{M}_i})$, and the MIP (B) is resolved. This iterative process continues until the equilibrium gap, defined as $\nabla = g - u(x_k^{\mathcal{M}}, \text{BR}(x_k^{\mathcal{M}}))$, where g is the sparse player’s optimal expected utility computed by (B), is below a pre-specified threshold $\epsilon > 0$. When the algorithm terminates, we are guaranteed an ϵ -optimal k -sparse commitment.

(ii) MILP-based method when n is large but m is small
 When only n is large, the basic method has a prohibitively large number of integer variables. However, in many cases, the huge action space arises because of some *combinatorial structure*, e.g., in security applications, the action space for patrollers is often the set all length L paths in a directed graph. While n is extremely large, we may exploit this combinatorial structure to compute k -sparse commitments. We term these generally as *MILP-representable* action spaces, which have actions given by the nonempty set $\mathcal{K} = \{z \in \{0, 1\}^l \mid Fz = a\}$, for constants $F \in \mathbb{R}^{n \times l}$, $a \in \mathbb{R}^n$. Clearly \mathcal{K} is finite, but extremely large. However, we can rewrite a k -mixture of strategies more concisely as: $\mathcal{S} = \{x^{(i)} \in \mathbb{R}^m, z^{(i)} \in \mathcal{K}, t \in \Delta^k \mid x^{(i)} \geq t^{(i)} - (1 - z^{(i)}), x^{(i)} \leq t^{(i)}, x^{(i)} \leq z^{(i)}, x^{(i)} \geq 0\}$. Essentially, \mathcal{S} “duplicates” \mathcal{K} up to k times, where $x^{(i)}$ is some $z^{(i)}$ “rescaled” by the probability $t^{(i)}$ with which it is played. The constraints enforce that $x^{(i)} = t^{(i)} \cdot z^{(i)}$. For a given pure strategy $z \in \mathcal{K}$, we define the payoff function for all opponent strategies $b \in [m]$:

$$A_{z,b} = \max\{C_{z,b}\}, \text{ where } C_{z,b} = \{c \in \mathbb{R} \mid C_b z + d_b \geq 1c\}.$$

Here, $C_b \in \mathbb{R}^{r \times m}$, $d_b \in \mathbb{R}^r$ are game constants for every action $b \in [m]$. Rescaling $C_{z,b}$ to account for $t^{(i)}$ yields:

$$\begin{aligned} & \max_{g \in \mathbb{R}, (x,z,t) \in \mathcal{S}, c \in \mathbb{R}^{k \times m}} g \\ & g \leq \sum_{i \in [k]} c(i,b), C_b x^{(i)} + d_b \cdot t^{(i)} \geq 1c(i,b) \quad \forall b \in [m]. \end{aligned}$$

While somewhat complicated, allowing the cost function to be *non-linear* function of z admits a much wider class of problems, including games involving security interdiction (Černý et al. 2024; Zhang et al. 2017). As a concrete example, we return to the patrolling example where Player 1’s action is to choose a length L path. Suppose Player 2’s action is to select a subset b of exactly w distinct edges to

hide evidence of criminal activity, where w is a game constant. Player 1 obtains a payoff of 1 if and only if its chosen path intersects at least 1 of Player 2’s chosen edges; no double counting is allowed. Then $z^{(i)}$ is a binary vector of length ℓ (the number of graph edges) such that $z^{(i)}(e) = 1$, $z^{(i)}(e) = t^{(i)}$ for all edges e included in path i . For a path z , $A_{z,b}$ is *not* a linear function of z , since path z can intersect the set of edges chosen in b *multiple times*. Yet, by using the above formulation we can set $r = 2$, and define the first row of C_b to contain 1 on every edge included in action b , $d_b(1) = 0$, second row of $C_b = 0$, and $d_b(2) = 1$. Therefore the constraint forces $A_{z,b}$ to be upper bounded by 1 and the number of times path z intersects the edges in b , avoiding the issue of double counting.

(iii) Combined methods when n and m are large The case when both n and m are large can be handled by combining methods (i) and (ii). Naturally, we would require Player 2 to be able to compute best responses to any mixed strategy “efficiently” for any Player 1 strategy with constant-sized support. This approach also requires solving the k -sparse MILP from Section (ii) “somewhat-efficiently.”

4.1 Extensions to gen-sum Stackelberg equilibria

The *multiple LPs* method (Conitzer and Sandholm 2006) is a standard approach for finding optimal commitments. Combined with our method, it yields k -sparse general-sum Stackelberg equilibria by solving *multiple MILPs*, one for each action $b \in [m]$ of Player 2. Specifically, we solve the following MILP for each action:

$$\begin{aligned} & \max_{x \in \Delta_k^n} \sum_{a \in [n]} A(a,b)x(a) & (G) \\ & 0 \geq \sum_{a \in [n]} (B(a,b') - B(a,b))x(a) \quad \forall b' \in [m]. \end{aligned}$$

The constraint guarantees x is restricted such that b is a best response to x . Note that for some choices of b this MILP could be infeasible, though at least one is feasible. At the end, we select the maximum value achieved over all of the MILPs that are feasible. We describe practical speedups and an alternative single-MILP method in the appendix.

4.2 Extensions to structured sparsity constraints

For some security applications, we may want Player 1’s sparsity to be imposed in a more structured manner. For example, suppose we are planning patrols in a graph, such that actions are paths of a given length L . Suppose further that we are also required to decide the locations of k_1 and k_2 command posts at which paths are allowed to begin and end. Thus, we do not require sparsity over the path distribution, but rather sparsity in the *number of starting and ending vertices* over length L paths chosen with non-zero probability. Consequently, utilizing Δ_k^n is overly restrictive, as there may be paths sharing a starting or ending (or both) vertex.

More generally, we will define R constraint sets $\mathcal{S} = \{\mathcal{S}^1, \dots, \mathcal{S}^R\}$. For each constraint set indexed by $i \in [R]$, we have *action sets* $\mathcal{S}^i = \{S_1^i, \dots, S_{q_i}^i\}$, where each $S_j^i \subseteq \mathcal{A}$. Each constraint set has a specified sparsity constraint k_i .

In the above patrolling example, $R = 2$, one for starting points, and another for ending points. Then q_1 (resp. q_2) is equal to the number of vertices, and S_j^1 (resp. S_j^2) contains all length L paths starting from (resp. ending at) vertex j .

Note that the sets in S^i do not necessarily form a partition of \mathcal{A} ; for a given constraint set i , an action $a \in \mathcal{A}$ can either be in one, multiple, or no action sets. For every action set, we incur a sparsity cost as long as at least one action it contains is played with positive probability. This yields the MILP:

$$\begin{aligned} 1 &= \sum_{a \in [n]} x(a), & x(a) &\in [0, 1] \quad \forall a \in [n] \\ k_i &\geq \sum_{S_j^i \in S^i} z(S_j^i) & \forall i &\in [R] \\ z(S_j^i) &\geq x(a) & \forall a &\in S_j^i, S_j^i \in S^i, i \in [R] \\ z(S_j^i) &\in \{0, 1\} & \forall S_j^i &\in S^i, i \in [R]. \end{aligned} \quad (\text{S})$$

5 Empirical Evaluation

We empirically analyze the performance and scalability of our proposed methods, focusing on (i) wall-clock computational time, (ii) the utility that Player 1 achieves for different support sizes k , and (iii) comparisons to k -uniform strategies. For purposes of comparison, we normalize running times using $t_{\text{normalized}} = \frac{t - t_{\min}}{t_{\max} - t_{\min}}$, where t_{\min} and t_{\max} are the minimum and maximum runtimes respectively. We normalize the utility value by the Nash value for zero-sum games and the Stackelberg equilibrium (SE) for general-sum games. Specifically, $u_{\text{normalized}} = \frac{u - u_{\min}}{u_{\text{equi}} - u_{\min}}$ where u_{\min} is the utility at $k = 1$ and u_{equi} is the true value, i.e. $k = \infty$. We use Gurobi (Gurobi Optimization, LLC 2023) for all MILP solvers. Unless otherwise stated, for experiments with randomness, 30 instances were generated and solved. We report the standard errors in plots (usually negligible). Other experimental details are deferred to the Appendix.

5.1 Fully enumerable strategy spaces

We begin by analyzing enforced sparsity on games where n and m are small, under two different experiment setups.

Randomly generated normal-form games We consider both zero-sum and general-sum games and solve them using the proposed MIP (B) and multiple MILP (G) respectively. We generate payoff matrices A, B with sizes $n = m \in \{20, 30, \dots, 80\}$. For zero-sum games, each A_{ij} is uniformly chosen in $[10, 100]$. In general-sum games, A_{ij} and B_{ij} are randomly chosen in $[-50, 50]$, under the condition that A_{ij} and B_{ij} have opposite signs.

Figure 1 shows the normalized runtime and relative utility as a function of k , each averaged over all instances per game size. For visualization purposes, we normalized the values of k with respect to the support size of NE (resp. SE) for zero-sum (resp. general-sum) games, denoted by k_{NE} (resp. k_{SE}). Thus, the x -axis represents the enforced support size w.r.t. the optimal strategy. Interestingly, the runtime curves exhibit a notable phase transition, i.e., the difficulty is concentrated in a specific range of k values. For example, for

zero-sum games we find a ‘‘hard zone’’ when k lies between $0.2k_{NE}$ and $0.8k_{NE}$. For general-sum games, this hard zone was observed for values of $k \leq 0.2k_{SE}$. This pattern is reminiscent of the behavior observed when solving random SAT instances (Gent and Walsh 1994). Furthermore, the **utility curves** demonstrate that as the game size increases, we are still able to capture nearly 90% of the unrestricted optimal commitment, even with a fraction of the support size. When $n = m = 80$, about 90% of the game value is attained at around $0.25k_{NE}$ and $0.45k_{SE}$.

Patrolling games We evaluate our MIP (B) on a security motivated example using the layered graph framework of Černý et al. (2024). We design a pursuit evasion (PE) game on a university campus: a professor is trying to apprehend a student who stole exam questions. We constructed the game using a real university campus path network. Each player starts at one of several potential initial locations on campus corresponding to vertices, and selects a path of length $T = 5$ to traverse (also known as *depth*); the student is apprehended if and only if the chosen paths share an edge. We call a set of fixed starting points and desirable final locations a *scenario*. Individual games are then generated by assigning random (uniform from $[6, 10]$ for desirable and $[1, 5]$ for all others) rewards for escaped students based on their final location.

Figure 2 shows results across 30 instances when we impose sparsity on the distribution over the professor’s paths. Just like random games, we again observe a phase transition pattern, with a pronounced ‘‘hard zone’’ when k ranges from 5 to 10. Furthermore, the professor is able to achieve more than 90% of the optimal even for k as low as 3.

Air defense battery placements Our task is to select which and where to place air defenses to maximize defensive coverage. Player 1’s actions involve choosing (a) which, out of 4 different types of air defense batteries; those which provide stronger coverage have lower range and vice versa, and (b) where to place its chosen battery. These locations are based off maps from the real world. Player 2 chooses a location to attack; the probability of success depends on how the defensive converges there. k -sparsity is sensible since batteries and ammunition dumps are expensive to procure and construct. Due to space constraints, we report detailed results in the Appendix. Nonetheless, our main observations are similar: while natural sparsity is quite low (e.g., < 20), we can still do well even with a small k (around 5). We also remark that the pathological behavior in Propositions 1 and 2 are seen in practice in these experiments.

5.2 Fully enumerable structured strategy spaces

We evaluate MILP (S) on experiments requiring structured sparsity, using the patrolling game (with $T = 5$) as the basis for two tests. In the first experiment, the professor chooses paths from 8 starting points but is limited to using k starting points, potentially with multiple paths per starting point. The results are reported in Figure 2. Interestingly, we no longer observe a clear phase transition. Again, we obtain almost maximum utility at just $k = 4$, i.e., around half of the possible starting points. Secondly, we experimented on a more

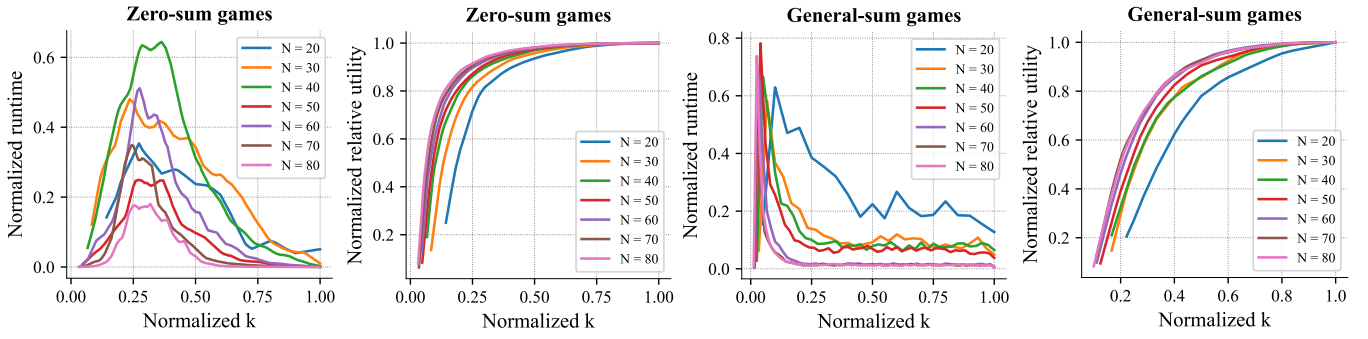


Figure 1: Average normalized runtime and relative utility for solving random zero-sum (left) and general-sum (right) games.

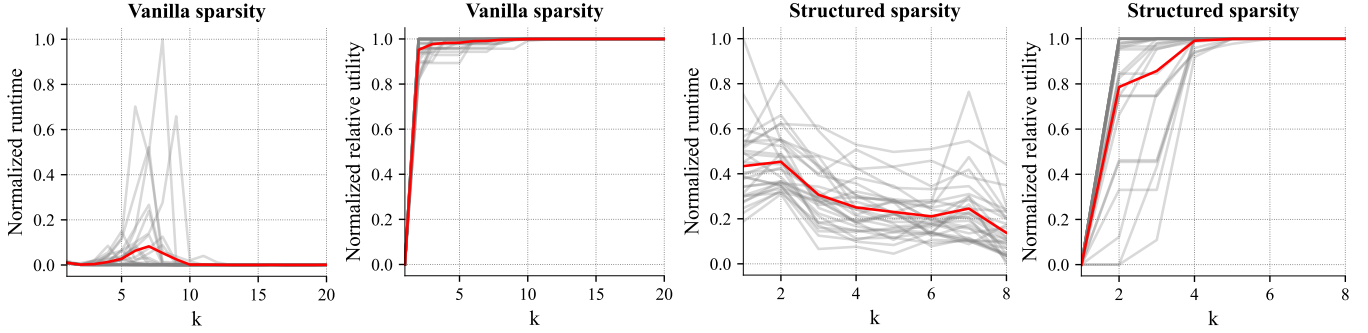


Figure 2: Average (red) normalized runtime and relative utility over 30 instances (gray) of a PE on a university campus. We impose *vanilla sparsity* on path distribution (left) and *structured sparsity* on the starting point distribution of Player 1 (right).

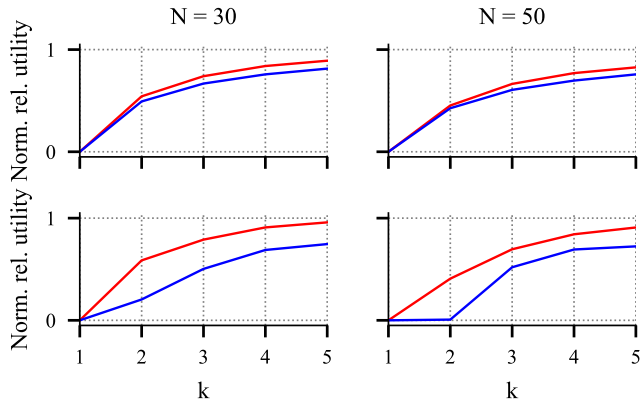


Figure 3: Average normalized relative utility for solving randomly generated zero-sum and general-sum games using optimal k -sparse (red) and k -uniform (blue) commitments. **Top:** zero-sum games. **Bottom:** general-sum games.

complex setting with sparsity constraints k_1 and k_2 on starting points and paths respectively. The runtime heat map in Figure 4 reveals a “2 dimensional hard zone”, with the hardest instances occurring at k_1 between $[4, 7]$ and k_2 in $[4, 6]$.

5.3 Scaling up to large strategy spaces

Next, we examine settings where the basic MIP approach fails due to the large strategy space of one or both players.

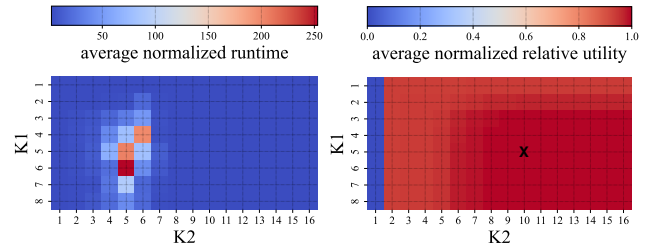


Figure 4: Average normalized runtime (left) and relative utility (right) for solving a pursuit-evasion game on a university campus, imposing *structured sparsity* on the distribution over starting points (k_1) and paths (k_2) of Player 1. The smallest values of k_1 and k_2 at which the Nash value is attained is marked by “ \times ”.

Using patrolling game variants, we test three setups: (i) large n , small m ; (ii) small n , large m ; and (iii) large n and m . For each setup, we run 30 instances and report average relative utility results for instances solved within a 12-hour limit.

(i) **Sparse player has a large action space** Here, only Player 1 has a large action space, which we increase by varying T from 5 to 8 (note that n grows exponentially with the path length T). We observe in Figure 5 (top) that for $T \in \{5, 6, 7\}$, Player 1 achieves more than 90% of the optimal game value for k as low as 3. Even at $T = 8$, we obtain a respectable 80% of the true value when $k = 3$.

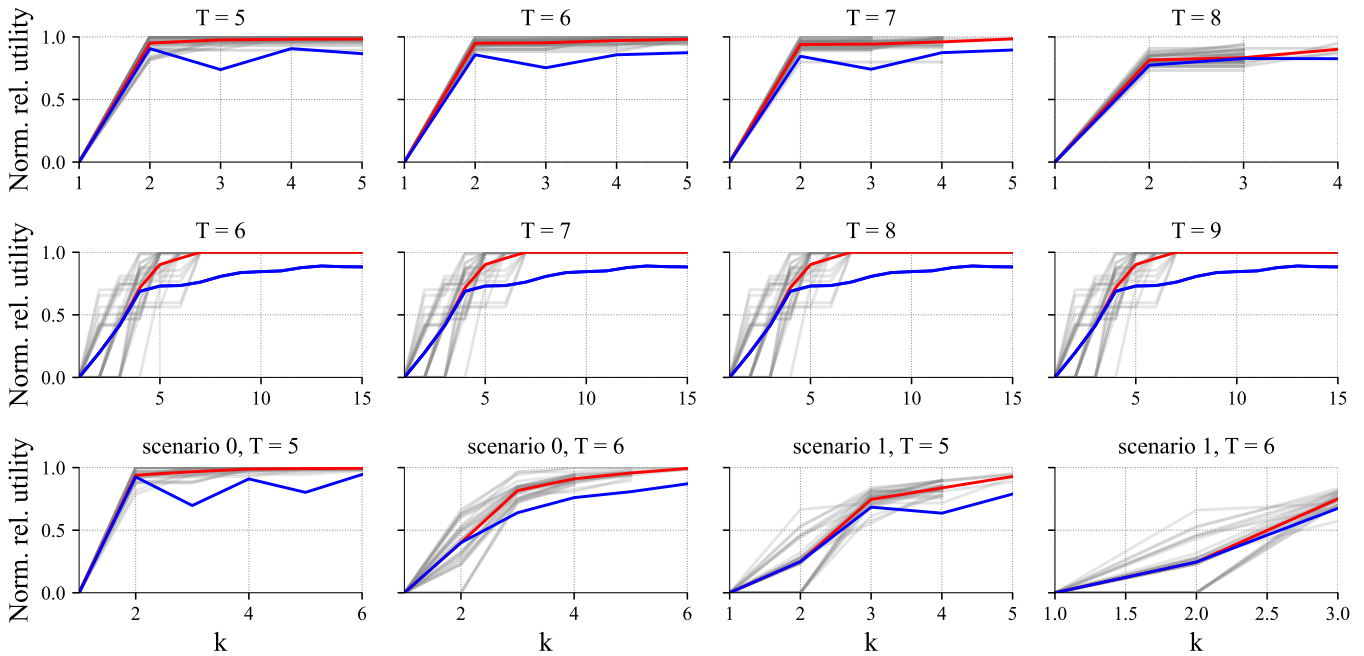


Figure 5: Average normalized relative utility curves for optimal k -sparse (red) and k -uniform (blue) commitments. Results for individual instances using optimal k -sparse commitments are in gray. **Top row:** sparse player has a large strategy space. **Middle row:** non-sparse player has a large strategy space. **Bottom row:** both players have large strategy spaces.

(ii) Non-sparse player has a large action space In this setting, Player 2 has a large action space whereas Player 1 places only a single patrol on a single intersection in the graph, which then stays there. We vary the depth of the graph from 6 to 9. The relative utility plots reported in Figure 5 (middle) show that Player 1 captures around 90% of the true Nash value at $k = 3$ for all depths. Notice however that the plots are almost identical. The reason behind this is that increasing depth does seem to provide Player 2 with no strategic advantage, Player 1 hence positions the patrol on the same intersections as with smaller T .

(iii) Both players have large action spaces Finally, we examine the case where both Player 1 and 2 have large action spaces. We study two scenarios differing in the locations of the players' starting points and desirable exits. We present in Figure 5 the plots for $T = \{5, 6\}$ across the two scenarios. In scenario 0, Player 1 gains high utility value at small k , notably for depth 5. Solving for the optimal k -sparse strategy at depth 6 in scenario 1 proves to be challenging. While some instances achieve approximately 80% of the Nash value, a support size of 3 remains insufficient for attaining higher utility. We point out that here, there are $\sim 16k$ paths per player, accounting for the relatively poor performance.

5.4 Comparison with k -uniform strategies

We compare the average relative utility achieved by Player 1 when using the optimal k -sparse commitment against the k -uniform mixed strategy proposed by McCarthy et al. (2018). Again, we consider random normal-form games and patrolling games with large action spaces. For the former, we

generate zero-sum and general-sum games as described earlier, considering games where $n = m \in \{30, 50\}$. We limit the x -axis to $k = 5$ to emphasize small support sizes, which are of primary interest. As shown in Figure 3, the results indicate that k -sparse commitments generally outperform k -uniform strategies, especially when k is small. This difference is more pronounced in general-sum games.

Figure 5 depicts the results in patrolling games, where the blue curves represent the average relative utility normalized by the Nash value when the sparse player employs k -uniform strategies. Consistent with the findings from random games, we observe that optimal k -sparse strategies provide higher utility for the sparse player, particularly when the support size is small. For instance, for $T = 5, 6, 7$, the sparse player secures over 95% of the Nash value with $k = 3$ when both players have large strategy spaces, whereas a uniform strategy yields less than 80%.

6 Conclusion

This paper studies properties and algorithms for finding k -sparse commitments for two player games. Our proposed method performs competitively with non-sparse commitments even for very small values of k . Furthermore, we have proposed extensions to handle Stackelberg commitments in general-sum games, structured sparsity, as well as cases with a large number of player actions. Our notion of k -sparse commitments often leads to significantly better performance when compared to k -uniform strategies. Future work include extensions to extensive-form or multiplayer games, exploring approximate sparsity using sparsity-inducing regularization techniques, or online learning of sparse strategies.

Acknowledgments

This research was supported by the Office of Naval Research awards N00014-22-1-2530 and N00014-23-1-2374, and the National Science Foundation awards IIS-2147361 and IIS-2238960. Part of the work was done while CKL was a post-doctoral scientist at Columbia University.

References

- Althöfer, I. 1994. On sparse approximations to randomized strategies and convex combinations. *Linear Algebra and its Applications*, 199: 339–355.
- Anagnostides, I.; Kalavasis, A.; Sandholm, T.; and Zampetakis, M. 2023. On the Complexity of Computing Sparse Equilibria and Lower Bounds for No-Regret Learning in Games. *arXiv preprint arXiv:2311.14869*.
- Babichenko, Y.; Barman, S.; and Peretz, R. 2014. Simple approximate equilibria in large games. In *Proceedings of the fifteenth ACM conference on Economics and computation*, 753–770.
- Bakhtin, A.; Brown, N.; Dinan, E.; Farina, G.; Flaherty, C.; Fried, D.; Goff, A.; Gray, J.; Hu, H.; et al. 2022. Human-level play in the game of Diplomacy by combining language models with strategic reasoning. *Science*, 378(6624): 1067–1074.
- Boeing, G. 2017. OSMnx: New methods for acquiring, constructing, analyzing, and visualizing complex street networks. *Computers, Environment and Urban Systems*, 65: 126–139.
- Bowling, M.; Burch, N.; Johanson, M.; and Tammelin, O. 2015. Heads-up limit hold'em poker is solved. *Science*, 347(6218): 145–149.
- Brown, G. W. 1951. Iterative Solution of Games by Fictitious Play. In Koopmans, T. C., ed., *Activity Analysis of Production and Allocation*. New York: Wiley.
- Brown, N.; and Sandholm, T. 2018. Superhuman AI for heads-up no-limit poker: Libratus beats top professionals. *Science*, 359(6374): 418–424.
- Černý, J.; Ling, C. K.; Chakrabarti, D.; Zhang, J.; Farina, G.; Kroer, C.; and Iyengar, G. 2024. Contested Logistics: A Game Theoretic Approach. In *International Conference on Decision and Game Theory for Security*. Springer.
- Černý, J.; Ling, C. K.; Kroer, C.; and Iyengar, G. 2024. Layered Graph Security Games. In Larson, K., ed., *Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence, IJCAI-24*, 2695–2703. International Joint Conferences on Artificial Intelligence Organization.
- Conitzer, V.; and Sandholm, T. 2006. Computing the optimal strategy to commit to. In *Proceedings of the 7th ACM conference on Electronic commerce*, 82–90.
- Fang, F.; Stone, P.; and Tambe, M. 2015. When security games go green: Designing defender strategies to prevent poaching and illegal fishing. In *Twenty-Fourth International Joint Conference on Artificial Intelligence*.
- Feder, T.; Nazerzadeh, H.; and Saberi, A. 2007. Approximating Nash equilibria using small-support strategies. In *Proceedings of the 8th ACM Conference on Electronic Commerce*, 352–354.
- Foster, D. J.; Golowich, N.; and Kakade, S. M. 2023. Hardness of independent learning and sparse equilibrium computation in markov games. In *International Conference on Machine Learning*, 10188–10221. PMLR.
- Gent, I. P.; and Walsh, T. 1994. The SAT phase transition. In *ECAI*, volume 94, 105–109. PITMAN.
- Gurobi Optimization, LLC. 2023. Gurobi Optimizer Reference Manual.
- Hart, S.; and Mas-Colell, A. 2000. A simple adaptive procedure leading to correlated equilibrium. *Econometrica*, 68(5): 1127–1150.
- Jain, M.; Tsai, J.; Pita, J.; Kiekintveld, C.; Rathi, S.; Tambe, M.; and Ordóñez, F. 2010. Software assistants for randomized patrol planning for the lax airport police and the federal air marshal service. *Interfaces*, 40(4): 267–290.
- Lipton, R. J.; Markakis, E.; and Mehta, A. 2003. Playing large games using simple strategies. In *Proceedings of the 4th ACM Conference on Electronic Commerce*, 36–41.
- McCarthy, S. M.; Laan, C. M.; Wang, K.; Vayanos, P.; Sinha, A.; and Tambe, M. 2018. The price of usability: Designing operationalizable strategies for security games. *IJCAI*.
- Perolat, J.; De Vylder, B.; Hennes, D.; Tarassov, E.; Strub, F.; de Boer, V.; Muller, P.; Connor, J. T.; Burch, N.; Anthony, T.; et al. 2022. Mastering the game of Stratego with model-free multiagent reinforcement learning. *Science*, 378(6623): 990–996.
- Pita, J.; Jain, M.; Marecki, J.; Ordóñez, F.; Portway, C.; Tambe, M.; Western, C.; Paruchuri, P.; and Kraus, S. 2008. Deployed armor protection: the application of a game theoretic model for security at the los angeles international airport. In *Proceedings of the 7th international joint conference on Autonomous agents and multiagent systems: industrial track*, 125–132.
- Shoham, Y.; and Leyton-Brown, K. 2008. *Multiagent systems: Algorithmic, game-theoretic, and logical foundations*. Cambridge University Press.
- Sinha, A.; Fang, F.; An, B.; Kiekintveld, C.; and Tambe, M. 2018. Stackelberg security games: Looking beyond a decade of success. *IJCAI*.
- Tambe, M. 2011. *Security and game theory: algorithms, deployed systems, lessons learned*. Cambridge university press.
- Von Stengel, B.; and Zamir, S. 2004. Leadership with commitment to mixed strategies. Technical report, Citeseer.
- Zhang, B. H.; and Sandholm, T. 2024. Exponential Lower Bounds on the Double Oracle Algorithm in Zero-Sum Games. *arXiv preprint arXiv:2405.06797*.
- Zhang, Y.; An, B.; Tran-Thanh, L.; Wang, Z.; Gan, J.; and Jennings, N. R. 2017. Optimal escape interdiction on transportation networks.

7 Appendix

7.1 Remarks on Sparse Approximations, Regularization, and Online Learning

While running our algorithms to full completion yields an exact sparse solution, doing so can be prohibitively time-consuming. In practice, the algorithms may be terminated earlier by, for example, using a less stringent termination criterion in the MILP solver or selecting a larger equilibrium gap, ∇ . The resulting strategy is an approximate solution in that the k -sparse commitment is strictly enforced, but the strategy may not be entirely optimal. This approach aligns better with the practical applications we envision. Alternatively, we can consider a broader definition of approximate sparse solutions, where the sparse player's strategy is nearly sparse – specifically, no more than k actions have a probability of at least ϵ . Such strategies could potentially be identified, e.g., using sparsity-inducing regularization. However, applying nonconvex regularization alone does not ensure a k -sparse equilibrium as per our definition; achieving this may require an additional truncation or projection step, which introduces further approximation error.

Another interesting use case for finding or implementing sparse strategies is in online learning. Defining sparsity in an online setting, however, presents additional challenges. Perhaps the most natural extension is to require that the online learning algorithm always selects an iterate from the k -sparse simplex at every iteration. However, it is possible, in principle, play a pure strategy at every iteration, for example via Follow The Perturbed Leader (FTPL).

7.2 Double Oracle Algorithm

In this section we present a pseudo code of a standard incremental strategy generation method described in Section 3.

Algorithm 1: Double Oracle Algorithm

```

1:  $\mathcal{N}, \mathcal{M} \leftarrow \text{INITIALSUBGAME}([n], [m])$ 
2: repeat
3:    $\tilde{x}^*, \tilde{y}^* \leftarrow \text{NASH-EQUILIBRIUM}(\mathcal{N}, \mathcal{M})$ 
4:    $x^{\text{BR}}, y^{\text{BR}} \leftarrow \text{BR}_1(\tilde{y}^*), \text{BR}_2(\tilde{x}^*)$ 
5:    $\mathcal{N}, \mathcal{M} \leftarrow \mathcal{N} \cup \{x^{\text{BR}}\}, \mathcal{M} \cup \{y^{\text{BR}}\}$ 
6: until  $\text{EQUILIBRIUMGAP}(\tilde{x}^*, \tilde{y}^*, x^{\text{BR}}, y^{\text{BR}}) < \epsilon$ 

```

7.3 Single General-Sum Stackelberg Equilibrium MILP

Here we formulate a single MILP that condenses the entire multiple LP approach described in Section 4.1 in one mathematical program. We note that in practice, the multiple LP method is often faster. This MILP has $n + m$ binary variables, $n \times m + n$ real variables, and $2n + 3m$ constraints.

$$\begin{aligned}
& \max \sum_{a \in [n]} \sum_{b \in [m]} A(a, b) r(a, b) \\
& 0 = s_{b'} + \sum_{a \in [n]} B(a, b') x(a) - \sum_{a \in [n]} \sum_{b \in [m]} B(a, b) r(a, b) && \forall b' \in [m] \\
& y(b) = \sum_{a \in [n]} r(a, b) && \forall b \in [m] \\
& 1 = \sum_{a \in [n]} x(a) \\
& 1 = \sum_{b \in [m]} y(b) \\
& z(a) \geq x(a) && \forall a \in [n] \\
& S \geq \sum_{a \in [n]} z(a) \\
& 0 \leq r(a, b) \leq x(a) && \forall a \in [n] \\
& 0 \leq s_b \leq M(1 - y(b)) && \forall b \in [m] \\
& 0 \leq x(a) \leq 1 && \forall a \in [n] \\
& 0 \leq r(a, b) \leq 1 && \forall a \in [n], \forall b \in [m] \\
& z(a) \in \{0, 1\} && \forall a \in [n]
\end{aligned}$$

$$y(b) \in \{0, 1\}$$

$$\forall b \in [m]$$

7.4 Proof of Proposition 1

We demonstrate a class of games where the optimal sparse commitments for $k = 2, \dots$ have completely disjoint support. Let $N > 2$ be a constant. The actions for each player are identical: $\mathcal{A}_1 = \mathcal{A}_2 = \mathcal{A}$, and thus $n = m = |\mathcal{A}_1| = |\mathcal{A}_2|$. The actions are partitioned into N subsets

$$\mathcal{A} = \bigcup_{i=2}^N \mathcal{A}^{(i)},$$

where the i -th subset contains i distinct elements as follows:

$$\mathcal{A}^{(i)} = \{a_{i,0}, a_{i,1}, \dots, a_{i,i-1}\};$$

where $i \in [2, \dots, N]$ and the $a_{i,\alpha}$'s are distinct actions such that $|\mathcal{A}^{(i)}| = i$ and $n = m = |\mathcal{A}| = \Theta(N^2)$.

As we will soon see, we will engineer the payoffs such that if both players are restricted to be playing actions in some fixed $\mathcal{A}^{(i)}$, then we will recover an ' i -th order matching pennies' game (plus some constant payoff to Player 1 which we will elaborate on later). That is, if Player 2 correctly guesses which of the i actions Player 1 chooses, Player 1 receive a payoff of $-r \cdot (i - 1)$, but if they do not, Player 1 receive a payoff of r . Therefore, under this restricted action subgame, $\mathcal{A}^{(i)}$ the optimal strategy is for both players to play uniformly at random. Player 2 then guesses right $1/i$ times and wrong $1 - (1/i)$ times, and we recover a fair game: the expected payoff is $r \cdot \left(-\left(1 - \frac{1}{i}\right) + \frac{i-1}{i}\right) = 0$.

We now move back to the original game where actions can be played across subsets. Our utility function is decomposed into 2 components,

$$U(a_{i\alpha}, a_{j\beta}) = U_{\text{base}}(a_{i\alpha}) + U_{\text{fight}}(a_{i\alpha}, a_{j\beta}),$$

where U_{base} is a positive payoff that Player 1 always gets no matter what the opponent (Player 2) plays, and in fact, only depends on the action set that Player 1's action belongs to. It is given by

$$U_{\text{base}}(a_{i\alpha}) = \frac{2^{i-1}}{2^N} = 2^{i-1-N} < 1,$$

and U_{fight} is an additive component that gives 0 utility if both players play in the different action sets x and y , but an extremely high-stakes (though still fair) high order matching pennies if they play in the same game. Specifically,

$$U_{\text{fight}}(a_{i\alpha}, a_{j\beta}) = \begin{cases} 0 & i \neq j \\ -r \cdot (\alpha - 1) & i = j \wedge \alpha = \beta \\ r & i = j \wedge \alpha \neq \beta. \end{cases}$$

We claim that for large enough $r = \Omega(N^2)$, the best $k \leq N$ -sparse commitment for Player 1 (as the max player) is to play $a_{k,0}, a_{k,1}, \dots, a_{k,k-1}$ uniformly at random, which gives them an expected payoff of 2^{k-1-N} , where the component from U_{fight} is equal to zero under the opponent's best response.

First, observe that as far as best responses go, Player 2 is indifferent between all of their actions. Obviously, only U_{fight} can be influenced by Player 2. Recall that we only need to consider pure strategy best responses. If they play some action in $\mathcal{A}^{(j)}$ where $j \neq k$, then they get a payoff of zero for the U_{fight} component. On the other hand, if they play some $a_{k,\beta}$ in the k -th action set, then the fact that Player 1 is playing uniformly in that action set means that Player 2 will get 0 regardless of which $a_{k,\beta}$ they choose (recall the structure of k -th order matching pennies). Thus, once we account for U_{base} , it is clear that 2^{k-1-N} is a lower bound that Player 1 can guarantee among all k -sparse commitments for all $k \leq N$. We will prove that Player 1 can do no better; in fact, this is the *unique* k -sparse commitment.

Theorem 1. *The unique optimal k -sparse commitment for the above game for $2 \leq k \leq N$ is to play actions in $\mathcal{A}^{(k)}$ uniformly at random.*

Theorem 1 obviously implies Proposition 1. We will prove Theorem 1 using 2 Lemmata, which when combined will rule out Player 1 placing any mass on any action set outside of $\mathcal{A}^{(k)}$ in any optimal commitment.

Lemma 1. *Suppose r is sufficiently large. Then for mixed strategies of Player 1 where the total mass M played in actions $\bigcup_{w=k+1}^N \mathcal{A}^{(w)}$ is strictly greater than 0, there exists a best response giving Player 1 a payoff **strictly** less than 2^{k-1-N} .*

Proof. We split the final payoff into 4 components. \hat{u}_{base} , \check{u}_{base} , \bar{u}_{base} , and u_{fight} . The first three are for the components of U_{base} for actions in $\bigcup_{w=k+1}^N \mathcal{A}^{(w)}$, $\bigcup_{w=1}^{k-1} \mathcal{A}^{(w)}$ and $\mathcal{A}^{(k)}$, respectively. Therefore, for a **fixed** Player 2 action $a_{j\beta}$, and distribution over actions x for Player 1, we have the expected utility

$$u_{\text{total}} = \underbrace{\sum_{a \in \bigcup_{w=k+1}^N \mathcal{A}^{(w)}} U_{\text{base}}(a) \cdot x(a)}_{\hat{u}_{\text{base}}} + \underbrace{\sum_{a \in \bigcup_{w=1}^{k-1} \mathcal{A}^{(w)}} U_{\text{base}}(a) \cdot x(a)}_{\check{u}_{\text{base}}} + \underbrace{\sum_{a \in \mathcal{A}^{(k)}} U_{\text{base}}(a) \cdot x(a)}_{\bar{u}_{\text{base}}} + \underbrace{\sum_{a \in \mathcal{A}} U_{\text{fight}}(a, a_{j\beta}) \cdot x(a)}_{u_{\text{fight}}}. \quad (3)$$

We first show that $\hat{u}_{\text{base}} + u_{\text{fight}} < 0$ under the best response (or for that matter, some action that we will specify in a moment). Since Player 1 places a mass $M > 0$ in actions $\bigcup_{w=k+1}^N \mathcal{A}^{(w)}$, by the pigeonhole principle, at least one $\mathcal{A}^{(w^*)}$ has mass greater or equal to M/n . Fix that w^* . Also, because Player 1 is playing a k -sparse strategy, at most k of these actions in $\mathcal{A}^{(w^*)}$ are played with non-zero probability. Thus, again by the pigeonhole principle, at least one action is played with at least $\frac{M}{n} \cdot \frac{1}{k}$ probability. A best-responding opponent can play that action all the time. So, the probability of losing is at least $\frac{M}{n} \cdot \frac{1}{k}$. This gives a payoff of

$$\frac{M}{N} \cdot \left(\underbrace{\frac{1}{k} \cdot -r \cdot (w^* - 1)}_{\text{payoff from losing} \leq -r} + \underbrace{\left(1 - \frac{1}{k}\right) \cdot r}_{\text{payoff from winning} \leq r \cdot \left(1 - \frac{1}{N}\right)} \right) \leq -Mr/N^2, \quad (4)$$

where the first inequality is because $k \leq w^* - 1$. Recall that $U_{\text{base}} < 1$. Hence, the amount obtained from U_{base} from playing in $\bigcup_{w=k+1}^N \mathcal{A}^{(w)}$ is no more than M in total. Noting that so if we select r large enough such that $Mr/N^2 > M$, the total utility from this strategy is strictly < 0 and we are done. This can be done by selecting $r > N^2$.

Now, under the same choice of best response, we will show that $\check{u}_{\text{base}} + \bar{u}_{\text{base}} < 2^{k-1-N}$. We have

$$\underbrace{\sum_{a \in \bigcup_{w=1}^{k-1} \mathcal{A}^{(w)}} U_{\text{base}}(a) \cdot x(a)}_{\check{u}_{\text{base}}} + \underbrace{\sum_{a \in \mathcal{A}^{(k)}} U_{\text{base}}(a) \cdot x(a)}_{\bar{u}_{\text{base}}} \leq (1 - M) \cdot (2^{k-1-N}) < 2^{k-1-N}.$$

Adding all 4 terms up, we get that $u_{\text{total}} < 2^{k-1-N} + (\text{a strictly negative term}) < 2^{k-1-N}$ as desired. \square

Lemma 2. *If Player 1 plays a mixed strategy x where the total mass M' played in actions $\bigcup_{w=1}^{k-1} \mathcal{A}^{(w)}$ is strictly greater than 0, then under any Player 2's best response Player 1 will obtain **strictly** less than 2^{k-1-N} .*

Proof. Let $a_{i^* \alpha^*}$ be the action in $\bigcup_{w=1}^{k-1} \mathcal{A}^{(w)}$ played with the highest probability. By our assumption, $x(a_{i^* \alpha^*}) > 0$.

As in our proof of Lemma 1, we decompose the utility for any Player 2 action $a_{j\beta}$ as

$$u_{\text{total}} = \underbrace{\sum_{a \in \bigcup_{w=k+1}^N \mathcal{A}^{(w)}} U_{\text{base}}(a) \cdot x(a)}_{\hat{u}_{\text{base}}} + \underbrace{\sum_{a \in \bigcup_{w=1}^{k-1} \mathcal{A}^{(w)}} U_{\text{base}}(a) \cdot x(a)}_{\check{u}_{\text{base}}} + \underbrace{\sum_{a \in \mathcal{A}^{(k)}} U_{\text{base}}(a) \cdot x(a)}_{\bar{u}_{\text{base}}} + \underbrace{\sum_{a \in \mathcal{A}} U_{\text{fight}}(a, a_{j\beta}) \cdot x(a)}_{u_{\text{fight}}}.$$

We observe that Player 2 can at least play $a_{i^* \alpha^*}$ to force a utility of at most 0 for the u_{fight} . Also, from Lemma 1 we may assume that actions in $\bigcup_{w=k+1}^N \mathcal{A}^{(w)}$ are played with probability 0 each. So, $\hat{u}_{\text{base}} = 0$. Finally, since $M' = \sum_{a \in \bigcup_{w=1}^{k-1} \mathcal{A}^{(w)}} x(a) > 0$, we have

$$\begin{aligned} \check{u}_{\text{base}} + \bar{u}_{\text{base}} &= \underbrace{\sum_{a \in \bigcup_{w=1}^{k-1} \mathcal{A}^{(w)}} U_{\text{base}}(a) \cdot x(a)}_{\check{u}_{\text{base}}} + \underbrace{\sum_{a \in \mathcal{A}^{(k)}} U_{\text{base}}(a) \cdot x(a)}_{\bar{u}_{\text{base}}} \\ &\leq M' \cdot (2^{k-2-N}) + (1 - M') \cdot (2^{k-1-N}) \\ &< 2^{k-1-N}. \end{aligned}$$

\square

From Lemmata 1 and 2, we conclude that for Player 1 to obtain a utility $\geq 2^{k-1-N}$ Player 1 can only play actions in $\mathcal{A}^{(k)}$. However, under that restriction of only playing in $\mathcal{A}^{(k)}$ it is obvious that the unique optimum is to play uniformly at random over all those actions (since it is a matching pennies game). This yields Theorem 1.

7.5 Proof of Proposition 2

We can directly use the example from the proof of Proposition 1. Let $N \geq 5$. Recall that $v_k^* = 2^{k-1-N}$. This is a convex, rather than concave function. More precisely,

$$\begin{aligned} v_3^* - v_2^* &= 2^{2-N} - 2^{1-N}, \text{ and} \\ v_4^* - v_3^* &= 2^{3-N} - 2^{2-N} = 2 \cdot (v_3^* - v_2^*). \end{aligned}$$

Since $v_3^* - v_2^*$ is strictly positive, this is clearly a strictly increasing function (and in fact exponentially increasing).

7.6 Proof of Proposition 3

We can again use the example from the proof of Proposition 1. Let $S = \{a_{2,0}, a_{2,1}\}$ and $S' = \{a_{2,0}, a_{2,1}, a_{3,0}, a_{3,1}\}$. Clearly $S' \supset S$. Now recall that a set function $f(S)$ is submodular if and only if $f(S \cup \{z\}) - f(S) \geq f(S' \cup \{z\}) - f(S')$ for all $S' \supseteq S$ and $z \notin S$, i.e., there are decreasing ‘‘marginal returns’’ of adding z to larger sets. Let $z = a_{3,2}$.

$$\begin{aligned} f(S) &= \frac{2}{2^N} && \text{(Uniform at random between } a_{2,0}, a_{2,1}) \\ f(S \cup \{z\}) &= \frac{2}{2^N} && \text{(Uniform at random between } a_{2,0}, a_{2,1}) \\ f(S') &= \frac{2}{2^N} && \text{(Uniform at random between } a_{2,0}, a_{2,1}) \\ f(S' \cup \{z\}) &= \frac{4}{2^N} && \text{(Uniform at random between } a_{3,0}, a_{3,1}, z) \end{aligned}$$

The proofs of the second to fourth lines follow from a similar reasoning as in the proof of Theorem 1. The idea is that unless all actions $a_{3,0}, a_{3,1}, a_{3,2}$ are all available, Player 1 should commit uniformly at random between $a_{2,0}, a_{2,1}$. This is because if some total nonzero mass is placed M between $a_{3,0}$ and $a_{3,1}$, then at least one of them, a^* , is played with at least $M/2$ probability (pigeonhole principle). If Player 2 best responds by playing a^* , then 4 tells us that the payoff from fighting is $\leq -Mr/N^2$ while the base payoff (accrued from playing in $\mathcal{A}^{(3)}$) is no greater than M . For $r > N^2$, this is strictly less than 0. Meanwhile, the base payoff from playing $a_{2,0}$ and $a_{2,1}$ is $(1 - M) \cdot \frac{2}{2^N} < \frac{2}{2^N}$.

With these calculations, we can directly verify that the inequality required for submodularity is not satisfied for these choices of S, S' and z .

7.7 Proof of Proposition 4

Consider a biased matching pennies game with a parameter $a > 0$, as depicted in Figure 6. The utilities in this game range from -1 to 1 for all values of a . The game has a unique Nash equilibrium, where Player 1 plays action H with a probability of $\frac{2}{a+3}$, and Player 2 plays action H with a probability of $\frac{a+1}{a+3}$. The value of this equilibrium is given by $v^* = \frac{1-a}{a(a+3)}$.

Now, consider a setting where Player 1 is restricted to k -uniform strategies as in the algorithm of McCarthy et al. (2018), while Player 2 responds optimally by choosing either H or T . We examine a deviation $\epsilon > 0$ from the equilibrium value v^* when Player 1 plays a k -uniform strategy \bar{x}_k :

$$|\bar{v}_k - v^*| \leq \epsilon, \tag{5}$$

where \bar{v}_k is the value of \bar{x}_k against some best-response of Player 2. If Player 2’s best response is H , then $\bar{v}_k = \frac{p}{ak} - \frac{1}{a}(1 - \frac{p}{k})$, and manipulating the inequality gives us a lower bound

$$k \geq \frac{(a+1)(a+3)}{a^2\epsilon + 3a\epsilon + 2a + 2}. \tag{6}$$

Similarly, to achieve the same deviation when Player 2 responds with T (where $\bar{v}_k = -\frac{p}{k} + \frac{1}{a}(1 - \frac{p}{k})$), Player 1 needs

$$k \geq \frac{2(a+3)}{a^2\epsilon + 3a\epsilon + 4}. \tag{7}$$

The required value of k increases at least at a rate determined by the minimum of these bounds.

This game also illustrates a case where our definition of a sparse commitment yields a significantly different (and higher quality) solution compared to the approach of McCarthy et al. (2018). Specifically, k -sparse strategies can exactly represent the equilibrium of this game already with $k = 2$.

		Player 2	
		<i>H</i>	<i>T</i>
Player 1	<i>H</i>	$\frac{1}{a}, -\frac{1}{a}$	$-1, 1$
	<i>T</i>	$-\frac{1}{a}, \frac{1}{a}$	$\frac{1}{a}, -\frac{1}{a}$

Figure 6: A biased matching pennies game with parameter a .

7.8 Experimental Setup

All the experiments on randomly generated games and structured sparsity experiments on patrolling games were conducted on a Linux 64-bit machine with 12th Gen Intel Core i9-12900, 2.4Ghz, with access to 64GB of RAM. The experiments on larger strategy spaces ran on a cluster consisting of machines with Intel Xeon Gold 6226, 2.9Ghz on a Linux 64-bit platform. Each run was restricted to 8 threads and 32GB of RAM. We used Gurobi 10.0.3 (Gurobi Optimization, LLC 2023) for (MILPs).

The real-world physical graph of a US university campus was obtained using OSMnx (Boeing 2017). Algorithms using the best response oracle of the non-sparse player were set to use the equilibrium gap tolerance $\epsilon = 10^{-3}$. More details about the domain construction can be found in the next section.

7.9 Domain Descriptions and Additional Experimental Results

Randomly generated general-sum games We evaluate the single general-sum Stackelberg equilibrium MILP proposed in Section 7.3. We consider the same payoff matrices used to assess the multiple MILP (G) for sizes $n = m \in \{20, 30, \dots, 70\}$. As for the multiple MILP, we report the normalized runtime and relative utility as a function of k , each averaged over all instances per game size, and normalize the values of k with respect to k_{SE} (Figure 7). Once again, we observe a phase transition pattern in the runtime curves. However, the single MILP exhibits a higher runtime compared to the multiple MILP, especially for games of sizes 30 and 40. Moreover, with the single MILP, we can still capture nearly 90% of the game value with only a fraction of the support size.

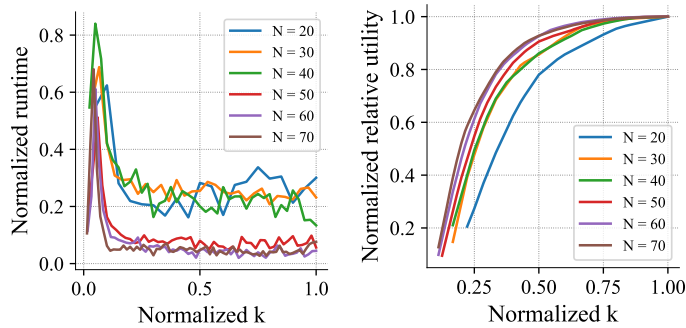


Figure 7: Average normalized runtime and relative utility for solving general-sum games with the single MILP.

Additionally, we explore an alternative method for generating random payoff matrices for general-sum games. Again, the entries A_{ij} are randomly chosen in $[-50, 50]$. However, the entries B_{ij} are now chosen such that the payoff matrix B is negatively correlated with A with some random noise. More precisely, we let $B_{ij} = c \times A_{ij} + N_{ij}$ where c is a fixed coefficient and N is a matrix of random uniform noise with entries in $[-85, 85]$. We consider different values for $c \in \{-0.8, -0.6, -0.4, -0.2\}$, and solve the games for sizes $n = m \in \{20, 30, \dots, 70\}$ using both the multiple and single MILPs. We present the normalized runtime and relative utility results across the different of the resulting Pearson product-moment correlation coefficients in Figures 12, 13, 14, and 15. The utility plots indicate that both MILPs exhibit very similar performance, while the runtime plots suggest that the single MILP generally has a higher runtime compared to the multiple MILP.

Air defence battery placements We extracted maps of different regions (randomly chosen) of the world from the video game *Hearts of Iron IV*. See Figure 8 for examples. Note that the only purpose of using these maps is because land masses have been broken to different regions, we did not use utilize any other information from the video game. The optimal sparse commitments were conducted on a M1 Macbook Pro with 16 GB of RAM. The focus of this experiment is not on running times, but quality and visualization of solutions. We use the Basic Method (B) to compute optimal commitments. In general,

each of these experiments takes longer to run than randomly generated matrix games. That said, note that the air defence game is a fair bit larger; typically $n \approx 800, m \approx 200$.

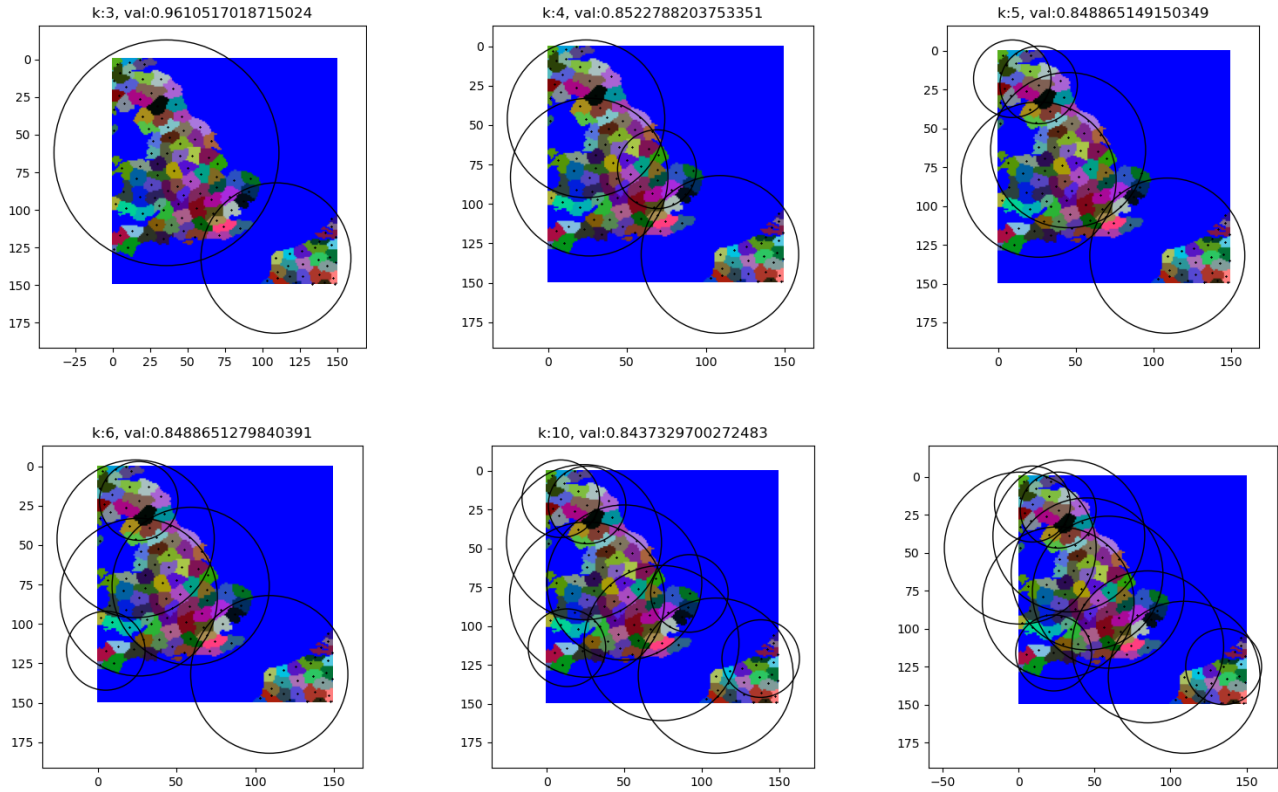


Figure 8: Results for air defence coverage near a region in the United Kingdom over different values of k . Colored, non-blue regions are land regions, and blue shades are sea/oceans. Circles are coverage circles (out of 4 different sizes available) for locations that are chosen with strictly non-zero probability. ‘val’ refers to the expected damage taken under that value of k . Bottom right picture are results for $k = \infty$.

For each instance, we allow for 4 different air defense batteries. Our job is to choose a single location (given by the map’s regions) and select a single air defense battery to place there. Each type of battery contains a different coverage effectiveness and radius. Coverage effectiveness is given by the probability that the attack succeeds on a region covered by the air defense battery, while radius influences the size of the circles as seen in Figure 8. Player 2 chooses a single region to attack. If it is not covered, then the target is hit with probability 1. If it is covered, then with some probability the attack goes through; this probability is dependent on the type of air defense chosen. Each region has a value depending on whether it is a regular region or a city. Cities are worth more than regular regions. The amount that Player 2 gets is the value of Player 2’s target, multiplied by the probability the attack goes through; we call this the *expected damage taken* by Player 1. The game is zero-sum, so Player 1’s payoff is likewise defined. Note crucially that Player 1 seeks to *minimize* the expected damage taken; hence this is a min-max problem rather than a max-min one.

In the above experiment, we choose radii of $(25, 50, 75, 100)$ ¹ and coverage effectiveness of $(0.05, 0.20, 0.85, 0.9)$ respectively. Cities were worth 1.1, while regular regions 1.0. Note that for the latter, lower numbers mean more effective defenses. Figure 8 show some results for different values of k . Here *val* refers to the expected payoff to *Player 2*. Qualitatively, we can see that this is reminiscent of some kind of “covering problem”, when $k = 2$, we are forced to use an effective battery to cover the mainland of the UK, but as k increases, we are able to utilize more effective defenses, but place them with varying probabilities throughout the mainland. There is small coverage at the bottom right region of the English channel which is always “serviced” by the same battery at the same location. Nonetheless, in general we see that these optimal placements vary greatly as k changes, similar in spirit to Proposition 1.

¹these units are in game pixels, not ground distances. Even though the earth is round we did not perform any transformations. This is to keep matters simple.

Finally, we report performance in Figure 9 for 6 different maps over 3 different experimental settings for a range of k . Note that these are different maps (and therefore incomparable across settings). We stress once again that Player 1 (the sparse player) is *minimizing*. We can see that unlike before, not as much as the true optimum is achievable for low k . Nonetheless, having $k = 4$ seems to yield reasonable results. We can clearly see the not non-increasing behavior as k increases. We can also see in a concrete setting the non-convexity (which we may expect from a minimizing sparse player) of the expected damage taken, just as Proposition 2 says. It is also worth pointing out that the shapes of each plot in a graph look surprisingly similar, e.g., where the knots are. We suspect this is because these maps have regions roughly spread evenly in a plane. (since this was from a video game) Therefore, barring the existence of large water bodies and the slight variations caused by cities, we are ultimately solving very similar “set cover” problems each time.

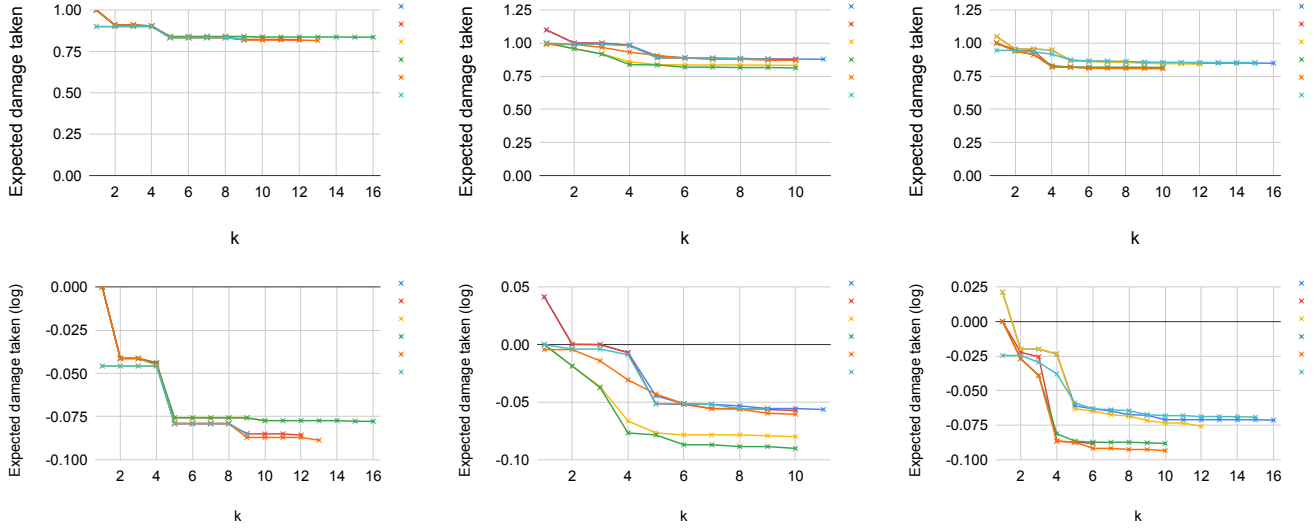


Figure 9: Expected damage taken over different k for 3 settings (**top**), and in log scale (**bottom**). The radii for all air defences are $[25, 50, 75, 100]$ for all 3 settings. Regular regions have a value of 1, and cities have a value of 1, 1.1, 1.05 from left to right. The probability of an attacker going through under coverage is (in terms of air defense types), from left to right, $[(0.01, 0.20, 0.85, 0.9), (0.05, 0.20, 0.85, 0.9), (0.05, 0.20, 0.85, 0.9)]$.

Patrolling games The patrolling games were conceptualized as layered graph security games (Černý et al. 2024) played on a physical graph, as illustrated in Figure 10. We assumed that each edge could be traversed in a single time step. The game was constructed by time-expanding the physical graph into a pursuit-evasion game, following the methodology from layered graph security games (Černý et al. 2024), using code available online². In the basic version of the game, the professor selects a path within the time-expanded graph, starting from a node within their designated starting points set. It is important to note that the number of possible paths grows exponentially with the size of the graph. Depending on the time horizon, this version was utilized for the vanilla and structured sparsity experiments (for shorter horizons) or for experiments involving a large strategy space for the professor (for longer horizons). In the scenario with a large strategy space for the student, the student selects a path originating from one of their starting points, while the professor sets up only a single checkpoint. When both players select paths, we refer to the setting as having both strategy spaces large. The specific settings for individual scenarios are detailed in Table 1. In a given scenario, certain vertices in the physical graph are identified as desirable exit nodes for the student, offering higher utility than others. When generating a game for a particular scenario, the utility of a vertex is assigned uniformly at random from the interval $[6, 10]$ if the vertex belongs to the set of desirable nodes, and uniformly at random from the interval $[1, 5]$ otherwise.

We now consider again the vanilla and sparsity experiments, but increase the path length to $T = 6$, meaning that the professor selects a path of length 6. The student still chooses a single location to escape to. Again, we impose vanilla sparsity constraints on the paths distribution and structured sparsity constraints on the starting points distribution of the professor. Figure 11 shows the results across 21 instances. The observed results are generally as expected. A phase transition pattern in the runtime curves is clearly present in the vanilla sparsity scenario but absent in the structured sparsity scenario. In both cases, however, the professor is able to achieve more than 90% of the game value for k as low as 3.

²<https://github.com/CoffeeAndConvexity/LayeredGraphGamesGenerators>

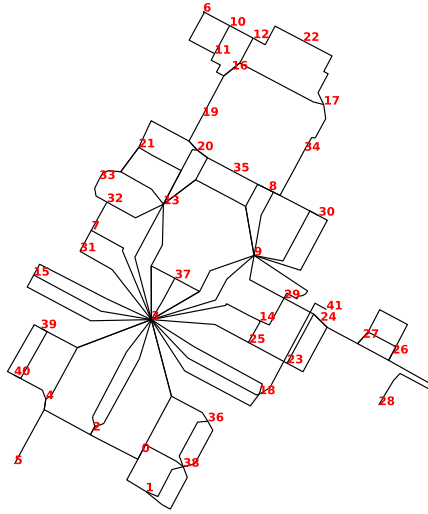


Figure 10: Physical graph of a US university campus our patrolling games are played on. Red numbers are the location indices.

Experiment	Scenario	Starting Points Professor	Starting Points Student	Desirable Exits
Vanilla sparsity	–	7, 9, 14, 19, 29, 35, 36, 39	–	13, 30, 32, 37, 40
Structured sparsity	–	7, 9, 14, 19, 29, 35, 36, 39	–	13, 30, 32, 37, 40
Large professor space	Scenario 0	2, 4, 10, 24, 33	–	9, 13, 37, 35
	Scenario 1	7, 9, 14, 19, 29, 35, 36, 39	–	13, 30, 32, 37, 40
Large student space	–	–	4, 9, 12, 26, 35, 40	11, 13, 21, 25, 29, 35
Large both spaces	Scenario 0	12, 16, 19, 21, 27, 32	12, 16, 19, 21, 27, 32	9, 27, 29, 33, 37
	Scenario 1	4, 8, 13, 16, 22, 24	4, 8, 13, 16, 22, 24	0, 3, 8, 14, 35
	Scenario 2	3, 5, 8, 21, 27, 39	3, 5, 8, 21, 27, 39	15, 20, 21, 35, 40

Table 1: Settings of individual scenarios used in our patrolling game experiments.

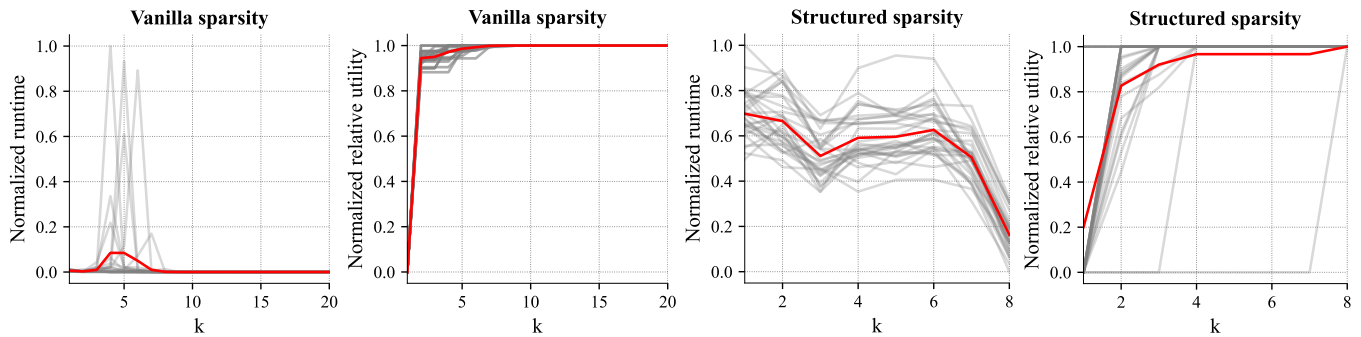


Figure 11: Average (red) normalized runtime and relative utility over 30 instances (gray) of a PE on a university campus. We impose *vanilla sparsity* on path distribution (**left**) and *structured sparsity* on the starting point distribution of Player 1 (**right**).

Games with large strategy spaces We conduct a deeper exploration of patrolling games with large strategy spaces by examining additional path lengths for each scenario and introducing new scenarios. We also provide runtime results for all experiments.

In games where the sparse player has a large action space, we evaluate a new set of starting points and desirable final locations (scenario 0) and vary T from 5 to 8. The results are generally consistent with those from the previous scenario (scenario 1).

However, at $T = 8$, there is a notable increase in utility as k rises from 3 to 5: approximately 20% of the true game value is achieved at $k = 3$, 70% at $k = 4$, and 90% at $k = 5$ (Figure 16, top).

For games where both players have large strategy spaces, we experiment on a new scenario (scenario 2), and consider a higher path length $T = 7$ for all scenarios. The normalized relative utility results, reported in Figure 16 (bottom), show that Player 1 is able to achieve around 90% of the game value for $k = 5$ and around 80% for $k = 3$ at $T = 6, 7$. The poor performance observed in scenario 1 at $T = 7$ is attributed to the huge number of paths (more than 16k) combined with an extremely small support size ($k = 2$).

Moreover, we present in Figures 17, 18 and 19 the runtime results for the experiments with large action spaces, across all scenarios and depths. For games where only Player 1 has a large strategy space and games where both players have large strategy spaces, we obtained results for only lower values of k in most experiments within the 12-hour time limit. The average runtime tends to increase after a certain value of k , such as $k = 6$ for scenario 0 at depth 5, when Player 1 has a large action space. However, in games where Player 2 has a large strategy space instead, the average runtime grows more slowly, allowing us to obtain results for instances up to $k = 15$. Overall, the results show that runtime generally increases with k , though with some fluctuations.

Comparison with k -uniform strategies The blue curves in Figure 16 represent the average relative utility normalized by the Nash value for the case where the sparse player uses k -sparse strategies. As expected, optimal k -sparse strategies generally outperform k -uniform strategies for $k > 2$. When $k = 1, 2$, k -sparse and k -uniform strategies yield nearly identical utility.

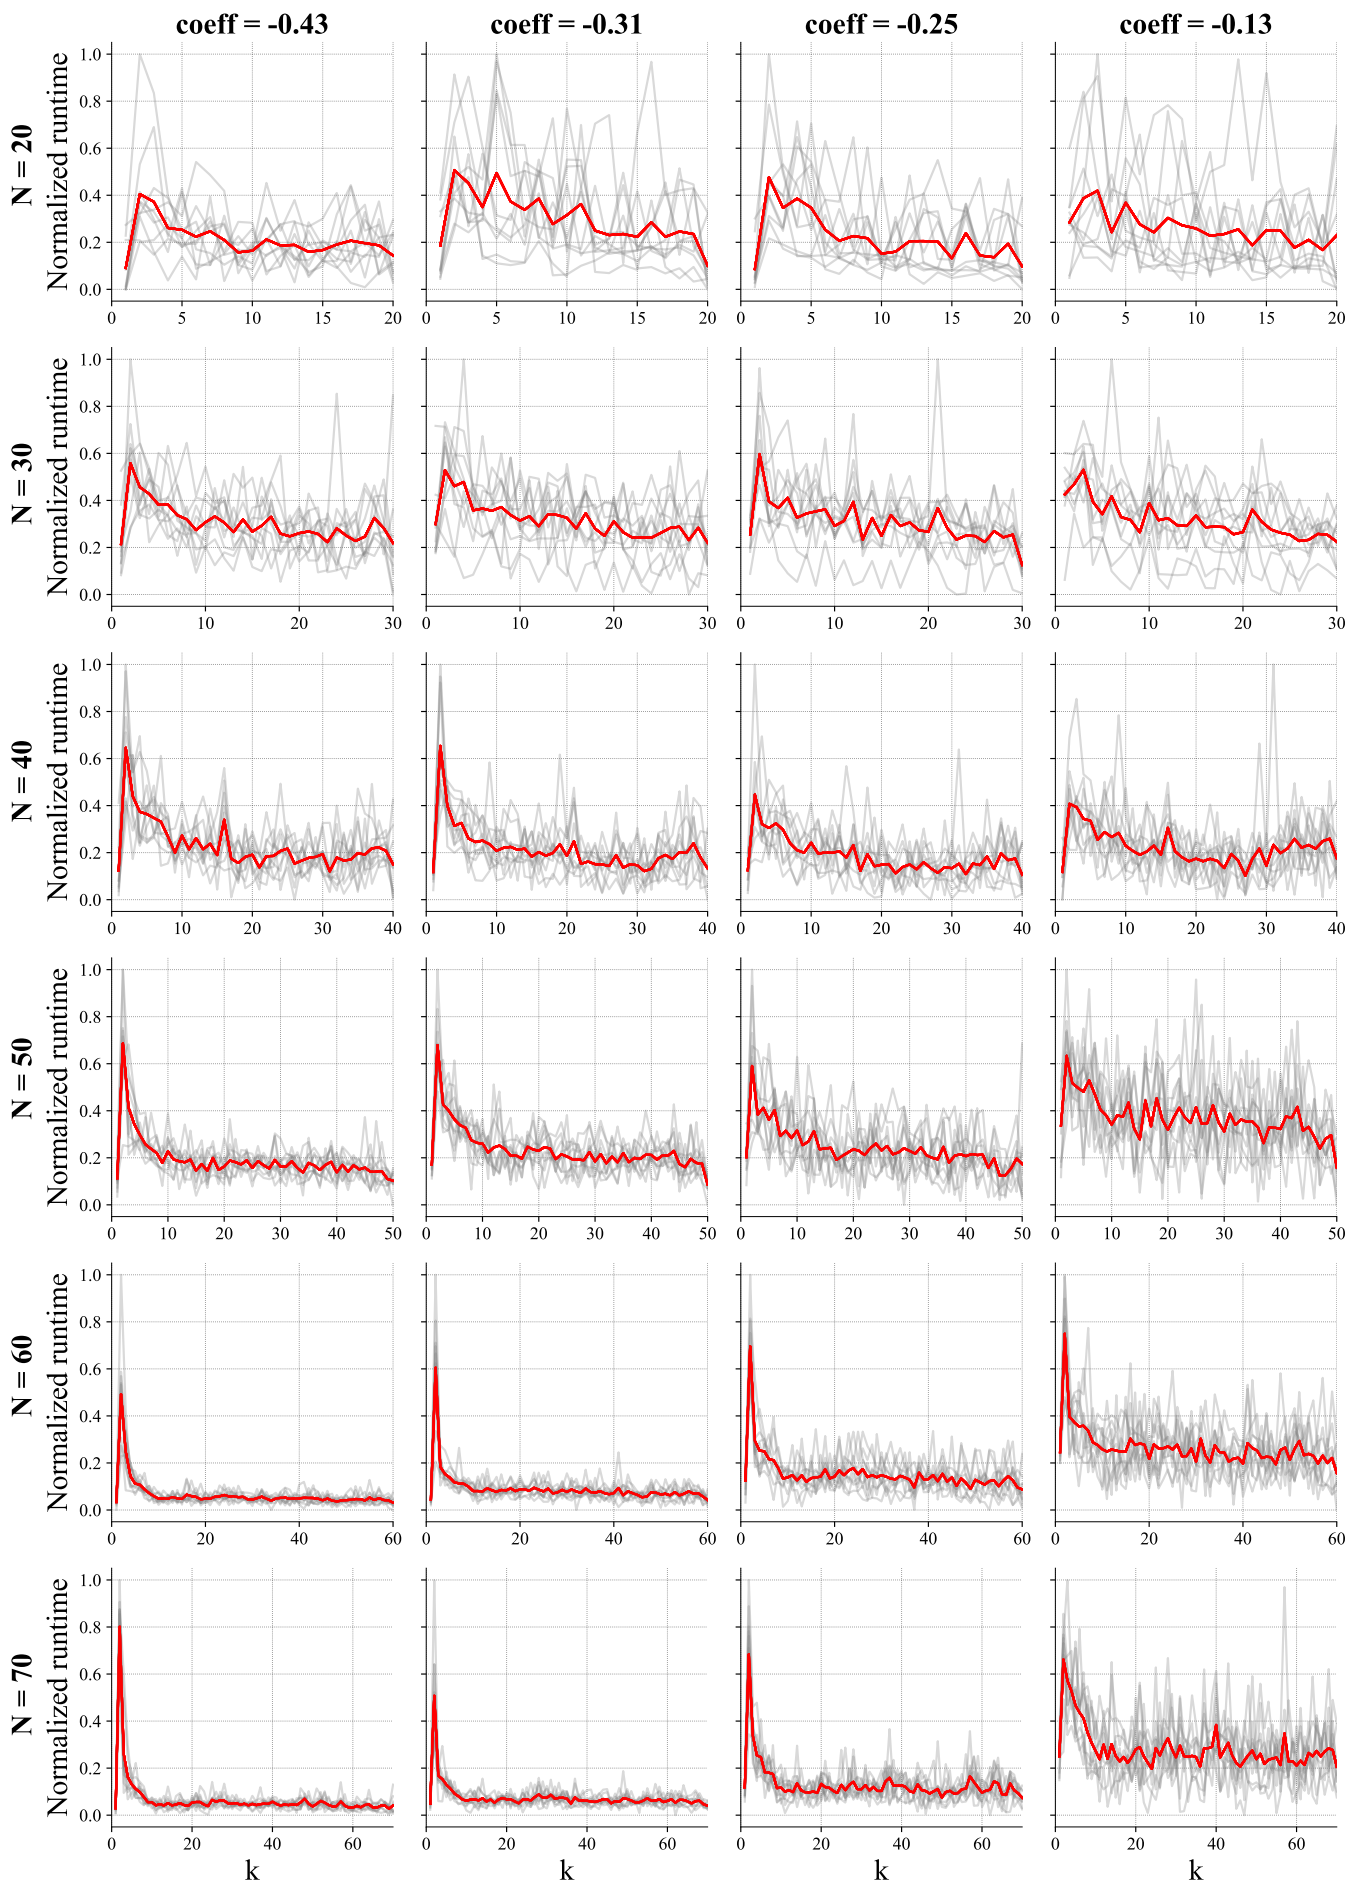


Figure 12: Average normalized runtime across different game sizes and correlation coefficients using the multiple MILP.

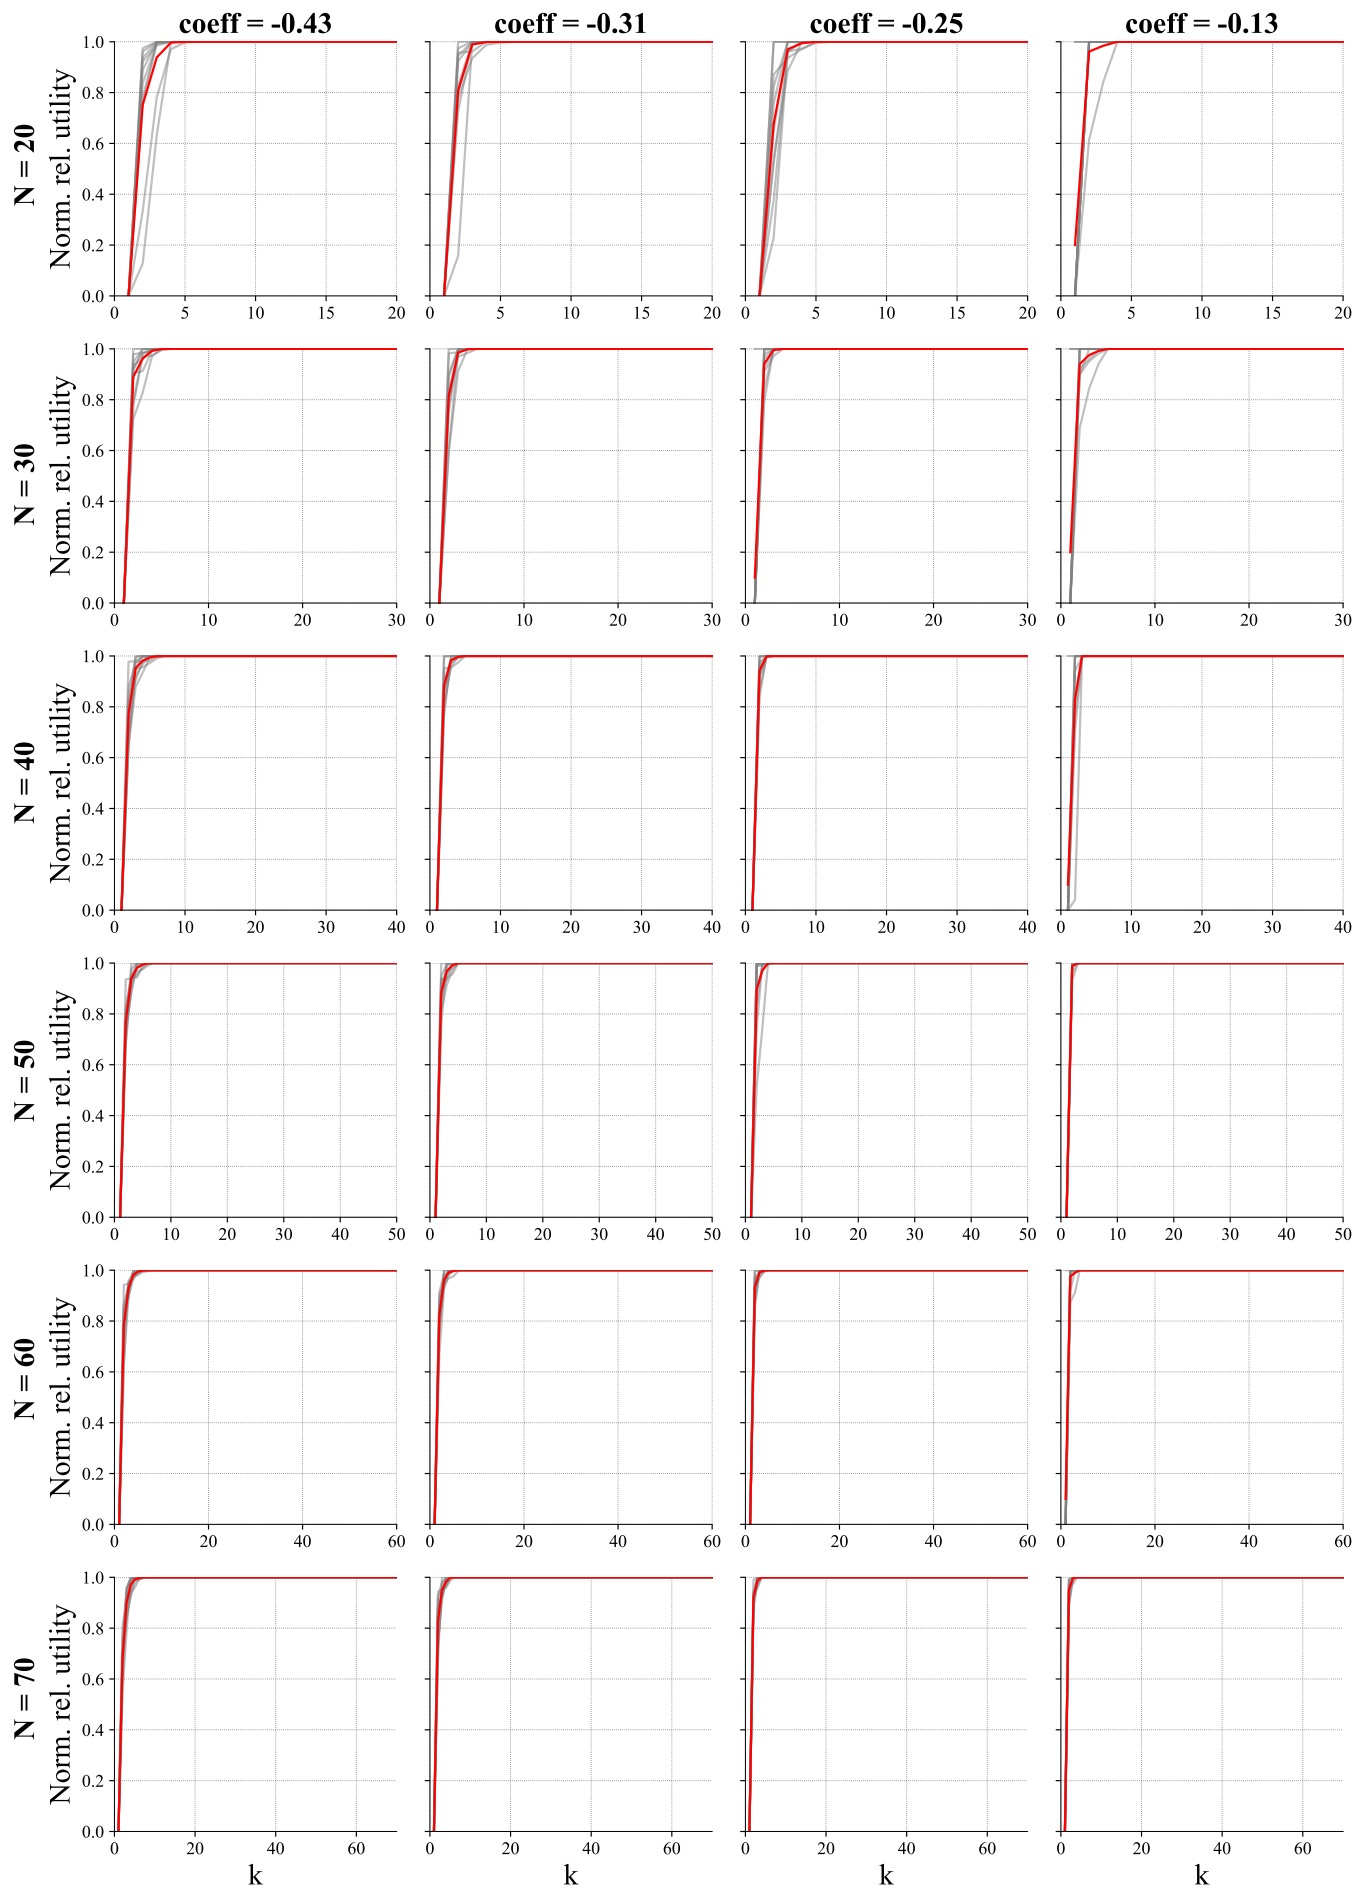


Figure 13: Average normalized relative utility across different game sizes and correlation coefficients using the multiple MILP.

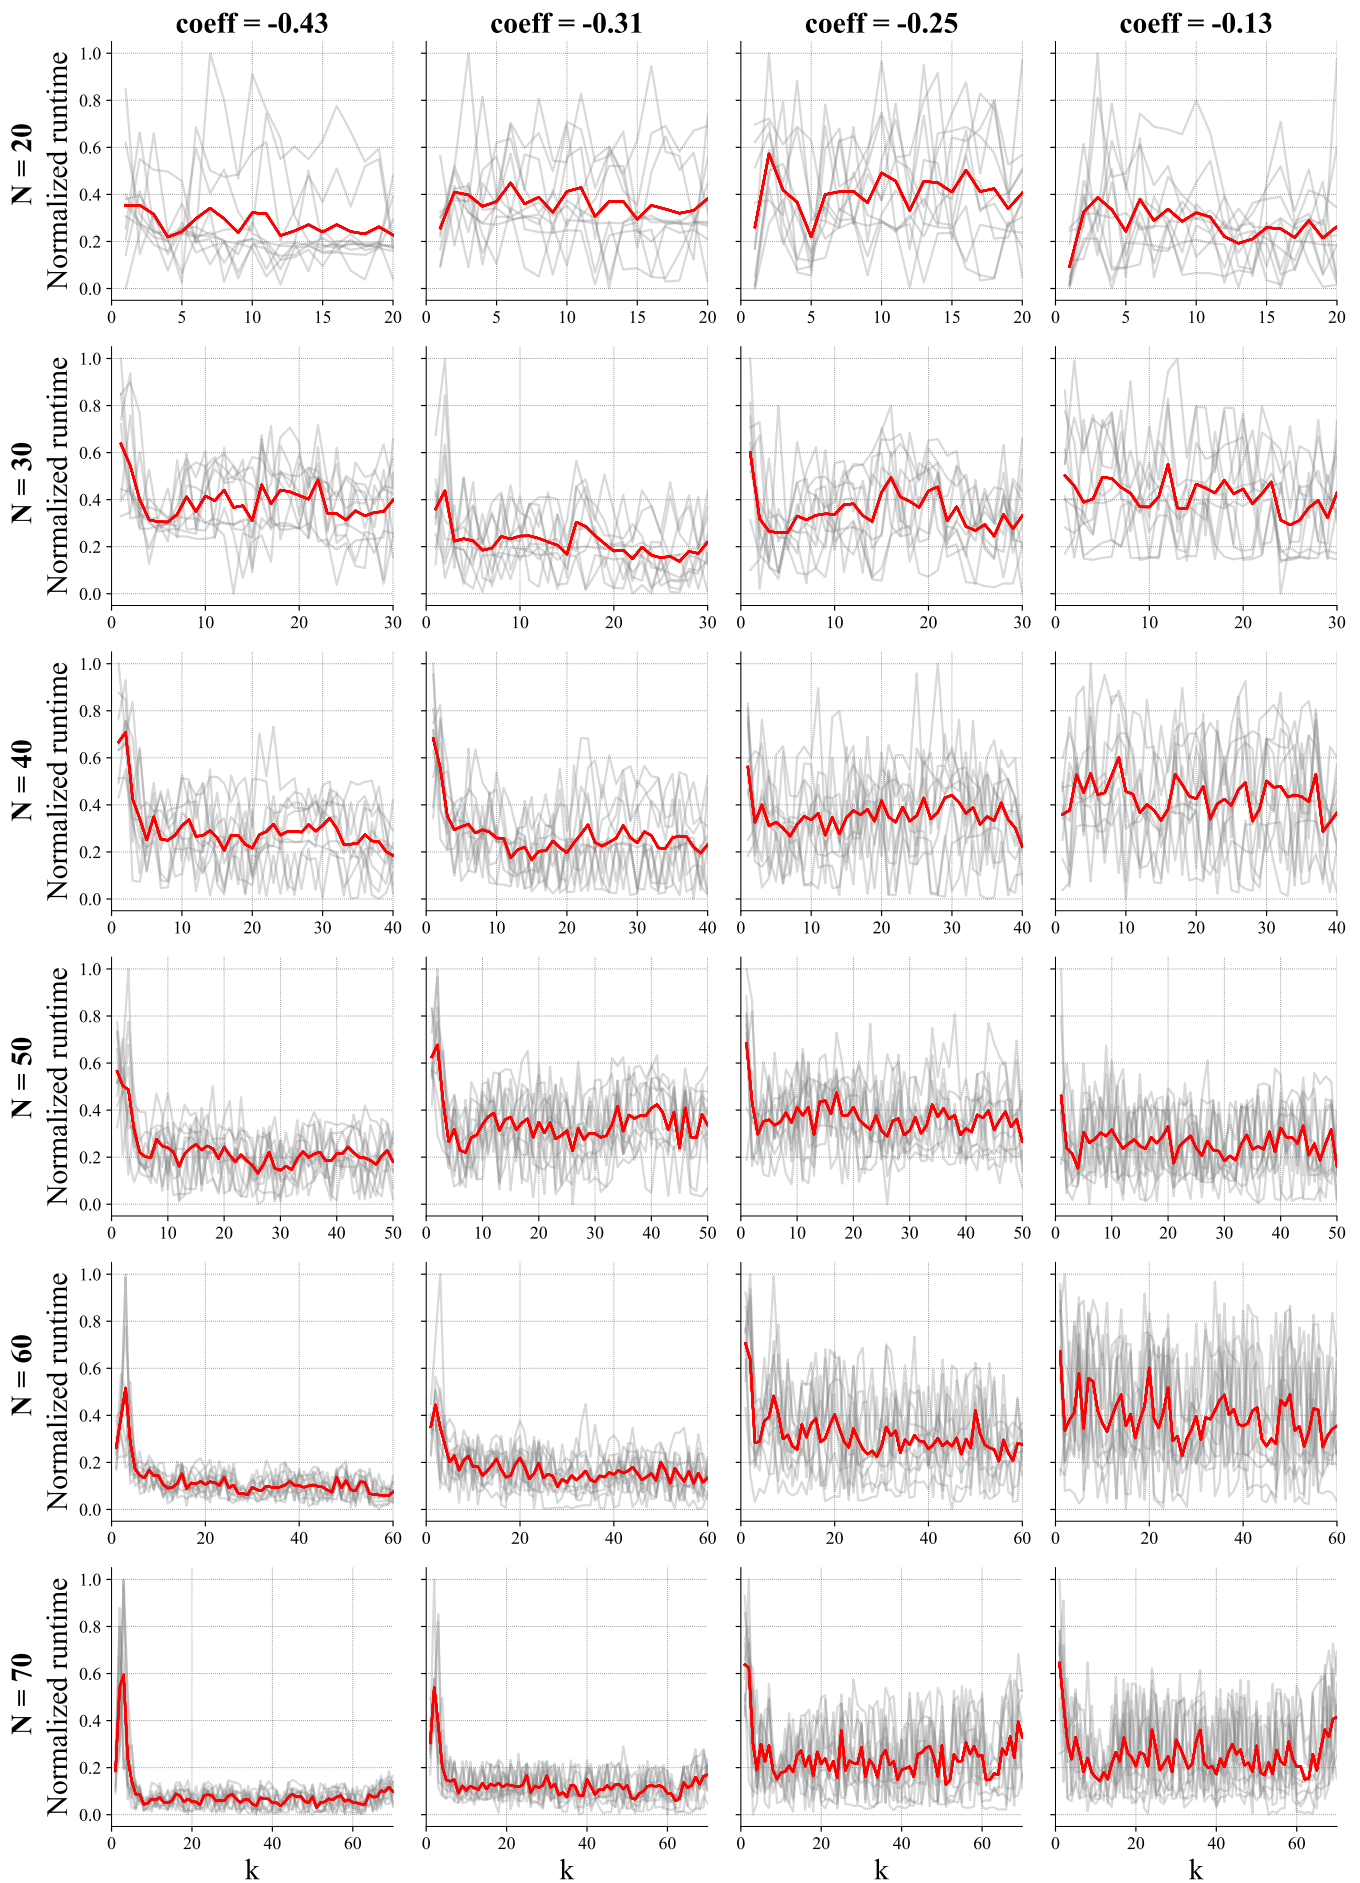


Figure 14: Average normalized runtime across different game sizes and correlation coefficients using the single MILP.

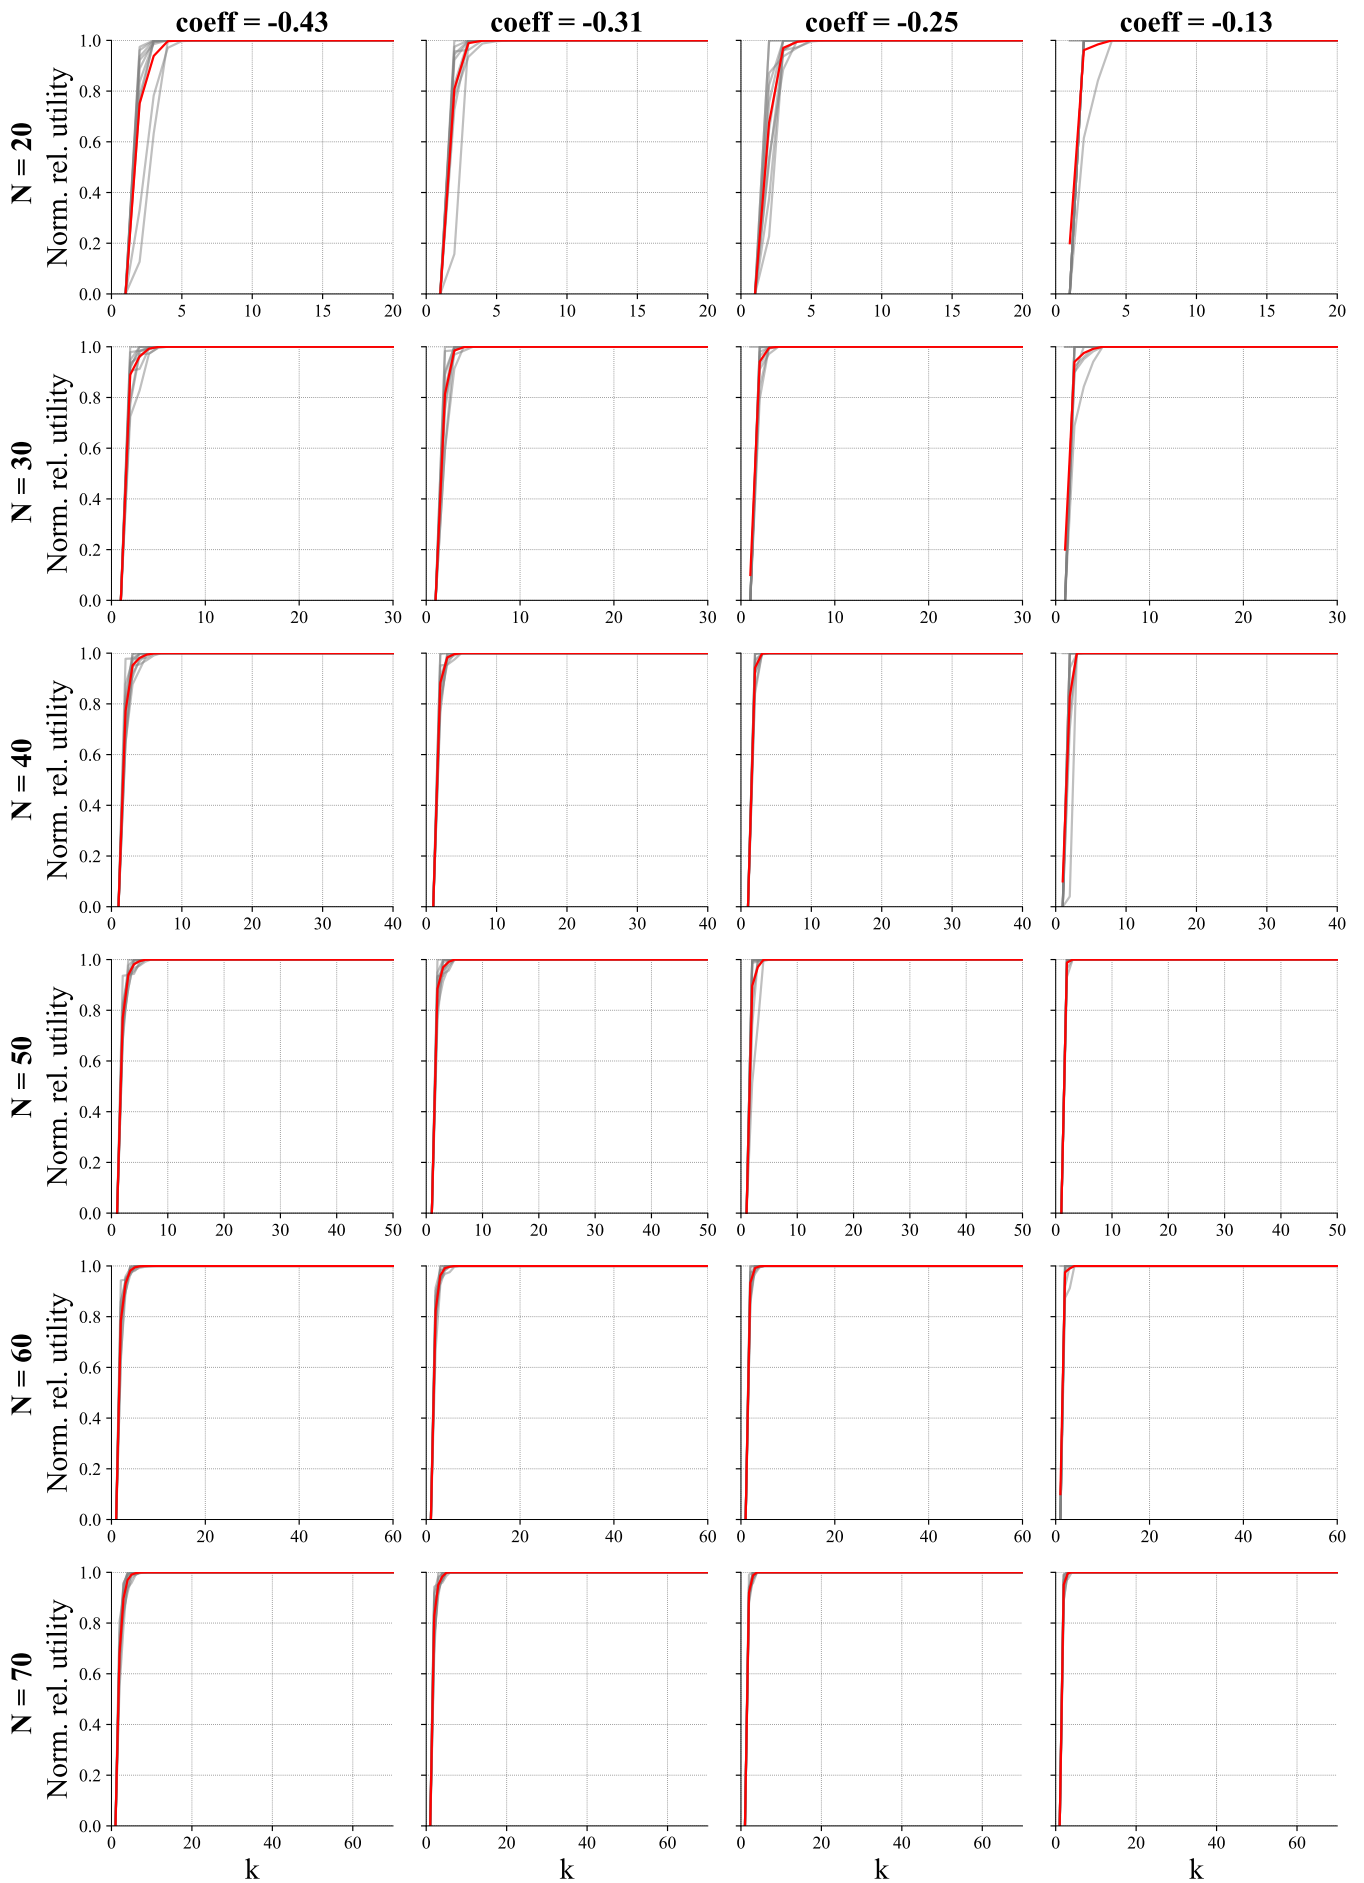


Figure 15: Average normalized relative utility across different game sizes and correlation coefficients using the single MILP.

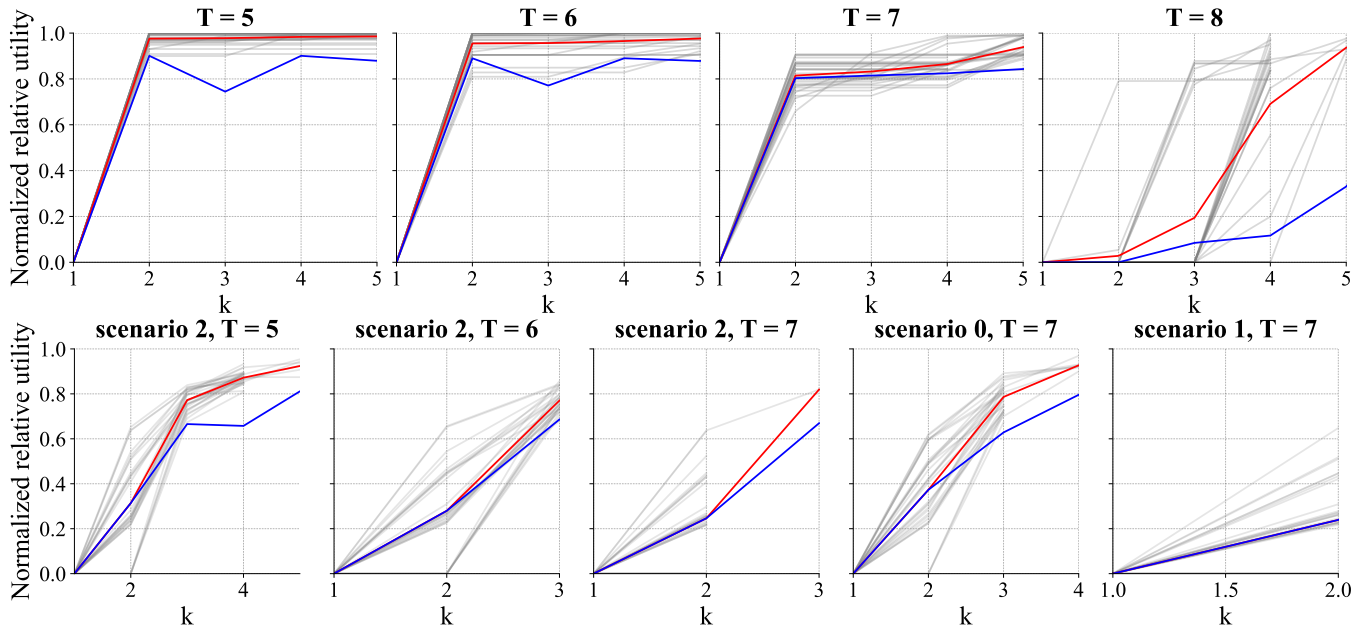


Figure 16: Average normalized relative utility curves for optimal k -sparse (red) and k -uniform (blue) commitments. Results for individual instances using optimal k -sparse commitments are in gray. **Top row:** sparse player has a large strategy space (scenario 0). **Bottom row:** both players have large strategy spaces.

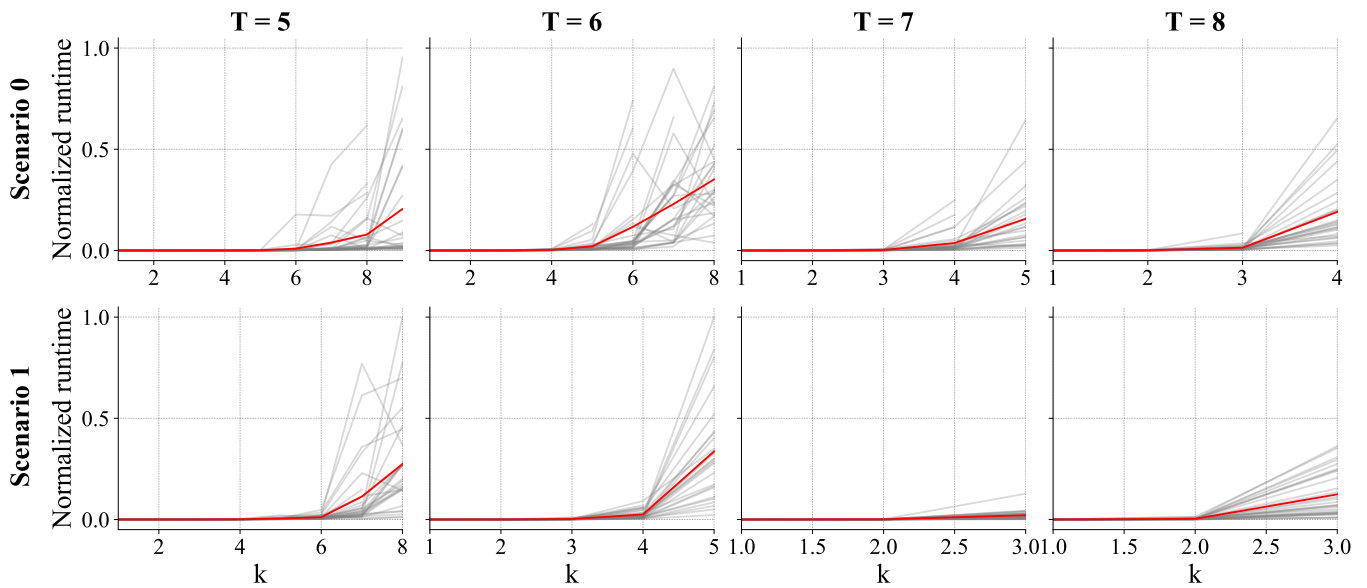


Figure 17: Average normalized runtime (red) across 30 instances (gray) for scenarios 0 and 1 at different depth values, when the sparse player has a large strategy space.

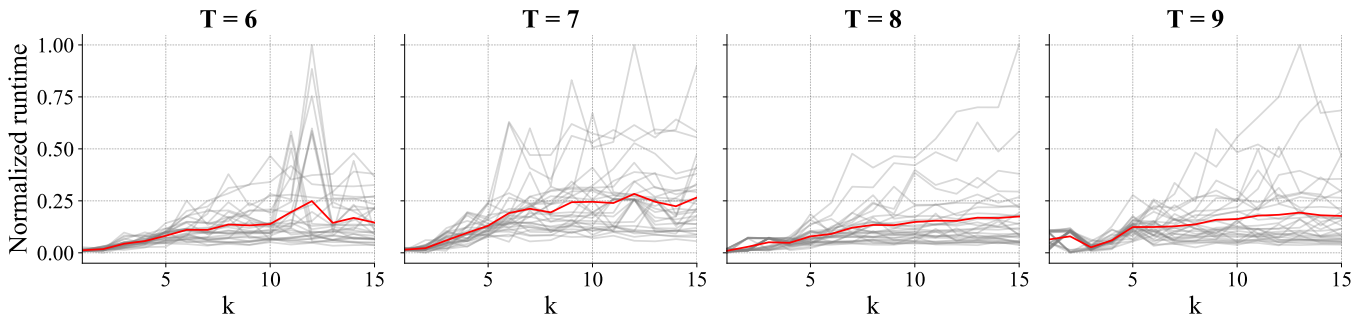


Figure 18: Average normalized runtime (red) across 30 instances (gray) for different depth values, when the non-sparse player has a large strategy space.

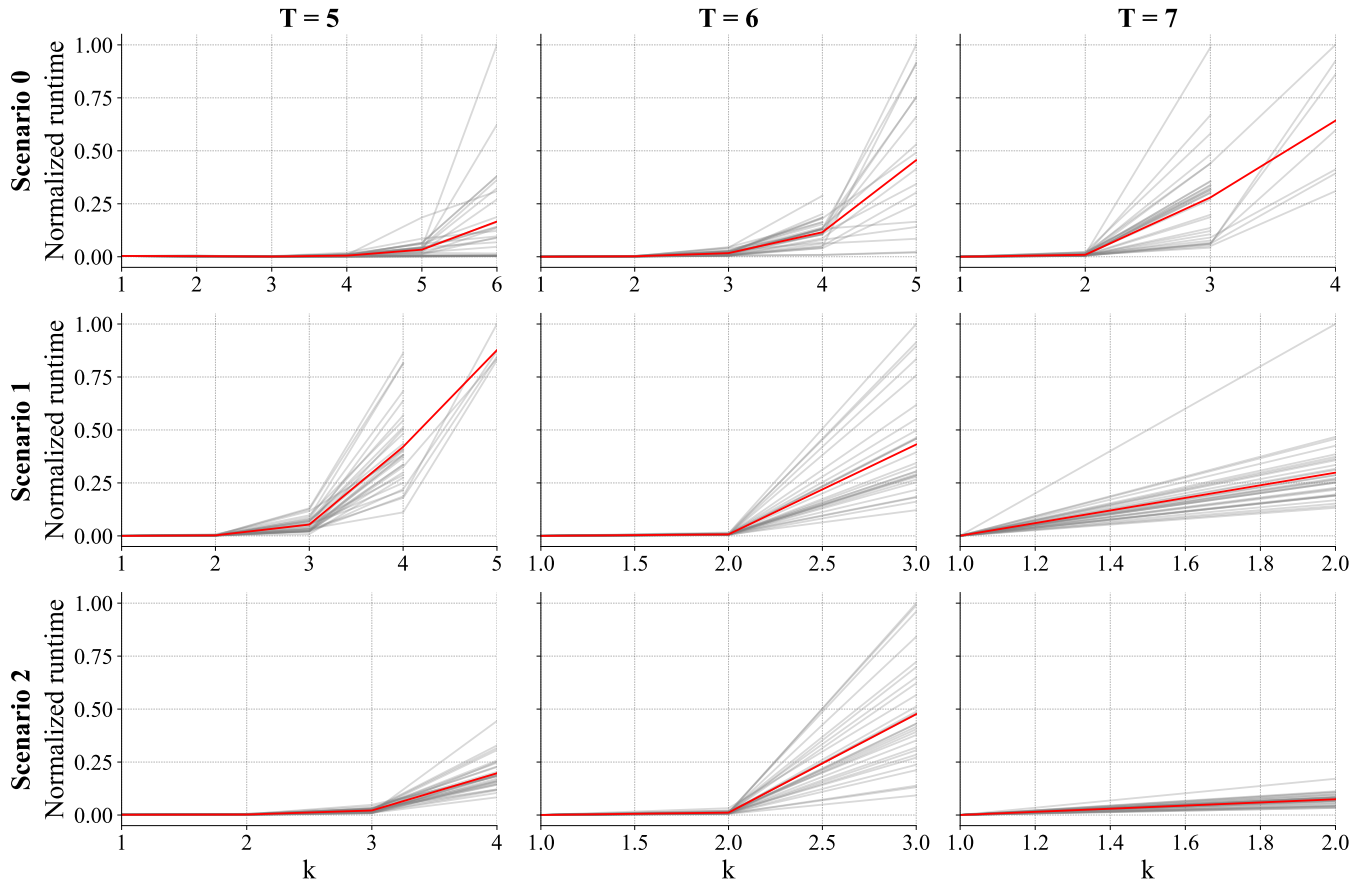


Figure 19: Average normalized runtime (red) across 30 instances (gray) for scenarios 0, 1 and 2 at different depth values, when both players have large strategy spaces.