

# Memorization Over Reasoning? Exposing and Mitigating Verbatim Memorization in Large Language Models’ Character Understanding Evaluation

Yuxuan Jiang , Francis Ferraro

Department of Computer Science and Electrical Engineering  
University of Maryland, Baltimore County  
yuxuanj1@umbc.edu

## Abstract

Recently, Large Language Models (LLMs) have shown impressive performance in character understanding tasks, such as analyzing the roles, personalities, and relationships of fictional characters. However, the extensive pre-training corpora used by LLMs raise concerns that they may rely on memorizing popular fictional works rather than genuinely understanding and reasoning about them. In this work, we argue that “gist memory”—capturing essential meaning—should be the primary mechanism for character understanding tasks, as opposed to “verbatim memory”—exact match of a string. We introduce a simple yet effective method to mitigate mechanized memorization in character understanding evaluations while preserving the essential implicit cues needed for comprehension and reasoning. Our approach reduces memorization-driven performance on popular fictional works from 96% accuracy to 72% and results in up to an 18% drop in accuracy across various character understanding tasks. These findings underscore the issue of data contamination in existing benchmarks, which often measure memorization rather than true character understanding.

## 1 Introduction

Character understanding requires the models to grasp the characters’ personalities and traits while reading a story, which aims to evaluate the models’ capability to comprehend personalities, goals, roles, and relationships of various fictional characters (Yu et al., 2023a; Vallurupalli et al., 2024; Shen et al., 2024; Brahman et al., 2021). However, the impressive performance of LLMs on such benchmarks (Li et al., 2023; Stambach et al., 2022; Goyal et al., 2023) raises the question: does it reflect genuine understanding or merely strong memorization (Chang et al., 2023a)? For example, in the TV show speaker guessing task shown in Figure 1, the model is expected to identify Sheldon

based on its memory of the character from previous episodes (e.g., preparing lessons for Howard). However, if the model simply memorizes the exact words, it could make predictions based on a very short sentence by directly extracting the speaker information from it.

To truly stimulate a model’s character understanding ability, it is crucial to understand how the model may be generating its responses. This can be especially challenging given the extensive and opaque pre-training corpora used by LLMs, making it particularly severe for character understanding tasks, as many benchmarks are derived from well-known and widely consumed fiction or scripts (Sang et al., 2022a). We hypothesize that this can lead to a form of memorization called “verbatim memory,” which encodes precise details and remembers every word exactly (Huang et al., 2024; Ippolito et al., 2022)—rather than reasoning over recalled overarching patterns (what is referred to as “gist memory” (Reyna and Brainerd, 1998)).

Motivated by these concepts, we propose an approach that alters elements such as character names, place names, and specific notations in the sentences while preserving the relationships between characters, significant events, and other information we want the model to utilize. We hypothesize that these modifications can reduce the model’s tendency to take shortcuts by relying on verbatim memory, and instead encourages the model to rely on gist memory to stimulate its reasoning ability for character understanding tasks. We tested our method on six key types of character understanding tasks and obtained an interesting finding: When the difficulty of using verbatim memory increases, the model is more likely to resort to reasoning to compensate.

Our work provides a simple approach to ensure a fairer benchmark for character understanding tasks on large models that already have strong memorization abilities of fictional works. It

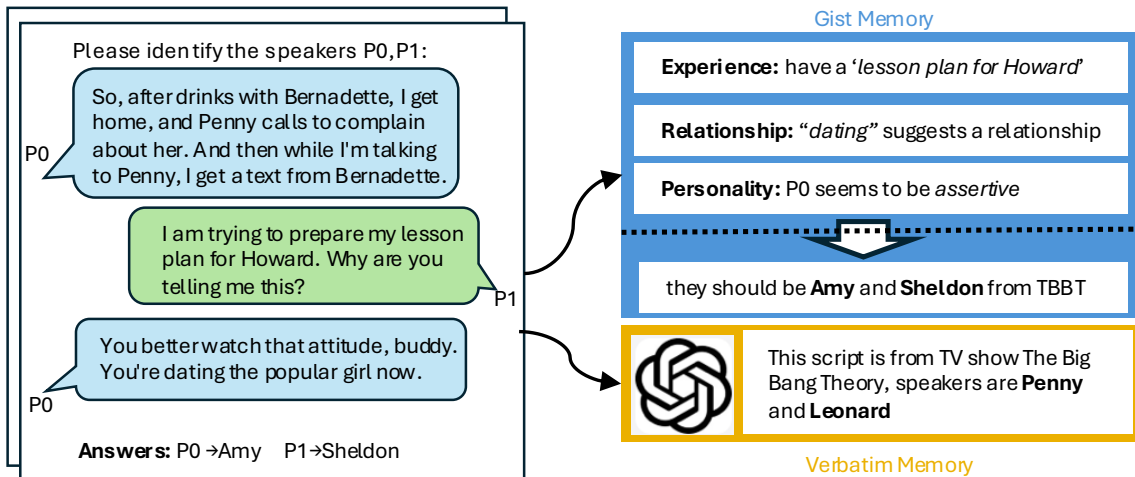


Figure 1: This figure illustrates the distinct mechanisms of gist and verbatim memory processes in the speaker-guessing task for a script. Verbatim memory (bottom right) aims to recall as much specific information as possible, including who said each sentence. If the memorization is not precise enough, the model fails to provide the correct answer. In contrast, gist memory (top right) focuses on extracting core information, such as character relationships, personalities, and key events. By relying on gist memory, the model is encouraged to engage in reasoning rather than purely relying on memorization.

offers an alternative method compared to more costly solutions, such as developing data from obscure or very new books that the model has not encountered (Ngo et al., 2024), or using techniques like machine unlearning to forget original training texts (Shaik et al., 2024).

In summary, we provide an outline of the paper and summarize our key contributions:

- To determine whether the memory types used in character understanding tasks align with our expectations, we draw on human cognitive science to define gist and verbatim memory in the context of character understanding tasks (§2).
- We benchmarked the mechanism memorization ability of over 100 sources of fictional works (§4.1).
- We measured the verbatim memory of large models for hundreds of different source fiction works and tested how different keywords affect the verbatim memory of these models (§4).
- We demonstrated that even for the same factor, such as a person’s name, different disturbances, such as gender or cultural interference, can lead to significantly different verbatim memory effects in large models (§5).
- We compared the different effects of the model using verbatim and gist memory across six different test sets and found that the model’s accuracy decreased by 0.7% to 17.2% (§6).

## 2 Related Task

**LLM’s Memorization and Reasoning** The reasoning abilities of large language models (LLMs) have garnered significant attention, but their memory has also been shown to play a crucial role in influencing benchmark reasoning performance (Zhou et al., 2023). This influence is complex: data contamination can inflate performance metrics (Khandelwal et al., 2020; Blevins and Zettlemoyer, 2022; Carlini et al., 2023), while knowledge conflict can reduce them (Su et al., 2024; Wang et al., 2024; Xie et al., 2024b; Xu et al., 2024). Recent efforts have aimed to mitigate the impact of memory on reasoning benchmarks to establish more reliable evaluations, particularly for reasoning tasks like numerical reasoning, commonsense reasoning, or logical reasoning, where memory requirements are less significant and easier to define (Xie et al., 2024a; Sainz et al., 2023; Li et al., 2024). However, in character understanding tasks, the diversity of task formats and scenarios means that memory requirements vary significantly, making it challenging to establish a universal standard to distinguish between acceptable and unacceptable use of memory. We propose leveraging gist memory to reduce LLMs’ reliance on precise memorization. This approach encourages models to utilize reasoning capabilities more effectively in solving character understanding tasks, aligning them more closely with the original intent behind these benchmarks.

**Character Understanding** Character understanding has made significant contributions to advancing story comprehension in psychological, literary, and educational research (Bower and Morrow, 1990; McKee, 2010; Paris and Paris, 2003). This multifaceted field encompasses a variety of tasks, including character recognition, coreference resolution, summarization, role detection, goal understanding, personality analysis, and question answering (Sang et al., 2022b; Bamman et al., 2020; Chen et al., 2022; Frermann et al., 2018; Vallurupalli et al., 2024; Yu et al., 2023b). Recent studies have shown promising performance by large language models (LLMs) on character understanding tasks (Li et al., 2023; Stambach et al., 2022; Goyal et al., 2023). However, these studies often overlook the potential influence of memorization on model performance. Fictional works, including movie and TV show scripts, famous novels, and news texts, serve as primary sources for narrative understanding (Sang et al., 2022a; Tapaswi et al., 2016; Caselli and Vossen, 2017). These texts, much like copyrighted books (Chang et al., 2023a), are prone to strong memorization. In our work, we measured the verbatim capabilities of LLMs on these sources, as well as the potential inflation of benchmark results caused by overly strong verbatim memory. Our approach also mitigates this effect.

**Verbatim and Gist Memory** Cognitive science defines two types of memory: verbatim memory and gist memory (Brainerd and Reyna, 2002; Reyna and Brainerd, 1998). Verbatim memory recalls the exact wording of a sentence, such as "The black-and-white cat sat on a soft, red mat in the living room," retaining every detail about the cat's color, the mat's texture and color, and the location. In contrast, gist memory captures the essential meaning, like "A cat was sitting indoors," focusing on the core idea—the presence of a cat and its general location—while discarding details such as the cat's color or the specific description of the mat. This highlights how verbatim memory retains all specific details, while gist memory abstracts the key information by ignoring less critical details. Cognitive science research suggests that humans primarily rely on gist memory for reasoning, and these two types of memory are independent, rather than hierarchical (Brainerd and Reyna, 1992). In recent studies on LLM memorization (Carlini et al., 2023), the extraction of strings from a larger text

is defined as a form of verbatim memory. Their solution primarily focuses on generating entirely new test samples that the model has never encountered (Xie et al., 2024a). However, for character understanding tasks, using obscure or newly released datasets that the model hasn't seen comes with high costs, and the quality and acquisition costs of the texts are difficult to control. Our work demonstrates that using gist memory provides a simple and effective way to alleviate this issue.

### 3 Data and Experiment Setup

In our experiments, we utilized two distinct datasets: (1) **Benchmark Datasets**: six pre-existing datasets designed to evaluate various character understanding tasks, and (2) **Fictional Works Dataset**: a newly constructed dataset consisting of script excerpts sampled directly from the original texts used to create the benchmark datasets. This dataset, drawn from 40 diverse sources—including TV shows, novels, and movies—was specifically designed to investigate GPT's familiarity with the original texts underlying the benchmark datasets.

#### 3.1 Benchmark Datasets

We evaluated the interplay between memory and reasoning across six types of character understanding tasks. The datasets used are detailed in this section, while task descriptions are provided in Section 6.1.

**Datasets** For coreference resolution, we use the latest released version of the MovieCoref dataset<sup>1</sup>. For character guessing, we adopt the TVSHOWGUESS dataset<sup>2</sup> to conduct experiments. For personality understanding, we utilize the PERSONET dataset<sup>3</sup>. For role detection, we use the CSI dataset<sup>4</sup>. For open-domain question answering, we conduct experiments using the FriendsQA dataset<sup>5</sup>. For summarization task, we adopt the SummScreen dataset<sup>6</sup>. We follow all the data preprocessing, development, and testing separation provided by the original datasets. Tasks and datasets details are in appendix G.

<sup>1</sup><https://github.com/usc-sail/mica-character-coref>

<sup>2</sup><https://github.com/YisiSang/TVSHOWGUESS>

<sup>3</sup>[https://github.com/Gorov/personet\\_acl23](https://github.com/Gorov/personet_acl23)

<sup>4</sup><https://github.com/EdinburghNLP/csi-corpus>

<sup>5</sup><https://github.com/emorynlp/FriendsQA>

<sup>6</sup><https://github.com/mingdachen/SummScreen>

**Evaluation Metrics** We followed the original evaluation metrics used in the respective tasks. For classification tasks (Character Guessing, Question Answering and Personality Understanding), we report accuracy using exact match. For sequence labeling and coreference tasks (Coreference and Role Detection), we use F1 scores as the evaluation metric. For summarization tasks (Text Summarization), we report ROUGE scores to measure the overlap between the generated and reference summaries.

Task Name	Task Type	Data Source	Metrics
TVshow Guessing	Character Guessing	TV Shows	Exact Match
FriendsQA	Question Answering	TV Shows	Exact Match
Screenplay	Character Coreference	Movies	F1 Score
SummScreen	Text Summarization	TV Shows	ROUGE
CSI	Role Detection	TV Shows	F1 Score
PERSONET	Personality Understanding	Novels	Exact Match

Table 1: Overview of benchmark tasks, including their type, data sources, and evaluation metrics.

### 3.2 Fictional Works Dataset

The existing six benchmark datasets, which are derived from 91 different TV shows, 12 different movies, and 33 classic literature books. We constructed the Fictional Works Dataset by uniformly sampling 200 segments from 40 selected sources, including 11 distinct TV series, 9 movies, and 20 novels, each source provides 5 scripts. Each segment contains an average of 312 words. The format of each segment is: *TV Show Title; Scene*, where the scene consists of a mixture of dialogue and narration from the script.

### 3.3 Extended Dataset Analysis

For the six representative character understanding tasks studied in our work, we selected one dataset for each category. However, we also recognize that there are many different benchmark datasets for each type of task. When selecting representative datasets for each category, we focused on choosing those with more diverse sources. Additionally, we supplemented the selection with eight datasets of the same type but derived from different sources in Table 2.

### 3.4 Model

We pass all passages with the same prompt through GPT4o (gpt-4o),<sup>7</sup> using the OpenAI API. The cost for the tasks in §4 and §5 is approximately \$80,

<sup>7</sup><https://platform.openai.com/docs/models/gpt-4-and-gpt-4-turbo>

Task Name	Task Type	Source
Character Mining	Character Identification	TV Shows
LISCU	Character Identification	Book Reviews
MovieQA	Visual Question Answering	Movies
Liter Coreference	Character Coreference	Novels
HVV Detect	Role Detection	Movies, News
SYMON	Visual Question Answering	Movies
CEB	Character Representation	Novels
Love and Violence	Summarization	TV Shows

Table 2: Overview of 14 tasks in the character understanding benchmark.

while the cost for the task in §6 is approximately \$40. The character description used in section 5 is generated by GPT-4 (gpt-4-turbo) API. For the prompts and description generated by GPT4 itself, please refer to Appendix C. Due to the inherent characteristic of ChatGPT’s unstable output, even though we had set the temperature to 0, each generation may exhibit slight variations in content. In our experiments, there is a variation of 1% to 3% in the results. To mitigate this, we repeat each experiment three times and report the average scores.

## 4 Verbatim Memorization Evaluation

We address our first research question: How does GPT utilize and integrate multi-source information to identify the origin of a script passage?

We do this by considering a task that is focused on evaluating the extent to which models rely on verbatim memory to solve problems without requiring significant reasoning.

### 4.1 Task Definition

**Name Source Prediction with Rationale** In this Source Memorization task, we assess the model’s ability to predict the origin of a text passage, investigating the extent to which it relies on memorized pretraining knowledge. The model is given a segment script and we ask it to identify the source while also providing a rationale for its prediction 9. This task includes two experimental settings: (1) with or without multiple-choice options, and (2) with or without the requirement for a rationale explanation, which made four combinations.

**Rationale Analysis** We collected and analyzed the rationales generated by GPT, then asked GPT to performing clustering on all rationales and find groups of rationales with similar pattern. This analysis helps identify common elements the model relies on during source prediction, especially when



character names are explicitly mentioned as part of the reasoning.

**Effect of Input Length** To explore the impact of input length, we limited the length of text segments provided to the model. We compared its performance in two settings: one with character names and specific mentions provided, and the other with them masked. We hypothesize that verbatim memory plays a lesser role in such tasks, aligning with the human prediction process (Brainerd and Reyna, 1992).

## 4.2 Result

**Source Prediction** The results presented in Table 3 reveal several notable trends across the different experimental setups. First, the model demonstrates a strong memorization ability when presented with the original script, achieving a consistent 96% accuracy even without any options and under the Chain-of-Thought (CoT) condition. This suggests a significant reliance on memorized content, as the model can accurately retrieve the source purely based on internal knowledge. Furthermore, the use of CoT reasoning substantially enhances the model’s performance across all conditions, improving the retrieval accuracy from 96% to 100% in the case of the original script. This indicates that CoT prompts help guide the model toward more accurate predictions by encouraging a more structured reasoning process. However, when character names are masked (using placeholders like P0, P1), the model’s accuracy decreases, highlighting the importance of specific names as primary retrieval cues. The drop in performance is even more pronounced when names are replaced with generic alternatives, suggesting that the model’s retrieval capability is highly dependent on the exact memorization of character names rather than broader contextual information. This is evidenced by the reduction in accuracy from 96% with the original script to 74% with replaced names. In contrast, replacing notable mentions (such as unique terms or identifiable elements other than character names) has a minimal effect on performance, with the model maintaining a high accuracy of 96%-98%. This further underscores that the model’s retrieval strategy is heavily focused on character names, and it places less emphasis on other narrative details when determining the text’s origin. Overall, these findings highlight the model’s dependency on character-specific memorization, revealing both the strengths and vulnera-

Condition	With Options	CoT	No Options	CoT
Origin Script	96%	100%	96%	98%
Name Masked (P0, P1)	92%	98%	82%	86%
Name Replaced	84%	98%	74%	80%
Notable Mentions Replaced	94%	98%	96%	96%
Name + Mention Replaced	84%	96%	72%	80%

Table 3: We find that CoT consistently improves the model’s prediction accuracy. Character names contribute significantly to accuracy, while notable mentions have a very small impact, likely due to the correlation between their influence and their frequency of occurrence in the text.

Rationale Element	Percentage (%)
Character Name	84%
Notable Mentions	28%
Content of Dialogue	66%
Tone	40%
Humor Style	46%
Setting	46%
Social Dynamics	36%

Table 4: We found that the model primarily relies on the combinations of character names mentioned in the text, especially the main characters, when guessing the source of the text. Although notable mentions are rarely utilized, some distinctive catchphrases, special place names, and event titles are still noticed and leveraged by the model.

bilities of its retrieval mechanisms when faced with modifications to key identifying elements.

**Rationale Statistics** We analyzed the 7 rationale content generated by the model across these conditions. The following table (Table 4) shows the frequency of the key rationale elements identified in the model’s output. The most frequently mentioned rationale elements include character name, content of dialogue, and setting, indicating that these factors play a significant role in the model’s reasoning process.

**Word Limitation** Table 5 shows the model’s source identification accuracy with varying token limits, comparing the original script and the script with replaced names. The model consistently achieves 96% accuracy with the original script, demonstrating strong memorization even with limited context (as few as 25 tokens). In contrast, replacing character names leads to a significant drop in accuracy, especially with shorter passages. For the 25-token input, accuracy falls to 26%, highlighting the model’s heavy reliance on specific names for retrieval. Increasing the token limit to 50 to-

kens improves accuracy to 48%, but extending to 100 tokens shows no further gains. On average, across all 342 samples, the accuracy for replaced names recovers to 74%, suggesting some benefit from longer contexts but still falling short of the original script’s performance. This indicates that character names play a crucial role in the model’s retrieval process, with limited capacity to compensate through broader context when explicit names are obscured.

Word Limit	Original Script	Replaced Names
25 Words	96%	26%
50 Words	96%	48%
100 Words	96%	52%
All (Avg. 342)	96%	74%

Table 5: By leveraging verbatim memory, GPT demonstrates a surprisingly high memorization ability even with as few as 25 words. The slower improvement as the number of words increases suggests that source prediction predominantly relies on verbatim memory.

### 4.3 Analysis

Using text excerpts to prompt the model to guess their source highlights the model’s reliance on verbatim memory. Experiments with word count limitations revealed that the number of words had little impact on performance, further confirming that the model relies on verbatim memory for this task. By employing CoT, we encouraged the model to use gist memory for reasoning, resulting in improved performance and greater robustness against perturbations. This, in turn, provides additional evidence that the model predominantly relies on verbatim memory to solve such tasks.

## 5 Gist Memory Evaluation

The experiment in Section §4 demonstrated that applying Chain-of-Thought (CoT) can prompt LLMs to utilize gist memory. In this section, we aim to explore additional methods to encourage LLMs to leverage gist memory effectively. We hypothesize that by reducing the confidence LLMs place in their verbatim memory, they are more likely to rely on gist memory while simultaneously applying reasoning. Building on previous findings that changing character names can significantly degrade performance, we intuitively believe that altering names allows the model to recognize changes in the information embedded within names, such as nationality and gender. Additionally, we pose our second

question: Does name replacement affect LLMs’ reliance on gist memory, and if so, to what extent? Moreover, does the choice of name replacement method make a difference?

### 5.1 Task Definition

We adopt the character guessing (Sang et al., 2022b) format, and we masked the character names mentioned in the script as well. For the prompts please refer to Appendix D.

**Name Replacement Strategies** We employed the following name replacement methods:

- **Cross-Language Replacement:** Replacing names with uncommon names from other languages, swapping the gender in some cases (GS).
- **Same-Language Replacement:** Replacing names with common names from the same language, including gender-swapped (GS) variants.
- **Anonymized Replacement:** Replacing all character names with neutral labels (e.g., "Speaker 0").
- **Gender-Swap Only (GS Only):** Swapping the gender of the original names without changing the language.
- **Control Tests:** Introducing incorrect show names or names from other TV shows to evaluate the model’s susceptibility to data contamination (an example in 11).

### 5.2 Result

Our analysis focuses on understanding how different replacement strategies affect the model’s predictions. Gender-swapping and cross-cultural name replacements may disrupt the model’s memorized associations more effectively than simple anonymization. This helps us gauge the model’s inference capabilities when it cannot rely solely on pretraining knowledge. Table 6 summarizes the accuracy of GPT-4o across different replacement strategies with and without character descriptions. The "Name Return" task shows that GPT-4o achieves a perfect 100% accuracy, indicating strong memorization of original character names. However, the accuracy significantly drops for other replacement strategies, especially for cross-language and gender-swapped (GS) replacements, where the performance decreases to as low as 20.2% and 15.5%, respectively. Interestingly, anonymization (replacing all names with neutral labels like "Speaker 0" and "Speaker 1") shows a moderate increase in accuracy when descriptions are provided, suggesting

Replacement Strategy	Without Description	With Description
Name Return	100	100
No Replacement	52.1	47.9
Cross-Language	35.5	28.2
Cross-Language (GS)	20.2	21.8
Same Language	34.2	24.1
Same Language (GS)	15.5	16.5
Anonymized	16.7	26.4
GS Only	7.3	8.9
Wrong show names	41.5	43.6
Names from other shows	12.3	31.1

Table 6: The impact of different name replacement methods on GPT-4o’s verbatim memory ability was demonstrated. With reduced confidence in its verbatim memorization, GPT-4o is more likely to rely on reasoning. By providing descriptions, GPT-4o is more inclined to access gist memory and then apply reasoning.

the model may rely more heavily on contextual information in these cases. The results indicate that providing character descriptions can slightly improve the model’s performance, particularly in the cases of anonymized and incorrect show names replacements.

### 5.3 Analysis

Providing character summarization evaluates two key aspects of GPT’s performance. Without summarization, the task primarily tests verbatim memory, where GPT tends to struggle. However, when character descriptions are provided, the task evaluates both memorization and inference abilities. We observe that as the task complexity increases, GPT relies more on reasoning and less on simple memorization.

## 6 Reasoning Validation Task

The character guessing task format is quite similar to verbatim memorization evaluation tasks, such as the name cloze task (Chang et al., 2023b). We have demonstrated that tasks heavily reliant on verbatim memory can measure its reliance and help transfer the model’s usage to gist memory. Intuitively, most types of character understanding tasks should rely more on gist memory. This leads us to our third question: Can we encourage GPT to rely more on gist memory in different character understanding tasks?

### 6.1 Benchmark Tasks Description

Generally, character understanding tasks require the model to predict a character’s information based on a given segment of text. For script-based character understanding, the provided texts often include

conversations from TV show and movie scripts, while novels typically include a mix of narrative descriptions and dialogue. The six selected benchmarks cover a range of character-centric tasks, designed to test different aspects of character understanding (Table 1):

**Character Guessing** This task involves identifying the speaker for each utterance in a script. Each utterance within a scene is segmented and input into the model, with the speaker’s name preceding each utterance masked and replaced by a unique special token. Consistent special tokens are used to represent the same speaker within a scene. The objective of the character guessing task is to accurately predict the identity of the speaker associated with each special token.

**Coreference Resolution** Given a conversation in scripts that contains multiple utterances and  $n$  character mention entity  $c_1, c_2, \dots, c_n$  within it, the objective of the coreference resolution task is to assemble all mention entities that refer to the same character in a cluster.

**Personality Understanding** Given a text snippet describing a character from classic literature along with preceding context, the objective of the personality understanding task is to predict the most likely personality trait depicted in the snippet. The task is formulated as a multi-choice problem with distractor traits, testing the model’s ability to infer character personalities from descriptive text.

**Role Detection** Given dialogues and scene descriptions from scripts, the objective is to determine whether each token refers to the perpetrator. This task is framed as a multi-label classification problem, where each label corresponds to a character in the script, with a focus on detecting roles within a crime narrative context.

**Open Domain Question Answering** The input is a dialogue excerpt from the script and a manually crafted question, the objective of the open-domain question-answering task is to extract the specific span in the dialogue that answers the question. This can be viewed as an answer span selection task, where the model is expected to identify spans within the dialogue that contain the answer to the question.

**Summarization** Given dialogue utterances and scene descriptions from transcripts, the objective of the summarization task is to generate a coherent summary that captures key plot points while excluding irrelevant details.

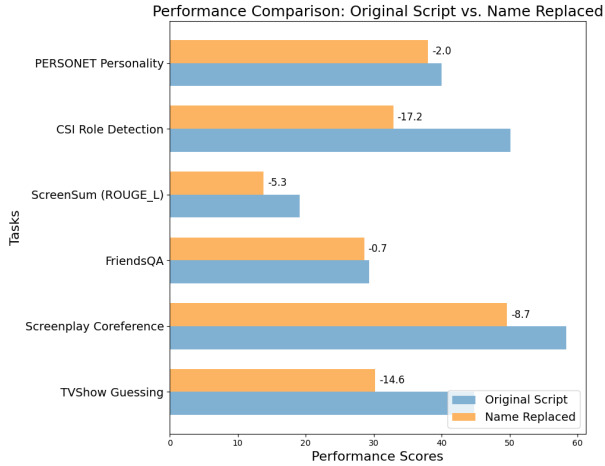


Figure 2: All tasks exhibited performance degradation. The decline in QA and personality understanding tasks was minimal, indicating that GPT effectively leveraged its reasoning abilities for these tasks. The most significant drop was observed in role detection, exceeding our expectations, which suggests that verbatim memory plays a substantial role in supporting this type of task.

## 6.2 Perturbed Method

We implemented the name-changing strategy of swapping genders across cultures, which, as demonstrated in Section §5, significantly drops performance.

## 6.3 Result

Table 7 presents the impact of replacing character names on a variety of downstream tasks using the GPT-4o model. The experiments assess performance across six tasks:

**Memory-Driven Tasks:** These tasks rely heavily on verbatim memory and are significantly affected by name replacement.

Intuitively, TV Show Guessing and Screenplay Coreference should rely more on verbatim memory and they drop of 14.6% and 8.7% meets our expectation.

**Reasoning-Driven Tasks:** These tasks primarily rely on gist memory and are more likely to engage in reasoning without external hints (CoT or extra description).

The slight drops in FriendsQA and Personet personality understanding tasks, with a decrease of 0.7% and 2%, align with our expectations. The 17.2% drop in role extraction is unexpectedly high, resembling the trend seen in coreference resolution tasks. The drop in ScreenSum is moderate, falling within expected ranges.

Task Name	Origin Script	Name Replaced
TVShow Guessing	44.8	30.2
Screenplay Coreference	58.3	49.6
FriendsQA	29.3	28.6
ScreenSum (ROUGE_L)	19.1	13.8
CSI Role Detection	50.1	32.9
PERSONET Personality	40.0	38.0

Table 7: All tasks showed a decline in performance, with the smallest drop in QA, which exceeded our expectations. We believe this is because the questions asked were relatively simple and basic. There was almost no change in personality understanding, indicating that the model knows it should use gist memory for such tasks. The largest decline was observed in role extraction, which also exceeded our expectations, suggesting that the model heavily relies on verbatim memory when handling this type of task.

## 6.4 Analysis

Our experiment, through name replacement, increases the difficulty of the model relying on verbatim memory. As a result, the model is more likely to focus on gist memory, thereby enabling reasoning. By comparing the performance before and after name replacement, we can observe whether the model relies more on verbatim or gist memory without external hints. Specifically, if the performance difference is small, it suggests that the model is more likely to use reasoning for answering such tasks. Conversely, if the difference is large, it indicates that the model tends to rely more on verbatim memory. All tasks showed a decline, and we observed that the model always tends to prioritize verbatim memory. This 'lazy' behavior suggests that to unlock the model's true reasoning ability, we need to design methods that encourage the model to focus more on gist memory, such as reducing the similarity between the text and pretraining data.

## 7 Conclusion

In this paper, we evaluate the extent of GPT-4's verbatim memory for fictional works and its impact on downstream tasks. We also propose methods to mitigate this impact and encourage the model to use reasoning. We draw several key conclusions: (1) The model always tends to first rely on verbatim memory when performing character understanding tasks, and it consistently benefits from this approach. (2) When the predicted text differs significantly from the pretraining data, the model is more likely to use reasoning to attempt to compensate.



## 8 Limitations

The specific training data of GPT-4o is not publicly disclosed by OpenAI, making it fundamentally unknowable. Our work employs probabilistic inference to estimate the model’s familiarity with a set of fictional works. However, whether these works are explicitly included in the training data remains unanswerable. Nevertheless, even mere familiarity can suffice to contaminate test data, posing challenges to fair evaluation.

Our study can be extended by future research in a number of ways. First, though we ground and motivate our work through “verbatim” and “gist” memory, we note that any apparent “reasoning” of AI systems may differ fundamentally from those of humans, and we did not pursue human studies to examine this in detail. Further investigation is needed to explore this topic.

Second, the relationship between memorization and reasoning remains a subject of debate in cognitive science. Future studies may uncover insights into this relationship from entirely new perspectives.

Finally, our study was centered on select, recent (but not contemporaneous) majority Western popular culture references. Given their popularity, this selection likely increases the chances that LLMs have been pretrained on more instances or language discussing those references (vs. contemporaneous references, or references from non-Western cultures, where overall occurrences in training data may be lower); it is possible that this exaggerated some of the effects we observed.

## 9 Ethics

Our study probes the degree to which GPT-4o have memorized fictional works, and its impact on character understanding tasks. This work uses the OpenAI API on experiments above, and at no point do we access, or attempt to access, the true training data behind these models, or any underlying components of the systems. **Risks** The several datasets and fictional works scripts in our experiment are sourced from publicly available sources. However, we cannot guarantee that they are devoid of socially harmful or toxic language. We use ChatGPT <sup>8</sup> to correct grammatical errors in this paper.

---

<sup>8</sup><https://chatgpt.com/>

## References

- David Bamman, Olivia Lewke, and Anya Mansoor. 2020. *An Annotated Dataset of Coreference in English Literature*. In *Proceedings of the Twelfth Language Resources and Evaluation Conference*, pages 44–54, Marseille, France. European Language Resources Association.
- Sabyasachee Baruah and Shrikanth Narayanan. 2023. Character coreference resolution in movie screenplays. In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 10300–10313.
- Terra Blevins and Luke Zettlemoyer. 2022. *Language Contamination Helps Explain the Cross-lingual Capabilities of English Pretrained Models*. *arXiv preprint*. ArXiv:2204.08110.
- Gordon H Bower and Daniel G Morrow. 1990. Mental models in narrative comprehension. *Science*, 247(4938):44–48.
- Faeze Brahman, Meng Huang, Oyvind Tafjord, Chao Zhao, Mrinmaya Sachan, and Snigdha Chaturvedi. 2021. *"Let Your Characters Tell Their Story": A Dataset for Character-Centric Narrative Understanding*. *arXiv preprint*. ArXiv:2109.05438 [cs].
- Charles J Brainerd and Valerie F Reyna. 2002. Fuzzy-trace theory: Dual processes in memory, reasoning, and cognitive neuroscience. *Advances in child development and behavior*, 28:41–100.
- CJ Brainerd and VF Reyna. 1992. Explaining" memory free" reasoning. *Psychological Science*, pages 332–339.
- Nicholas Carlini, Daphne Ippolito, Katherine Lee, Florian Tramèr, Matthew Jagielski, and Chiyuan Zhang. 2023. QUANTIFYING MEMORIZATION ACROSS NEURAL LANGUAGE MODELS. *arXiv preprint arXiv:2202.07646*.
- Tommaso Caselli and Piek Vossen. 2017. *The Event StoryLine Corpus: A New Benchmark for Causal and Temporal Relation Extraction*. In *Proceedings of the Events and Stories in the News Workshop*, pages 77–86, Vancouver, Canada. Association for Computational Linguistics.
- Kent Chang, Mackenzie Cramer, Sandeep Soni, and David Bamman. 2023a. *Speak, Memory: An Archaeology of Books Known to ChatGPT/GPT-4*. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 7312–7327, Singapore. Association for Computational Linguistics.
- Kent K Chang, Mackenzie Cramer, Sandeep Soni, and David Bamman. 2023b. *Speak, memory: An archaeology of books known to chatgpt/gpt-4*. *arXiv preprint arXiv:2305.00118*.
- Mingda Chen, Zewei Chu, Sam Wiseman, and Kevin Gimpel. 2022. *SummScreen: A Dataset for Abstractive Screenplay Summarization*. *arXiv preprint*. ArXiv:2104.07091 [cs].

- Lea Frermann, Shay B. Cohen, and Mirella Lapata. 2018. [Whodunnit? Crime Drama as a Case for Natural Language Understanding](#). *Transactions of the Association for Computational Linguistics*, 6:1–15. Place: Cambridge, MA Publisher: MIT Press.
- Tanya Goyal, Junyi Jessy Li, and Greg Durrett. 2023. [News Summarization and Evaluation in the Era of GPT-3](#). *arXiv preprint*. ArXiv:2209.12356 [cs].
- Jing Huang, Diyi Yang, and Christopher Potts. 2024. Demystifying verbatim memorization in large language models. *arXiv preprint arXiv:2407.17817*.
- Daphne Ippolito, Florian Tramèr, Milad Nasr, Chiyuan Zhang, Matthew Jagielski, Katherine Lee, Christopher A Choquette-Choo, and Nicholas Carlini. 2022. Preventing verbatim memorization in language models gives a false sense of privacy. *arXiv preprint arXiv:2210.17546*.
- Urvashi Khandelwal, Omer Levy, Dan Jurafsky, Luke Zettlemoyer, and Mike Lewis. 2020. [Generalization through Memorization: Nearest Neighbor Language Models](#). *arXiv preprint*. ArXiv:1911.00172.
- Dawei Li, Hengyuan Zhang, Yanran Li, and Shiping Yang. 2023. Multi-level contrastive learning for script-based character understanding. *arXiv preprint arXiv:2310.13231*.
- Yucheng Li, Frank Guerin, and Chenghua Lin. 2024. [An Open Source Data Contamination Report for Large Language Models](#). *arXiv preprint*. ArXiv:2310.17589 [cs].
- Robert McKee. 2010. *Story: style, structure, substance, and the principles of screenwriting*. Harper Collins.
- Thinh Ngo, Khoa Dang, Son Luu, Kiet Nguyen, and Ngan Nguyen. 2024. [VlogQA: Task, dataset, and baseline models for Vietnamese spoken-based machine reading comprehension](#). In *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1310–1324, St. Julian’s, Malta. Association for Computational Linguistics.
- Alison H Paris and Scott G Paris. 2003. Assessing narrative comprehension in young children. *Reading Research Quarterly*, 38(1):36–76.
- Valerie F Reyna and Charles J Brainerd. 1998. Fuzzy-trace theory and false memory: New frontiers. *Journal of experimental child psychology*, 71(2):194–209.
- Oscar Sainz, Jon Ander Campos, Iker García-Ferrero, Julen Etxaniz, Oier Lopez de Lacalle, and Eneko Agirre. 2023. [Nlp evaluation in trouble: On the need to measure llm data contamination for each benchmark](#). *Preprint*, arXiv:2310.18018.
- Yisi Sang, Xiangyang Mou, Jing Li, Jeffrey Stanton, and Mo Yu. 2022a. A survey of machine narrative reading comprehension assessments. *arXiv preprint arXiv:2205.00299*.
- Yisi Sang, Xiangyang Mou, Mo Yu, Shunyu Yao, Jing Li, and Jeffrey Stanton. 2022b. [TVShowGuess: Character Comprehension in Stories as Speaker Guessing](#). *arXiv preprint*. ArXiv:2204.07721 [cs].
- Yisi Sang, Xiangyang Mou, Mo Yu, Shunyu Yao, Jing Li, and Jeffrey Stanton. 2022c. [Tvshowguess: Character comprehension in stories as speaker guessing](#). *arXiv preprint arXiv:2204.07721*.
- Thanveer Shaik, Xiaohui Tao, Haoran Xie, Lin Li, Xiaofeng Zhu, and Qing Li. 2024. Exploring the landscape of machine unlearning: A comprehensive survey and taxonomy. *IEEE Transactions on Neural Networks and Learning Systems*.
- Tianhao Shen, Sun Li, Quan Tu, and Deyi Xiong. 2024. [RoleEval: A Bilingual Role Evaluation Benchmark for Large Language Models](#). *arXiv preprint*. ArXiv:2312.16132 [cs].
- Dominik Stammach, Maria Antoniak, and Elliott Ash. 2022. [Heroes, Villains, and Victims, and GPT-3: Automated Extraction of Character Roles Without Training Data](#). In *Proceedings of the 4th Workshop of Narrative Understanding (WNU2022)*, pages 47–56, Seattle, United States. Association for Computational Linguistics.
- Zhaochen Su, Jun Zhang, Xiaoye Qu, Tong Zhu, Yanshu Li, Jiashuo Sun, Juntao Li, Min Zhang, and Yu Cheng. 2024. [ConflictBank: A Benchmark for Evaluating the Influence of Knowledge Conflicts in LLM](#). *arXiv preprint*. ArXiv:2408.12076.
- Makarand Tapaswi, Yukun Zhu, Rainer Stiefelwagen, Antonio Torralba, Raquel Urtasun, and Sanja Fidler. 2016. [MovieQA: Understanding Stories in Movies through Question-Answering](#). In *2016 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 4631–4640, Las Vegas, NV, USA. IEEE.
- Sai Vallurupalli, Katrin Erk, and Francis Ferraro. 2024. [Saga: A participant-specific examination of story alternatives and goal applicability for a deeper understanding of complex events](#). *arXiv preprint arXiv:2408.05793*.
- Yike Wang, Shangbin Feng, Heng Wang, Weijia Shi, Vidhisha Balachandran, Tianxing He, and Yulia Tsvetkov. 2024. [Resolving Knowledge Conflicts in Large Language Models](#). *arXiv preprint*. ArXiv:2310.00935.
- Chulin Xie, Yangsibo Huang, Chiyuan Zhang, Da Yu, Xinyun Chen, Bill Yuchen Lin, Bo Li, Badih Ghazi, and Ravi Kumar. 2024a. On memorization of large language models in logical reasoning. *arXiv preprint arXiv:2410.23123*.
- Jian Xie, Kai Zhang, Jiangjie Chen, Renze Lou, and Yu Su. 2024b. [Adaptive Chameleon or Stubborn Sloth: Revealing the Behavior of Large Language Models in Knowledge Conflicts](#). *arXiv preprint*. ArXiv:2305.13300.

Rongwu Xu, Zehan Qi, Cunxiang Wang, Hongru Wang, Yue Zhang, and Wei Xu. 2024. Knowledge conflicts for llms: A survey. *arXiv preprint arXiv:2403.08319*.

Zhengzhe Yang and Jinho D. Choi. 2019. **FriendsQA: Open-Domain Question Answering on TV Show Transcripts**. In *Proceedings of the 20th Annual SIG-dial Meeting on Discourse and Dialogue*, pages 188–197, Stockholm, Sweden. Association for Computational Linguistics.

Mo Yu, Jiangnan Li, Shunyu Yao, Wenjie Pang, Xiaochen Zhou, Zhou Xiao, Fandong Meng, and Jie Zhou. 2023a. **Personality Understanding of Fictional Characters during Book Reading**. *arXiv preprint ArXiv:2305.10156* [cs].

Mo Yu, Jiangnan Li, Shunyu Yao, Wenjie Pang, Xiaochen Zhou, Zhou Xiao, Fandong Meng, and Jie Zhou. 2023b. Personality understanding of fictional characters during book reading. *arXiv preprint arXiv:2305.10156*.

Kun Zhou, Yutao Zhu, Zhipeng Chen, Wentong Chen, Wayne Xin Zhao, Xu Chen, Yankai Lin, Ji-Rong Wen, and Jiawei Han. 2023. **Don't Make Your LLM an Evaluation Benchmark Cheater**. *arXiv preprint ArXiv:2311.01964*.

## A Example of Script-based Character Understanding Task

In Table 8 we show a full example of the character understanding task. In this example, we have automatically replaced the individual character names with placeholders like P0 and P1.

## B Example for Verbatim Memory

### B.1 Source Prediction

## C Self-generated Character Description

For the self-generated character description, we use following prompts to ask ChatGPT to generate a brief character summarization for each character. The following block-quoted text shows the output we got; importantly, it demonstrates the level of deep knowledge about each of these characters that is baked into the model itself.

**Input:** Give me a detailed character description for all main characters in the TV show Friends.

**Output: Rachel Green (Jennifer Aniston):**

Background: Initially introduced as a runaway bride, Rachel starts as a

waitress at Central Perk and evolves into a successful fashion executive.

Character Traits: Fashion-conscious, independent, initially somewhat spoiled, but grows into a more self-sufficient and career-focused woman.

Romantic Arc: Has an iconic on-again, off-again relationship with Ross throughout the series.

### **Ross Geller (David Schwimmer):**

Profession: Paleontologist working at a museum.

Character Traits: Intelligent, nerdy, and somewhat socially awkward. Ross has a complicated love life and is often portrayed as the "smart" but emotionally vulnerable member of the group.

Romantic Arc: His tumultuous relationships, particularly with Rachel, are central to the series.

### **Monica Geller (Courteney Cox):**

Profession: Chef and later a restaurant owner.

Character Traits: Competitive, organized, and slightly obsessive about cleanliness. Monica is Ross's sister and becomes the motherly figure of the group.

Romantic Arc: Her relationship with Chandler Bing becomes a major storyline.

### **Chandler Bing (Matthew Perry):**

Profession: Holds an office job with a mysterious title related to statistical analysis.

Character Traits: Known for his sarcastic humor, commitment issues, and use of humor as a defense mechanism. Evolves into a more mature and emotionally secure character.

Romantic Arc: Develops a significant romantic relationship with Monica.

### **Joey Tribbiani (Matt LeBlanc):**

Profession: Aspiring actor throughout the series.

Character Traits: Easygoing, simple-

Input	P0: Hey, sorry about that P1: No, we're sorry. We never should have been comparing relationships in the first place. P2: Why? We won. You know, I say, next, we take on Koothrappali and his dog. Really give ourselves a challenge. P3: I just want to say one more thing about this. Just because Penny and I are very different people does not mean that we're a bad couple. P2: The answer is one simple test away. Hmm? You know, it's like when I thought there was a possum in my closet. Did I sit around wondering? No, I sent Leonard in with a pointy stick and a bag. P3: I killed his Chewbacca slippers. P0: Let's just take the test. P3: No, no, no, I don't want to. P0: Oh, well, 'cause you know we're gonna do bad. P3: Because it doesn't matter. I don't care if we're a ten or a two. P2: Or a one. A one is possible. P3: Marriage is scary. You're scared, I'm scared. But it doesn't make me not want to do it. It, it just makes me want to hold your hand and do it with you. P0: Leonard. P1: It makes me so happy if you said things like that. P2: We got an eight-point-two. Trust me, you're happy.
Label	P0: Penny, P1: Amy, P2: Sheldon, P3: Leonard

Table 8: An example from character guessing task.

Input	Tell me the source for following script:Penny: Hey, sorry about that Amy: No, we're sorry. We never should have been comparing relationships in the first place. Sheldon: Why? We won. You know, I say, next, we take on Koothrappali and his dog. Really give ourselves a challenge. Leonard: I just want to say one more thing about this. Just because Penny and I are very different people does not mean that we're a bad couple.	provides offbeat humor and memorable songs. Romantic Arc: Her romantic life includes unique relationships, and her eccentricity adds a distinctive element to the group.
Source	The Big Bang Theory	These six characters form the core group of friends in the series, and their individual personalities, relationships, and growth over the ten seasons contribute to the show's humor, heart, and enduring popularity.

Table 9: An example for source prediction task.

minded, and often portrayed as the least academically inclined. Known for his catchphrase "How you doin'?" and his love for food.

Romantic Arc: Has numerous short-term relationships, and his genuine friendship with Chandler is a key dynamic.

**Phoebe Buffay (Lisa Kudrow):**

Profession: Eccentric musician with a unique and mysterious past.

Character Traits: Quirky, free-spirited, and spiritually inclined. Phoebe often

**D Prompts for GPT4**

**for personality traits extraction** 'you are a psychology research assistant designed to help analysis character personalities according to conversations.'  
**conversation** 'Here ends the conversation.Give me a character description for each main character according to this conversation.'

**E Name Replacement and Character Comparison**

**E.1 Cross-Language Uncommon Name Replacement**

With gender swap:[Bojing, Cuixia, Jingjing, Yunsheng, Meilin, Yusong] Without gender swap:[Cuixia, Bojing, Yunsheng, Jingjing, Yusong, Meilin]



Task name	Before replacement	After replacement
TVShow	Monica, Joey, Chandler, Phoebe, Ross, Rachel	Bojing, Cuixia, Jingjing, Yunsheng, Meilin, Yusong
CSI	Grissom, Catherine, Nick, Sara, Brass	Jingbo, Jingwen, Huaqiang, Lihui, Weimin
PERSONET	Villefort, The Count, Dantès, Caderousse, Danglars, Albert, Mercédès, Elders, Abbé Bussoni, Eugénie, Faria priest, Ferdinand, Franz, Faria, Morre, Monte Cristo	Weina, Nüxia, Danqing, Cailing, Danyu, Ailan, Mengzhe, Lianhua, Busu, Yujun, Fanli, Feiyan, Fangqing, Fangli, Moya, Mingxia

Table 10: Besides the main characters, there are many names of minor characters and passersby appearing in the tasks. In each task, these secondary and passerby names can be dozens of times more than the number of main characters. Replacing these names is complex but not impossible (e.g., with the help of LLMs). However, to align with the TV show approach of only replacing the names of main characters, we only replaced the main characters in all tasks. From the results, it is clear that even replacing only the main characters has had a significant effect.

replace all the character name [**Monica, Joey, Chandler, Phoebe, Ross, Rachel**] in the conversation with [**Bojing, Cuixia, Jingjing, Yunsheng, Meilin, Yusong**].

#### **The comparison before and after name substitution**

The scene overall reflects a group dynamic characteristic of close friends who are comfortable jesting with each other, while also being there in times of crisis or emotional turmoil.

1. Monica: Responsible, caring, and organized. Assertive and confident in her actions.

1. Bojing: Bojing comes across as practical, level-headed and caring. He often acts as the voice of reason for his friends, attempting to mediate, clarify, and console in various situations. His attempts to play down his date suggest he is a private person who doesn't enjoy sharing intimate details of his life.

2. Joey: Energetic, extroverted, and casual. Lacks the sensitivity of others' feelings at times but genuinely care about friends.

2. Cuixia: Cuixia seems like a lively, fun-loving character. However, she sometimes shows a more cynical side, quick to suspect something might be wrong with Bojing's date and suggesting a strip joint as a solution to Meilin's woes.

3. Chandler: Witty and self-deprecating with an approachable sense of humor. Exhibits insecurity and anxiety in his dialogues, making references to uncomfortable situations and questioning his own actions.

3. Jingjing: Jingjing can be open and candid about his thoughts, even if they seem inappropriate or unusual. He's also humorously self-aware, undercutting his moments of honesty with reminders that he might be oversharing.

4. Phoebe: Quirky, eccentric, and a free spirit. Her train of thought tends to lean toward the unusual and bizarre. However, she is also compassionate and caring.

4. Yunsheng: Appears offbeat and unusual, suggesting the eating chalk anecdote about his past relationship. He also believes in new-age concepts like auras, showing a more spiritual side.

5. Ross: Insecure and somewhat neurotic and

vulnerable. His behavior is indicative of someone who is going through emotional turmoil.

5. Meilin: Exhibits vulnerability and emotional turmoil, especially regarding his recent divorce. He seems to be fluctuating between hurt, anger, and longing for his past relationship.

6. Rachel: Spontaneous and open to change, she takes risks and is adaptable. She is also reliant on her relationships with others, signifying her dependency and need for support.

6. Yusong: Yusong presents as impulsive, high-strung and somewhat comical in moments of panic. Fleeing her wedding because of a sudden realization shows she can make drastic decisions based on her emotions.

#### **E.2 Same-Language Replacement**

With Gender-Matched replacement, we replace all the character name [**Monica, Joey, Chandler, Phoebe, Ross, Rachel**] in the conversation with [**Sally, Andrew, Ethan, Olivia, Benjamin, Lauren**].

With Gender Swap as well, we got [**Andrew, Sally, Olivia, Ethan, Lauren, Benjamin**].

#### **E.3 Anonymized Speaker Replacement**

replace all the character name [**Monica, Joey, Chandler, Phoebe, Ross, Rachel**] in the conversation with

[**Speaker 0, Speaker 1, Speaker 2, Speaker 3, Speaker 4, Speaker 5**]. **LLM summarized character description**

We use the prompt of "you are a psychology research assistant designed to help analysis character personalities according to conversations.....Here ends the conversation. Give me a character description for each main character according to this conversation." " " and we get such result from TVshow Friends scene1.

#### **E.4 Control Test**

### **F Verbatim avoid Reasoning**

### **G Benchmark Datasets**

The six selected benchmarks cover a range of character-centric tasks, designed to test different aspects of character understanding (Table 1):

- **TVShow Guessing:** Based on the TVSHOWGUESS dataset, which contains

Example	Here is a dialogue between 2 people: Sheldon : (now lifts her head) phoebe!! Amy : you know it's me? Sheldon : for like a half an hour! man, you can lie about sweden! Amy : how can you come here? Sheldon : how could you not tell me you worked here? Amy : i don't have to tell you everything!P2: We got an eight-point-two. Trust me, you're happy.
Prompt	The following is a dialogue between the same two people. Please identify who they are: P0 : (singing) ĩpan stripan, glupi glabi! änd that is the swedish national anthem! thank you for asking! (looks annoyed) P1 : wow, ikea... what a rich culture. uhm, you know what? i have a friend who is a masseuse. P0 : oh, ja! ja! P1 : yah! she's... uhm... not very good though... (phoebe looks devastated)

Table 11: An example for the control test, where in the example, the script is from Friends but speakers are annotated as Amy and Sheldon (from The Big Bang Theory).

Task: Personality Understanding  
Text: Joey returned a lost property to Monica.  
Based on this dialogue, which character trait best describes Joey at this moment\_\_?

Evidence: It seems the script is from TVShow Friends. Joey (Fully using memory evidence)  
Personality:  
A. Honest  
B. Irresponsible ✓

GPT4 inference process

Evidence: Returning lost property to its owner shows he is a honest person. (Fully using contextual evidence)  
Personality:  
A. Honest ✓  
B. Irresponsible

Human inference process

Figure 3: In a personality understanding task where the scenario involves 'Joey returned the lost wallet to its rightful owner, Monica,' the question posed might be, 'According to this action, his personality should be: ?' The human reasoning process would draw on contextual evidence, concluding that returning lost property demonstrates honesty. In contrast, the LLM might conclude, 'Joey and Monica are from the TV show Friends, and Joey is characterized as an honest character in this show,' thus relying heavily on memorized information rather than genuine reasoning.

scripts from five popular TV series: *Friends*, *The Big Bang Theory*, *The Office*, *Frasier*, and *Gilmore Girls* (Sang et al., 2022c), this is a multi-choice classification task. The dialogue is anonymized using placeholder identifiers (e.g., P1, P2), and the model must predict the correct speaker for each line, testing its ability to identify characters based on context.

- **Screenplay:** Using screenplays from nine popular movies, such as *Avengers: Endgame* (2019), *Dead Poets Society* (1989), *John Wick* (2014), and *The Shawshank Redemption* (1994) (Baruah and Narayanan, 2023), this is a coreference resolution task. The model is tasked with linking

character mentions throughout the text, forming coreference clusters and resolving ambiguities in character references.

- **Personality Understanding:** Using the PERSONET dataset, which comprises approximately 32,000 samples from 33 classic literature books (Yu et al., 2023b), this task involves predicting the most likely personality trait depicted in a given text snippet, along with its preceding context. Formulated as a multi-choice problem with distractor traits, this task evaluates the model's ability to infer character personalities from descriptive text.
- **CSI Role Detection:** Based on 39 episodes of the TV series *CSI* (Frermann et al., 2018), this sequence labeling task requires the model to identify mentions of the perpetrator in dialogues and scene descriptions, focusing on role detection within crime-related narratives.
- **FriendsQA:** Derived from 1,222 scenes from the first four seasons of *Friends* (Yang and Choi, 2019), this dataset supports an open-domain question answering task. The model is given a dialogue excerpt and a manually crafted question and must extract the specific span in the dialogue that answers the question, testing its comprehension of dialogue context.
- **SUMMSCREEN:** Built from transcript-recap pairs of 91 TV series collected from community sources such as The TV MegaSite, Inc. (TMS) and ForeverDreaming (FD) (Chen et al., 2022), this dataset supports a summarization task. The model is required to generate a coherent summary from dialogue utterances and scene descrip-

tions, capturing key plot points while excluding irrelevant details.