

Guided Diffusion Model for Sensor Data Obfuscation

Xin Yang
University of Alberta
Edmonton, Canada
xin.yang@ualberta.ca

Omid Ardakanian
University of Alberta
Edmonton, Canada
ardakanian@ualberta.ca

Abstract—Sensor data collected by Internet of Things (IoT) devices carries detailed information about individuals in their vicinity. Sharing this data with a semi-trusted service provider may compromise the individuals’ privacy, as sensitive information can be extracted by powerful machine learning models. Data obfuscation empowered by generative models is a promising approach to generate synthetic sensor data such that the useful information contained in the original data is preserved and the sensitive information is obscured. This newly generated data will then be shared with the service provider instead of the original sensor data. In this work, we propose PrivDiffuser, a novel data obfuscation technique based on a denoising diffusion model that attains a superior trade-off between data utility and privacy through effective guidance techniques. Specifically, we extract latent representations that contain information about public and private attributes from sensor data to guide the diffusion model, and impose mutual information-based regularization when learning the latent representations to alleviate the entanglement of public and private attributes, thereby increasing the effectiveness of guidance. Evaluation on three real-world datasets containing different sensing modalities reveals that PrivDiffuser yields a better privacy-utility trade-off than the state-of-the-art obfuscation model, decreasing the utility loss by up to 1.81% and the privacy loss by up to 3.42%. Moreover, we showed that users with diverse privacy needs can use PrivDiffuser to protect their privacy without having to retrain the model.

Index Terms—Privacy-utility trade-off, Deep generative models

I. INTRODUCTION

The widespread adoption of IoT devices brings data collection closer to our bodies and intimate spaces. Numerous IoT devices, such as smart home systems and wearables, are presently equipped with cameras, microphones, inertial measurement units (IMUs), and other sensors, enabling them to collect a wide range of data, mostly inconspicuously. These data are often shared with applications that run in the cloud to make desired inferences using powerful deep learning models. While the service provider is assumed to faithfully perform the desired inferences, they may also perform unwanted inferences on these data to gain sensitive information about the user. This honest-but-curious (HBC) adversary might sell this information or use it for targeted advertisement. For example, an individual’s motion data collected for fitness tracking can be used to infer their age, gender, or body size [1], [2]. Similarly, audio and video recorded by a baby camera for sleep monitoring can be used to infer the room layout and dimensions [3]. These intrusive inferences pose a significant threat to our privacy, calling for the development of privacy-preserving techniques that are well-suited for IoT systems.




Fig. 1: The workflow of the proposed obfuscation technique

While there are effective privacy-preserving techniques for structured data, sensor data presents unique challenges for privacy protection. First, the attributes of interest, including *public and private attributes*¹, are embedded in time-series emitted by sensors but not readily available in the dataset, so they can only be inferred using machine learning techniques. Second, in sensor data obfuscation, the private attribute can be any attribute of the user and does not have to be their identity, which is normally protected in differential privacy [4]. Third, users have to release their sensor data because the desired inferences are typically performed in the cloud rather than on resource-constrained IoT devices. This differs from the setting studied in Local Differential Privacy (LDP) [5], [6], because directly adding calibrated noise to the sensor data could significantly reduce its utility. While it is possible to extract the private attribute from time-series data and selectively add noise to that attribute, even a weak entanglement between public and private attributes would void the privacy guarantees provided by differential privacy [7]. The complete disentanglement of public and private attributes proves to be extremely difficult in some cases as we show in this work. Lastly, the overall level of privacy is also determined by a fixed privacy budget in LDP, which cannot be translated to a continual setting in a straightforward manner. The cryptographic techniques that exist for privacy protection, such as secure multi-party computation and homomorphic encryption, are computationally expensive and unsuitable for resource-constrained IoT devices [8].

Privacy-preserving techniques based on generative models treat data obfuscation as a conditional data generation problem, i.e. the synthesized data must contain enough information for desired inferences, yet little sensitive information to prevent unwanted inferences [9], [2], [1]. Since sampling from a trained generative model is relatively inexpensive, obfuscation can be performed on IoT devices [10]. Moreover, generative

¹*Public attributes* are defined as what users wish to infer from their sensor data (e.g. their activity) and *private attributes* are what they wish to conceal in their sensor data (e.g. their age). Users sending data to the same service provider may have different private attributes but their public attribute is the same for that service provider, as it is usually related to the offered service.

models produce new data in the same space as the input data, allowing downstream applications to seamlessly consume the obfuscated data. For these reasons, these data obfuscation techniques have received much attention in IoT applications.

In this work, we propose PrivDiffuser, a novel obfuscation technique for sensor data based on a denoising diffusion model. PrivDiffuser achieves a superior trade-off between utility and privacy compared to the previous work that integrates a conditional generative adversarial network (GAN), and allows modifying the definition and importance of private attributes at will, eliminating the need to retrain the diffusion model. Figure 1 shows the workflow of PrivDiffuser. In the forward process of the diffusion-based obfuscation model, a small amount of Gaussian noise is added to the sensor data at each step, transforming it to near isotropic Gaussian noise after a number of steps. The backward process inverts this by training a machine learning model to predict the noise added at each step. This allows the diffusion model to generate realistic sensor data by progressively denoising randomly sampled Gaussian noise. By guiding the diffusion process using the information extracted from the original sensor data, we ensure that the newly generated data contains rich information about the public attribute (maintaining utility) and minimum information about the private attribute (mitigating privacy loss).

Using diffusion models for sensor data obfuscation presents unique challenges. First, the diffusion model must be *guided* toward generating data that carries useful information about the public attribute, while excluding information about the private attribute. To achieve this, guidance is provided based on positive conditions (for public attributes) and negative conditions (for private attributes). Although classifier-free guidance [11] is more efficient than classifier guidance [12], as it uses classification labels rather than the gradients derived from an auxiliary classifier, classification labels do not provide substantive information about the public or private attribute embedded in the sensor data. Thus, we adopt classifier-free guidance to condition the diffusion model on the public attribute using the latent features learned by a surrogate utility model. For the private attribute, we design a negative conditioning technique based on classifier guidance and enhance it using forward universal guidance [13]. This conditioning technique is suitable for data obfuscation as it allows guiding a trained diffusion model during the sampling stage, enabling users with diverse privacy needs to protect their private attributes with minimum retraining effort. Lastly, the entanglement between the public and private attributes creates an intricate trade-off between utility and privacy. To disentangle these attributes, we impose mutual information-based regularization to extract a latent representation of the private attribute that is weakly correlated with the latent representation of the public attribute, such that applying the negative condition to mitigate privacy loss does not compromise utility. Our contribution is threefold:

- We propose a novel data obfuscation model based on a denoising diffusion model and design effective guidance techniques for positive and negative conditions governing data utility and privacy loss, respectively. These guidance

techniques offer the flexibility to navigate the privacy-utility trade-off without retraining the diffusion model.

- We design a mutual information-based regularization to extract weakly correlated latent representations of public and private attributes to achieve a better privacy-utility trade-off. The representation of the private attribute is utilized to guide a trained diffusion model without counteracting the effect of the positive condition.
- We evaluate the proposed sensor data obfuscation model, PrivDiffuser, on three datasets to corroborate its versatility and efficacy for different sensing modalities and private attribute definitions. Our results show that it outperforms the state-of-the-art GAN-based obfuscation model with respect to privacy and utility.

II. RELATED WORK

A. Privacy-Aware Feature Extraction

Privacy-aware feature extraction involves projecting sensor data into a subspace, producing a low-dimensional representation that contains the maximum amount of information about the public attribute(s) and almost no information about the private attribute(s). Previous work in this area combines deep learning and adversarial training. For example, Privacy Adversarial Network (PAN) [14] and DeepObfuscator [15] train an encoder alongside a classification model for the target task and two adversarial networks aiming to reconstruct the original data and predict the private attribute(s) respectively. Similarly, Li *et al.* [16] used mutual information between random variables to train a feature extractor that minimizes privacy loss while maintaining data utility through adversarial training. The common drawback of these techniques is that the learned representation is not in the same space as the original sensor data. Thus, it cannot be readily consumed by existing applications that take sensor data as input, requiring substantial changes to the apps, which is laborious and often impractical.

B. Data Obfuscation via Generative Models

Data obfuscation can be performed using a sequence of transformations that result in an output sharing the same dimensions as the input data, allowing seamless integration with existing applications. Given the input sensor data, a generative model can produce new data by obscuring the sensitive information contained in the original data while keeping the useful information for the target inference task. If the generative process is conditioned properly, this approach leads to a reasonable trade-off between data utility and privacy loss. DoppelGANger [17] shows the possibility of synthesizing high-fidelity time-series data using GANs and recurrent neural networks. But it does not obscure sensitive information in the generated data. An autoencoder-based data obfuscation model is proposed in [2] where the autoencoder is regularized using multiple loss terms to reduce sensitive information in its latent space. Olympus [9] uses adversarial training to iteratively train an autoencoder-based obfuscation model and an attacker model. This allows minimizing privacy loss while

maintaining the utility of data. ObscureNet [1] uses a conditional variational autoencoder (CVAE) for data obfuscation. A discriminator network classifies the private attribute given the latent representation extracted by the encoder/generator. The discriminator is jointly trained with the CVAE in an adversarial fashion to encourage the CVAE to obscure sensitive information in the latent space. In summary, existing data obfuscation models are mostly built on the autoencoder architecture, where the encoder acts as a generator and is jointly trained with a discriminator in the same spirit as GAN. For this reason, we classify them as GAN-based obfuscation models.

Diffusion models [18] are another type of generative models that have gained popularity due to their outstanding performance in generating high-quality, realistic images or videos. Ho *et al.* proposed Denoising Diffusion Probabilistic Model (DDPM) [19] by modeling the diffusion process as a Markov chain. In DDPM, the sampling (denoising) process can be slow because generating a sample requires synthesizing data in all previous steps. To accelerate the sampling process, Song *et al.* [20] proposed Denoising Diffusion Implicit Model (DDIM). DDIM offers a non-Markovian perspective on the diffusion process, enabling faster sampling. A recent study [21] suggests that the denoising diffusion model is suitable for data obfuscation if the diffusion model is conditioned on the public attribute only, as other attributes will be sampled randomly from a diverse distribution learned from the training data. This *white-listing* approach ensures that only information about the public attribute is embedded in the obfuscated data, as illustrated in Figure 2. However, since attributes are entangled in the latent space, some information about the other attributes will inevitably be included in the obfuscated data. This problem was not addressed in [21]. That being said, the denoising diffusion model is indeed a promising approach for data obfuscation, offering several advantages over GAN-based data obfuscation. Specifically, training a diffusion model does not entail a min-max game between a generator and a discriminator, hence it is more stable and efficient. Moreover, in GAN-based data obfuscation, different privacy-utility trade-offs can be achieved by tuning the weight of the discriminator loss, but this requires retraining the obfuscation model. In contrast, different privacy-utility trade-offs can be achieved in diffusion-based data obfuscation by tuning parameters at the sampling stage, without retraining the obfuscation model. More details are provided in Section IV-B1 and VI-D.

C. Conditional Diffusion Models

The output of an unconditional diffusion model is highly stochastic due to the randomness in the backward diffusion process. Extensive research has been done in recent years on conditioning the diffusion model and guiding the sampling process so as to control the content of the generated data [12], [11], [22]. In particular, Dhariwal *et al.* [12] proposed *classifier guidance*, a guidance technique that uses the gradient of an auxiliary classifier to condition the diffusion model on the target class information. Since the auxiliary classifier takes as input the noisy data generated by the diffusion model, training

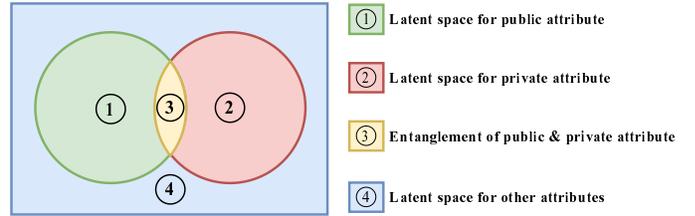


Fig. 2: GAN-based obfuscation uses a discriminator to hide information about the private attribute in ②+③. PrivDiffuser is conditioned on the public attribute to include information in ①+③ and the negated private attribute to exclude private information in ③. The white-listing characteristic of diffusion-based obfuscation offers protection for the private attribute and all attributes that were not listed by the user, extending privacy protection to ②+③+④. For ease of presentation, the entanglement between the public/private attribute and other attributes is not shown.

it under various noise levels is extremely difficult. Bansal *et al.* proposed *universal guidance* [13], a guidance technique that substitutes the noisy input of the auxiliary classifier during sampling with predicted clean data, making it possible to train the auxiliary classifier on clean data for improved performance. Ho *et al.* [11] proposed *classifier-free guidance*, a guidance technique that directly conditions the diffusion model using the (one-hot encoded) label of the target class. Considering that the label itself has no semantic structure and labels in multiple conditions might be conflicting, the latent representation learned by a semantic encoder is used to condition a DDIM in [23]. Other studies utilized pre-trained image-language models, such as contrastive language-image pre-training [24], to guide the image generation process using text prompts [22], [25]. Further, diffusion models have been found to achieve state-of-the-art performance in image inpainting tasks through conditioning on the masked images [26]. Yet image inpainting [27] has fundamental differences with data obfuscation because the unwanted content in data obfuscation is the information that is not explicitly included in the dataset but can be inferred from the sensor data. The above guidance techniques only consider a positive condition that the diffusion model should include in the generated data.

In many applications, it is crucial to also guide the diffusion model with negative conditions, such that specific content is removed from the synthesized data. Du *et al.* [28] and Liu *et al.* [29] interpreted diffusion models as energy-based models and proposed the composition of multiple text conditions through conjunction and negation operations for visual generation. The conjunction operation enables the composition of multiple positive conditions, whereas the negation operation allows the composition of negative conditions. These negation techniques require pre-training a series of diffusion models, each conditioned on one of the respective conditions. This drastically increases the training cost. Similar approaches have also been used in text-to-image models based on latent diffusion models [30], [31]. Armandpour *et al.* [32] found that the composition of complex text input conditions requires condi-

tional independence between positive and negative conditions, which is not often the case in the real world. To address this, the authors proposed the Perp-Neg technique to compute the overlapped semantics between the denoising score components of the positive and negative conditions and then subtract it from the denoising score component of the negative condition. However, we found empirically that Perp-Neg is not very effective for sensor data obfuscation. An alternative approach to disentangle the positive and negative conditions is to project the representations of these conditions onto the orthogonal space of each other. For instance, Deng *et al.* [33] proposed extracting latent representations of the public attribute that are orthogonal to the subspace of the private attribute, where the latent representations for the public and private attributes are extracted using dedicated encoders. This approach requires knowledge of the private attribute prior to the training of the public attribute encoder, which is not ideal when the private attribute can change over time, because the diffusion-based data obfuscation model must be retrained in that case. In our work, we propose a mutual information-based regularization approach for extracting latent representations of the private attribute. This enables post-training guidance based on the negative condition using the latent representations of the private attribute, such that PrivDiffuser can be reused to protect different private attributes without retraining. We expand on this in Section IV-B.

Novelty of this work: We put forward an innovative approach to data obfuscation based on the diffusion process that is well-suited for IoT systems and achieves a superior privacy-utility trade-off by alleviating the entanglement of public and private attributes in a latent space. Our work differs from the previous work on conditional denoising diffusion models in three ways. First, existing methods are mostly designed for text-to-image generation tasks, whereas our work takes multi-channel sensor data segments (multivariate time-series) as input and utilizes a diffusion model to obscure the sensitive information contained in sensor data. Second, to guide text-to-image generation, off-the-shelf models, such as Word2Vec [34], are used to extract word embeddings from the available text prompts. But, in data obfuscation, public and private attributes must be inferred and transformed, e.g., projected into a latent space, before they are used to condition the diffusion model. Third, we incorporate a mutual information-based regularization to apply the negative condition without counteracting the effect of the positive condition, leading to a better privacy-utility trade-off.

III. BACKGROUND ON CONDITIONAL DENOISING DIFFUSION MODEL

A. Training

A diffusion model consists of a forward diffusion process and a backward diffusion process. The forward process is divided into T timesteps, where Gaussian noise is added to the data in each timestep. We denote the original data as x_0 , its latent probability distribution as q , and the perturbed data at timestep t as x_t . The amount of noise added at each timestep t is modeled using a variance scheduler β_t ,

where $0 < \beta_1 < \dots < \beta_T < 1$. In DDPM, the diffusion process is modeled as a Markov process, such that the noisy data at timestep t of the forward process depends on the data at the previous timestep $t - 1$ as follows:

$$p(x_t|x_{t-1}) = \mathcal{N}(\sqrt{1-\beta_t} x_{t-1}, \beta_t \mathbf{I}). \quad (1)$$

The downside of using the above relation is that the denoised data at every timestep must be computed and stored in the sampling process. This can be addressed by rewriting (1) such that x_t depends on x_0 only. Specifically, by introducing $\alpha_t = 1 - \beta_t$ and $\bar{\alpha} = \prod_{t=1}^T \alpha_t$, we can write:

$$p(x_t|x_0) = \mathcal{N}(\sqrt{\bar{\alpha}}x_0, (1-\bar{\alpha})\mathbf{I}), \quad (2)$$

and its reparameterization yields x_t as a function of x_0 :

$$x_t = \sqrt{\bar{\alpha}}x_0 + \sqrt{1-\bar{\alpha}}\epsilon, \quad (3)$$

where ϵ follows a standard Gaussian distribution, i.e. $\epsilon \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$. Notice that for sufficiently large T , x_T will have nearly an isotropic Gaussian distribution. This offers an intuitive interpretation of the diffusion model: *novel data (x_0) can be generated by sampling x_T from the standard Gaussian distribution and progressively denoising it using the reverse process.* To this end, the intractable reverse process $q(x_{t-1}|x_t)$ must be approximated using a neural network model p_θ . When the noise schedule β is sufficiently small, $p_\theta(x_{t-1}|x_t)$ can also be considered to have a Gaussian distribution:

$$p_\theta(x_{t-1}|x_t) = \mathcal{N}(\mu_\theta(x_t, t), \Sigma_\theta(x_t, t)), \quad (4)$$

where μ_θ and Σ_θ are its mean and variance, respectively. Following Ho *et al.* [19], we use a time-dependent constant (β_t^2) for the variance to simplify training, and train a neural network to predict the noise (ϵ) that is added to data rather than a neural network predicting the mean of the Gaussian distribution p_θ . Let $\epsilon_\theta(x_t)$ be the model that predicts ϵ . This noise-prediction network is trained using the mean squared error (MSE) between the actual noise and the predicted noise:

$$\mathcal{L}_\theta = \|\epsilon - \epsilon_\theta(x_t, t)\|_2^2 = \|\epsilon - \epsilon_\theta(\sqrt{\bar{\alpha}}x_0 + \sqrt{1-\bar{\alpha}}\epsilon, t)\|_2^2, \quad (5)$$

where ϵ is the noise randomly drawn from $\mathcal{N}(\mathbf{0}, \mathbf{I})$, and t is the timestep uniformly sampled between 1 and T . We use the UNet architecture [35] for $\epsilon_\theta(x_t)$.

We note that the noise-prediction network can be used to derive a *score function* as outlined in [12]:

$$\nabla_{x_t} \log p_\theta(x_t) = -\frac{1}{\sqrt{1-\bar{\alpha}_t}} \epsilon_\theta(x_t). \quad (6)$$

To condition the diffusion model, the condition, denoted as c , is introduced in the backward diffusion process. Concretely, the noise prediction model receives c as input, so it is expressed as $\epsilon_\theta(x_t, t, c)$. Similar to an unconditional diffusion model, the predicted noise is compared with the noise introduced in the forward diffusion process and the following MSE loss is optimized to train this model [19]:

$$\mathcal{L}_\theta = \|\epsilon - \epsilon_\theta(\sqrt{\bar{\alpha}}x_0 + \sqrt{1-\bar{\alpha}}\epsilon, t, c)\|_2^2. \quad (7)$$

We discuss how to encode an attribute to get c in Section IV-A.

B. Sampling

We briefly explain how to guide the diffusion model via classifier guidance and classifier-free guidance during sam-

pling in DDIM [20].

1) *Classifier Guidance* [12]: In this approach, the condition is the output label (y) of an auxiliary classifier parameterized by ϕ . This classifier is trained to predict y given the input data x_t . The score function for $p(x_t)p(y|x_t)$ is given by

$$\begin{aligned} \nabla_{x_t} \log(p_\theta(x_t)p_\phi(y|x_t)) &= \nabla_{x_t} \log p_\theta(x_t) + \nabla_{x_t} \log p_\phi(y|x_t) \\ &= -\frac{\epsilon_\theta(x_t) - \sqrt{1 - \bar{a}_t} \nabla_{x_t} \log p_\phi(y|x_t)}{\sqrt{1 - \bar{a}_t}}, \end{aligned} \quad (8)$$

where the last derivation is obtained by using (6). We now define a new epsilon prediction $\bar{\epsilon}(x_t)$ corresponding to the score of the joint distribution:

$$\bar{\epsilon}(x_t) := \epsilon_\theta(x_t) - \sqrt{1 - \bar{a}_t} \nabla_{x_t} \log p_\phi(y|x_t). \quad (9)$$

This modified noise prediction $\bar{\epsilon}(x_t)$ is used instead of $\epsilon_\theta(x_t)$ during sampling to repeatedly predict x_{t-1} given x_t , until we get x_0 [12]:

$$x_{t-1} = \sqrt{\bar{\alpha}_{t-1}} \left(\frac{x_t - \sqrt{1 - \bar{\alpha}_t} \bar{\epsilon}(x_t)}{\sqrt{\bar{\alpha}_t}} \right) + \sqrt{1 - \bar{\alpha}_{t-1}} \bar{\epsilon}(x_t). \quad (10)$$

Remark. Since $\bar{\epsilon}(x_t)$ depends on the unconditional diffusion model rather than the conditional diffusion model, it is not necessary to train $\epsilon_\theta(x_t, t, y)$ for this approach and it suffices to introduce the condition at sampling time. This is beneficial because changing the condition does not require retraining the diffusion model. We expand on this in Section IV.

2) *Classifier-free Guidance* [11]: Classifier guidance requires training an additional classifier to obtain its gradient $\nabla_{x_t} \log p(y|x_t)$ for sampling. In classifier-free guidance, an *implicit classifier* is obtained by jointly training a conditional and an unconditional diffusion model. Let the unconditional denoising diffusion model $p_\theta(x)$ be parameterized through a score estimator $\epsilon_\theta(x_t, t)$ and the conditional model $p_\theta(x|y)$ through $\epsilon_\theta(x_t, t, y)$, with y being the one-hot encoding of a given class label. These two models can be obtained by training a single neural network because $\epsilon_\theta(x_t, t) = \epsilon_\theta(x_t, t, y = \emptyset)$, where $y = \emptyset$ indicates that no bit is set in y .

Considering the following relation:

$$p(y|x_t) \propto \frac{p(x_t|y)}{p(x_t)}, \quad (11)$$

the score function of $p_\theta(y|x)$ is given by:

$$\begin{aligned} \nabla_{x_t} \log p_\theta(y|x) &= \nabla_{x_t} \log p_\theta(x_t|y) - \nabla_{x_t} \log p_\theta(x_t) \\ &= -\frac{1}{\sqrt{1 - \bar{a}_t}} (\epsilon_\theta(x_t, t, y) - \epsilon_\theta(x_t, t)). \end{aligned} \quad (12)$$

By plugging (12) into (9) and introducing the scale term w , a hyperparameter that governs the importance of guidance, we have:

$$\begin{aligned} \bar{\epsilon}_\theta(x_t, t, y) &= \epsilon_\theta(x_t, t, y) - \sqrt{1 - \bar{a}_t} w \nabla_{x_t} \log p_\theta(y|x_t) \\ &= \epsilon_\theta(x_t, t, y) - \sqrt{1 - \bar{a}_t} w (\nabla_{x_t} \log p_\theta(x_t|y) - \nabla_{x_t} \log p_\theta(x_t)) \\ &= (1 + w) \epsilon_\theta(x_t, t, y) - w \epsilon_\theta(x_t, t). \end{aligned} \quad (13)$$

This $\bar{\epsilon}_\theta(x_t, t, y)$ is used in the sampling process as discussed in [11].

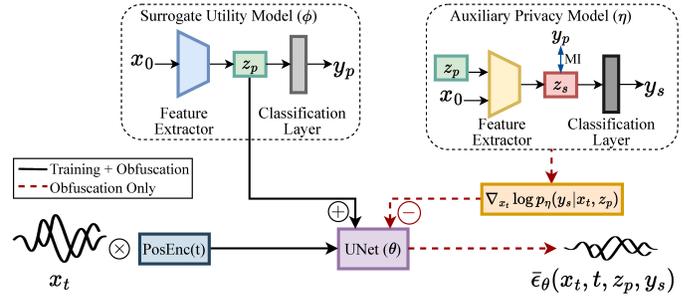


Fig. 3: Architecture of PrivDiffuser

Remark. Since $\bar{\epsilon}_\theta(x_t, t, y)$ depends on the conditional diffusion model, the condition must be introduced at the training stage so that it can affect the sampling process.

IV. GUIDING DIFFUSION SAMPLING TOWARDS A DESIRABLE PRIVACY-UTILITY TRADE-OFF

We propose obfuscating sensor data via the iterative denoising procedure of a diffusion model that is guided to add information about the true public attribute label while ensuring that no information about the true private attribute label will be added in this process. Below we outline the specific techniques that are employed in the training and sampling stages of PrivDiffuser to achieve a good trade-off between utility and privacy. We first discuss how to encode the public and private attributes and use them to condition the diffusion model. We then introduce an effective regularization technique to alleviate the entanglement between these attributes. These techniques are shown in Figure 3. We denote the labels for the public attribute and the private attribute as y_p and y_s , and the latent representation of y_p and y_s extracted by the feature extractors as z_p and z_s , respectively. η is the parameter of the auxiliary privacy model that predicts y_s , and ϕ is the parameter of the surrogate utility model that predicts y_p .

A. Classifier-free Guidance for Enhanced Data Utility

To exploit the simplicity and efficiency of classifier-free guidance while tackling the unique challenges in data obfuscation, we propose training a classifier to predict the public attribute and conditioning the diffusion model with the latent representation extracted by the first few layers of this classifier (i.e., the feature extractor part) rather than its output. Intuitively, the learned latent representation carries richer semantics about the public attribute compared to the one-hot encoded public attribute label. Thus, using this representation for classifier-free guidance makes the obfuscated data more similar to real data.

The public attribute classifier, parameterized by ϕ , serves as our *surrogate utility model*. It takes the raw sensor data segment x as input and predicts the public attribute label y_p . Note that the actual model used in the target task to predict the public attribute may differ from the surrogate utility model, hence the name. For instance, the obfuscated data could eventually be processed on the server side by a more sophisticated or deeper neural network than the surrogate utility model.

We adopt a convolutional neural network as our surrogate utility model. This network consists of 2 convolutional layers followed by 4 fully connected (FC) layers. The convolutional layers and the first 3 FC layers constitute the feature extractor. The first FC layer takes as input the latent representations learned by the convolutional layers and compresses the latent representation to a size of 256. The second and third FC layers then scale down the latent representations using 128, and 60 neurons, respectively. The gradual decrease in the size of the latent space forces the surrogate utility model to condense important features that are highly correlated to the public attribute and remove other information. We use ReLU as the activation function and normalize the output of the third FC layer. The output of the feature extractor, denoted as z_p , is incorporated as the condition c in the diffusion model as described in Section III-A. We then stack the fourth FC layer after the feature extractor and use the Softmax activation function to map z_p into a probability distribution over public attribute classes. Cross entropy loss is used for training the surrogate utility model.

Given a trained surrogate utility model, we incorporate the learned representation of the public attribute into the training process of the diffusion model. Specifically, adaptive group normalization (AdaGN) [12] is used to condition the diffusion model on both the timestep t and the latent representation z_p :

$$\text{AdaGN}(h, y) = y_t \text{GroupNorm}(h) + y_{z_p}, \quad (14)$$

where h is the output of the first convolutional layer in the UNet's residual block, y_t is the linear transformation of the positional encoding [36] of the timestep t , y_{z_p} is the linear transformation of the latent representation z_p . Finally, $y := [y_t, y_{z_p}]$ is incorporated as a condition into the UNet.

Once trained, the conditioned diffusion model is used in the sampling process to ensure that the obfuscated data will contain information about the same public attribute as the original sensor data. We emphasize that the surrogate utility model is trained before training the diffusion model. This way, during sampling, this surrogate utility model is simply used to obtain the representation of the public attribute as we do not need to calculate its gradient for classifier-free guidance. As a result, sampling is less expensive in this case compared to the classifier guidance approach where the gradient of the classifier must be computed for sampling.

B. Privacy Protection via Classifier Guidance

To minimize privacy loss, sampling must be done such that sensitive information about the private attribute is not included in the obfuscated data. To this end, we incorporate a negative condition for each private attribute using the classifier guidance approach, and call this classifier the *auxiliary privacy model*. A negative condition enforces the *absence* of information pertaining to a particular label in the generated data, whereas a positive condition, which is used for a public attribute, enforces the *presence* of information pertaining to a particular label in the generated data. The primary reason for conditioning the private attributes via classifier guidance

is that unlike classifier-free guidance that requires training a conditional diffusion model, classifier guidance can be directly applied at sampling time. This characteristic allows users with diverse privacy needs to reuse the same pre-trained diffusion model conditioned on a specific public attribute and eliminates the complexity of training a conditional diffusion model that takes into account all potential combinations of the conditions.

1) *Combining Positive and Negative Conditions to Achieve a Desirable Privacy-Utility Trade-off*: We extend the derivations for sampling using classifier guidance to the case that there are both positive and negative conditions for public and private attributes, respectively. The negative condition is denoted as \bar{y}_s , which represents the complement of y_s or $\text{not}(y_s)$. Our goal is to compute $p_{\theta, \phi, \eta}(x_t | y_p, \bar{y}_s)$. Considering a realistic scenario in which y_p and y_s are entangled, i.e., they are not conditionally independent, we can write [31], [29]:

$$p_{\theta, \phi, \eta}(x_t | y_p, \bar{y}_s) \propto p_{\theta, \phi, \eta}(x_t, y_p, \bar{y}_s) \propto p_{\theta}(x_t) \frac{p_{\phi}(y_p | x_t)}{p_{\eta}(y_s | y_p, x_t)}. \quad (15)$$

Taking the gradient of the logarithm of (15) w.r.t. x yields:

$$\begin{aligned} \nabla_{x_t} \log (p_{\theta}(x_t) p_{\phi}(y_p | x_t) p_{\eta}(\bar{y}_s | y_p, x_t)) = & \quad (16) \\ \nabla_{x_t} \log p_{\theta}(x_t) + \nabla_{x_t} \log p_{\phi}(y_p | x_t) - \nabla_{x_t} \log p_{\eta}(y_s | y_p, x_t) = & \\ - \frac{1}{\sqrt{1 - \bar{a}_t}} \epsilon_{\theta}(x_t) + \nabla_{x_t} \log p_{\phi}(y_p | x_t) - \nabla_{x_t} \log p_{\eta}(y_s | y_p, x_t), & \end{aligned}$$

where in the last step we substituted the noise prediction model for the score function using (6). Finally, we define $\bar{\epsilon}_{\theta}(x_t, t, y_p, \bar{y}_s)$ that is used in the sampling process:

$$\begin{aligned} \bar{\epsilon}_{\theta}(x_t, t, y_p, \bar{y}_s) = \epsilon_{\theta}(x_t) - \sqrt{1 - \bar{a}_t} \nabla_{x_t} \log p_{\phi}(y_p | x_t) & \quad (17) \\ + \sqrt{1 - \bar{a}_t} \nabla_{x_t} \log p_{\eta}(y_s | y_p, x_t). & \end{aligned}$$

Recall that we use an implicit classifier for the public attribute because classifier-free guidance is used in that case. Thus, we substitute $-\frac{1}{\sqrt{1 - \bar{a}_t}} (\epsilon_{\theta}(x_t, t, y_p) - \epsilon_{\theta}(x_t, t))$ for $\nabla_{x_t} \log p_{\phi}(y_p | x_t)$ according to (12), and use the latent representation z_p instead of y_p (as discussed in Section IV-A) to obtain the modified noise-prediction network:

$$\begin{aligned} \bar{\epsilon}_{\theta}(x_t, t, z_p, y_s) = (1 + w_1) \epsilon_{\theta}(x_t, t, z_p) - w_1 \epsilon_{\theta}(x_t, t) & \quad (18) \\ + w_2 \sqrt{1 - \bar{a}_t} \nabla_{x_t} \log p_{\eta}(y_s | z_p, x_t). & \end{aligned}$$

The auxiliary privacy model $p_{\eta}(y_s | y_p, x_t)$ shares the same architecture as the surrogate utility model $p_{\phi}(y_p | x_t)$, except that for the auxiliary privacy model, we concatenate the public latent representation z_p generated by $p_{\phi}(y_p | x_t)$ with the flattened output of the second convolutional layer in the feature extractor of the auxiliary privacy model and feed the result to its first FC layer. Here w_1 and w_2 are hyperparameters that are introduced to control the influence of positive and negative conditions in the sampling (obfuscation) process. By tuning these hyperparameters, one can navigate the utility-privacy trade-off as discussed in Section VI-D.

2) *Regularizing Auxiliary Privacy Model via Mutual Information*: The proposed approach for combining positive and negative conditions relaxes the strong assumption that the corresponding attributes are conditionally independent. In this setting, guiding the diffusion model toward generating

obfuscated data that does not contain information about the private attribute could remove information about the public attribute, worsening the privacy-utility trade-off. For example, an individual’s height might be correlated with their race, so one cannot simply combine these conditions to generate sensor data that belongs to a tall person while hiding their race. Thus, to achieve a desirable privacy-utility trade-off, we encourage learning a latent representation of the private attribute, z_s , that is weakly correlated with the latent representation of the public attribute, y_p , such that introducing the negative condition will not counteract the effect of the positive condition.

We propose regularizing the auxiliary privacy model by minimizing the mutual information (MI) between z_s and the public attribute label y_p . This is accomplished by augmenting the loss function of the auxiliary privacy model, which will in turn affect the representation learned for the private attribute. Since computing the exact MI between z_s and y_p is intractable, we estimate the MI between z_s and y_p by using the Mutual Information Neural Estimator (MINE) [37], a neural network that is trained to predict the approximate MI given z_s and y_p .

We implement MINE using a neural network parameterized by μ with four fully connected layers where each layer is followed by a ReLU activation function. The first layer takes as input the concatenation of the two random variables and use 400 neurons to compute the output. The second and third FC layers also use 400 neurons, and the last FC layer outputs a single value estimating the MI between the two input random variables. We train MINE together with the auxiliary privacy model. In particular, for every mini-batch of training data that contains b data samples, we first obtain the private latent representation z_s by feeding the clean data input x_0 and the public attribute representation z_p to the privacy auxiliary classifier $p_\eta(y_s|z_p, x_0)$, where z_p is computed using the pre-trained feature extractor in the surrogate utility model. Next, MINE is trained to estimate MI between z_s and y_p following the algorithm proposed in [37]. We use Adam optimizer with a learning rate of 0.0002 to train MINE. Then z_p is fed into the classification layer of the auxiliary privacy model to predict the private attribute label. We regularize the auxiliary privacy model by using MINE to estimate the MI between z_s and y_p :

$$\mathcal{L}_\eta = \mathcal{L}_{\text{CE}} + w_3 \cdot \text{MI}(z_s, y_p), \quad (19)$$

where \mathcal{L}_{CE} is the cross-entropy loss for predicting the private attribute label, and w_3 is a hyperparameter that controls the strength of the regularization term. Note that although w_3 can also serve as a tunable knob to navigate the privacy-utility trade-off, we argue that it is more intuitive and preferable to only tune w_1 and w_2 with a fixed w_3 . We empirically select a value of w_3 that encourages disentangling the public and private attributes to the maximum extent, while preserving high accuracy of the auxiliary privacy model.

3) *Improving Effectiveness of Negative Conditions using Universal Guidance*: The negative conditioning is achieved via classifier guidance to take advantage of its ability to guide the diffusion model during the sampling stage, where the input of the auxiliary privacy model is the data perturbed with noise

that is sampled at a random timestep t . This requires p_η to achieve high accuracy on noisy input x_t . However, we found that training p_η on the noisy data causes convergence issues and reduces the effectiveness of negative conditioning. Therefore, we train $p_\eta(y_s|y_p, x_t)$ on clean sensor data and follow the idea of universal guidance [13] to substitute the noisy input x_t with the predicted clean data \hat{x}_0 during sampling. Specifically, the denoised data x_{t-1} is sampled from $q(x_{t-1}|x_t, \hat{x}_0)$ in DDIM, where $\hat{x}_0 = \frac{x_t - \sqrt{1 - \bar{\alpha}_t} \bar{\epsilon}(x_t)}{\sqrt{\bar{\alpha}_t}}$ is the predicted denoised data that substitutes the unknown x_0 , as shown in (10). Since the diffusion model is conditioned on the public attribute in our work, we apply the forward universal guidance to a conditional diffusion model by substituting x_t with:

$$\begin{aligned} \hat{x}_0 &= \frac{x_t - \sqrt{1 - \bar{\alpha}_t} \bar{\epsilon}_\theta(x_t, t, z_p)}{\sqrt{\bar{\alpha}_t}} \\ &= \frac{x_t - \sqrt{1 - \bar{\alpha}_t} ((1 + w_1) \epsilon_\theta(x_t, t, z_p) - w_1 \epsilon_\theta(x_t, t))}{\sqrt{\bar{\alpha}_t}}. \end{aligned} \quad (20)$$

Finally, we update our noise-prediction network as follows:

$$\begin{aligned} \bar{\epsilon}_\theta(x_t, t, z_p, y_s) &= (1 + w_1) \epsilon_\theta(x_t, t, z_p) - w_1 \epsilon_\theta(x_t, t) \\ &\quad + w_2 \sqrt{1 - \bar{\alpha}_t} \nabla_{x_t} \log p_\eta(y_s|z_p, \hat{x}_0). \end{aligned} \quad (21)$$

Remark. When there are multiple positive and negative conditions, it is possible to derive $\bar{\epsilon}_\theta$ in a similar fashion, as long as the auxiliary privacy classifiers are regularized to learn latent representations that are weakly correlated with the latent representations of the public attributes. For brevity, the derivations are given for one positive and one negative condition only.

V. EVALUATION

A. Baselines

ObscureNet [1]: ObscureNet is a GAN-based data obfuscation model that utilizes a conditional variational autoencoder (CVAE) jointly optimized with a discriminator in an adversarial fashion. The discriminator encourages the encoder of CVAE to learn latent representations that do not contain sensitive information. By conditioning the decoder of CVAE with a dummy private attribute label, this obfuscation model generates sensor data that contain misleading private information to reduce the privacy loss while maintaining the utility. Since it outperforms other autoencoder-based data obfuscation models in terms of the privacy-utility trade-off [1], we use it as a representative GAN-based obfuscation model. Note that, in ObscureNet, a dedicated obfuscation model is trained per public attribute class, whereas our approach trains a single diffusion model for all public and private attributes, thus it has a higher training cost than ours. ObscureNet is trained and evaluated using the code released by the authors on GitHub. We use the randomized anonymization approach, as it is robust to the re-identification attack.

Diffusion: Our next baseline is an obfuscation model based on a denoising diffusion model with the same architecture as PrivDiffuser. We use the same conditioning approach for the public attribute, but we do not apply the negative condition for

the private attribute. This baseline highlights the white-listing capability of diffusion-based obfuscation models that only use the positive condition for the public attribute.

Diffusion with Negation: We implement this baseline on top of the *Diffusion* baseline by adding the proposed negative conditioning technique to enforce the absence of information about the private attribute in the obfuscated data. However, we do not apply the proposed mutual information-based regularization to alleviate the entanglement between public and private attributes. This baseline is used to establish two things: First, the effectiveness of the negative conditioning technique through comparison with the *Diffusion* baseline; Second, the role of regularization based on MI in disentangling the public and private attributes through comparison with PrivDiffuser.

B. Datasets

Our evaluation is conducted on three publicly available datasets including different modalities that are commonly used for human activity recognition (HAR). The first two datasets use IMU sensors and the third one uses WiFi signals.

MobiAct [38]: It is an activity recognition dataset collected using the accelerometer, gyroscope, and orientation sensor in a Samsung smartphone [38]. It contains data from 66 participants performing 12 different daily activities. For a fair comparison with our first baseline [1] that used a subset of this dataset, we use only the accelerometer and gyroscope data to detect these 4 activities: walking, standing, jogging, and walking up the stairs. This yields 6 channels from the 3-axis accelerometer and the 3-axis gyroscope. We select the same 36 participants (20 male and 16 female participants) used in that baseline. We preprocess the data by performing standardization and segmentation using a sliding window of size 128 samples and a stride length of 10 samples. We split the data with an 8:2 train-test ratio. The public attribute that participants wish to infer from their sensor data is *activity*. We consider two private attributes that were recorded for each participant: *gender* and *weight*. Gender is a binary attribute in this dataset, and weight is considered as a ternary attribute comprising Group 0 ($\leq 70\text{kg}$), Group 1 (70-90kg), and Group 2 ($\geq 90\text{kg}$). This models individuals' weight as a categorical attribute containing three groups of nearly the same size.

MotionSense [2]: It is collected using the accelerometer and gyroscope sensor of an iPhone 6s, carried by 24 participants (14 male and 10 female participants). For a fair comparison with our first baseline [1], we consider the following 4 activities from the 6 activities recorded in the dataset: walking up and down the stairs, walking, and jogging. Each activity is repeated in 15 trials. We use the first 9 trials for training and the remaining 6 trials for testing, similar to the baseline. The public attribute is *activity* and the public attribute is the user's *gender*, a binary attribute in this dataset. Magnitude readings from the accelerometer and gyroscope are aggregated over their respective 3 axes, resulting in 2 channels, one for each sensor. The aggregated sensor data is then segmented using the same technique used for the MobiAct dataset.

WiFi-HAR [39]: It uses radio frequency (RF), in particular WiFi channel state information (CSI), for activity recognition. The WiFi-HAR dataset contains 90 CSI channels collected from 3 transceiver pairs (1 transmitter and 3 receivers), with each transceiver pair generating 30 channels. We follow [10] and use the data collected in a line-of-sight environment, where 10 participants performed 12 activities. Each activity is repeated 20 times. We select 4 activities, namely standing, sitting, lying down, and turning around. This constitutes our public attribute. The participants' weight is chosen as the private attribute and categorized into two groups: higher and lower than 80kg. To preprocess the data, the magnitude of the CSI readings for each channel is computed and standardized. We then apply a sliding window of 80 samples with a stride length of 40 samples to segment the data. The segments are randomly shuffled and divided into training and test sets with a split ratio of 8:2.

C. Evaluation Metrics

1) *Privacy Loss:* Our first evaluation metric is the loss of private information due to sharing data with an HBC service provider. We consider a powerful intrusive inference model that can be used by this adversary to predict the private attribute given the obfuscated data. This model is a convolutional neural network (CNN) that has 4 convolutional layers, followed by 3 fully connected layers. We train this model on raw sensor data, and use its classification accuracy as a measure of privacy loss. The training and test sets are resampled and different from the ones used to train PrivDiffuser. Ideally, the classification accuracy on obfuscated data should be close to the level of random guessing (e.g., 50% for binary private attribute) instead of 0%. This is because the latter is prone to a re-identification attack, where the adversary learns the quasi-deterministic mapping and recovers the original private attribute label [1].

2) *Data Utility:* We use the classification accuracy of a powerful desired inference model as a measure of data utility. The desired inference model takes as input the obfuscated sensor data and predicts the public attribute label. It is a more sophisticated model than the surrogate utility model used in the obfuscation pipeline, showing that data obfuscated using a simpler model can maintain high utility. We construct the desired inference model using the same architecture as the intrusive inference model and train it on the raw sensor data. Overall, the obfuscation model should not decrease the utility of data, meaning that the desired inference accuracy should remain the same as the case that raw sensor data is used.

D. Implementation Details

We implement the surrogate utility model and auxiliary privacy model using a simple CNN that contains 2 convolutional layers followed by 4 FC layers as introduced in Section IV-A. The third FC layer outputs the latent feature representations of size 60, and the fourth FC layer is the classification layer. We use ReLU as the activation function. For the MobiAct, MotionSense, and WiFi-HAR datasets, we set the number of

output channels of the (first, second) convolutional layers to (8, 16), (64, 128), and (16, 32), respectively. Both convolutional layers use a kernel size of 2. We implement the diffusion model of ϵ_θ based on an open-source UNet architecture released by OpenAI [40]. We use a linear scheduler [19] that starts from 0.0001 and ends at 0.02 with $T = 1000$. A total of 50 steps are used in the sampling stage to generate obfuscated data. We use a batch size of 128 for MobiAct and MotionSense, and a smaller batch size of 8 for WiFi-HAR for GPU memory efficiency. In this setting, obfuscating one batch containing 128 sensor data segments from the MobiAct dataset takes approximately 11 seconds on one NVIDIA RTX 2080 Ti GPU, that is ~ 86 ms for obfuscating one sensor data segment. We find that there is a linear relationship between the number of steps used in the sampling stage and the obfuscation time (see Appendix C). For MobiAct, we empirically set the number of model channels used in the UNet to 64, and hyperparameters as follows: $w_1 = 3.8$, $w_2 = 1.5$, and $w_3 = 8$. For MotionSense, we set the number of model channels to 256, $w_1 = 7.8$, $w_2 = 0.05$, and $w_3 = 8$. For WiFi-HAR, we set the number of model channels to 256, $w_1 = 5.8$, $w_2 = 0.4$, and $w_3 = 4$. The values of w_1 and w_2 are chosen so as to obtain a near-random guessing level of accuracy from the intrusive inference model. This makes the diffusion-based models robust to re-identification attacks. We use the same hyperparameters for the two diffusion-based baselines. Our implementation will be made available on GitHub upon acceptance of the paper.

VI. CASE STUDIES

A. Case Study 1: HAR on MobiAct

1) *Protecting Gender*: We first evaluate the obfuscation models on the MobiAct dataset when the user wishes to protect their gender. Figure 4a compares the intrusive inference accuracy obtained on the data obfuscated by each model. We consider five independent runs for each experiment, and plot the average and standard deviation (error bars) of accuracy over these runs. Without data obfuscation, the adversary can easily predict the user’s gender from the raw sensor data, attaining an average intrusive inference accuracy (F1 score) of 97.53% (97.50%). The data obfuscated by ObscureNet yields an average intrusive inference accuracy (F1 score) of 52.04% (52.04%), which is pretty close to random guessing. The Diffusion baseline shows the worst privacy loss with an average intrusive inference accuracy (F1 score) of 67.26% (66.33%). This suggests that without using the private attribute for negative conditioning, the diffusion baseline can provide limited protection for the gender attribute due to its white-listing characteristic. By introducing the negative conditioning, the Diffusion with Negation baseline drastically reduces the privacy loss and achieves an average intrusive inference accuracy (F1 score) of 50.06% (48.52%). Yet the improvement in privacy loss comes at the expense of reducing data utility (as discussed later), due to the entanglement of public and private attributes. PrivDiffuser integrates the negative condition and mutual information-based regularization to achieve an average intrusive inference accuracy (F1 score) of 51.12%

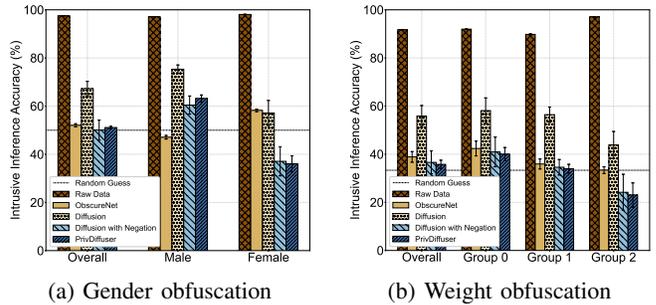


Fig. 4: Intrusive inference accuracy on MobiAct dataset for gender and weight obfuscation

(49.25%), slightly underperforming Diffusion with Negation in that respect. But this accuracy is still close to random guessing and better than ObscureNet. When looking at the individual gender class, we notice that PrivDiffuser shows slightly less balanced results compared to ObscureNet. We attribute this to the different levels of entanglement between each gender and the public attribute, causing the negative conditioning to have a weaker effect on the private attribute class that has a stronger correlation with the public attribute.

Next, we study the impact of data obfuscation on the utility of data when the user wishes to protect their gender. The result is reported in Table I. We find that all obfuscation models maintain relatively high data utility. Notably, the Diffusion with Negation baseline results in the lowest utility despite achieving the lowest privacy loss, showing an average activity recognition accuracy (F1 score) of 95.64% (81.07%). We attribute this to using the negative condition to remove information about the private attribute without disentangling the public and private attributes. ObscureNet yields an average HAR accuracy (F1 score) of 97.21% (84.99%), outperforming the Diffusion with Negation baseline. The Diffusion baseline shows the highest HAR accuracy (F1 score) of 97.96% (87.44%), underscoring the outstanding capability of a conditional diffusion model to produce realistic data. However, it fails to offer strong privacy protection as explained earlier. PrivDiffuser yields the second-best data utility, with an average HAR accuracy (F1 score) of 97.30% (85.05%). Overall, we conclude that PrivDiffuser yields the best privacy-utility trade-off in the gender obfuscation task, outperforming the state-of-the-art GAN-based obfuscation baseline.

2) *Protecting Weight*: We now evaluate the obfuscation models when users want to protect their weight (a ternary attribute) on MobiAct. Figure 4b shows the result. ObscureNet achieves a decent average intrusive inference accuracy (F1 score) of 38.88% (35.15%). Similar to the gender obfuscation case, the Diffusion baseline offers the worst privacy protection with an average weight inference accuracy (F1 score) of 55.86% (51.54%). However, this result is still encouraging as it reduces the intrusive inference accuracy by 35.88% compared to raw sensor data, without requiring knowledge of the private attribute. Both the Diffusion with Negation baseline and PrivDiffuser outperform ObscureNet in terms of privacy loss, showing an intrusive inference accuracy (F1 score) of 36.61%

Activity	Walking		Standing		Jogging		Upstairs		Overall (Accuracy/F1-score)	
Private Attribute	Gender	Weight	Gender	Weight	Gender	Weight	Gender	Weight	Gender	Weight
Raw Data	98.10%		99.58%		99.74%		95.14%		98.80% / 91.85%	
ObscureNet	94.82%	94.96%	99.60%	99.08%	98.14%	97.78%	93.00%	92.04%	97.21% / 84.99%	97.02% / 84.29%
Diffusion	96.84%		99.19%		99.40%		87.86%		97.96% / 87.44%	
Diffusion with Negation	96.00%	95.08%	95.22%	94.62%	99.34%	99.42%	83.26%	83.46%	95.64% / 81.07%	94.93% / 79.53%
PrivDiffuser	96.24%	96.12%	98.34%	97.92%	99.50%	99.46%	87.50%	86.76%	97.30% / 85.05%	97.03% / 84.17%

TABLE I: Average activity recognition accuracy of obfuscation models on the MobiAct dataset. Note that the Diffusion baseline does not assume the knowledge of the private attribute, hence the HAR accuracy for gender/weight obfuscation is the same.




Fig. 5: Intrusive inference accuracy on MotionSense for gender obfuscation




Fig. 6: Intrusive inference accuracy on WiFi-HAR for weight obfuscation

(32.39%) and 35.78% (31.53%), respectively. PrivDiffuser offers the best privacy protection since the weight inference accuracy is closest to the random guessing level (33.33%).

Finally, we look at data utility in the weight obfuscation task. As Table I shows, the Diffusion with Negation baseline achieves the lowest HAR accuracy (94.93%) because of the application of negative conditioning without disentangling the attributes. ObscureNet and PrivDiffuser show nearly the same performance, achieving an average HAR accuracy (F1 score) of 97.02% (84.29%) and 97.03% (84.17%), respectively. Specifically, the F1 score of ObscureNet is slightly higher, due to its higher accuracy in the walking upstairs activity. This is because ObscureNet trains a dedicated model for each activity, allowing each model to focus on a simpler task, which offers a slight advantage in maintaining data utility compared to PrivDiffuser. Regardless, PrivDiffuser outperforms ObscureNet in terms of privacy loss by 3.10% (3.62%) w.r.t. the intrusive inference accuracy (F1 score). Overall, PrivDiffuser yields a better trade-off between privacy and utility.

B. Case Study 2: HAR on MotionSense

We then evaluate the obfuscation models on the MotionSense dataset for gender obfuscation and report the intrusive inference accuracy in Figure 5. Without applying data obfuscation, the intrusive inference model achieves a high average accuracy (F1 score) of 93.52% (93.26%) in predicting the gender attribute. Data obfuscated by ObscureNet reduces the intrusive inference accuracy (F1 score) to 53.46% (52.61%). We find that the Diffusion baseline offers surprisingly good privacy-preserving performance and outperforms ObscureNet by only conditioning on the public attribute, showing an average intrusive inference accuracy (F1 score) of 51.34% (50.18%). Although the Diffusion baseline does not consistently outperform ObscureNet on all datasets, the white-listing characteristic could still offer promising privacy protection

Model	Downstairs	Upstairs	Walking	Jogging	Overall (Accu./F1)
Raw Data	96.60%	94.40%	99.00%	97.40%	97.47% / 96.59%
ObscureNet	79.82%	95.28%	98.58%	97.22%	94.96% / 93.05%
Diffusion	96.10%	96.08%	95.68%	98.02%	96.28% / 95.64%
Diffusion with Negation	96.06%	96.34%	95.64%	97.94%	96.28% / 95.64%
PrivDiffuser	96.14%	96.44%	95.64%	98.00%	96.32% / 95.69%

TABLE II: Average activity recognition accuracy on MotionSense dataset for gender obfuscation

when the public and private attributes have relatively weak entanglement. By incorporating the negative condition, the Diffusion with Negation baseline further reduces the intrusive inference accuracy (F1 score) to 49.42% (48.31%). With mutual information-based regularization, PrivDiffuser yields an intrusive inference accuracy (F1 score) of 49.96% (49.00%). For MotionSense, all diffusion-based obfuscation models outperform the GAN-based baseline in terms of privacy loss.

We report the HAR accuracy when obfuscating gender on MotionSense in Table II. In particular, ObscureNet yields good data utility, with an average HAR accuracy of 94.96% (93.05%), but underperforms all diffusion-based obfuscation models. The Diffusion and Diffusion with Negation baselines achieve the HAR accuracy (F1 score) of 96.28% (95.64%) on average. PrivDiffuser achieves the highest average HAR accuracy (F1 score) of 96.32% (95.69%). In summary, for gender obfuscation in the MotionSense dataset, PrivDiffuser and the two diffusion-based baseline models outperform the GAN-based baseline in terms of privacy loss and data utility.

C. Case Study 3: HAR on WiFi-HAR

Lastly, we extend our evaluation study to obfuscate data collected using RF sensors on the WiFi-HAR dataset. Figure 6 shows the intrusive inference accuracy on the WiFi-HAR dataset when obfuscating the binary weight attribute. ObscureNet achieves an average weight inference accuracy (F1 score) of 51.43% (51.39%). Although the Diffusion baseline achieves slightly higher ($\sim 1.35\%$) weight inference accuracy than ObscureNet, it still offers decent protection for the weight attribute, highlighting its white-listing characteristic. The Diffusion with Negation baseline offers stronger privacy protection thanks to the negative conditioning, showing an average intrusive inference accuracy (F1 score) of 47.67% (47.62%). PrivDiffuser yields an average intrusive inference accuracy (F1 score) of 49.21% (49.15%), which is only 0.79% away from the ideal 50% random guessing accuracy.

We evaluate the activity recognition accuracy on the obfuscated data and present the results in Table III. ObscureNet yields the lowest overall HAR accuracy (F1 score) of 86.37% (86.17%). All diffusion-based obfuscation models yield similar data utility and outperform ObscureNet. Specifically, the

Model	Standing	Turning	Lying	Sitting	Overall (Accu./F1)
Raw Data	95.77%	97.73%	99.40%	98.58%	97.88% / 97.88%
ObscureNet	86.82%	72.46%	96.68%	89.44%	86.37% / 86.17%
Diffusion	85.94%	96.64%	92.14%	78.38%	88.30% / 88.24%
Diffusion with Negation	85.76%	96.56%	91.78%	78.46%	88.17% / 88.11%
PrivDiffuser	85.76%	96.70%	91.56%	78.62%	88.18% / 88.12%

TABLE III: Average activity recognition accuracy on WiFi-HAR dataset for weight obfuscation

Diffusion with Negation baseline achieves a lower HAR accuracy (F1 score) of 88.17% (88.11%). PrivDiffuser outperforms ObscureNet w.r.t. the average HAR accuracy (F1 score) by 1.81% (1.95%). Looking at the individual activities, we find that all diffusion-based obfuscation models achieve over 96% accuracy in recognizing the turning activity, exceeding ObscureNet by $\sim 24\%$. ObscureNet performs better for the lying and sitting activity, yet it still falls behind the diffusion-based models in terms of the overall HAR accuracy.

In summary, our evaluation on the three datasets confirms that PrivDiffuser consistently yields a superior privacy-utility trade-off, regardless of the sensing modality and the user-specified private attribute.

D. Parameter Tuning and Privacy-Utility Trade-offs

We now turn our attention to how users with diverse privacy needs can navigate the privacy-utility trade-off. We use the MotionSense dataset as an example and consider activity as the public attribute and gender as the private attribute. To control the data utility and privacy, we adjust the hyperparameters w_1 and w_2 introduced in (18), respectively. Concretely, we assign one of the following four values to w_2 : 0, 0.1, 0.2, and 0.3, where $w_2 = 0$ corresponds to the Diffusion baseline. Then, for each w_2 value, we assign 9 different values from $\{1, \dots, 9\}$ to w_1 . Note that a higher w_1 imposes stronger guidance on the positive condition (public attribute) which is expected to improve data utility. Similarly, a higher w_2 imposes stronger guidance on the negative condition (private attribute), which is expected to improve privacy protection. We study the effect of different values of w_1 and w_2 on the same pre-trained obfuscation model, meaning that these values are updated at the sampling stage to adjust the privacy-utility trade-off offered by PrivDiffuser. Thus, retraining the diffusion model, the surrogate utility model, and the auxiliary privacy model would not be necessary. This is the main advantage of the proposed guidance approaches.

We illustrate the so-obtained trade-off curves in Figure 7. The y-axis shows the activity recognition accuracy (a measure of utility), and the x-axis shows the gender inference accuracy (a measure of privacy loss). A red star is drawn to mark the ideal trade-off, which is defined as the HAR accuracy obtained on the raw sensor data (97.47%) and the perfect random guessing accuracy of 50% for the intrusive inference that involves the binary gender attribute. For a fixed value of w_2 , we find that increasing the value of w_1 substantially enhances the strength of the positive condition and improves data utility when w_1 is relatively small (≤ 5). However, as w_1 further increases, the control over the positive condition becomes insignificant and can counteract the effect of the

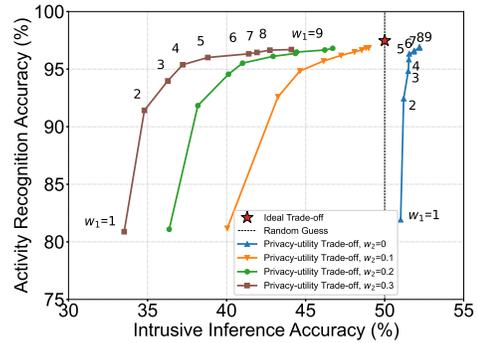


Fig. 7: Privacy-utility trade-off curves obtained by tuning the hyperparameters w_1 and w_2 of PrivDiffuser post training for gender obfuscation on MotionSense. Note that both axes are exaggerated. The activity recognition accuracy increases with w_1 in all curves, but we annotate only two curves for brevity.

negative condition, i.e., causing an increase in the intrusive inference accuracy when w_2 is fixed. We attribute this to the fact that the latent representation of the public attribute z_p is extracted without applying information disentanglement techniques, hence a stronger guidance on the public attribute could add more sensitive information to z_p due to the entanglement problem. On the other hand, for a fixed value of w_1 , increasing w_2 can effectively control the intrusive inference accuracy with very limited impact on data utility, thanks to the mutual information-based regularization that alleviates the entanglement of the public attribute with the latent representation of the private attribute z_s . The key takeaway is that we can effectively balance the effect of positive and negative conditions post-training by tuning the two knobs w_1 and w_2 . This enables users to navigate the privacy-utility trade-off according to their privacy needs that may change over time.

E. White-listing Characteristic of PrivDiffuser

In this section, we revisit the white-listing characteristic of diffusion-based obfuscation models. In diffusion-based obfuscation, information about the public attribute is preserved in the obfuscated data through positive conditioning, hence it is considered a white-listed attribute. The white-listing characteristic of diffusion-based obfuscation makes it possible to protect a wide range of attributes excluding the white-listed attribute(s). This stems from the nature of diffusion models that generate data from noise. Without explicit guidance based on attributes that are outside the white list, the generated data would ideally contain information of arbitrary classes for those attributes, causing an adversary to obtain near-random guessing accuracy for the respective intrusive inferences. However, the public attribute can be entangled with other attributes in practice, so applying the positive condition could reveal information about other attributes and increase privacy loss. In this case, users can specify the attribute they deem private and employ the proposed negative conditioning technique to provide strong privacy protection for that attribute.

Figure 2 sheds light on this white-listing characteristic of diffusion models, where not only the user-specified private

Model	Group 0	Group 1	Group 2	Overall
Raw Data	91.96%	89.80%	97.10%	91.74%
ObscureNet	100.00%	0.00%	0.00%	61.41%
Diffusion	58.12%	56.44%	43.84%	55.86%
Diffusion with Negation	49.72%	48.92%	37.74%	48.06%
PrivDiffuser	51.14%	47.54%	37.10%	48.17%

TABLE IV: Intrusive inference accuracy on the non-private weight attribute for MobiAct dataset. Obfuscation models are trained to protect the gender attribute.

attribute (area ②+③) but also other attributes (area ④) are protected, assuming their entanglement with the public attribute is negligible. We use the MobiAct dataset as an example to further investigate this characteristic in two cases:

- 1) No private attribute is specified by the user. Thus, all attributes apart from the public attribute, including gender and weight, are protected due to the white-listing characteristic of diffusion models. We study this case using the Diffusion baseline.
- 2) Gender is the only private attribute specified by the user. In this case, the weight attribute may also be protected due to the white-listing characteristic of diffusion models. We study this case on all obfuscation models.

In the first case, the white-listing characteristic of the Diffusion baseline can offer moderate privacy protection while maintaining high data utility as discussed in the case studies. In the MobiAct dataset, the Diffusion baseline yields the highest utility, achieving 97.96% HAR accuracy. Meanwhile, the white-listing characteristic reduces the intrusive inference accuracy on the binary gender and ternary weight attribute from 97.53% to 67.26% and from 91.74% to 55.86%, respectively. Similar observations can be made for MotionSense and WiFi-HAR datasets, where the Diffusion baseline yields high utility. The overall intrusive inference accuracy on the binary gender attribute in MotionSense is reduced to 51.34% (from 93.52%), and the intrusive inference accuracy on the binary weight attribute in WiFi-HAR is reduced to 52.78% (from 99.14%). We find that for both MotionSense and WiFi-HAR, the Diffusion baseline offers outstanding privacy protection, when compared to the random guessing level. We attribute this to the underlying data distribution in these two datasets, where the public and non-public attributes are relatively less entangled than MobiAct. Overall, the white-listing characteristic of a basic diffusion-based obfuscation model provides moderate privacy protection for multiple non-public attributes.

Next, we study the second case. In Table IV, we report the intrusive inference accuracy on the weight attribute when the obfuscation models are trained to protect gender on MobiAct. We find that when the GAN-based ObscureNet baseline is trained to protect gender, the obfuscated data contains substantial information about the weight attribute. Specifically, ObscureNet achieves an average weight inference accuracy of 61.41%, which is significantly lower than the accuracy obtained on the raw data but noticeably higher than other diffusion-based obfuscation models. Examining the result for each weight group, it becomes evident that all data segments obfuscated by ObscureNet are classified as weight group 0,

the largest weight group representing 50% of total users. This shows that the GAN-based obfuscation model fails to provide meaningful protection for attributes that were not explicitly black-listed by the user. The Diffusion baseline, however, provides moderate privacy protection for the weight attribute, demonstrating better privacy protection performance than ObscureNet by not only reducing the overall intrusive inference accuracy but also lowering the inference accuracy for all weight groups in a relatively balanced manner. By introducing the negative condition, the Diffusion with Negation baseline and PrivDiffuser further reduce the intrusive inference accuracy to around 48%. This implies that applying the negative condition of the gender attribute also contributes to the white-listing characteristic and improves the privacy loss on the weight attribute. We believe this is due to the entanglement between the weight and gender attribute in the latent space, as removing information about gender also helps with protecting the weight attribute.

In summary, we have shown that the white-listing characteristic of diffusion-based obfuscation models could provide privacy protection for a broad range of attributes other than the user-specified public and private attributes. Furthermore, the adoption of negative conditions could enhance this effect when the private attribute is entangled with unspecified attributes.

VII. CONCLUSION AND FUTURE WORK

We proposed PrivDiffuser, a novel sensor data obfuscation model that employs guided denoising diffusion models. PrivDiffuser maintains high data utility by conditioning the public attribute via classifier-free guidance and protects user privacy by conditioning the negated private attribute via improved classifier guidance. To achieve a desirable privacy-utility trade-off, we proposed a novel approach for disentangling the public and private attributes. It entails imposing mutual information-based regularization when extracting the latent representations of the private attribute. Through evaluation on HAR datasets that contain data collected by different types of sensors, we corroborated that PrivDiffuser achieves a superior privacy-utility trade-off compared to the state-of-the-art GAN-based data obfuscation, showing improved data utility by up to 1.81% and reduced privacy loss by up to 3.42%. Our ablation studies showed the efficacy of negative conditioning and regularization based on mutual information. Lastly, we discussed distinct advantages offered by PrivDiffuser, namely the possibility of adjusting the privacy-utility trade-off for each user during the sampling stage without model retraining, and protecting other attributes to some extent due to its white-listing characteristic.

In future work, we aim to explore conditioning multiple public attributes and private attributes. For instance, compositional conditioning techniques that simultaneously incorporate multiple positive or negative conditions can be applied [29], [41]. Moreover, we plan to deploy PrivDiffuser on mobile and IoT devices to study the efficiency of data obfuscation in real-world scenarios. We will investigate the feasibility of obfuscating sensor data under a limited budget of time or

computational resources. This requires PrivDiffuser to dynamically adjust the progressive diffusion process, such that the obfuscated data can achieve a satisfactory privacy-utility trade-off before exhausting the budget.

REFERENCES

- [1] O. Hajihassnai, O. Ardakanian, and H. Khazaei, "ObscureNet: Learning attribute-invariant latent representation for anonymizing sensor data," in *Proceedings of the International Conference on Internet-of-Things Design and Implementation*, 2021, pp. 40–52.
- [2] M. Malekzadeh *et al.*, "Mobile sensor data anonymization," in *Proceedings of the International Conference on Internet-of-Things Design and Implementation*, 2019, pp. 49–58.
- [3] S. Purushwalkam *et al.*, "Audio-visual floorplan reconstruction," in *IEEE/CVF International Conference on Computer Vision*, 2021, pp. 1163–1172.
- [4] M. Abadi, A. Chu, I. Goodfellow, H. B. McMahan, I. Mironov, K. Talwar, and L. Zhang, "Deep learning with differential privacy," in *Proceedings of the 2016 ACM SIGSAC conference on computer and communications security*, 2016, pp. 308–318.
- [5] Ú. Erlingsson, V. Pihur, and A. Korolova, "Rappor: Randomized aggregatable privacy-preserving ordinal response," in *Proceedings of the 2014 ACM SIGSAC Conference on Computer and Communications Security*, 2014, pp. 1054–1067.
- [6] X. Zheng and Z. Cai, "Privacy-preserved data sharing towards multiple parties in industrial IoTs," *IEEE journal on selected areas in communications*, vol. 38, no. 5, pp. 968–979, 2020.
- [7] B. Weggenmann, V. Rublack, M. Andrejczuk, J. Mattern, and F. Kerschbaum, "Dp-vae: Human-readable text anonymization for online reviews with differentially private variational autoencoders," in *Proceedings of the ACM Web Conference 2022*, 2022, pp. 721–731.
- [8] A. Al Badawi *et al.*, "Towards the alexnet moment for homomorphic encryption: HCNN, the first homomorphic CNN on encrypted data with GPUs," *IEEE Transactions on Emerging Topics in Computing*, vol. 9, no. 3, pp. 1330–1343, 2021.
- [9] N. Raval *et al.*, "Olympus: Sensor privacy through utility aware obfuscation," *Proceedings on Privacy Enhancing Technologies*, vol. 2019, no. 1, pp. 5–25, 2019.
- [10] X. Yang and O. Ardakanian, "Blinder: End-to-end privacy protection in sensing systems via personalized federated learning," *ACM Transactions on Sensor Networks*, vol. 20, no. 1, pp. 1–32, 2023.
- [11] J. Ho and T. Salimans, "Classifier-free diffusion guidance," *arXiv preprint arXiv:2207.12598*, 2022.
- [12] P. Dhariwal and A. Nichol, "Diffusion models beat GANs on image synthesis," *Advances in Neural Information Processing Systems*, vol. 34, pp. 8780–8794, 2021.
- [13] A. Bansal *et al.*, "Universal guidance for diffusion models," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 843–852.
- [14] S. Liu *et al.*, "Privacy adversarial network: representation learning for mobile data privacy," *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies*, vol. 3, no. 4, pp. 1–18, 2019.
- [15] A. Li *et al.*, "DeepObfuscator: Obfuscating intermediate representations with privacy-preserving adversarial learning on smartphones," in *Proceedings of the International Conference on Internet-of-Things Design and Implementation*, 2021, pp. 28–39.
- [16] A. Li *et al.*, "TIPRDC: Task-independent privacy-respecting data crowdsourcing framework for deep learning with anonymized intermediate representations," in *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, 2020, pp. 824–832.
- [17] Z. Lin *et al.*, "Using GANs for sharing networked time series data: Challenges, initial promise, and open questions," in *Proceedings of the ACM Internet Measurement Conference*, 2020, pp. 464–483.
- [18] J. Sohl-Dickstein *et al.*, "Deep unsupervised learning using nonequilibrium thermodynamics," in *International Conference on Machine Learning*. PMLR, 2015, pp. 2256–2265.
- [19] J. Ho, A. Jain, and P. Abbeel, "Denoising diffusion probabilistic models," *Advances in Neural Information Processing Systems*, vol. 33, pp. 6840–6851, 2020.
- [20] J. Song, C. Meng, and S. Ermon, "Denoising diffusion implicit models," *arXiv preprint arXiv:2010.02502*, 2020.
- [21] X. Yang and O. Ardakanian, "Privacy through diffusion: A white-listing approach to sensor data anonymization," in *Proceedings of the 5th Workshop on CPS&IoT Security and Privacy*, 2023, pp. 101–107.
- [22] A. Q. Nichol *et al.*, "GLIDE: Towards photorealistic image generation and editing with text-guided diffusion models," in *Proceedings of the 39th International Conference on Machine Learning*. PMLR, 2022, pp. 16 784–16 804.
- [23] K. Preechakul *et al.*, "Diffusion autoencoders: Toward a meaningful and decodable representation," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022, pp. 10 619–10 629.
- [24] A. Radford *et al.*, "Learning transferable visual models from natural language supervision," in *International Conference on Machine Learning*. PMLR, 2021, pp. 8748–8763.
- [25] G. Kim, T. Kwon, and J. C. Ye, "Diffusionclip: Text-guided diffusion models for robust image manipulation," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022, pp. 2426–2435.
- [26] R. Rombach *et al.*, "High-resolution image synthesis with latent diffusion models," in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2022, pp. 10 684–10 695.
- [27] R. Suvorov *et al.*, "Resolution-robust large mask inpainting with fourier convolutions," in *Proceedings of the IEEE/CVF winter conference on applications of computer vision*, 2022, pp. 2149–2159.
- [28] Y. Du, S. Li, and I. Mordatch, "Compositional visual generation with energy based models," *Advances in Neural Information Processing Systems*, vol. 33, pp. 6637–6647, 2020.
- [29] N. Liu *et al.*, "Compositional visual generation with composable diffusion models," in *European Conference on Computer Vision*. Springer, 2022, pp. 423–439.
- [30] R. Gandikota *et al.*, "Erasing concepts from diffusion models," in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023, pp. 2426–2436.
- [31] P. Dong *et al.*, "Towards test-time refusals via concept negation," *Advances in Neural Information Processing Systems*, vol. 36, 2024.
- [32] M. Armandpour *et al.*, "Re-imagine the negative prompt algorithm: Transform 2D diffusion into 3D, alleviate Janus problem and beyond," *arXiv preprint arXiv:2304.04968*, 2023.
- [33] W. Deng *et al.*, "On fairness of medical image classification with multiple sensitive attributes via learning orthogonal representations," in *International Conference on Information Processing in Medical Imaging*. Springer, 2023, pp. 158–169.
- [34] K. W. Church, "Word2vec," *Natural Language Engineering*, vol. 23, no. 1, pp. 155–162, 2017.
- [35] O. Ronneberger, P. Fischer, and T. Brox, "U-net: Convolutional networks for biomedical image segmentation," in *Proceedings of the 18th International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, 2015, pp. 234–241.
- [36] A. Vaswani *et al.*, "Attention is all you need," *Advances in Neural Information Processing Systems*, vol. 30, 2017.
- [37] M. I. Belghazi *et al.*, "Mutual information neural estimation," in *International conference on machine learning*. PMLR, 2018, pp. 531–540.
- [38] C. Chatzaki *et al.*, "Human daily activity and fall recognition using a smartphone's acceleration sensor," in *International Conference on Information and Communication Technologies for Ageing Well and e-Health*. Springer, 2016, pp. 100–118.
- [39] A. Baha'A *et al.*, "A dataset for wi-fi-based human activity recognition in line-of-sight and non-line-of-sight indoor environments," *Data in Brief*, vol. 33, p. 106534, 2020.
- [40] "Unet implementation," <https://github.com/openai/guided-diffusion>, 2024 [Online], accessed in 2024.
- [41] L. Huang *et al.*, "Composer: Creative and controllable image synthesis with composable conditions," in *Proceedings of the 40th International Conference on Machine Learning*. PMLR, Jul 2023, pp. 13 753–13 773.

A. Protecting Multiple Private Attributes

PrivDiffuser is capable of protecting multiple private attributes simultaneously via a straightforward extension of the proposed negative conditioning technique. Consider a total of K private attributes denoted as $y_{s_1}, y_{s_2}, \dots, y_{s_K}$. For each private attribute $k \in [1, 2, \dots, K]$, we adopt an auxiliary privacy model parameterized by η_k . Our goal is to compute $p_{\theta, \phi, \eta_1, \dots, \eta_K}(x_t | y_p, \bar{y}_{s_1}, \dots, \bar{y}_{s_K})$. For the ease of exposition in the analysis, we derive the noise predictor by assuming that the K private attributes are conditionally independent, given x_t and the public attribute y_p .² Similar to (15), we can write:

$$\begin{aligned} p_{\theta, \phi, \eta_1, \dots, \eta_K}(x_t | y_p, \bar{y}_{s_1}, \dots, \bar{y}_{s_K}) &\propto \\ p_{\theta, \phi, \eta_1, \dots, \eta_K}(x_t, y_p, \bar{y}_{s_1}, \dots, \bar{y}_{s_K}) &\propto \frac{p_{\theta}(x_t) p_{\phi}(y_p | x_t)}{\prod_{k=1}^K p_{\eta_k}(y_{s_k} | y_p, x_t)}. \end{aligned} \quad (22)$$

Taking the gradient of the logarithm of (22) w.r.t. x yields:

$$\begin{aligned} \nabla_{x_t} \log p_{\theta}(x_t) + \nabla_{x_t} \log p_{\phi}(y_p | x_t) - \sum_{k=1}^K \nabla_{x_t} \log p_{\eta_k}(y_{s_k} | y_p, x_t) \\ = -\frac{\epsilon_{\theta}(x_t)}{\sqrt{1 - \bar{a}_t}} + \nabla_{x_t} \log p_{\phi}(y_p | x_t) - \sum_{k=1}^K \nabla_{x_t} \log p_{\eta_k}(y_{s_k} | y_p, x_t). \end{aligned} \quad (23)$$

The rest of the derivation follows (17) and (18). We can write the noise predictor $\bar{\epsilon}$ as:

$$\begin{aligned} \bar{\epsilon}_{\theta}(x_t, t, z_p, y_{s_1}, \dots, y_{s_K}) &= (1 + w_1) \epsilon_{\theta}(x_t, t, z_p) - w_1 \epsilon_{\theta}(x_t, t) \\ &+ \sum_{k=1}^K w_{k+1} \sqrt{1 - \bar{a}_t} \nabla_{x_t} \log p_{\eta}(y_{s_k} | z_p, x_t), \end{aligned} \quad (24)$$

where w_{k+1} is a hyperparameter that controls the strength of negative conditioning for private attribute y_{s_k} . The mutual information-based regularization technique and improved classifier guidance based on forward universal guidance can also be trivially applied to train each auxiliary privacy model.

Evaluation. We use the MobiAct dataset to evaluate the effectiveness of our approach for protecting multiple private attributes through negative conditioning. We consider user activity as the public attribute, and gender and weight group as the two private attributes. We empirically set the hyperparameters as follows: $w_1=3.8$, $w_2=1.4$, $w_3=1.6$, with w_2 and w_3 being the hyperparameters that control the strength of excluding information about gender and weight from the obfuscated data, respectively. We follow the same experimental setup as described in Section V. We repeat the experiment 5 times and report the average HAR accuracy and intrusive inference accuracy. We re-use the pre-trained surrogate utility model, the diffusion model conditioned on the public attribute, and the auxiliary privacy classifier trained to predict gender

²This assumption simplifies the optimization problem and the dependency between private attributes is expected to result in stronger privacy protection at the cost of slightly reducing utility. That being said, one can disentangle the private attributes first before performing negative conditioning to improve the privacy-utility trade-off.

as introduced in Section VI-A, and only incorporate a newly trained auxiliary privacy classifier that predicts the weight attribute. The data obfuscated by PrivDiffuser achieves HAR accuracy of 94.04%. This shows that PrivDiffuser can protect multiple private attributes on MobiAct with little impact on the data utility. The intrusive inference accuracy on the private attribute gender and weight group is 50.37% and 37.57%, deviating from the random guessing level by only 0.37% and 4.24%, respectively. Compared to the privacy protection on the weight attribute due to the white-listing characteristic, using negative conditioning further reduces the intrusive inference accuracy on weight group by 10.60% with very limited impact on utility. In summary, we corroborated that PrivDiffuser can be easily extended to protect multiple private attributes even without re-training the surrogate utility model and the diffusion model.

B. Supporting Multiple Downstream Tasks by Conditioning on Multiple Public Attributes

PrivDiffuser is also capable of supporting desired inferences about multiple public attributes via an extension. We use multi-task learning as an example to demonstrate the feasibility of conditioning two public attributes, denoted y_{p_1} and y_{p_2} . In particular, we first modify the surrogate utility model p_{ϕ} to predict two public attributes simultaneously. Specifically, the latent representation, z_p , extracted by the feature extractor of the surrogate utility model is used to separately predict y_{p_1} and y_{p_2} via two classification heads. Each classification head uses the cross-entropy (CE) loss to measure the error of predicting its corresponding public attribute. The two CE loss terms are then summed to obtain the total classification loss of the surrogate utility model, which is trained through the Adam optimizer following the same approach introduced in Section IV-A. We also adapt the training of the auxiliary privacy model to disentangle the private attribute from both public attributes. To this end, we employ two MINE models, each estimating the mutual information between the latent representation of the private attribute z_s and the label of each public attribute. This encourages the auxiliary privacy classifier to learn private attribute information that is weakly correlated with both public attributes. Hence, we can modify the loss function of the auxiliary privacy model in (19) as:

$$\mathcal{L}_{\eta} = \mathcal{L}_{\text{CE}} + w_3 \cdot \text{MI}(z_s, y_{p_1}) + w_4 \cdot \text{MI}(z_s, y_{p_2}), \quad (25)$$

where w_3 and w_4 control the strength of the MI-based regularization for disentangling private attribute with public attribute y_{p_1} and y_{p_2} , respectively.

Evaluation. We use the MobiAct dataset as an example to evaluate the effectiveness of conditioning two public attributes. We consider user activity and gender as the public attributes, and the weight group as the private attribute. We empirically choose the following hyperparameters: $w_1=5.8$, $w_2=2.2$, $w_3=2$, $w_4=2.5$. The remaining experimental setup is identical to the setup described in Section V. Note that for the second public attribute (gender), we treat the intrusive inference model trained in Section V-C as a representative of

potential downstream models for desired gender inference and use its accuracy as an evaluation metric for data utility. We report the desired inference accuracy and intrusive inference accuracy averaged over 5 runs.

Considering data utility, we find that data obfuscated by PrivDiffuser achieves 86.77% accuracy for activity recognition and 91.48% accuracy for gender recognition. Compared to performing inferences directly on raw sensor data, the HAR accuracy and gender recognition accuracy decreased by 12.03% and 4.16%, respectively. We observe that protecting the weight attribute will cause a stronger negative impact on the activity attribute because of the inherently stronger entanglement between an individual’s weight and activity.

Next, we examine the privacy-preserving performance of PrivDiffuser for weight obfuscation when conditioned on two public attributes. The obfuscated data yields an intrusive inference accuracy of 45.85% on the ternary weight attribute, reducing the intrusive inference accuracy by 45.89% compared to when raw data is released. Note that in Section VI-A, when PrivDiffuser was conditioned on one public attribute (activity) and weight was the private attribute, PrivDiffuser achieved an average intrusive inference accuracy of 36.61%. Thus, conditioning on a second public attribute causes a slight increase in intrusive inference accuracy (by 9.24%) due to the entanglement between weight and gender. This experiment confirms that by extending PrivDiffuser with multi-task learning, it can effectively protect the weight attribute, while allowing downstream applications to infer two public attributes with relatively high accuracy.

We remark that there are alternative approaches to enable conditioning on multiple public attributes, for instance, by training a dedicated surrogate utility model for each public attribute and applying compositional conditioning techniques [29], [41]. We defer the comparison between our approach for conditioning PrivDiffuser on multiple public attributes that is based on multi-task learning and alternative approaches to future work.

C. Time and Space Complexity for Deployment on IoT Devices

In Section V-D, the MobiAct dataset was used in a case study to measure the inference time of PrivDiffuser on an NVIDIA RTX 2080 Ti GPU. We found that obfuscating a batch of 128 data segments takes about 11 seconds, including the inference time of the auxiliary models, i.e. approximately 86 ms for obfuscating one data segment. This is less than the interval between two consecutive data segments, which is 200 ms assuming a sampling rate of 50Hz and stride length of 10 samples. Thus, data obfuscation can be performed in real-time on this GPU.

To get a sense of the overhead of running PrivDiffuser on GPU-equipped IoT/edge devices, we make a comparison with Jetson Orin NX that is designed for IoT/edge applications and can provide up to 100 sparse INT8 Tera Operations per Second (TOPS) with 8/16GB of memory. This is comparable to our RTX 2080 Ti. Thus, we argue that it is possible to run diffusion model-based obfuscation on IoT/edge devices as they

become increasingly more prevalent and powerful. It is worth mentioning that the deployment on mobile devices can benefit from further optimization, such as reducing the number of sampling steps or applying few-shot sampling techniques for diffusion models. Moreover, applying data quantization and model pruning is expected to improve the running time on resource-constrained devices.

Finally, among the three datasets, the largest diffusion model is the one trained for the WiFi-HAR dataset with a size of 282 MB, and each auxiliary classifier is around 495 MB. The MobiAct dataset has the smallest diffusion model with a size of 18 MB, with each classifier having a size of around 35 MB. Nevertheless, all three versions of PrivDiffuser would fit in the memory of GPU-equipped IoT/edge devices such as Jetson Orin NX.