## MRAG: A Modular Retrieval Framework for Time-Sensitive Question Answering

Siyue Zhang<sup>◊♡</sup> Yuxiang Xue<sup>♠</sup> Yiming Zhang<sup>♣</sup> Xiaobao Wu<sup>◊</sup> Anh Tuan Luu<sup>◊</sup> Chen Zhao<sup>♠★</sup>

Nanyang Technological University <sup>O</sup>Alibaba-NTU JRI <sup>A</sup>NYU Shanghai <sup>A</sup>Zhejiang University <sup>\*</sup>Center for Data Science, New York University {siyue001, xiaobao002}@e.ntu.edu.sg anhtuan.luu@ntu.edu.sg {yx3044, cz1285}@nyu.edu yimingz@zju.edu.cn

#### Abstract

Understanding temporal relations and answering time-sensitive questions is crucial yet a challenging task for question-answering systems powered by large language models (LLMs). Existing approaches either update the parametric knowledge of LLMs with new facts, which is resource-intensive and often impractical, or integrate LLMs with external knowledge retrieval (i.e., retrieval-augmented generation). However, off-the-shelf retrievers often struggle to identify relevant documents that require intensive temporal reasoning. To systematically study time-sensitive question answering, we introduce the TEMPRAGEVAL benchmark, which repurposes existing datasets by incorporating temporal perturbations and gold evidence labels. As anticipated, all existing retrieval methods struggle with these temporal reasoning-intensive questions. We further propose Modular Retrieval (MRAG), a trainless framework that includes three modules: (1) Question Processing that decomposes question into a main content and a temporal constraint; (2) Retrieval and Summarization that retrieves evidence and uses LLMs to summarize according to the main content; (3) Semantic-Temporal Hybrid Ranking that scores each evidence summarization based on both semantic and temporal relevance. On TEMPRAGEVAL, MRAG significantly outperforms baseline retrievers in retrieval performance, leading to further improvements in final answer accuracy.

### 1 Introduction

Facts are constantly evolving in our ever-changing world. This dynamic nature highlights the need for natural language processing (NLP) systems capable of adapting to new information (Liška et al., 2022; Zhang et al., 2024; Kasai et al., 2024) and providing accurate responses to time-sensitive questions (Chen et al., 2021; Chu et al., 2024). For instance, a common query like "Who is the UK Prime Minister?" sees the answer transition from "Rishi




Figure 1: A time-sensitive question example that requires temporal reasoning (as of 6 May 2021  $\rightarrow$  2019 - 2022) to both retrieve documents and generate answers. State-of-the-art retrieval systems struggle to conduct in-depth reasoning to identify relevant documents. We provide a new diagnostic benchmark TEM-PRAGEVAL, and propose a new modular framework to tackle this challenge.

Sunak" to "Keir Starmer" in 2024 (Figure 1).

With developments of large language models (LLMs), existing approaches rely on the parametric knowledge of LLMs to answer time-sensitive questions directly, and constantly update the parametric knowledge on new facts (Rozner et al., 2024; Wu et al., 2024b; Wang et al., 2024). However, updating LLM parameters are often resourceintensive. Moreover, recent studies reveal that even after updates, LLMs often struggle to accurately reflect the latest facts and their associated facts (Cohen et al., 2024). An alternative line of research explores Retrieval-Augmented Generation (RAG), which integrates LLMs with external knowledge (e.g., Wikipedia) through information retrieval (Izacard et al., 2020). While RAG allows for the incorporation of new facts with minimal effort, its performance heavily relies on off-theshelf retrieval systems, which are often limited to keywords or semantic matching. Time-sensitive questions, however, often require intensive temporal reasoning to identify relevant documents, *i.e.*, reasoning-intensive retrieval (Su et al., 2024a). For example, in Figure 1, retrievers should infer the date "24 July 2019" as relevant to the constraint "as of 6 May 2021", rather than only match with date like "May 2021". Despite widespread recognition of the temporal reasoning-intensive retrieval challenge, there remains a lack of measurements and approaches. We fill that lacuna.

We begin by conducting a diagnostic evaluation of existing retrieval approaches for temporal reasoning-intensive retrieval. Following the idea of systematic evaluation with contrast set (Gardner et al., 2020), we repurpose two existing datasets, TIMEQA (Chen et al., 2021) and SITU-ATEDQA (Zhang and Choi, 2021), to introduce the **Temp**oral QA for **RAG Eval**uation benchmark (TEMPRAGEVAL). We manually augment the test questions with temporal perturbations (*e.g.*, modifying the time period). In addition, we annotate gold evidence on Wikipedia for more accurate retrieval evaluation. As expected, current retrieval methods exhibit limited temporal reasoning capabilities, especially on temporal perturbed questions.

To address time-sensitive questions, we propose a training-free Modular Retrieval framework (MRAG) to enhance temporal reasoning-intensive retrieval. MRAG contains three key modules: (1) Question Processing, which decomposes each question into a main content and a temporal constraint; (2) Retrieval and Summarization, which adopts off-the-shelf retrievers to find evidence passages based on the main content, then instructs LLM to condense or split relevant passages into query-related sentences; (3) Semantic-Temporal Hybrid Ranking, which ranks each evidence sentence using a combination of a semantic score measuring semantic similarity, and a temporal score, a novel symbolic component that assesses temporal relevance to the query's temporal constraint.

Compared to the classic retrieve-then-rerank systems, MRAG offers several advancements: (1) It disentangles relevance-based retrieval from temporal reasoning through question preprocessing, avoiding distractions of off-the-shelf retrievers; (2) It introduces a temporal scoring mechanism that evaluates whether the temporal information in the evidence (*e.g.*, "2019 - 2022") satisfies the query's temporal relations (*e.g.*, "before 2023");
(3) The modular framework enhances transparency, enabling users to easily identify which component leads to an incorrect answer.

On TEMPRAGEVAL, our proposed MRAG framework achieves substantial improvements in performance, with 9.3% top-1 answer recall and 11% top-1 evidence recall. We also incorporate state-of-the-art (SOTA) answer generators (Asai et al., 2024; Yan et al., 2024; Wei et al., 2022), and demonstrate that the improvements in retrieval from MRAG propagate to enhanced final QA accuracy, with 4.5% for both exact match and F1. Detailed case studies further confirms MRAG's robustness to temporal perturbations qualitatively.

Our contributions can be summarized as follows.

- We introduce TEMPRAGEVAL, a time-sensitive QA benchmark dataset to diagnostically evaluate each component of existing retrieval-augmented generation systems.
- We propose MRAG, a new modular framework to identify evidence through separating relevancebased retrieval and temporal reasoning.
- On TEMPRAGEVAL, MRAG significantly outperforms all baseline retrieval systems, and the improvements further lead to better answer predictions.

### 2 Background

In this section, we first define the time-sensitive question answering task (§2.1), and then introduce the baseline retrieval-augmented generation QA based systems (§2.2).

#### 2.1 Time-sensitive Question Answering

Our task is to predict an answer y, to a timesensitive question q, in which the input question qalso includes temporal relations  $t_1, ..., t_n$ .<sup>1</sup>

With advancements in LLMs, a straightforward approach is to directly ask these questions to an off-the-shelf LLM (e.g., LLama 3.1), hoping the relevant facts are captured in its parametric knowledge. However, this is often not the case for timesensitive questions. A significant portion of such

<sup>&</sup>lt;sup>1</sup>To simplify our setting, we make sure each question has a valid answer.

questions are recent events (*e.g.*, "Who is the UK Prime Minister in November 2024?"), which typically fall beyond the knowledge cutoff for training LLMs (*e.g.*, December 2023 for LLama 3.1).

One potential solution is to constantly update the parameters of LLMs with new facts, *i.e.*, knowledge editing (Wu et al., 2024b; Wang et al., 2024). However, this approach is highly resource-intensive and often impractical for very large LLMs (*e.g.*, GPT-40). Moreover, knowledge editing is not always effective. Recent studies reveal that even after parameter updates, LLMs often fail to accurately answer questions about new facts (Liška et al., 2022; Rozner et al., 2024; Wang et al., 2024), let alone related or associated facts (Zhong et al., 2023; Wu et al., 2024b,c).

Therefore, our study adopts an alternative approach that leverages external text collections as a knowledge source, integrating relevant information into existing LLMs to answer questions (detailed in §2.2). While we use Wikipedia<sup>2</sup> as the text collection D, our approach is broadly applicable to any corpus, e.g., ClueWeb (Overwijk et al., 2022).

#### 2.2 Retrieval-Augmented Generation

The goal of RAG is to address the limitations in the parametric knowledge of LLMs (Izacard et al., 2020). RAG involves a retrieval system to find relevant evidence from a large corpus and a LLM to generate a response based on the evidence (Wu et al., 2024a).

**Passage retrieval and reranking.** Retrieval methods are typically categorized into sparse retrieval and dense retrieval. Sparse retrieval methods, like TF-IDF (Das and Chakraborty, 2018) and BM25 (MacAvaney et al., 2020), rely on lexical matching. In contrast, dense retrieval models (Karpukhin et al., 2020; Zhao et al., 2021; Thakur et al., 2021; Izacard et al., 2021) use LLMs (*e.g.*, BERT) encode the question q and the passage p separately using two independent encoders (*i.e.*, biencoders). These models learn a scoring function (*e.g.*, dot product) between question and passage vectors to capture semantic similarities:

$$f(q, p) = \sin(\operatorname{Enc}_Q(q), \operatorname{Enc}_P(p)), p \in \mathcal{D}.$$
 (1)

Dense retrieval models are highly scalable, since passages can be encoded offline, and are efficiently retrieved over maximum inner product search (MIPS) with the question (Shrivastava and Li, 2014).

However, bi-encoder models may lack the ability to capture fine-grained interactions between the query and passage. A common optional<sup>3</sup> approach is to have another cross-encoder model to rerank top retrieved passages. Cross-encoder models (Khattab and Zaharia, 2020; Wang et al., 2020; Gemma et al., 2024) jointly encode the query q and the passage p together by concatenating them as input into a single model as:

$$f(q, p) = \sin(\operatorname{Enc}([q; p])), p \in \mathcal{D}.$$
 (2)

Answer generation. The answer generation component takes the question and support passages as input to generate the answer. A widely used approach is Fusion-in-Decoder (Izacard et al., 2020), which fine-tunes an encoder-decoder LLM (e.g., T5 (Raffel et al., 2020)). FiD independently encodes each passage and question, then concatenates their representations into the decoder, as formulated below:

$$y = \operatorname{Dec}([\operatorname{Enc}([q; p_1]); \dots; \operatorname{Enc}([q; p_k])]), p_k \in \mathcal{D}.$$
(3)

With decoder-only LLMs (OpenAI et al., 2024; Dubey et al., 2024), the support passages and the question are concatenated into a single sequence.

To unlock the reasoning capabilities of LLMs, Chain-of-Thought (CoT) prompting (Wei et al., 2022) introduces intermediate reasoning steps within prompt examples, significantly improving performance on various reasoning tasks. Self-RAG (Asai et al., 2024) predicts answers for each passage independently, and then adopts self-reflect mechanisms (Yao et al., 2022) into prompts to select the best answer. Self-RAG achieve SOTA results on multiple knowledge-intensive QA datasets.

### **3 TEMPRAGEVAL Benchmark**

In this section, we first present existing timesensitive QA datasets (§3.1), then introduce our diagnostic benchmark dataset TEMPRAGEVAL (§3.2), finally we evaluate existing retrieval approaches on TEMPRAGEVAL (§3.3).

### 3.1 Existing Time-Sensitive QA Datasets

Existing time-sensitive QA datasets often feature questions where timestamps are closely tied to their

<sup>&</sup>lt;sup>2</sup>we use December 2021 Wikipedia dump, with 33.1M text chunks

<sup>&</sup>lt;sup>3</sup>Note that reranking is not always adopted, as it adds additional computational cost.

answers, as illustrated in Figure 1. Consequently, retrievers relying on surface-form date matching tend to perform well on these test sets, limiting the evaluation of true temporal reasoning capabilities. To systematically evaluate time-sensitive question answering, we establish the following criteria: (1) questions with varying difficulty levels, including both common and rare entities; (2) manual evidence annotation to enable retrieval evaluation; and (3) temporal perturbations as contrast sets (Gardner et al., 2020). Since no existing datasets provide both temporal perturbations and evidence annotations, we primarily adapt from the following two datasets:

- SITUATEDQA (Zhang and Choi, 2021) is a opendomain QA dataset where the correct answer to a question is based on a temporal context, specifically of the type "as of". SITUATEDQA sources questions from exiting QA datasets such as NQ-Open (Kwiatkowski et al., 2019) and WebQuestions (Berant et al., 2013), which primarily focus on popular entities.
- **TIMEQA** (Chen et al., 2021) is a time-sensitive QA dataset in which question-answer pairs are synthetically generated from time-evolving Wiki-Data facts using templates. The dataset includes a wide range of reasoning types and difficulty levels, with a notable emphasis on rare entities.

Other time-sensitive QA datasets, StreamingQA (Liška et al., 2022), TempLAMA (Dhingra et al., 2022), and concurrent dataset ComplexTQA (Gruber et al., 2024), can also serve as alternatives. Temporal reasoning benchmarks such as Wei et al. (2023); Chu et al. (2024); Wang and Zhao (2024); Tan et al. (2023) fall outside the scope of our study.

#### 3.2 **TEMPRAGEVAL Construction**

We create TEMPRAGEVAL, a time-sensitive QA benchmark for rigorously evaluating temporal reasoning in both retrieval and answer generation.

**Perturbed question-answer pair generation.** We source questions from TIMEQA (Chen et al., 2021) and SITUATEDQA (Zhang and Choi, 2021) datasets. For each question, we introduce perturbations to the original temporal constraints, *e.g.*, "as of 2019", with complex variations such as *e.g.*, "between 2020 and 2021", "the last before 2020", or "as of 6 May 2021". We guarantee the answer (*e.g.*, "Boris Johnson") remains consistent across the perturbed questions.

Dataset	# Eval.	Evid.	Natu.	Pert.
ComplexTQA	10M			
StreamingQA	40K	$\checkmark$	$\checkmark$	
TempLAMA	35K			
SituatedQA	2K		$\checkmark$	
TimeQA	3K			
MenatQA	2K			
TempRAGEva	al 1K	$\checkmark$	$\checkmark$	$\checkmark$

Table 1: Comparison of temporal QA datasets. TEM-PRAGEVAL is featured by manual evidence annotations, human-written question (*i.e.*, Naturalness), and perturbations.

Evidence annotation. To better evaluate the performance of retrieval systems, we supplement question-answer pairs with up to two annotated gold evidence passages. Specifically, for each question, we manually review top-100 passages retrieved by the leading retriever, Contriever (Izacard et al., 2021), and the best reranker, GEMMA (Li et al., 2023). If these retrieval methods fail to identify relevant passages within top-100 passages, we manually search Wikipedia pages related to the query entities to locate the gold evidence (around 12.7% of original questions). In total, we have annotated 1,000 test examples with both original and perturbed questions, along with humanannotated evidence. TEMPRAGEVAL-TIMEQA (500 examples) focus on popular entities, and TEM-PRAGEVAL-TIMEQA (500 examples) on rare entities.

### 3.3 Preliminary Evaluation on TEMPRAGEVAL

In TEMPRAGEVAL, we first evaluate the performance on SOTA retrieval systems as a sanity check.

**Experimental Setup.** We follow the popular retrieve-then-rerank pipeline, using the dense retriever Contriever (Izacard et al., 2021) and the LLM-based reranker GEMMA (Gemma et al., 2024). The retriever finds top 1,000 passages, and among them, the reranker reorders the top 100 passages. We use two evaluation metrics: **Answer Recall (AR@k)** that measures the proportion of samples where at least one answer appears within the top-*k* retrieved passages, and **Gold Evidence Recall (ER@k)** that assesses the percentage of samples where at least one gold evidence document is included in the top-*k* passages.




Figure 2: The retrieval performance degradation of the GEMMA baseline on TEMPRAGEVAL-SITUATEDQA, comparing original and perturbed questions (see TEM-PRAGEVAL-TIMEQA in Appendix C).

**Performance degradation on perturbed questions.** As shown in Figure 2, we observe a significant degradation in retrieval performance caused by temporal perturbations. For instance, for the GEMMA baseline, the top-1 answer recall and evidence recall drop from 85.8% to 54.7% and from 45.0% to 20.3% on TEMPRAGEVAL-SITUATEDQA. This is because the perturbed temporal constraints avoid matching between timestamps in the questions and the passages. Consequently, retrievers must conduct in-depth temporal reasoning to identify the relevant passages.

We further conduct a controlled experiment to reveal the temporal reasoning capabilities of existing retrieval methods. Specifically, we compute the similarity scores for query-evidence pairs by varying the temporal relation in the query, *e.g.*, "before", "after", and "as of", and the timestamp in the evidence, *e.g.*, from "1958" to "1965". Experiments confirm that all methods prioritize matching *exact* dates indicating a shortcut for temporal reasoning in retrieval. We present full results in Figure 5 in Appendix.

## 4 MRAG: Modular Retrieval

Motivated by the performance degradation of the existing retrieval methods in the preliminary evaluation, we propose a Modular Retrieval (MRAG) framework (as shown in Figure 3) to enhance temporal reasoning-intensive retrieval. At a high level, MRAG disentangles relevance-based retrieval from temporal reasoning, leveraging a dense embedding model for semantic scoring and a set of symbolic heuristics for temporal scoring. Specifically, MRAG has three key modules: question processing, retrieval and summarization, and semantictemporal hybrid ranking.

**Question processing.** We prompt LLMs to decompose each time-sensitive question into a main content (MC) and a temporal constraint (TC). This approach disentangles temporal relevance from semantic relevance: MC measures the semantic relevance of the evidence, while TC determines its temporal relevance.

**Retrieval and summarization.** We apply off-theshelf retrievers (*e.g.*, Contriever) to find relevant passages to MC in Wikipedia. Then we adopt a cross-encoder model to rerank the passages with high semantic similarity to MC.

It is common for a passage to contain multiple pieces of temporal information, most of which are unrelated to the question and can distract the temporal scoring component introduced next. For example, the relevant passage in Figure 3 includes the sentence, "it was filmed in 2017", which satisfies the TC but is irrelevant. Therefore, we initially considered splitting passages into individual sentences to eliminate temporal distractors. However, as shown in Figure 3, critical information from the most relevant passages-such as "America's Next Top Model", "The winner of the competition", and "January 9, 2018"—is often scattered across different sentences. Relying solely on sentence splitting would miss key details. To overcome this challenge, we instead adopt LLMs to summarize the top-k passages into a single sentence to condense relevant phrases and temporal information.<sup>4</sup>

**Semantic-temporal hybrid ranking.** We rerank each sentence (summarized from a LLM or segmented from the original passage) with two distinct scores: a semantic score and a temporal score. The semantic score is calculated from the similarity between the evidence sentence and MC. For temporal score, we first extract temporal information in the evidence sentence, then we apply symbolic scoring functions<sup>5</sup> to verify whether the temporal informa-

<sup>&</sup>lt;sup>4</sup>While using LLMs to summarize passages can introduce hallucinations, we mitigate this by summarizing only the top-k passages and simply splitting the remaining passages into sentences. An analysis of this approach is provided in §6.1.

<sup>&</sup>lt;sup>5</sup>We include details of pre-defined temporal scoring functions in Appendix D.

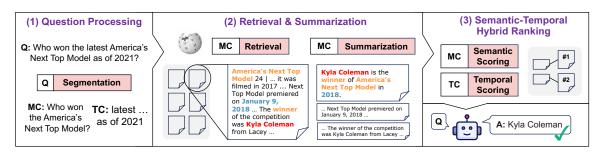


Figure 3: An overview of the MRAG framework, consisting of three key modules: question processing, retrieval and summarization, and semantic-temporal hybrid ranking. The question processing module separates each query into the main content (*i.e.*, MC) and the temporal constraint (*i.e.*, TC). The retrieval and summarization module finds the most relevant evidence based on the main content and summarizes or splits these evidence into fine-grained sentences. The hybrid ranking module combines symbolic temporal scoring and dense embedding-based semantic scoring at a fine-grained level to determine the final evidence ranking.

tion in the evidence satisfies TC. For example, the evidence summary timestamp "2018" satisfies TC "as of 2021" in Figure 3. The final score for each sentence is the product of the semantic score and the temporal score. We select the passages that contains the highest-scoring sentences.

## **5** Experiments

In this section, we evaluate MRAG and baseline systems on TEMPRAGEVAL.

### 5.1 Experimental Setup

**Baselines.** For retrieval, we include BM25, Contriever, and a hybrid method (Jedidi et al., 2024). Reranking methods include ELECTRA (Clark et al., 2020), MiniLM (Wang et al., 2020), Jina(Jina, 2024), BGE (Xiao et al., 2023), NV-Embed (Lee et al., 2024), and GEMMA (Gemma et al., 2024). We follow state-of-the-art answer generation approaches based on prompting LLMs (§2.2). We evaluate four approaches, **Direct Prompt** that adopts question-answer pairs as few-shot examples; **Direct CoT** that adds rationals into prompts (Wei et al., 2022); **RAG-Concat**, where passages are concatenated into a LLM; and **Self-RAG**, which processes each passage independently and selects the best answer (Asai et al., 2024).

Metrics. We use the same setup in \$3.3 for retrieval evaluation. For answer evaluation, we use **Exact Match (EM)** that measures the exact match to the gold answer, and **F1 score (F1)** that measures the word overlap to the gold answer.

**Implementation details.** Due to limited budget, we evaluate GPT-40 mini (OpenAI et al., 2024) with direct prompting, and three open-source

LLMs: TIMO, a LLaMA2-13B model fine-tuned for temporal reasoning (Su et al., 2024b), and two general-purpose models, Llama3.1-8B-Instruct and Llama3.1-70B-Instruct (Dubey et al., 2024). We use 10 examples in prompts.

#### 5.2 Main Results

**MRAG enhances retrieval performance for time-sensitive questions.** According to Table 2, MRAG significantly outperform all retrieve then rerank baselines, which highlight the superior temporal reasoning capabilities. For example, MRAG improves the best baselines Contriver + GEMMA significantly, with 7.7% top-5 evidence recall in TEMPRAGEVAL-TIMEQA and 13.9% top-5 evidence recall in TEMPRAGEVAL-SITUATEDQA.

**Retrieval augmentation improves time-sensitive QA performance.** According to Table 3, we observe that LLMs relying solely on their parametric knowledge struggle to accurately answer timesensitive questions, with limited QA accuracy. Incorporating retrieval-augmented generation significantly improves QA accuracy. Notably, we observe larger improvements on TEMPRAGEVAL-TIMEQA, which primarily focuses on less frequent entities that pose greater challenges to the parametric knowledge of LLMs (Kandpal et al., 2023).

**Enhanced retrieval contributes to improved time-sensitive QA performance.** As shown in Table 3, MRAG outperforms baseline RAG approaches in QA accuracy, for instance 49.2% EM (MRAG) over 44.0% EM (RAG) in TEM-PRAGEVAL-TIMEQA for Llama3.1-8B. This highlights the role of enhanced retrieval in improving accuracy of the time-sensitive QA task. Incorporating a self-reflection strategy improves per-

	Method		Тем	PRAGE	VAL-TIM	EQA	Темр	RAGEVA	L-SITUAT	redQA
	Methou		AR	e @	ER	<b>(</b> @	AR	e @	EF	@
1st	2nd	# QFS	1	5	1	5	1	5	1	5
BM25	-	-	17.5	39.0	4.2	14.1	27.6	58.2	6.8	18.4
Cont.	-	-	18.8	49.9	9.6	28.7	22.6	51.1	6.8	17.1
Hybrid	-	-	18.8	51.2	9.6	28.1	22.6	55.8	6.8	19.7
Cont.	ELECTRA	-	40.1	76.9	21.8	58.6	35.5	71.3	15.3	37.1
Cont.	MiniLM	-	34.0	76.1	16.2	57.3	36.8	73.4	20.0	40.3
Cont.	Jina	-	42.4	77.2	23.6	58.6	47.9	78.4	19.5	41.1
Cont.	BGE	-	40.3	80.9	23.3	61.3	36.3	74.2	14.5	35.0
Cont.	NV-Embed	-	49.9	81.2	33.4	62.9	47.4	81.3	23.4	46.1
Cont.	Gemma	-	46.7	82.5	26.0	66.6	54.7	82.6	20.3	45.3
Cont.	MRAG	-	57.6	89.4	32.4	73.5	61.1	88.2	27.4	56.3
Cont.	MRAG	5	58.6	90.0	37.1	74.3	61.3	89.0	31.1	59.2
Cont.	MRAG	10	56.0	88.1	35.5	73.2	62.1	87.9	30.8	57.9

Table 2: The answer recall (AR@k) and gold evidence recall (ER@k) of each retrieval method on perturbed temporal queries in TIMEQA and SITUATEDQA subsets of TEMPRAGEVAL. 1st means the first-stage retrieving method; 2nd means the second-stage reranking method; # QFS means the number of top passages to be summarized. **Bold** numbers indicate the best performance. We include complete results in Appendix E.

Mathad	Темр	RAGEVAL-7	TimeQA	Темр	AGEVAL-Sit	tuatedQA
Method	# Docs	EM	F1	# Docs	EM	F1
		GF	PT4o-mini			
Direct Prompt	-	19.6	30.6	-	54.2	58.6
			TIMO			
Direct Prompt	-	16.2	24.8	-	50.6	53.1
Direct CoT	-	15.8	28.2	-	49.4	53.9
RAG-Concat	3	43.4	<u>55.2</u>	3	55.8	58.1
MRAG-Concat	3	48.2	57.2	3	<u>61.4</u>	<u>63.6</u>
Self-MRAG	3	<u>44.6</u>	54.9	3	62.4	64.5
		Llama3	.1-8B-Instru	ct		
Direct Prompt	-	16.0	23.9	-	42.8	45.0
Direct CoT	-	16.8	27.8	-	49.6	54.5
RAG-Concat	5	44.0	52.8	5	60.0	62.7
MRAG-Concat	5	<u>49.2</u>	<u>59.2</u>	5	<u>65.8</u>	<u>68.0</u>
Self-MRAG	5	54.2	65.6	5	66.4	68.2
		Llama3.	1-70B-Instru	ıct		
Direct Prompt	-	31.0	42.3	-	59.0	62.1
Direct CoT	-	33.2	45.8	-	69.0	72.6
RAG-Concat	5	54.4	63.2	20	67.0	69.8
MRAG-Concat	5	<u>58.0</u>	<u>68.4</u>	20	<u>69.2</u>	72.5
Self-MRAG	5	61.2	75.3	20	72.2	76.0

Table 3: End-to-end QA comparison for various generation strategies and LLMs on TEMPRAGEVAL. **Bold** numbers indicate the best performance the each backbone LLM. The second best is <u>underlined</u>.

formance for Llama3.1 models but not for TIMO. We observe that TIMO makes more errors in selfreflection, likely due to the limited reasoning capacity of its backbone model, Llama 2.

## 6 Analysis

In this part, we provide detailed analysis on how each component of MRAG contributes to the overall improvement.

## 6.1 Ablation Study

The impact of the numbers of passages for summarization. Our LLM based summarization removes irrelevant temporal information but may also introduce hallucinations. We conduct a parametric study to evaluate the impact of the number of

Who had the most home runs by two teammates in a season <u>as of 1988</u>?

Gemma #1 Passage: Bobby Bonds | ... until José Canseco of the Oakland Athletics in 1988. Barry and Bobby had 1,094 combined home runs through 2007 — a record for a father-son combination ...

### MRAG #1 Passage:

50 home run club | **M&M Boys**—are the only teammates ... hitting a combined 115 home runs in 1961 and breaking the <u>single-season</u> record for home runs by <u>a pair of teammates</u>.

Figure 4: A case study for top-1 passages retrieved by GEMMA and MRAG for a question from TEM-PRAGEVAL-SITUATEDQA.

passages used for summarization. As shown at the bottom of Table 2, summarizing top-five passages achieves the best balance.

The impact of the number of passages used for answer generation in MRAG. Our experiments show that the optimal number of passages depends on the size of the LLM. TIMO can handle a maximum of 3 passages, while the optimal number for LLaMA 3.1-8B is five, and for LLaMA 3.1-70B, it is twenty. Larger LLMs, with more parameters, process longer contexts better. Full results are presented in Appendix G.

## 6.2 Human Evaluation

One limitation of the retrieval metrics is that AR@k overestimates performance, as a passage might incidentally contain an answer without directly supporting it. Conversely, ER@k acts as a conservative lower bound, potentially overlooking other relevant but unannotated passages. To address this, we conduct a human evaluation on a random subset of 200 examples to assess actual retrieval performance. We manually review the top 20 passages retrieved by MRAG and GEMMA, annotating the first relevant passage. The results confirm that MRAG consistently outperforms GEMMA in retrieval accuracy. We present full results in Appendix F.

## 6.3 Case Study

We conduct case studies to qualitatively assess the advantages of MRAG over the GEMMA baseline. According to Figure 4, the top-1 passage by GEMMA matches the query date "1988", but discusses a father-son record set in 2007. In contrast, MRAG result is about a teammate combination record in the same season, despite the date "1961" differing from the query date "1988". We include more cases in Appendix H.

## 7 Other Related Works

LLM embeddings. Recent research has explored LLM embeddings for retrieval. Some studies focus on distilling or fine-tuning LLM embeddings for reranking tasks, such as GEMMA (Gemma et al., 2024) and MiniCPM (Hu et al., 2024). Others aim to develop generalist embedding models capable of performing a wide range of tasks including retrieval and reranking, *e.g.*, gte-Qwen (Yang et al., 2024) and NV-Embed (Lee et al., 2024). These LLM-based methods have demonstrated unprecedented performance in benchmarks such as MTEB (Muennighoff et al., 2023) over Contriver-based dense retrievers, and also on our TEMPRAGEVAL benchmark.

**Reasoning intensive retrieval.** Existing retrieval benchmarks primarily target keyword-based or semantic-based retrieval. Su et al. (2024a) introduces BRIGHT, a new retrieval benchmark emphasizing intensive reasoning. The benchmark challenges retrievers to perform reasoning across diverse domains, such as analogies and algorithms, to identify relevant documents. We focus on temporal reasoning-intensive retrieval, sharing a similar vision for future advanced retrieval systems.

# 8 Conclusion

This study focuses on time-sensitive QA, a task that challenges LLM based QA systems. We first present TEMPRAGEVAL, a diagnostic benchmark featuring natural questions, evidence annotations, and temporal perturbations. We further propose a training-free MRAG framework, which disentangles relevance-based retrieval from temporal reasoning and introduces a symbolic temporal scoring mechanism. While existing systems struggle on TEMPRAGEVAL due to limited temporal reasoning capacities in retrieval, MRAG shows significant improvements. We hope this work advances future research on reasoning-intensive retrieval.

## Limitations

There are still some limitations in our work: (1) Our proposed benchmark is designed to evaluate time-sensitive questions with explicit temporal constraints. However, addressing questions with implicit temporal constraints presents a more complex challenge for retrieval systems. Our symbolic approach is not directly applicable to such questions and requires more advanced reasoning mechanisms to bridge this gap. (2) Our benchmark primarily targets time-sensitive questions with a single answer. Future work can extend to predict a list of answers with different temporal constraints. (3) Despite our approach improves temporal reasoning in retrieval, there is still head room. Fine-tuning dense retrieval models on temporal reasoning-intensive retrieval datasets may offer a promising solution for future work.

### References

- Akari Asai, Zeqiu Wu, Yizhong Wang, Avirup Sil, and Hannaneh Hajishirzi. 2024. Self-rag: Learning to retrieve, generate, and critique through self-reflection. In *International Conference on Learning Representations*.
- Jonathan Berant, Andrew Chou, Roy Frostig, and Percy Liang. 2013. Semantic parsing on freebase from question-answer pairs. In *Proceedings of the 2013 Conference on Empirical Methods in Natural Language Processing.*
- Steven Bird and Edward Loper. 2004. NLTK: The natural language toolkit. In *Proceedings of the ACL Interactive Poster and Demonstration Sessions.*
- Wenhu Chen, Xinyi Wang, and William Yang Wang. 2021. A dataset for answering time-sensitive questions. 2021 Conference on Neural Information Processing Systems Track on Datasets and Benchmarks.
- Zheng Chu, Jingchang Chen, Qianglong Chen, Weijiang Yu, Haotian Wang, Ming Liu, and Bing Qin. 2024. TimeBench: A comprehensive evaluation of temporal reasoning abilities in large language models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics*.
- Kevin Clark, Minh-Thang Luong, Quoc V. Le, and Christopher D. Manning. 2020. ELECTRA: Pretraining text encoders as discriminators rather than generators. In *ICLR*.
- Roi Cohen, Eden Biran, Ori Yoran, Amir Globerson, and Mor Geva. 2024. Evaluating the ripple effects of knowledge editing in language models. *Transactions* of the Association for Computational Linguistics.
- Bijoyan Das and Sarit Chakraborty. 2018. An improved text sentiment classification model using tf-idf and next word negation. *arXiv preprint arXiv:1806.06407*.

- Bhuwan Dhingra, Jeremy R. Cole, Julian Martin Eisenschlos, Daniel Gillick, Jacob Eisenstein, and William W. Cohen. 2022. Time-aware language models as temporal knowledge bases. *Transactions of the Association for Computational Linguistics*.
- Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, Anirudh Goyal, Anthony Hartshorn, Aobo Yang, Archi Mitra, Archie Sravankumar, Artem Korenev, Arthur Hinsvark, Arun Rao, Aston Zhang, Aurelien Rodriguez, Austen Gregerson, Ava Spataru, Baptiste Roziere, Bethany Biron, Binh Tang, Bobbie Chern, Charlotte Caucheteux, Chaya Nayak, Chloe Bi, Chris Marra, Chris McConnell, Christian Keller, Christophe Touret, Chunyang Wu, Corinne Wong, Cristian Canton Ferrer, Cyrus Nikolaidis, Damien Allonsius, Daniel Song, Danielle Pintz, Danny Livshits, David Esiobu, Dhruv Choudhary, Dhruv Mahajan, Diego Garcia-Olano, Diego Perino, Dieuwke Hupkes, Egor Lakomkin, Ehab AlBadawy, Elina Lobanova, Emily Dinan, Eric Michael Smith, Filip Radenovic, Frank Zhang, Gabriel Synnaeve, Gabrielle Lee, Georgia Lewis Anderson, Graeme Nail, Gregoire Mialon, Guan Pang, Guillem Cucurell, Hailey Nguyen, Hannah Korevaar, Hu Xu, Hugo Touvron, Iliyan Zarov, Imanol Arrieta Ibarra, Isabel Kloumann, Ishan Misra, Ivan Evtimov, Jade Copet, Jaewon Lee, Jan Geffert, Jana Vranes, Jason Park, Jay Mahadeokar, Jeet Shah, Jelmer van der Linde, Jennifer Billock, Jenny Hong, Jenya Lee, Jeremy Fu, Jianfeng Chi, Jianyu Huang, Jiawen Liu, Jie Wang, Jiecao Yu, Joanna Bitton, Joe Spisak, Jongsoo Park, Joseph Rocca, Joshua Johnstun, Joshua Saxe, Junteng Jia, Kalyan Vasuden Alwala, Kartikeya Upasani, Kate Plawiak, Ke Li, Kenneth Heafield, Kevin Stone, Khalid El-Arini, Krithika Iyer, Kshitiz Malik, Kuenley Chiu, Kunal Bhalla, Lauren Rantala-Yeary, Laurens van der Maaten, Lawrence Chen, Liang Tan, Liz Jenkins, Louis Martin, Lovish Madaan, Lubo Malo, Lukas Blecher, Lukas Landzaat, Luke de Oliveira, Madeline Muzzi, Mahesh Pasupuleti, Mannat Singh, Manohar Paluri, Marcin Kardas, Mathew Oldham, Mathieu Rita, Maya Pavlova, Melanie Kambadur, Mike Lewis, Min Si, Mitesh Kumar Singh, Mona Hassan, Naman Goyal, Narjes Torabi, Nikolay Bashlykov, Nikolay Bogoychev, Niladri Chatterji, Olivier Duchenne, Onur Çelebi, Patrick Alrassy, Pengchuan Zhang, Pengwei Li, Petar Vasic, Peter Weng, Prajjwal Bhargava, Pratik Dubal, Praveen Krishnan, Punit Singh Koura, Puxin Xu, Qing He, Qingxiao Dong, Ragavan Srinivasan, Raj Ganapathy, Ramon Calderer, Ricardo Silveira Cabral, Robert Stojnic, Roberta Raileanu, Rohit Girdhar, Rohit Patel, Romain Sauvestre, Ronnie Polidoro, Roshan Sumbaly, Ross Taylor, Ruan Silva, Rui Hou, Rui Wang, Saghar Hosseini, Sahana Chennabasappa, Sanjay Singh, Sean Bell, Seohyun Sonia Kim, Sergey Edunov, Shaoliang Nie, Sharan Narang, Sharath Raparthy, Sheng Shen, Shengye Wan, Shruti Bhosale, Shun Zhang, Simon Vandenhende, Soumya Batra, Spencer Whitman, Sten Sootla, Stephane Collot, Suchin Gururangan, Sydney Borodinsky, Tamar Herman, Tara

Fowler, Tarek Sheasha, Thomas Georgiou, Thomas Scialom, Tobias Speckbacher, Todor Mihaylov, Tong Xiao, Ujjwal Karn, Vedanuj Goswami, Vibhor Gupta, Vignesh Ramanathan, Viktor Kerkez, Vincent Gonguet, Virginie Do, Vish Vogeti, Vladan Petrovic, Weiwei Chu, Wenhan Xiong, Wenyin Fu, Whitney Meers, Xavier Martinet, Xiaodong Wang, Xiaoqing Ellen Tan, Xinfeng Xie, Xuchao Jia, Xuewei Wang, Yaelle Goldschlag, Yashesh Gaur, Yasmine Babaei, Yi Wen, Yiwen Song, Yuchen Zhang, Yue Li, Yuning Mao, Zacharie Delpierre Coudert, Zheng Yan, Zhengxing Chen, Zoe Papakipos, Aaditya Singh, Aaron Grattafiori, Abha Jain, Adam Kelsey, Adam Shajnfeld, Adithya Gangidi, Adolfo Victoria, Ahuva Goldstand, Ajay Menon, Ajay Sharma, Alex Boesenberg, Alex Vaughan, Alexei Baevski, Allie Feinstein, Amanda Kallet, Amit Sangani, Anam Yunus, Andrei Lupu, Andres Alvarado, Andrew Caples, Andrew Gu, Andrew Ho, Andrew Poulton, Andrew Ryan, Ankit Ramchandani, Annie Franco, Aparajita Saraf, Arkabandhu Chowdhury, Ashley Gabriel, Ashwin Bharambe, Assaf Eisenman, Azadeh Yazdan, Beau James, Ben Maurer, Benjamin Leonhardi, Bernie Huang, Beth Loyd, Beto De Paola, Bhargavi Paranjape, Bing Liu, Bo Wu, Boyu Ni, Braden Hancock, Bram Wasti, Brandon Spence, Brani Stojkovic, Brian Gamido, Britt Montalvo, Carl Parker, Carly Burton, Catalina Mejia, Changhan Wang, Changkyu Kim, Chao Zhou, Chester Hu, Ching-Hsiang Chu, Chris Cai, Chris Tindal, Christoph Feichtenhofer, Damon Civin, Dana Beaty, Daniel Kreymer, Daniel Li, Danny Wyatt, David Adkins, David Xu, Davide Testuggine, Delia David, Devi Parikh, Diana Liskovich, Didem Foss, Dingkang Wang, Duc Le, Dustin Holland, Edward Dowling, Eissa Jamil, Elaine Montgomery, Eleonora Presani, Emily Hahn, Emily Wood, Erik Brinkman, Esteban Arcaute, Evan Dunbar, Evan Smothers, Fei Sun, Felix Kreuk, Feng Tian, Firat Ozgenel, Francesco Caggioni, Francisco Guzmán, Frank Kanayet, Frank Seide, Gabriela Medina Florez, Gabriella Schwarz, Gada Badeer, Georgia Swee, Gil Halpern, Govind Thattai, Grant Herman, Grigory Sizov, Guangyi, Zhang, Guna Lakshminarayanan, Hamid Shojanazeri, Han Zou, Hannah Wang, Hanwen Zha, Haroun Habeeb, Harrison Rudolph, Helen Suk, Henry Aspegren, Hunter Goldman, Ibrahim Damlaj, Igor Molybog, Igor Tufanov, Irina-Elena Veliche, Itai Gat, Jake Weissman, James Geboski, James Kohli, Japhet Asher, Jean-Baptiste Gaya, Jeff Marcus, Jeff Tang, Jennifer Chan, Jenny Zhen, Jeremy Reizenstein, Jeremy Teboul, Jessica Zhong, Jian Jin, Jingyi Yang, Joe Cummings, Jon Carvill, Jon Shepard, Jonathan McPhie, Jonathan Torres, Josh Ginsburg, Junjie Wang, Kai Wu, Kam Hou U, Karan Saxena, Karthik Prasad, Kartikay Khandelwal, Katayoun Zand, Kathy Matosich, Kaushik Veeraraghavan, Kelly Michelena, Keqian Li, Kun Huang, Kunal Chawla, Kushal Lakhotia, Kyle Huang, Lailin Chen, Lakshya Garg, Lavender A, Leandro Silva, Lee Bell, Lei Zhang, Liangpeng Guo, Licheng Yu, Liron Moshkovich, Luca Wehrstedt, Madian Khabsa, Manav Avalani, Manish Bhatt, Maria Tsimpoukelli, Martynas Mankus, Matan Hasson, Matthew Lennie, Matthias Reso, Maxim Groshev, Maxim

Naumov, Maya Lathi, Meghan Keneally, Michael L. Seltzer, Michal Valko, Michelle Restrepo, Mihir Patel, Mik Vyatskov, Mikayel Samvelyan, Mike Clark, Mike Macey, Mike Wang, Miquel Jubert Hermoso, Mo Metanat, Mohammad Rastegari, Munish Bansal, Nandhini Santhanam, Natascha Parks, Natasha White, Navyata Bawa, Nayan Singhal, Nick Egebo, Nicolas Usunier, Nikolay Pavlovich Laptev, Ning Dong, Ning Zhang, Norman Cheng, Oleg Chernoguz, Olivia Hart, Omkar Salpekar, Ozlem Kalinli, Parkin Kent, Parth Parekh, Paul Saab, Pavan Balaji, Pedro Rittner, Philip Bontrager, Pierre Roux, Piotr Dollar, Polina Zvyagina, Prashant Ratanchandani, Pritish Yuvraj, Qian Liang, Rachad Alao, Rachel Rodriguez, Rafi Ayub, Raghotham Murthy, Raghu Nayani, Rahul Mitra, Raymond Li, Rebekkah Hogan, Robin Battey, Rocky Wang, Rohan Maheswari, Russ Howes, Ruty Rinott, Sai Jayesh Bondu, Samyak Datta, Sara Chugh, Sara Hunt, Sargun Dhillon, Sasha Sidorov, Satadru Pan, Saurabh Verma, Seiji Yamamoto, Sharadh Ramaswamy, Shaun Lindsay, Shaun Lindsay, Sheng Feng, Shenghao Lin, Shengxin Cindy Zha, Shiva Shankar, Shuqiang Zhang, Shuqiang Zhang, Sinong Wang, Sneha Agarwal, Soji Sajuyigbe, Soumith Chintala, Stephanie Max, Stephen Chen, Steve Kehoe, Steve Satterfield, Sudarshan Govindaprasad, Sumit Gupta, Sungmin Cho, Sunny Virk, Suraj Subramanian, Sy Choudhury, Sydney Goldman, Tal Remez, Tamar Glaser, Tamara Best, Thilo Kohler, Thomas Robinson, Tianhe Li, Tianjun Zhang, Tim Matthews, Timothy Chou, Tzook Shaked, Varun Vontimitta, Victoria Ajayi, Victoria Montanez, Vijai Mohan, Vinay Satish Kumar, Vishal Mangla, Vítor Albiero, Vlad Ionescu, Vlad Poenaru, Vlad Tiberiu Mihailescu, Vladimir Ivanov, Wei Li, Wenchen Wang, Wenwen Jiang, Wes Bouaziz, Will Constable, Xiaocheng Tang, Xiaofang Wang, Xiaojian Wu, Xiaolan Wang, Xide Xia, Xilun Wu, Xinbo Gao, Yanjun Chen, Ye Hu, Ye Jia, Ye Qi, Yenda Li, Yilin Zhang, Ying Zhang, Yossi Adi, Youngjin Nam, Yu, Wang, Yuchen Hao, Yundi Qian, Yuzi He, Zach Rait, Zachary DeVito, Zef Rosnbrick, Zhaoduo Wen, Zhenyu Yang, and Zhiwei Zhao. 2024. The llama 3 herd of models.

- Matt Gardner, Yoav Artzi, Victoria Basmov, Jonathan Berant, Ben Bogin, Sihao Chen, Pradeep Dasigi, Dheeru Dua, Yanai Elazar, Ananth Gottumukkala, Nitish Gupta, Hannaneh Hajishirzi, Gabriel Ilharco, Daniel Khashabi, Kevin Lin, Jiangming Liu, Nelson F. Liu, Phoebe Mulcaire, Qiang Ning, Sameer Singh, Noah A. Smith, Sanjay Subramanian, Reut Tsarfaty, Eric Wallace, Ally Zhang, and Ben Zhou. 2020. Evaluating models' local decision boundaries via contrast sets. In *Findings of the Association for Computational Linguistics: EMNLP 2020*.
- Gemma, Thomas Mesnard, Cassidy Hardin, Robert Dadashi, Surya Bhupatiraju, Shreya Pathak, Laurent Sifre, Morgane Rivière, Mihir Sanjay Kale, Juliette Love, Pouya Tafti, Léonard Hussenot, Pier Giuseppe Sessa, Aakanksha Chowdhery, Adam Roberts, Aditya Barua, Alex Botev, Alex Castro-Ros, Ambrose Slone, Amélie Héliou, Andrea Tac-

chetti, Anna Bulanova, Antonia Paterson, Beth Tsai, Bobak Shahriari, Charline Le Lan, Christopher A. Choquette-Choo, Clément Crepy, Daniel Cer, Daphne Ippolito, David Reid, Elena Buchatskaya, Eric Ni, Eric Noland, Geng Yan, George Tucker, George-Christian Muraru, Grigory Rozhdestvenskiy, Henryk Michalewski, Ian Tenney, Ivan Grishchenko, Jacob Austin, James Keeling, Jane Labanowski, Jean-Baptiste Lespiau, Jeff Stanway, Jenny Brennan, Jeremy Chen, Johan Ferret, Justin Chiu, Justin Mao-Jones, Katherine Lee, Kathy Yu, Katie Millican, Lars Lowe Sjoesund, Lisa Lee, Lucas Dixon, Machel Reid, Maciej Mikuła, Mateo Wirth, Michael Sharman, Nikolai Chinaev, Nithum Thain, Olivier Bachem, Oscar Chang, Oscar Wahltinez, Paige Bailey, Paul Michel, Petko Yotov, Rahma Chaabouni, Ramona Comanescu, Reena Jana, Rohan Anil, Ross McIlroy, Ruibo Liu, Ryan Mullins, Samuel L Smith, Sebastian Borgeaud, Sertan Girgin, Sholto Douglas, Shree Pandya, Siamak Shakeri, Soham De, Ted Klimenko, Tom Hennigan, Vlad Feinberg, Wojciech Stokowiec, Yu hui Chen, Zafarali Ahmed, Zhitao Gong, Tris Warkentin, Ludovic Peran, Minh Giang, Clément Farabet, Oriol Vinyals, Jeff Dean, Koray Kavukcuoglu, Demis Hassabis, Zoubin Ghahramani, Douglas Eck, Joelle Barral, Fernando Pereira, Eli Collins, Armand Joulin, Noah Fiedel, Evan Senter, Alek Andreev, and Kathleen Kenealy. 2024. Gemma: Open models based on gemini research and technology.

- Raphael Gruber, Abdelrahman Abdallah, Michael Färber, and Adam Jatowt. 2024. Complextempqa: A large-scale dataset for complex temporal question answering. *arXiv preprint arXiv:2406.04866*.
- Shengding Hu, Yuge Tu, Xu Han, Chaoqun He, Ganqu Cui, Xiang Long, Zhi Zheng, Yewei Fang, Yuxiang Huang, Weilin Zhao, Xinrong Zhang, Zheng Leng Thai, Kaihuo Zhang, Chongyi Wang, Yuan Yao, Chenyang Zhao, Jie Zhou, Jie Cai, Zhongwu Zhai, Ning Ding, Chao Jia, Guoyang Zeng, Dahai Li, Zhiyuan Liu, and Maosong Sun. 2024. Minicpm: Unveiling the potential of small language models with scalable training strategies.
- Gautier Izacard, Mathilde Caron, Lucas Hosseini, Sebastian Riedel, Piotr Bojanowski, Armand Joulin, and Edouard Grave. 2021. Unsupervised dense information retrieval with contrastive learning. *Transactions* on Machine Learning Research.
- Gautier Izacard, Fabio Petroni, Lucas Hosseini, Nicola De Cao, Sebastian Riedel, and Edouard Grave. 2020. A memory efficient baseline for open domain question answering. *arXiv preprint arXiv:2012.15156*.
- Nour Jedidi, Yung-Sung Chuang, Leslie Shing, and James Glass. 2024. Zero-shot dense retrieval with embeddings from relevance feedback.
- Jina. 2024. Jina reranker v2 for agentic rag: Ultrafast, multilingual, function-calling and code search. https://jina.ai/news/jina-reranker-v2-for -agentic-rag-ultra-fast-multilingual-fun

ction-calling-and-code-search/. Accessed: 2024-11-26.

- Nikhil Kandpal, Haikang Deng, Adam Roberts, Eric Wallace, and Colin Raffel. 2023. Large language models struggle to learn long-tail knowledge. In *International Conference on Machine Learning*, pages 15696–15707. PMLR.
- Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. 2020. Dense passage retrieval for opendomain question answering. In Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP).
- Jungo Kasai, Keisuke Sakaguchi, Yoichi Takahashi, Ronan Le Bras, Akari Asai, Xinyan Yu, Dragomir Radev, Noah A. Smith, Yejin Choi, and Kentaro Inui. 2024. Realtime qa: What's the answer right now?
- Omar Khattab and Matei Zaharia. 2020. Colbert: Efficient and effective passage search via contextualized late interaction over bert. In *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval.*
- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, Kristina Toutanova, Llion Jones, Matthew Kelcey, Ming-Wei Chang, Andrew M. Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. 2019. Natural questions: A benchmark for question answering research. *Transactions of the Association for Computational Linguistics*.
- Chankyu Lee, Rajarshi Roy, Mengyao Xu, Jonathan Raiman, Mohammad Shoeybi, Bryan Catanzaro, and Wei Ping. 2024. Nv-embed: Improved techniques for training llms as generalist embedding models.
- Chaofan Li, Zheng Liu, Shitao Xiao, and Yingxia Shao. 2023. Making large language models a better foundation for dense retrieval.
- Adam Liška, Tomáš Kočiský, Elena Gribovskaya, Tayfun Terzi, Eren Sezener, Devang Agrawal, Cyprien de Masson d'Autume, Tim Scholtes, Manzil Zaheer, Susannah Young, Ellen Gilsenan-McMahon Sophia Austin, Phil Blunsom, and Angeliki Lazaridou. 2022. Streamingqa: A benchmark for adaptation to new knowledge over time in question answering models. *arXiv preprint arXiv:2205.11388*.
- Nelson F Liu, Kevin Lin, John Hewitt, Ashwin Paranjape, Michele Bevilacqua, Fabio Petroni, and Percy Liang. 2024. Lost in the middle: How language models use long contexts. *Transactions of the Association for Computational Linguistics*.
- Sean MacAvaney, Franco Maria Nardini, Raffaele Perego, Nicola Tonellotto, Nazli Goharian, and Ophir Frieder. 2020. Efficient document re-ranking for transformers by precomputing term representations.

In Proceedings of the 43rd International ACM SI-GIR Conference on Research and Development in Information Retrieval.

- Niklas Muennighoff, Nouamane Tazi, Loic Magne, and Nils Reimers. 2023. MTEB: Massive text embedding benchmark. In Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics.
- OpenAI, Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, Red Avila, Igor Babuschkin, Suchir Balaji, Valerie Balcom, Paul Baltescu, Haiming Bao, Mohammad Bavarian, Jeff Belgum, Irwan Bello, Jake Berdine, Gabriel Bernadett-Shapiro, Christopher Berner, Lenny Bogdonoff, Oleg Boiko, Madelaine Boyd, Anna-Luisa Brakman, Greg Brockman, Tim Brooks, Miles Brundage, Kevin Button, Trevor Cai, Rosie Campbell, Andrew Cann, Brittany Carey, Chelsea Carlson, Rory Carmichael, Brooke Chan, Che Chang, Fotis Chantzis, Derek Chen, Sully Chen, Ruby Chen, Jason Chen, Mark Chen, Ben Chess, Chester Cho, Casey Chu, Hyung Won Chung, Dave Cummings, Jeremiah Currier, Yunxing Dai, Cory Decareaux, Thomas Degry, Noah Deutsch, Damien Deville, Arka Dhar, David Dohan, Steve Dowling, Sheila Dunning, Adrien Ecoffet, Atty Eleti, Tyna Eloundou, David Farhi, Liam Fedus, Niko Felix, Simón Posada Fishman, Juston Forte, Isabella Fulford, Leo Gao, Elie Georges, Christian Gibson, Vik Goel, Tarun Gogineni, Gabriel Goh, Rapha Gontijo-Lopes, Jonathan Gordon, Morgan Grafstein, Scott Gray, Ryan Greene, Joshua Gross, Shixiang Shane Gu, Yufei Guo, Chris Hallacy, Jesse Han, Jeff Harris, Yuchen He, Mike Heaton, Johannes Heidecke, Chris Hesse, Alan Hickey, Wade Hickey, Peter Hoeschele, Brandon Houghton, Kenny Hsu, Shengli Hu, Xin Hu, Joost Huizinga, Shantanu Jain, Shawn Jain, Joanne Jang, Angela Jiang, Roger Jiang, Haozhun Jin, Denny Jin, Shino Jomoto, Billie Jonn, Heewoo Jun, Tomer Kaftan, Łukasz Kaiser, Ali Kamali, Ingmar Kanitscheider, Nitish Shirish Keskar, Tabarak Khan, Logan Kilpatrick, Jong Wook Kim, Christina Kim, Yongjik Kim, Jan Hendrik Kirchner, Jamie Kiros, Matt Knight, Daniel Kokotajlo, Łukasz Kondraciuk, Andrew Kondrich, Aris Konstantinidis, Kyle Kosic, Gretchen Krueger, Vishal Kuo, Michael Lampe, Ikai Lan, Teddy Lee, Jan Leike, Jade Leung, Daniel Levy, Chak Ming Li, Rachel Lim, Molly Lin, Stephanie Lin, Mateusz Litwin, Theresa Lopez, Ryan Lowe, Patricia Lue, Anna Makanju, Kim Malfacini, Sam Manning, Todor Markov, Yaniv Markovski, Bianca Martin, Katie Mayer, Andrew Mayne, Bob McGrew, Scott Mayer McKinney, Christine McLeavey, Paul McMillan, Jake McNeil, David Medina, Aalok Mehta, Jacob Menick, Luke Metz, Andrey Mishchenko, Pamela Mishkin, Vinnie Monaco, Evan Morikawa, Daniel Mossing, Tong Mu, Mira Murati, Oleg Murk, David Mély, Ashvin Nair, Reiichiro Nakano, Rajeev Nayak, Arvind Neelakantan, Richard Ngo, Hyeonwoo Noh, Long Ouyang, Cullen O'Keefe, Jakub Pachocki, Alex

Paino, Joe Palermo, Ashley Pantuliano, Giambattista Parascandolo, Joel Parish, Emy Parparita, Alex Passos, Mikhail Pavlov, Andrew Peng, Adam Perelman, Filipe de Avila Belbute Peres, Michael Petrov, Henrique Ponde de Oliveira Pinto, Michael, Pokorny, Michelle Pokrass, Vitchyr H. Pong, Tolly Powell, Alethea Power, Boris Power, Elizabeth Proehl, Raul Puri, Alec Radford, Jack Rae, Aditya Ramesh, Cameron Raymond, Francis Real, Kendra Rimbach, Carl Ross, Bob Rotsted, Henri Roussez, Nick Ryder, Mario Saltarelli, Ted Sanders, Shibani Santurkar, Girish Sastry, Heather Schmidt, David Schnurr, John Schulman, Daniel Selsam, Kyla Sheppard, Toki Sherbakov, Jessica Shieh, Sarah Shoker, Pranav Shyam, Szymon Sidor, Eric Sigler, Maddie Simens, Jordan Sitkin, Katarina Slama, Ian Sohl, Benjamin Sokolowsky, Yang Song, Natalie Staudacher, Felipe Petroski Such, Natalie Summers, Ilya Sutskever, Jie Tang, Nikolas Tezak, Madeleine B. Thompson, Phil Tillet, Amin Tootoonchian, Elizabeth Tseng, Preston Tuggle, Nick Turley, Jerry Tworek, Juan Felipe Cerón Uribe, Andrea Vallone, Arun Vijayvergiya, Chelsea Voss, Carroll Wainwright, Justin Jay Wang, Alvin Wang, Ben Wang, Jonathan Ward, Jason Wei, CJ Weinmann, Akila Welihinda, Peter Welinder, Jiayi Weng, Lilian Weng, Matt Wiethoff, Dave Willner, Clemens Winter, Samuel Wolrich, Hannah Wong, Lauren Workman, Sherwin Wu, Jeff Wu, Michael Wu, Kai Xiao, Tao Xu, Sarah Yoo, Kevin Yu, Qiming Yuan, Wojciech Zaremba, Rowan Zellers, Chong Zhang, Marvin Zhang, Shengjia Zhao, Tianhao Zheng, Juntang Zhuang, William Zhuk, and Barret Zoph. 2024. Gpt-4 technical report.

- Arnold Overwijk, Chenyan Xiong, and Jamie Callan. 2022. Clueweb22: 10 billion web documents with rich information. In Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*.
- Amit Rozner, Barak Battash, Lior Wolf, and Ofir Lindenbaum. 2024. Knowledge editing in language models via adapted direct preference optimization. In *Findings of the Association for Computational Linguistics: EMNLP 2024.*
- Anshumali Shrivastava and Ping Li. 2014. Asymmetric lsh (alsh) for sublinear time maximum inner product search (mips). *Advances in neural information processing systems*, 27.
- Hongjin Su, Howard Yen, Mengzhou Xia, Weijia Shi, Niklas Muennighoff, Han yu Wang, Haisu Liu, Quan Shi, Zachary S. Siegel, Michael Tang, Ruoxi Sun, Jinsung Yoon, Sercan O. Arik, Danqi Chen, and Tao Yu. 2024a. Bright: A realistic and challenging benchmark for reasoning-intensive retrieval.

- Zhaochen Su, Jun Zhang, Tong Zhu, Xiaoye Qu, Juntao Li, Min Zhang, and Yu Cheng. 2024b. Timo: Towards better temporal reasoning for language models. *Proceedings of the Conference on Language Model.*
- Qingyu Tan, Hwee Tou Ng, and Lidong Bing. 2023. Towards benchmarking and improving the temporal reasoning capability of large language models. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics.*
- Nandan Thakur, Nils Reimers, Johannes Daxenberger, and Iryna Gurevych. 2021. Augmented SBERT: Data augmentation method for improving bi-encoders for pairwise sentence scoring tasks. In Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies.
- Peng Wang, Ningyu Zhang, Bozhong Tian, Zekun Xi, Yunzhi Yao, Ziwen Xu, Mengru Wang, Shengyu Mao, Xiaohan Wang, Siyuan Cheng, Kangwei Liu, Yuansheng Ni, Guozhou Zheng, and Huajun Chen. 2024. EasyEdit: An easy-to-use knowledge editing framework for large language models. In Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 3: System Demonstrations).
- Wenhui Wang, Furu Wei, Li Dong, Hangbo Bao, Nan Yang, and Ming Zhou. 2020. Minilm: Deep selfattention distillation for task-agnostic compression of pre-trained transformers.
- Yuqing Wang and Yun Zhao. 2024. TRAM: Benchmarking temporal reasoning for large language models. In *Findings of the Association for Computational Linguistics: ACL 2024.*
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, brian ichter, Fei Xia, Ed Chi, Quoc V Le, and Denny Zhou. 2022. Chain-of-thought prompting elicits reasoning in large language models. In Advances in Neural Information Processing Systems.
- Yifan Wei, Yisong Su, Huanhuan Ma, Xiaoyan Yu, Fangyu Lei, Yuanzhe Zhang, Jun Zhao, and Kang Liu. 2023. MenatQA: A new dataset for testing the temporal comprehension and reasoning abilities of large language models. In *Findings of the Association for Computational Linguistics: EMNLP 2023*.
- Shangyu Wu, Ying Xiong, Yufei Cui, Haolun Wu, Can Chen, Ye Yuan, Lianming Huang, Xue Liu, Tei-Wei Kuo, Nan Guan, and Chun Jason Xue. 2024a. Retrieval-augmented generation for natural language processing: A survey.
- Xiaobao Wu, Liangming Pan, William Yang Wang, and Anh Tuan Luu. 2024b. AKEW: Assessing knowledge editing in the wild. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*.
- Xiaobao Wu, Liangming Pan, Yuxi Xie, Ruiwen Zhou, Shuai Zhao, Yubo Ma, Mingzhe Du, Rui

Mao, Anh Tuan Luu, and William Yang Wang. 2024c. Antileak-bench: Preventing data contamination by automatically constructing benchmarks with updated real-world knowledge. *arXiv preprint arXiv:2412.13670*.

- Shitao Xiao, Zheng Liu, Peitian Zhang, and Niklas Muennighoff. 2023. C-pack: Packaged resources to advance general chinese embedding.
- Shi-Qi Yan, Jia-Chen Gu, Yun Zhu, and Zhen-Hua Ling. 2024. Corrective retrieval augmented generation.
- An Yang, Baosong Yang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Zhou, Chengpeng Li, Chengyuan Li, Dayiheng Liu, Fei Huang, Guanting Dong, Haoran Wei, Huan Lin, Jialong Tang, Jialin Wang, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Ma, Jianxin Yang, Jin Xu, Jingren Zhou, Jinze Bai, Jinzheng He, Junyang Lin, Kai Dang, Keming Lu, Kegin Chen, Kexin Yang, Mei Li, Mingfeng Xue, Na Ni, Pei Zhang, Peng Wang, Ru Peng, Rui Men, Ruize Gao, Runji Lin, Shijie Wang, Shuai Bai, Sinan Tan, Tianhang Zhu, Tianhao Li, Tianyu Liu, Wenbin Ge, Xiaodong Deng, Xiaohuan Zhou, Xingzhang Ren, Xinyu Zhang, Xipin Wei, Xuancheng Ren, Xuejing Liu, Yang Fan, Yang Yao, Yichang Zhang, Yu Wan, Yunfei Chu, Yuqiong Liu, Zeyu Cui, Zhenru Zhang, Zhifang Guo, and Zhihao Fan. 2024. Qwen2 technical report.
- Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. 2022. React: Synergizing reasoning and acting in language models. *arXiv preprint arXiv:2210.03629*.
- Michael Zhang and Eunsol Choi. 2021. SituatedQA: Incorporating extra-linguistic contexts into QA. In Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing.
- Siyue Zhang, Anh Tuan Luu, and Chen Zhao. 2024. SynTQA: Synergistic table-based question answering via mixture of text-to-SQL and E2E TQA. In Findings of the Association for Computational Linguistics: EMNLP 2024.
- Chen Zhao, Chenyan Xiong, Jordan Boyd-Graber, and Hal Daumé III. 2021. Distantly-supervised dense retrieval enables open-domain question answering without evidence annotation. In *Emperical Methods in Natural Language Processing*.
- Zexuan Zhong, Zhengxuan Wu, Christopher D Manning, Christopher Potts, and Danqi Chen. 2023. MQuAKE: Assessing knowledge editing in language models via multi-hop questions. In Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing.

### A Controlled Experiments

We conduct controlled experiments to investigate the behaviors of retrieval methods on temporally constrained queries, including the bi-encoder retriever Contriever (Izacard et al., 2021), the crossencoder reranker MiniLM (Wang et al., 2020), and the LLM embedding-based reranker Gemma (Li et al., 2023). As shown in Figure 5, all methods prioritize date-matching, having the highest scores when the query and document share the same year. Besides, the score is unusually high when the query and document share the same month and day but differ in year, e.g., orange triangles in the diagrams.

The Contriever retriever is less sensitive to document dates than the MiniLM reranker. Both methods exhibit similar trends across varying temporal relations, indicating their inability to differentiate effectively between different relations, e.g., "before" and "after". Notably, documents without specific dates receive unusually low scores, even lower than those with irrelevant dates, e.g., orange dash lines in the diagrams.

The LLM embedding based reranker Gemma exhibits stronger temporal reasoning capabilities. For the "after" relation, documents with dates later than the query date are assigned relatively high and consistent scores. So all temporally relevant documents will be retained. However, for "before" and "as of", despite their temporal relevance, documents with earlier dates fail to achieve sufficiently high similarity scores, potentially leading to their exclusion from the retrieval process.

In summary, existing retrieval methods demonstrate limited temporal reasoning capabilities. The LLM embedding-based method shows better performance than others.

## **B** Implementation Details

We conduct empirical evaluations for MRAG and SOTA retrieving-and-reranking systems on TEM-PRAGEVAL. MRAG consists of functional modules, which can be based on algorithms, models, or prompting methods. In implementation, algorithm based modules include question normalization, keyword ranking, time extraction, and semantictemporal hybrid ranking. Model based modules are retrieving, semantic ranking, sentence tokenization. To ensure fair comparison, we use the same retriever model, i.e., Contriever (Izacard et al., 2021), as the first stage method for MRAG and two-stage systems. We use GEMMA embeddings (Li et al.,

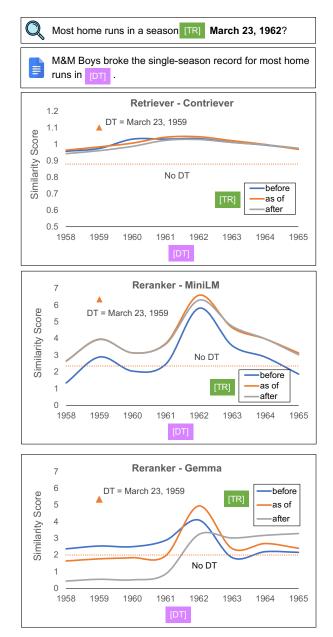


Figure 5: Similarity scores of query-document pairs by varying the temporal relation in the query and the date in the document.

2023) as the main tool to measure semantic similarity for passages and sentences in MRAG. NLTK package is used for sentence tokenization (Bird and Loper, 2004). LLM prompting based modules are keyword extraction, query-focused summarization. As shown in Appendix E, we have tested Llama3.1-8B-Instruct and Llama3.1-70B-Instruct models (Dubey et al., 2024) for LLM prompting based modules. Detailed prompts are listed in Appendix I. The evaluation metrics are computed based on retrieved passages not sentences.

## C Retrieval Performance Degradation from Perturbations

We compare the retrieval performance between original queries and perturbed queries using the same baseline retrieval system (*i.e.*, Contriever retriever and GEMMA reranker). For both the TIMEQA and SITUATEDQA subsets, the perturbed questions significantly increase the difficulty of retrieving relevant documents, particularly when evaluating the top-1 and top-5 ranked documents. This suggests that the introduction of perturbations introduces greater complexity. The existing retrieval method has limited temporal reasoning capabilities and is not robust to such variations.

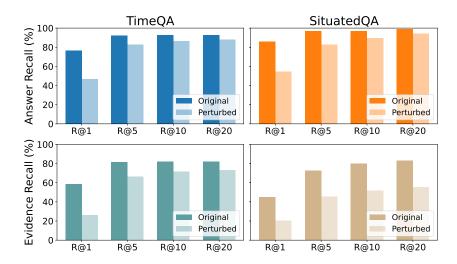


Figure 6: Retrieval performance difference between original queries and perturbed queries in TEMPRAGEVAL subsets for the baseline GEMMA retrieval.

## **D** Spline Functions for Temporal Scoring

In MRAG, the temporal relevance is determined symbolically using temporal constraints in query, extracted dates from sentences, and pre-defined scoring functions. The temporal constraints are categorized by implicit conditions, i.e., "first" and "last", and temporal relations, i.e., "before", "after", and "between". For example, the question "Who won the latest game as of 1981?" will be classified as the "last" type and the "before" type. We pre-define spline function templates for each type of temporal constraints, as shown in Figure 7. Each spline function computes a temporal score for a given input date extracted from the sentence. For sentences with multiple dates, the highest temporal score is selected.

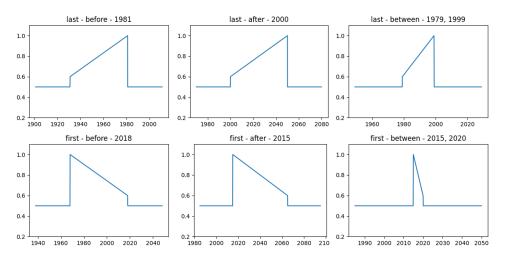


Figure 7: Pre-defined spline functions for temporal relevance scoring. The title of each subplot represents the type of query temporal constraint. The horizontal coordinate of each subplot is the date in the document sentence.

	Met	hod		A	nswer	Recall	@	Gold	Evider	nce Rec	call @
1st	2nd	LLM	# QFS	1	5	10	20	1	5	10	20
BM25	-	-	-	17.5	39.0	49.1	59.0	4.2	14.1	22.6	33.7
Cont.	-	-	-	18.8	49.9	62.1	72.9	9.6	28.7	39.5	51.5
Hybrid	-	-	-	18.8	51.2	65.0	75.3	9.6	28.1	41.1	55.2
Cont.	ELECTRA	-	-	40.1	76.9	83.6	86.7	21.8	58.6	66.8	71.6
Cont.	MiniLM	-	-	34.0	76.1	84.4	87.0	16.2	57.3	68.2	72.4
Cont.	Jina	-	-	42.4	77.2	86.2	87.5	23.6	58.6	68.2	71.4
Cont.	BGE	-	-	40.3	80.9	85.7	87.0	23.3	61.3	68.7	72.2
Cont.	NV-Embed	-	-	49.9	81.2	85.7	87.5	33.4	62.9	70.6	72.7
Cont.	Gemma	-	-	46.7	82.5	86.5	87.8	26.0	66.6	71.6	73.2
Cont.	MRAG	Llama3.1	-	57.6	89.4	93.6	94.2	32.4	73.5	82.8	84.1
Cont.	MRAG	Llama3.1	5	58.6	90.0	93.4	94.2	37.1	74.3	82.5	84.1
Cont.	MRAG	Llama3.1	10	56.0	88.1	93.6	94.2	35.5	73.2	82.2	84.4
Cont.	MRAG	Llama3.1 <sup>b</sup>	-	57.6	89.4	93.6	94.2	32.1	73.5	82.5	84.1
Cont.	MRAG	Llama3.1 <sup>♭</sup>	5	57.0	90.5	93.6	94.2	34.5	75.3	82.5	84.1
Cont.	MRAG	Llama3.1 <sup>b</sup>	10	53.3	90.7	93.6	94.2	33.2	74.8	82.8	84.1

# **E** Complete Retrieval Evaluation Results

Table 4: The answer recall (AR@k) and gold evidence recall (ER@k) performance of each retrieval system on perturbed temporal queries in TEMPRAGEVAL - TIMEQA subset. <sup>b</sup>Meta-Llama-3.1-70B-Instruct.

	Met	hod		A	nswer	Recall	@	Gold	Evider	nce Rec	all @
1st	2nd	LLM	# QFS	1	5	10	20	1	5	10	20
BM25	-	-	-	27.6	58.2	69.0	80.8	6.8	18.4	25.8	34.7
Cont.	-	-	-	22.6	51.1	65.5	79.5	6.8	17.1	22.9	30.5
Hybrid	-	-	-	22.6	55.8	71.8	81.6	6.8	19.7	26.6	35.0
Cont.	ELECTRA	-	-	35.5	71.3	82.4	88.4	15.3	37.1	45.0	52.9
Cont.	MiniLM	-	-	36.8	73.4	86.3	90.8	20.0	40.3	50.5	54.2
Cont.	Jina	-	-	47.9	78.4	87.6	93.2	19.5	41.1	48.2	54.2
Cont.	BGE	-	-	36.3	74.2	86.3	92.9	14.5	35.0	44.7	54.2
Cont.	NV-Embed	-	-	47.4	81.3	88.7	92.4	23.4	46.1	50.5	55.0
Cont.	Gemma	-	-	54.7	82.6	89.5	94.0	20.3	45.3	51.8	55.5
Cont.	MRAG	Llama3.1	-	61.1	88.2	92.1	93.7	27.4	56.3	64.0	68.7
Cont.	MRAG	Llama3.1	5	61.3	89.0	93.4	94.2	31.1	59.2	65.8	69.0
Cont.	MRAG	Llama3.1	10	62.1	87.9	92.6	94.2	30.8	57.9	66.1	70.3
Cont.	MRAG	Llama3.1 <sup>b</sup>	-	61.1	86.3	92.4	94.0	27.1	54.5	63.4	67.6
Cont.	MRAG	Llama3.1 <sup>b</sup>	5	63.2	86.1	92.6	93.7	29.7	56.6	64.0	67.1
Cont.	MRAG	Llama3.1 <sup>b</sup>	10	62.1	86.8	92.1	93.7	27.1	56.1	64.2	69.0

Table 5: The answer recall (AR@k) and gold evidence recall (ER@k) performance of each retrieval system on perturbed temporal queries in TEMPRAGEVAL – SITUATEDQA subset.  $^{b}$ Meta-Llama-3.1-70B-Instruct.

## F Human Evaluation of Retrieval

The Answer Recall (AR@k) represents the upper bound of the retrieval performance, while the Evidence Recall (ER@k) signifies the lower bound. As shown in Figure 10a and Figure 10b, the gray areas are delineated by the AR@k and ER@k lines, within which the actual performance remains uncertain. To address this, we conduct a human evaluation of ranked document passages retrieved by MRAG and GEMMA (denoted as "Standard" in the figures) on a subset of 200 randomly selected examples from TEMPRAGEVAL.

The metric for the actual retrieval performance, termed **Ground Truth Recall** (GR@k), is computed based on the annotations of the highest-ranking passages supporting the answers. As illustrated, the gray areas for MRAG are positioned higher in the plots than those for GEMMA. Furthermore, the actual performance curves (purple lines) for MRAG are consistently closer to the upper boundaries compared to those for GEMMA (green lines). These two observations demonstrate the superior performance of MRAG in temporal reasoning-intensive retrieval.




Figure 8: Human annotated retrieval performance on 100 examples from TEMPRAGEVAL-TIMEQA.




Figure 9: Human annotated retrieval performance on 100 examples from TEMPRAGEVAL-SITUATEDQA.

### G Parametric Study on the Optimal Number of Passages for Concatenation

The number of concatenated passages and their order significantly impact the accuracy of reader QA tasks. This is largely due to the inherent primacy and recency biases exhibited by LLMs, where information presented earlier or later in the input sequence tends to be weighted more heavily during processing (Liu et al., 2024). Therefore, the retrieval performance is of great importance.

We evaluate the Llama reader accuracy with a varying number of concatenated documents retrieved by GEMMA and MRAG in Figure 10. The rapid accuracy improvement within the first five passages highlights the effectiveness of RAG in enhancing LLMs' performance by supplementing their knowledge with external information. In both TEMPRAGEVAL subsets, the reader demonstrates higher accuracy with MRAG-retrieved documents in most cases. Notably, MRAG achieves peak accuracy with only the top 5 retrieved documents, whereas GEMMA might require more, as illustrated in Figure 10b. For Llama3.1-8B, using 5 documents is optimal, as including additional documents may introduce noise, leading to errors made by the reader.

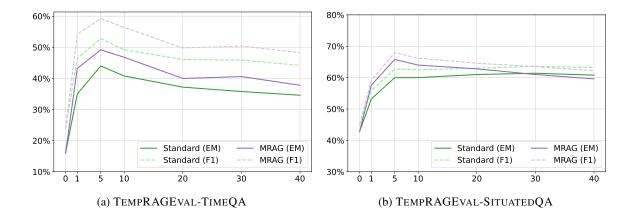


Figure 10: Llama3.1-8B-Instruct reader performance versus number of concatenated context passages retrieved by the GEMMA retrieval (denoted as "Standard") and MRAG.

## H Case Studies

We conducted five case studies to qualitatively evaluate the advantages of MRAG over the GEMMA-based retrieval system as below. The results demonstrate MRAG's robustness to temporal perturbations and its ability to retrieve relevant context passages. For instance, in Case 1, the top-1 passage retrieved by GEMMA matches the query date "1988" but discusses a father-son record set in 2007. In contrast, the first passage retrieved by MRAG focuses on a teammate combination record in the same season, despite the date "1961" differing from the query date "1988". Since semantic relevance outweighs strict date matching in this situation, MRAG provides more contextually appropriate results for the time-sensitive question.

Question	Gemma-based Retrieval	Modular Retrieval
(1) Who had the	#7 is the top true evidence	#1 is the top true evidence
most home runs by two teammates in a season as of 1988?	#1 Bobby Bonds   Bobby Bonds hit 39 home runs and had 43 stolen bases in 1973 — the highest level of home runs until José Canseco of the Oakland Athletics in 1988. Barry and Bobby had 1,094 combined home runs through 2007 — a record for a father-son combination.	<ul> <li>#1 50 home run club   M&amp;M</li> <li>Boys—are the only teammates to reach the 50 home run club in the same season, hitting a combined 115 home runs in 1961 and breaking the single-season record for home runs by a pair of teammates.</li> <li>#2 1987 Major League Base-</li> </ul>
	#2 1987 in baseball   With teammate Howard Johnson already having joined, it marks the first time that two teammates achieve 30–30 seasons in the same year.	ball season   Cal Ripken, Jr. is lifted from the lineup and replaced by Ron Washington it marks the first time that two teammates achieve 30–30 seasons in the same year.
	#3 1988 Toronto Blue Jays season   April 4, 1988: George Bell set a major league record for the most home runs hit on Opening Day, with three	#3 1987 in baseball   Whitt connects on three of the home runs it marks the first time that two teammates achieve 30–30 seasons in the same year.
	<b>#7</b> 50 home run club   <b>M&amp;M</b> <b>Boys</b> —are the only teammates to reach the 50 home run club in the same season, hitting a combined 115 home runs in 1961 and breaking the single-season record for home runs by a pair of teammates.	

Question	Gemma-based Retrieval	Modular Retrieval
(2) Who had the	No true evidence retrieved	#1 is the top true evidence
most home runs by two teammates in a season by August 17, 1992?	<ul> <li>#1 1992 in baseball   August 28 – The Milwaukee Brewers lash 31 hits in a 22-2 drubbing of the Toronto Blue Jays , setting a record for the most hits by a team in a single nine-inning game.</li> <li>#2 1997 in baseball   McG- wire, who hit a major league-leading 52 homers for the Oakland Athletics last season, becomes the first player with back-to-back 50-homer seasons since Ruth did it</li> </ul>	<ul> <li>#1 50 home run club   M&amp;M</li> <li>Boys—are the only teammates to reach the 50 home run club in the same season, hitting a combined 115 home runs in 1961 and breaking the single-season record for home runs by a pair of teammates.</li> <li>#2 List of career achievements by Babe Ruth   1927 (Ruth 60, Lou Gehrig 47) Achieved by several other pairs of teammates since Two teammates with 40 or more home runs, season: Thrice Clubs with three consecutive home runs in inning</li> </ul>
(3) Who won the latest America's Next Top Model as of 2021?	No true evidence retrieved #1 America's Next Top Model (season 17)   the final season for Andre Leon Talley as a judge. The winner of the competition was 30-year-old Lisa D'Amato from Los Angeles, California, who originally placed sixth on Cycle 5 making her the oldest winner at the age of 30. Allison Harvard, who originally placed second on cycle 12 #2 Germany's Next Topmodel   that Soulin Omar who was the sec- ond runner up, should've won based on her performance throughout the season. German Magazine "OK!" and "Der Westen" stated #3 America's Next Top Model (season 21)   (Ages stated are at start of contest) Indicates that the contestant died after filming ended	<ul> <li>#3 is the top true evidence</li> <li>#1 America's Next Top Model (season 23)   The twenty-third cycle of America's Next Top Model premiered on December 12, 2016 The winner of the competition was 20 year-old India Gants from Seattle </li> <li>#2 America's Next Top Model</li> <li>  five contestants were featured modeling Oscar gowns: On May 12, 2010, Angelea Preston, Jessica Serfaty, and Simone Lewis (all cycle 14) appeared on a Jay Walking On February 24, 2012, Brittany Brower (cycle 4), Bre Scullark (cycle 5) (both cycle 17), and Lisa D'Amato (cycle 5 and cycle 17 winner) appeared on a Jay</li> <li>#3 America's Next Top Model (season 24)   The twenty-fourth cycle of America's Next Top Model premiered on January 9, 2018 The winner of the competition was 20 year-old Kyla Coleman from Lacey, Washington</li> </ul>

Question	Gemma-based Retrieval	Modular Retrieval
(4) When did	#5 is the top true evidence	#1 is the top true evidence
Dwight Howard play for Los Angeles Lakers between 2000 and 2017?	<ul> <li>#1 List of career achievements by Dwight Howard   Defensive re- bounds, 5-game series: 58, Orlando Magic vs. Los Angeles Lakers, 2009</li> <li>#2 Dwight Howard   wanted". In a 2013 article titled "Is Dwight Howard the NBA's Worst Team- mate?" When he was traded from the Atlanta Hawks to the Charlotte Hornets, some of his Hawks team- mates reportedly cheered. After Charlotte traded Howard to the Washington Wizards, Charlotte player Brendan Haywood asserted</li> <li>#5 2012-13 Los Angeles Lak- ers season   In a March 12, 2013 game against his former team, the Orlando Magic, Dwight Howard tied his own NBA record of 39 free throw attempts</li> </ul>	<ul> <li>#1 Is the top true evidence</li> <li>#1 Dwight Howard   On August 10, 2012, Howard was traded from Orlando to the Los Angeles Lakers in a deal that also involved the Philadelphia 76ers and the Denver Nuggets</li> <li>#2 Dwight Howard   In 2012, after eight seasons with Orlando, Howard was traded to the Los Angeles Lakers Howard returned to the Lakers in 2019 and won his first NBA championship in 2020.</li> </ul>

(5) Which political party did Clive Palmer belong to on Apr 20, 1976?No true evidence retrieved#3 is the top true evidence#1 Clive Palmer   On 25 April 2013, Palmer announced a "refor- mation" of the United Australia Party, which had been folded into the present-day Liberal Party in 1945, to stand candidates in the 2013 federal election, and had applied for its registration in Queensland #2 Clive Palmer   de-registering the party on 5 May 2017, Palmer revived his party as the United Australia Party, announcing that he would be running candidates for all 151 seats in the House of Representatives and later that he would run as a Queensland candidate for the Senate. In the 2019 federal election, despite extensive advertising#2 Clive Palmer   Palmer re- signed his life membership of the Liberal National Party. His member- ship of the party had been suspended on 9 November 2012, following his comments on the actions of state government ministers. He was re-instated to the party on 22 November, but resigned the same day#3 United Australia Party view of team work. Given this, I felt it best that I resign from the party and pursue my senate role as an independent senator."#3 Clive Palmer   Palmer was instrumental in the split of the South Australia, Steele
Palmer belong to on Apr 20, 1976?
Hall. Palmer joined the Queensland

## I Prompts List

## **Keyword Extraction Prompting**

Your task is to extract keywords from the question. Response by a list of keyword strings. Do not include pronouns, prepositions, articles.

There are some examples for you to refer to: <Question> When was the last time the United States hosted the Olympics? </Ouestion> <Keywords> ["United States", "hosted", "Olympics"] </Keywords> <Question> Who sang 1 national anthem for Super Bowl last year? </Question> <Keywords> ["sang", "1", "national anthem", "Super Bowl"] </Keywords> <Question> Who runs the fastest 40-yard dash in the NFL? </Question> <Keywords> ["runs", "fastest", "40-yard", "dash", "NFL"] </Keywords> <Ouestion> When did Khalid write Young Dumb and Broke? </Question> <Keywords> ["Khalid", "write", "Young Dumb and Broke"] </Keywords> Now your question is <Question> {normalized question} </Question> <Keywords>

Table 7: Detailed prompts for Keyword Extraction.

### **Query-Focused Summarization Prompting**

You are given a context paragraph and a specific question. Your goal is to summarize the context paragraph in one standalone sentence by answering the given question. If dates are mentioned in the paragraph, include them in your answer. If the question cannot be answered based on the paragraph, respond with "None". Ensure that the response is relevant, complete, concise and directly addressing the question.

There are some examples for you to refer to:

<Context>

Houston Rockets | The Houston Rockets have won the NBA championship twice in their history. Their first win came in 1994, when they defeated the New York Knicks in a seven-game series. The following year, in 1995, they claimed their second title by sweeping the Orlando Magic. Despite several playoff appearances in the 2000s and 2010s, the Rockets have not reached the NBA Finals since their last championship victory in 1995.

</Context>

<Question>

When did the Houston Rockets win the NBA championship?

</Question>

<Summarization>

The Houston Rockets have won the NBA championship in 1994 and 1995.

</Summarization>

<Context>

2019 Grand National | The 2019 Grand National (officially known as the Randox Health 2019 Grand National for sponsorship reasons) was the 172nd annual running of the Grand National horse race at Aintree Racecourse near Liverpool, England. The showpiece steeplechase is the pinnacle of a three-day festival which began on 4 April, followed by Ladies' Day on 5 April. </Context>

<Question>

Who won the Grand National?

</Question>

<Summarization>

None

</Summarization>

Now your question and paragraph are <Context> {title} | {text} </Context> <Question> {normalized question} </Question> <Summarization>

Table 8: Detailed prompts for Query-Focused Summarization.

### **Reader Direct Prompting**

As an assistant, your task is to answer the question directly after <Question>. Your answer should be after <Answer>.

There are some examples for you to refer to: <Question> When did England last get to the semi final of a World Cup before 2019? </Question> <Answer> 2018 </Answer> <Question> Who sang the national anthem in the last Super Bowl as of 2021? </Question> <Answer> Eric Church and Jazmine Sullivan </Answer> <Question> What's the name of the latest Pirates of the Caribbean by 2011? </Question> <Answer> **On Stranger Tides** </Answer> <Ouestion> What was the last time France won World Cup between 2016 and 2019? </Question> <Answer> Priscilla Joan Torres </Answer> <Question> Which school did Marshall Sahlins go to from 1951 to 1952? </Question> <Answer> Columbia University </Answer> Now your Question is <Question> {question} </Question> <Answer>

Table 9: Detailed prompts for Reader Direct Question Answering.

## **Reader Chain-of-Thought Prompting**

As an assistant, your task is to answer the question after <Question>. You should first think step by step about the question and give your thought and then answer the <Question> in the short form. Your thought should be after <Thought>. The direct answer should be after <Answer>.

There are some examples for you to refer to: <Question> When did England last get to the semi final of a World Cup before 2019? </Question> <Thought> England has reached the semi-finals of FIFA World Cup in 1966, 1990, 2018. The latest year before 2019 is 2018. So the answer is 2018. </Thought> <Answer> 2018 </Answer> <Ouestion> Who sang the national anthem in the last Super Bowl as of 2021? </Question> <Thought> The last Super Bowl as of 2021 is Super Bowl LV, which took place in February 2021. In Super Bowl LV, the national anthem was performed by Eric Church and Jazmine Sullivan. So the answer is Eric Church and Jazmine Sullivan. </Thought> <Answer> Eric Church and Jazmine Sullivan </Answer> <Ouestion> Where was the last Rugby World Cup held between 2007 and 2016? </Question> <Thought> The Rugby World Cup was held in 1987, 1991, 1995, 1999, 2003, 2007, 2011, 2015, 2019. The last Rugby World Cup held between 2007 and 2016 is in 2015. The IRB 2015 Rugby World Cup was hosted by England. So the answer is England. </Thought> <Answer> England </Answer> Now your Question is <Question> {question} </Question> <Thought>

Table 10: Detailed prompts for Reader Chain-of-Thought Question Answering.

## **Retrieval-Augmented Reader Prompting**

As an assistant, your task is to answer the question based on the given knowledge. Your answer should be after <Answer>. The given knowledge will be after the <Context> tage. You can refer to the knowledge to answer the question. If the context knowledge does not contain the answer, answer the question directly.

There are some examples for you to refer to:

<Context>

Sport in the United Kingdom Field | hockey is the second most popular team recreational sport in the United Kingdom. The Great Britain men's hockey team won the hockey tournament at the 1988 Olympics, while the women's hockey team repeated the success in the 2016 Games.

Three Lions (song) | The song reached number one on the UK Singles Chart again in 2018 following England reaching the semi-finals of the 2018 FIFA World Cup, with the line "it's coming home" featuring heavily on social media.

England national football team | They have qualified for the World Cup sixteen times, with fourthplace finishes in the 1990 and 2018 editions.

</Context> <Question> When did England last get to the semi final of a World Cup before 2019? </Question> <Answer> 2018 </Answer>

<Context>

Bowl LV | For Super Bowl LV, which took place in February 2021, the national anthem was performed by Eric Church and Jazmine Sullivan. They sang the anthem together as a duet.

Super Bowl LVI | For Super Bowl LVI, which took place in February 2022, the national anthem was performed by Mickey Guyton. She delivered a powerful rendition of the anthem. </Context> <Question> Who sang the national anthem in the last Super Bowl as of 2021? </Question> <Answer> Eric Church and Jazmine Sullivan </Answer>

Now your question and context knowledge are <Context> {texts} </Context> <Question> {question} </Question> <Answer>

Table 11: Detailed prompts for Retrieval-Augmented Question Answering.

### **Relevance Checking Prompting**

You will be given a context paragraph and a question. Your task is to decide whether the context is relevant and contains the answer to the question. Requirements are as follows:

- First, read the paragraph after <Context> and the question after <Question> carefully.

- Then you should think step by step and give your thought after <Thought>.

- Finally, write the response as "Yes" or "No" after <Response>.

There are some examples for you to refer to:

<Context>

Petronas Towers | From 1996 to 2004, they were officially designated as the tallest buildings in the world until they were surpassed by the completion of Taipei 101. The Petronas Towers remain the world's tallest twin skyscrapers, surpassing the World Trade Center towers in New York City, and were the tallest buildings in Malaysia until 2019, when they were surpassed by The Exchange 106.

</Context>

<Question>

Tallest building in the world?

</Question>

<Thought>

The question asks what the tallest building in the world is. The context paragraph talks about the Petronas Towers. The context paragraph states that Petronas Towers were officially designated as the tallest buildings in the world from 1996 to 2004. And the Taipei 101 became the tallest building in the world after 2004. This context paragraph contains two answers to the question. Therefore, the response is "Yes".

</Thought>

<Response>

Yes

</Response>

Now your context paragraph and question are:

<Context>

{context}

</Context>

<Question>

{normalized question}

</Question>

<Thought>

Table 12: Detailed prompts for relevance checking.

## **Independent Reading Prompting**

You are a summarizer summarizing a retrieved document about a user question. Keep the key dates in the summarization. Write "None" if the document has no relevant content about the question.

There are some examples for you to refer to:

<Document>

David Beckham | As the summer 2003 transfer window approached, Manchester United appeared keen to sell Beckham to Barcelona and the two clubs even announced that they reached a deal for Beckham's transfer, but instead he joined reigning Spanish champions Real Madrid for €37 million on a four-year contract. Beckham made his Galaxy debut, coming on for Alan Gordon in the 78th minute of a 0–1 friendly loss to Chelsea as part of the World Series of Soccer on 21 July 2007.

</Document>

<Question>

David Beckham played for which team?

</Question>

<Summarization>

David Beckham played for Real Madrid from 2003 to 2007 and for LA Galaxy from July 21, 2007. </Bummarization>

<Document>

Houston Rockets | The Houston Rockets have won the NBA championship twice in their history. Their first win came in 1994, when they defeated the New York Knicks in a seven-game series. The following year, in 1995, they claimed their second title by sweeping the Orlando Magic. Despite several playoff appearances in the 2000s and 2010s, the Rockets have not reached the NBA Finals since their last championship victory in 1995.

</Document>

<Question>

When did the Houston Rockets win the NBA championship?

</Question>

<Summarization>

The Houston Rockets won the NBA championship twice in 1994 and 1995.

</Summarization>

Now your document and question are:

<Document>

{document}

</Document>

<Question>

{normalized question}?

</Question>

<Summarization>

Table 13: Detailed prompts for Independent Reading.

### **Combined Reading Prompting**

As an assistant, your task is to answer the question based on the given knowledge. Answer the given question; you can refer to the document provided. Your answer should follow the <Answer> tag. The given knowledge will be after the <Context> tag. You can refer to the knowledge to answer the question. Answer only the name for 'Who' questions. If the knowledge does not contain the answer, answer the question directly.

There are some examples for you to refer to:

<Context>

In 1977, Trump married Czech model Ivana Zelníčková. The couple divorced in 1990, following his affair with actress Marla Maples.

Trump and Maples married in 1993 and divorced in 1999.

In 2005, Donald Trump married Slovenian model Melania Knauss. They have one son, Barron (born 2006).

</Context>

<Question>

Who was the spouse of Donald Trump between 2010 and 2014?

</Question>

<Thought>

According to the context, Donald Trump married Melania Knauss in 2005. The period between 2010 and 2014 is after 2005. Therefore, the answer is Melania Knauss.

</Thought>

<Answer>

Melania Knauss

</Answer>

Now your question and context knowledge are:

<Context>

{generations}

</Context>

<Question>

{question}

</Question>

<Thought>

Table 14: Detailed prompts for Combined Reading.