Parameterized Complexity of (d,r)-Domination via Modular Decomposition

A PREPRINT

Gennaro Cordasco¹, Luisa Gargano*², and Adele A. Rescigno*²

Department of Psychology, University of Campania "L.Vanvitelli", Italy, gennaro.cordasco@unicampania.it

Department of Computer Science, University of Salerno, Italy, lgargano@unisa.it

Department of Computer Science, University of Salerno, Italy, arescigno@unisa.it

ABSTRACT

With the rise of social media, misinformation has significant negative effects on the decision-making of individuals, organizations and communities within society. Identifying and mitigating the spread of fake information is a challenging issue. We consider a generalization of the Domination problem that can be used to detect a set of individuals who, through an awareness process, can prevent the spreading of fake narratives. The considered problem, named (d,r)-DOMINATION generalizes both distance and multiple domination. We study the parameterized complexity of the problem according to standard and structural parameters. We give fixed-parameter algorithms as well as polynomial compressions/kernelizations for some variants of the problem and parameter combinations.

1 Introduction

Domination is a fundamental concept in graph theory, which deals with the idea of dominating sets within a graph. In this problem, you seek to find the smallest set of vertices in a graph in such a way that every vertex in the graph is either in the dominating set or adjacent to a vertex in the dominating set. Dominating sets are critical in various real-world applications across fields that involve networks, connections, and coverage [33, 34].

The Domination Problem in graph theory has several important variants that focus on different aspects of the problem. We focus on generalizations to distance domination and multiple domination that provide ways to solve practical problems related to the physical or operational constraints of networks.

One application that inspires this paper is epidemiology. Graph-based information dissemination algorithms can be used to study the spread of real and fake information in a network. While these algorithms are not designed to intercept fakes, they can be used as part of a broader strategy to identify and mitigate the spread of fakes. Controlling the spread of fake news is an ongoing challenge. Strategies to reduce the size of propagation by immunizing/removing vertices have been investigated in several papers [2, 45]. In this paper, we focus on the effective production of accurate and

^{*} Work partially supported by project SERICS (PE00000014) under the MUR National Recovery and Resilience Plan funded by the European Union - NextGenerationEU.

evidence-based information to combat misinformation. To this end, we study the (d, r)-domination problem [3], which includes both multiplicity and distance.

Apart from our inspiring application the (d, r)-domination problem, as the classical domination problem, has many applications. For instance it can be used, from the other side, as a mechanism to identify key influencers or individuals who can drive (mis)information diffusion within a network [7, 8, 9, 10, 11, 12]. In wireless sensor networks, it helps minimize the number of sensors while ensuring full coverage and connectivity [15]. In facility location and placement, it helps determine the optimal locations for services, facilities, or resources to ensure that they are accessible to a maximum number of people while minimizing the number of locations needed [29].

The problem. Let G=(V,E) be a graph. For a set of vertices $X\subseteq V$, we denote by G[X] the induced subgraph of G generated by X. Moreover, for $v\in V$, by $N(v)=\{u\in V\mid (u,v)\in E\}$ the neighborhood of v. This notation can also be extended to a set $X\subseteq V$, we let $N(X)=\{y\in V\setminus X\mid \exists x\in X, (x,y)\in E\}$ be the set of vertices outside X that have a neighbor in X. For any two vertices $u,v\in V$, we denote by S(u,v) the distance between S(u,v) and by S(u,v) the distance between S(u,v) and S(u,v) the neighborhood of radius S(u,v) around S(u,v).

A Dominating set in a graph G = (V, E) is a subset of V such that every vertex not in the set has at least one neighbor in the set. In this paper, we will consider the following generalization introduced in [3]: Given a demand d and a radius around r, a vertex $v \in V \setminus S$ is dominated by S if there exist at least d vertices in S that are at a distance at most r from v.

In an information diffusion setting, we consider a networked population of people who could be misled by a word-of-mouth dissemination approach. It can be assumed that an individual gets immune when exposed to enough debunking information. For further clarification, an individual is considered immunized when he/she receives the debunking information from a number of neighbors at least equal to its demand d. Furthermore, every individual has a circle of trust (level of trust) defined by a radius r around it. Debunking information from inside the circle of trust is the only source that can be trusted.

Specifically, we examine how to use (d, r)-dominating sets to identify a collection of individuals who can stop the spread of false narratives by initiating a debunking (or prebunking) immunization campaign. The vaccination operation on a vertex prevents the contamination of the vertex itself as well as the spread of such false narratives when there is a debunking immunization campaign in place. Therefore, to prevent the spread of malicious items, we are looking for a small subset S of vertices (also known as the immunizing set) which allows us to minimize the propagation of false information by disseminating the debunking information. Depending on the vertex demand d and the radius r,

 $^{^{2}}$ We will use the subscript G whenever the graph is not clear from the context.

A PREPRINT

which characterizes the vertices' circle of trust, the immunizing set should be able to cover each vertex d times within a maximum distance of r.

Definition 1. Given an undirected graph G = (V, E) and integers r, d > 0, a subset of vertices $S \subseteq V$ is a (d, r)-dominating set of G if

$$|N_r(v) \cap S| \ge d$$
, for all $v \in V \setminus S$.

In this paper, we study the (d, r)-DOMINATION problem that asks for a minimum (d, r)-dominating set.

(d,r)-DOMINATION:

Input: An undirected graph G=(V, E) and two integers r, d>0

Output: A (d, r)-dominating set of minimum size.

Since the problem can be solved independently in each connected component of the input graph, from now on, we assume that the input graph is connected.

1.1 Parameterized Complexity and Compression/Kernelization

We study the (d, r)-DOMINATION problem from a parameterized point of view. Parameterized complexity is a refinement of classical complexity theory in which one takes into account not only the input size but also other aspects of the problem given by a parameter p. A problem Q with input size n and parameter p is called *fixed-parameter tractable* (FPT) if it can be solved in time $f(p) \cdot n^c$, where f is a computable function only depending on p and c is a constant. Downey and Fellows introduced a hierarchy of parameterized complexity classes $FPT \subseteq W[1] \subseteq W[2] \subseteq \ldots$ that is believed to be strict, see [19, 25].

Once fixed-parameter tractability of a problem is established, we can ask whether we can go even one step further by showing the existence of a polynomial compression/kernelization algorithm.

Definition 2. A compression for a parameterized problem Q is a polynomial-time algorithm, which takes an instance (I,p) and produces an instance (I',p') called a kernel, such that $(I,p) \in Q$ iff $(I',p') \in Q'$ for another problem Q' and the size |I'| + p' is bounded by f(p) for some computable function f, called the size of the kernel. If f is a polynomial function, the algorithm is called polynomial compression, denoted PC.

If Q = Q' then the algorithm is called kernelization. Moreover, if Q = Q' and f is a polynomial function then the algorithm is called polynomial kernelization, denoted PK.

Kernelization can be seen as a special case of compression when the algorithm is required to produce another instance of the same problem. Moreover by Theorem 1.6 in [27], we know that if there is a polynomial compression of a problem Q into another problem Q' and the decision versions of Q and Q' are both NPC, then Q also admits a polynomial kernel. The reason is that any two NPC problems have a polynomial-time reduction between them. So, for two NPC

problems, polynomial compression and polynomial kernel are equivalent, if we do not consider kernel size. In this paper we will treat the two concepts separately in order to emphasize the fact that a kernelization is often a straightforward preprocessing strategy in which inputs to the algorithm are replaced by a smaller input, achieved by applying a set of reduction rules that cut away parts of the instance that are easy to handle. It is known that for decidable problems, fixed-parameter tractability is equivalent to the existence of a kernelization algorithm, but not necessarily a PK.

Related results. The (d, r)-DOMINATION problem was proved to be NP-complete even when restricted to bipartite graphs and chordal graphs [3]. Bounds on the minimum size of a solution of (d, r)-DOMINATION are presented in [37]. Subsequent results for some special classes of graphs are given in [32, 42]. (d, r)-DOMINATION generalizes several well-known, and widely studied, generalized domination problems.

- When d=r=1 the problem becomes the classic Dominating Set problem.
- When r = 1 and d ≥ 2, the problem becomes the d-DOMINATION problem [23, 24]. For any d, this problem is known to remain NP-hard in the classes of split graphs. From a positive point of view, it is solvable in linear time in the class of graphs having the property that any block is a clique, a cycle or a complete bipartite graph (this includes trees, block graphs, cacti, and block-cactus graphs), and it is solvable in polynomial time in the class of chordal bipartite graphs [41]. The d-DOMINATION problem was also studied with respect to its (in)approximability properties, both in general [6] and in restricted graph classes [1].
- When d=1 and $r \geq 2$, the problem becomes the r-DISTANCE DOMINATION problem [35]. This problem, for any r, remains NP-hard even if we restrict the graph to belong to certain special classes of graphs, including bipartite or chordal graphs [5]. Slater presented a linear time algorithm for the r-DISTANCE DOMINATION problem in forests [47]. An approximate algorithm for unit disk graphs was presented in [16].

From a parameterized complexity point of view, it is known that the (d,r)-Domination problem, as well as the d-Domination problem and the r-Distance Domination problem are W[2]-hard with respect to the size k of the solution since all these problems have the Dominating Set problem as special case [18]. Moreover, since (d,1)-Domination remains NP-hard for each $d \geq 2$ we have that (d,r)-Domination is para-NP-hard with respect to d and W[2]-hard with respect to d and W[2]-hard with respect to d.

For graphs of bounded branchwidth, it was presented in [36] an algorithm for the d-DOMINATION problem parameterized by d and the branchwidth bw(G) of graph G. Due to the linear relation between the branchwidth bw(G) and the treewidth tw(G) of graph G, the above result allows to obtain an algorithm for the d-DOMINATION problem parameterized by d and the treewidth tw(G). An XP algorithm for the d-DOMINATION problem parameterized by cliquewidth cw(G) of graph G was presented in [7]. For the r-DISTANCE DOMINATION problem, an algorithm parameterized by r and the treewidth tw(G) was presented in [4].

Parameters	(1,1)-Domination	(1,r)-Domination	(d,1)-Domination	(d,r)-Domination
nd	PK[13]	PC[Th.4]	FPT[38]	FPT[Cor.1]
itp	PK[13]	PC[Th.4]	W[1]-hard[38]	W[1]-hard[38]
mw	FPT[46]		W[1]-hard[38]	W[1]-hard[38]
	PC [Th.3]	PC [Th.4]		
nd and d	-	-	PK [Th.7]	PK [Th.7]
itp and d	-	-	PC[Lem.5]	PC[Th.6]
${\tt mw} \ {\tt and} \ d$	-	-	FPT [Lem.3]	FPT [Th.2]

Table 1: Parameterized complexity with respect to demand (d), neighborhood diversity (nd), iterated type partition number (itp) and modular-width (mw).

In this paper, we are interested in the analysis of (d, r)-Domination with respect to some structural parameters of the input graph G: The neighborhood diversity nd(G), the iterated type partition itp(G), and the modular-width mw(G) of G. FPT algorithms for Dominating Set for nd(G), itp(G), and mw(G) parameters were presented in [44], [13], and [46], respectively. Recently, Lafond and Luo [38] presented an FPT algorithm for d-Domination parameterized by nd(G) and proved that this problem is W[1]-hard with respect to itp(G).

The existence of PKs for the DOMINATING SET and r-DISTANCE DOMINATION problems with respect to the size k of the solution in special classes of graphs has also been studied [20, 22, 26]. No PK for the DOMINATING SET problem exists when parameterized by the solution size and the vertex cover number vc(G) [17]. A PK for the DOMINATING SET problem parameterized by itp, and consequently by nd, has been provided in [13].

Our results. In this paper, we give some results with respect to some standard and structural parameters of G: the demand d, the modular-width mw(G), the iterated type partition number itp(G) and the neighborhood diversity nd(G).

We present:

- a FPT algorithm for (d, r)-DOMINATION parameterized by mw(G) + d.
- a PC for (1,r)-DOMINATION parameterized by mw(G) and, consequently, by itp(G) and nd(G).
- a PC for (d, r)-DOMINATION parameterized by itp(G) + d.
- a PK for (d, r)-DOMINATION parameterized by nd(G) + d.

Table 1 gives a summary of known and new parameterized complexity results with respect to the considered parameters.

2 Modular Decomposition

The notion of modular decomposition of graphs was introduced by Gallai in [31], as a tool to define hierarchical decompositions of graphs.

Definition 3. The following operations can be used to construct a graph:

(01) The creation of an isolated vertex.

- (O2) The disjoint union of two graphs denoted by $G_1 \oplus G_2$, i.e., $G_1 \oplus G_2$ is the graph with vertex set $V(G_1) \cup V(G_2)$ and edge set $E(G_1) \cup E(G_2)$.
- (O3) The complete join of two graphs denoted by $G_1 \otimes G_2$, i.e., $G_1 \otimes G_2$ has vertex set $V(G_1) \cup V(G_2)$ and edge set $E(G_1) \cup E(G_2) \cup \{(u,w) \mid u \in V(G_1), w \in V(G_2)\}.$
- (O4) The substitution of the vertices $1, \ldots, \ell$ of an outline graph H by the graphs G_1, \ldots, G_ℓ , denoted by $H(G_1, \ldots, G_\ell)$, is the graph with vertices $\bigcup_{1 \leq i \leq \ell} V(G_i)$ and edge set $\bigcup_{1 \leq i \leq \ell} E(G_i) \cup \{(u, w) \mid u \in G_i, w \in G_j, (i, j) \in E(H), 1 \leq i \neq j \leq \ell\}$.

Notice that (O2) and (O3) are special cases of (O4) with $\ell = 2$.

A module of a graph G=(V,E) is a set $M\subseteq V$ such that for all $u,v\in M,\ N(u)\setminus M=N(v)\setminus M$. Two modules M and M' are adjacent if, in G, every vertex of M is adjacent to every vertex of M', and independent if no vertex of M is adjacent to a vertex of M'. The empty set, the vertex set V, and all singletons $\{v\}$ for each $v\in V$ are always modules and they are called *trivial modules*. A graph is called *prime* if all of its modules are trivial. A partition $\mathcal{M}=\{M_1,M_2,\ldots,M_\ell\}$ of V is called a modular partition of G if every element of \mathcal{M} is a module of G. Hence, the modular partition of $G=G_1\oplus G_2$ and $G=G_1\otimes G_2$ in operations (O2)-(O3) is $\mathcal{M}=\{M_1,M_2\}$ where $G_1=G[M_1]$ and $G_2=G[M_2]$ and the modular partition of $G=H(G_1,\ldots,G_\ell)$ in operation (O4) is $\mathcal{M}=\{M_1,\ldots,M_\ell\}$ where for each G0 in operation (O4) is G1.

Operations (O1)-(O4) taken to construct a graph, form a parse-tree of the graph. A parse tree of a graph G is a tree T(G) that captures the decomposition of G into modules. The leaves of T(G) represent the vertices of G (operation (O1)). The internal vertices of T(G) capture operations on modules: Disjoint union of its children (operation (O2)), complete join (operation (O3)) and substitution (operation (O4)). Figure 1 depicts a graph G and the corresponding parse tree.

Modular-width. The Modular-width parameter was introduced in [30]. The *width* of a graph G is the maximum size of the vertex set of an outline graph H used in operation (O4) to construct G, if any, it is 2 otherwise; this number corresponds to the maximum number of children of a vertex in the corresponding parse tree. The *modular-width* is the minimum width such that G can be obtained from some sequence of operations (O1)-(O4). Finding a parse-tree, of a given graph G, corresponding to the modular-width, can be done in linear-time [14].

 \mathcal{G} -modular cardinality. A variant of modular-width restricted to fixed graph classes has been proposed in [38]. A graph class \mathcal{G} is a (possibly infinite) set of graphs containing at least one non-empty graph.

³For a positive integer a, we use [a] to denote the set of integers $[a] = \{1, 2, \dots, a\}$.

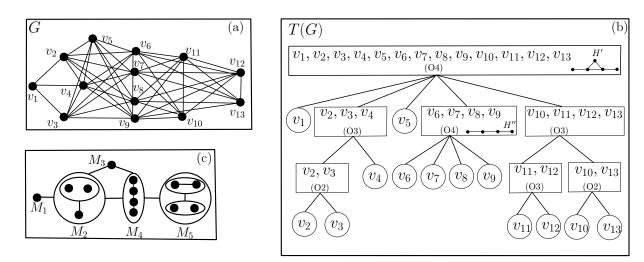


Figure 1: (a) A graph G. (b) The parse tree T(G) associated with a decomposition of G into modules. The width of the presented decomposition is 5. (c) A hierarchical representation of the decomposition of G into modules.

Definition 4. [38]. Let \mathcal{G} be a graph class. For a graph G (not necessarily in \mathcal{G}), a modular partition $\mathcal{M} = \{M_1, \ldots, M_\ell\}$ of G is called a \mathcal{G} -modular partition if each $G[M_i]$ belongs to \mathcal{G} . The \mathcal{G} -modular cardinality of G, denoted by \mathcal{G} -mc(G), is the minimum cardinality of a \mathcal{G} -modular partition of G.

Therefore, a graph G of \mathcal{G} -modular cardinality $\ell \geq 1$ and modules M_1, \ldots, M_ℓ , can be seen as $G = H(G_1, \ldots, G_\ell)$, according to substitution operation (O4) (including (O2) or (O3) when $\ell = 2$), in which $G_i = G[M_i] \in \mathcal{G}$, for each $i \in [\ell]$. If $\ell = |V(G)|$, we say that G is prime with respect to the class \mathcal{G} .

Neighborhood diversity. The neighborhood diversity $\operatorname{nd}(G)$ of a graph G was introduced by Lampis in [40]. It can be seen as the $(\mathcal{K} \cup \mathcal{I})$ -modular cardinality of G, where \mathcal{K} and \mathcal{I} denote the class of clique and of independent set graphs, respectively. Hence, a graph G of neighborhood diversity $\ell \geq 1$ and modules M_1, \ldots, M_ℓ , can be seen as $G = H(G_1, \ldots, G_\ell)$, in which $G_i = G[M_i] \in \mathcal{K} \cup \mathcal{I}$, for each $i \in [\ell]$.

Iterated type partition. Given a graph G, the *iterated type partition* of G, introduced in [13], is defined by iteratively contracting *clique* and *independent set* modules until no more contractions are possible; that is, the obtained graph is prime with respect to the class $K \cup \mathcal{I}$. The iterated type partition number, denoted $\mathtt{itp}(G)$, is the number of vertices of the obtained prime graph. An example of a graph G with $\mathtt{itp}(G) = 5$ and its iterative identification is given in Figure 2. It can be shown that the vertices of the obtained *prime graph* represent modules that are *cographs*. Therefore, the *iterated type partition* number of a graph is equivalent to its C-modular cardinality, where C denotes the cograph class. We know that for each graph G we have $\mathtt{mw}(G) \leq \mathtt{itp}(G) \leq \mathtt{nd}(G)$. See also [13] for a discussion on the relations

between modular decomposition parameters and other parameters.

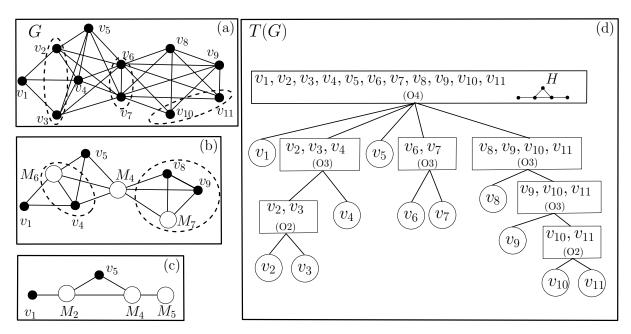


Figure 2: (a)-(c) A graph G with *iterated type partition* number 5 and its iterative identification. Dashed circles describe the identified *clique* or *independent set* modules. (d) The parse tree T(G) associated with a decomposition of G into modules. Apart from the root, all internal vertices use only operations (O2) and (O3).

2.1 Modular Decomposition on Power Graphs

The r-th graph power of a graph G=(V,E), denoted by G^r , is a graph that has the same set of vertices of G and an edge exists between two vertices if and only if their distance in G is at most r, that is, $V(G^r)=V$ and $E(G^r)=\{(u,v)\mid u,v\in V,\ \delta_G(u,v)\leq r\}.$

Lemma 1. Let G = (V, E) be any connected undirected graph. It holds

- (i) for every graph class \mathcal{G} such that $\mathcal{K} \subseteq \mathcal{G}$, \mathcal{G} -mc $(G^r) \leq \mathcal{G}$ -mc(G);
- (ii) $mw(G^r) < mw(G)$.

Leveraging Lemma 1, we establish the following result.

Theorem 1. For any d, r > 0, if the (d, 1)-DOMINATION problem is FPT parameterized by mw (resp. \mathcal{G} -mc(G) with $\mathcal{K} \subseteq \mathcal{G}$), then the (d, r)-DOMINATION problem is FPT parameterized by mw (resp. \mathcal{G} -mc(G) with $\mathcal{K} \subseteq \mathcal{G}$).

Proof. We know that there exists an algorithm $\mathcal{A}_{\mathtt{mw}}$ (resp. $\mathcal{A}_{\mathtt{mc}}$) that solves the (d,1)-Domination problem within time $f(\mathtt{mw}(G)) \cdot n^c$ (resp. $f(\mathcal{G}\text{-mc}(G)) \cdot n^c$) where c is a constant. Starting from G one can easily build in polynomial time G^r . Then we observe that a (d,r)-dominating set of G corresponds to a (d,1)-dominating set of G^r and vice-versa. Hence, using $\mathcal{A}_{\mathtt{mw}}$ (resp. $\mathcal{A}_{\mathtt{mc}}$) on G^r we are able to solve the (d,r)-Domination problem within time $f(\mathtt{mw}(G^r)) \cdot n^{c'}$ (resp. $f(\mathcal{G}\text{-mc}(G^r)) \cdot n^{c'}$) where c' is a constant. Moreover by Lemma 1 we know that $\mathtt{mw}(G^r) \leq \mathtt{mw}(G)$ (resp. if $\mathcal{K} \subseteq \mathcal{G}$, $\mathcal{G}\text{-mc}(G^r) \leq \mathcal{G}\text{-mc}(G)$) and the result holds.

Theorem 1 implies that, by applying the FPT algorithm for DOMINATING SET parameterized by mw(G) (presented in [46]), we immediately have that (1, r)-DOMINATION is FPT parameterized by mw(G) and, consequently, by itp(G) and nd(G). Moreover, recalling that both in case of nd(G) and itp(G) modules are in $\mathcal{K} \cup \mathcal{I}$, one can apply Theorem 1 on the faster algorithms for DOMINATING SET parameterized by nd(G) (presented in [44]) and itp(G) (presented in [13]).

Moreover, by Theorem 1, we have that, using the FPT algorithm [38] for the (d, 1)-DOMINATION problem on G^{r} , the following result holds.

Corollary 1. (d,r)-Domination problem is FPT parameterized by nd.

3 A FPT algorithm for (d, r)-DOMINATION parameterized by mw plus the demand d

Given a graph G = (V, E), and let T(G) be the parse-tree of G where the number of children of each vertex in T(G), representing the (O4) operation, is at most mw(G). Our strategy traverses the tree T(G) in an opposite breadth-first fashion. For each vertex $w_M \in T(G)$, representing one of the operations (O1)-(O4) of Definition 3 and corresponding to a module M, in order to be able to reconstruct the solution recursively, we calculate optimal solutions under different hypotheses based on the following consideration.

Since all the vertices $v \in M$ share the same neighborhood $N(v) \setminus M$, we can solve the problem locally, considering that the solution, adopted by modules adjacent to M, dominates all the vertices in M with the same multiplicity (i.e., for each $u,v \in M$, $|N(v) \cap (S \setminus M)| = |N(u) \cap (S \setminus M)|$). Hence, we can partition the solution S into two sets $S' \subseteq V \setminus M$ and $S'' \subseteq M$. If we assume that $|N(v) \cap S'| = a$, then all the vertices in M are dominated a times by vertices in S' and we need to build a solution $S'' \subseteq M$, which dominates each vertex $v \in M$ at least $t = \max\{d - a, 0\}$ times, that is we need a (t,1)-Dominating set of G[M]. Hence, we compute the optimal solution for G[M] considering all the possible demands $t = 0, 1, \ldots, d$, where t = 0 corresponds to the case $a \ge d$ (i.e., all the vertices are already dominated by at least d neighbors) and, t = d corresponds to the case a = 0 (i.e., adjacent modules do not contain any vertex in S').

Definition 5. For each vertex $w_M \in T(G)$, representing a module M and for each $t \in \{0, 1, ..., d\}$ we define the cost of the module M with demand t, denoted $c_M(t)$, as the size of a minimum (t, 1)-Dominating set of G[M].

It is worth observing that:

- For each module M, we have $c_M(0) = 0$.
- For each module leaf $w_{\{v\}}$ of the parse tree T(G), which corresponds to a vertex $v \in V$, we have $c_{\{v\}}(t) = 1$, for each $t \in [d]$.

Algorithm 1: MODULE COST COMPUTATION

```
Input: A graph G[M] = H(G_1, \ldots, G_\ell), costs c_{M_i}(t), for each i \in [\ell] and t \in [d].

Output: The costs c_M(t), for each t \in [d].

1 for t = 1, 2, \ldots, d do

2 c_M(t) = \infty

for each t_1, t_2, \ldots, t_\ell \in \{0, 1, \ldots, t\} do // here c_{M_i}(0) = 0, for each i \in [\ell]

4 \text{if (for each } i \in [\ell], t_i \geq t - \sum_{(i,j) \in E(H)} c_{M_j}(t_j)) then

5 \text{if } \left(\sum_{i=1}^{\ell} c_{M_i}(t_i) < c_M(t)\right) then c_M(t) = \sum_{i=1}^{\ell} c_{M_i}(t_i)
```

• The size of the solution of our (d, 1)-Domination problem on G corresponds to $c_V(d)$ (i.e., the cost of the root vertex for t = d).

Recalling that operations (O2) and (O3) of Definition 3 are special case of (O4), the following Algorithm 1 enables us to compute the costs of an internal vertex w_M representing the (O4) operation, that is $G[M] = H(G_1, \ldots, G_\ell)$, in which $\mathcal{M} = \{M_1, M_2, \ldots, M_\ell\}$ is a modular partition of G[M], $G_i = G[M_i]$ and $\ell \leq \mathsf{mw}(G)$, assuming that the costs for the children modules G_1, G_2, \ldots, G_ℓ have already been computed.

Lemma 2. Let $G[M] = H(G_1, \ldots, G_\ell)$, in which $G_i = G[M_i]$ and for each $i \in [\ell], t \in [d]$ let $c_{M_i}(t)$ be the size of a minimum (t, 1)-Dominating set of G_i . The Algorithm 1 computes, in time $O(d(d+1)^\ell)$, for each $t \in [d]$, all the values $c_M(t)$.

Lemma 3. (d, 1)-DOMINATION is solvable in time $O(|V(G)|d(d+1)^{mw})$.

Proof. By observing that every vertex in the parse tree T(G) has at least two children and there are exactly |V(G)| leaves, we have that T(G) has at most |V(G)| - 1 internal vertices and the result in Lemma 2. Hence, using the Algorithm 1 for each internal vertex, we can easily build in time $O(|V(G)|d(d+1)^{mw})$ the optimal cost $c_V(d)$ of the solution for the root vertex, which corresponds to the size of the solution of the problem. The optimal set S can be computed within the same time by a standard backtracking technique.

By Lemma 3 and by using the same arguments of the proof of Theorem 1, the following result holds.

Theorem 2. (d,r)-Domination is solvable in time $O(|V(G)|d(d+1)^{mw})$.

The next section shows a stronger result in case d = 1.

3.1 A PC for (1, r)-DOMINATION parameterized by mw

We shift our attention to the (1,1)-DOMINATION problem, that is the classical DOMINATING SET problem on connected graphs.

Lafond and Luo [39] proved the nonexistence of a PC for the DOMINATING SET problem – without the restriction of a connected input graph – parameterized by mw, while Luo [43] showed that the DOMINATING SET problem – without the restriction of a connected input graph – has a polynomial Turing compression (PTC) parameterized by mw. A PTC is a relaxed version of a PC defined as follows.

Definition 6. A Turing compression for a parameterized problem Q is a polynomial-time algorithm with the ability to access an oracle for another problem Q', that can decide whether an instance $(I,p) \in Q$ with queries, called Turing kernels, of size at most f(p) for some computable function f. In particular, Q admits a polynomial Turing compression (PTC) if f is a polynomial function.

In the following, we restrict our attention to connected graphs and prove the existence of a PC for (1,1)-DOMINATION parameterized by mw, that is, if we constrain the DOMINATING SET problem to connected graphs, then it admits a PC parameterized by mw.

Let G=(V,E) be a connected undirected graph and let T(G) be the parse-tree of G where the number of children of each vertex in T(G), representing the (O4) operation, is at most $\mathtt{mw}(G)$. Hence, there exists a modular partition $\mathcal{M}=\{M_1,M_2,\ldots,M_\ell\}$ where $\ell \leq \mathtt{mw}(G)$ and $G=H(G_1,\ldots,G_\ell)$, in which $G_i=G[M_i]$, for some outline graph H having ℓ vertices.

Lemma 4. Let $G = H(G_1, ..., G_\ell)$, in which $G_i = G[M_i]$, be a connected undirected graph. There exists a solution S of the DOMINATING SET problem for G such that, for each $i \in [\ell]$.

- (a) $|S \cap M_i| \leq 1$;
- (b) if $|S \cap M_i| = 0$, then there exists $j \in N_H(i)$ such that $|S \cap M_j| = 1$;
- (c) if $|S \cap M_i| = 1$ and for each $j \in N_H(i)$ holds $|S \cap M_j| = 0$, then $\bigcap_{v \in M_i} (N_{G_i}(v) \cup \{v\}) \neq \emptyset$.

We now define a variation of DOMINATING SET that will be useful to present the Polynomial Compression.

COLORED DOMINATION:

Input: A graph G = (V, E), a coloring function $c : V \to \{B, W\}$, and an integer k.

Output: A colored dominating set, that is, a set $S \subseteq V$ such that

- \bullet |S| < k,
- $N(v) \cap S \neq \emptyset$, for each $v \in V$ such that either c(v) = B or $v \notin S$.

The following Theorem shows that an instance $\langle G, k \rangle$ of the decision version of DOMINATING SET on $G = H(G_1, \ldots, G_\ell)$ with parameter mw(G) can be reduced to an instance $\langle H, c, k \rangle$ of COLORED DOMINATION.

Theorem 3. DOMINATING SET admits a PC with respect to mw, for the class of connected graphs.

By Lemma 1, we know that $mw(G^r) \le mw(G)$. Observing that a (1, r)-dominating set of G corresponds to a dominating set of G^r and vice-versa, we have that the above strategy, applied on G^r , allows to devise a PC parameterized by mw for the (1, r)-Domination problem on G. By Theorem 3, the following result holds.

Theorem 4. (1, r)-DOMINATION admits a PC with respect to mw.

4 A PC for (d, r)-DOMINATION parameterized by itp plus the demand d

This section is devoted to devising a PC for (d, 1)-Domination problem parameterized by the iterated type partition number itp plus the demand d.

Let $I = \langle G, k \rangle$ be an input of the decision version of the (d,1)-DOMINATION problem on G = (V,E). As observed in Section 2, any graph G = (V,E) is described by a modular partition $\{M_1,M_2,\ldots,M_{\text{itp}}\}$ where itp = itp(G) and can be seen as $G = H(G_1,\ldots,G_{\text{itp}})$, for some outline graph H having itp vertices, and for each $i \in \{1,2,\ldots,\text{itp}\}$, $G_i = G[M_i]$ is a cograph.

We are going to define an instance I' of an Integer Linear Programming (ILP) problem on the variables $x_{i,t} \in \{0,1\}$, for each $i \in \{1,2,\ldots,\text{itp}\}$ and $t \in [d]$, which we will prove to be equivalent to I.

The ILP uses the costs $c_{M_i}(t)$ associated with the modules M_i , for each $i \in \{1, 2, ..., \text{itp}\}$ and each $t \in [d]$, which can be obtained exploiting Algorithm 1. The binary variable $x_{i,t} = 1$ means that we are choosing a solution $S_i \subseteq M_i$ such that S_i is a minimum (t, 1)-Dominating set of G_i . By Lemma 2 we know that $|S_i| = c_{M_i}(t)$. The constraints of the ILP are as follows:

$$\begin{array}{ll} (1) & \displaystyle \sum_{i \in \{1,2,\ldots, \mathtt{itp}\}, \ t \in [d]} c_{M_i}(t) \cdot x_{i,t} \leq k \\ \\ (2) & \displaystyle \sum_{(i,j) \in E(H), \ t \in [d]} c_{M_j}(t) \cdot x_{j,t} + \sum_{t \in [d]} t \cdot x_{i,t} \geq d \qquad \forall i \in \{1,2,\ldots,\mathtt{itp}\} \\ \\ (3) & \displaystyle \sum_{t \in [d]} x_{i,t} \leq 1 \qquad \qquad \forall i \in \{1,2,\ldots,\mathtt{itp}\} \\ \\ (4) & x_{i,t} \in \{0,1\} \qquad \qquad \forall i \in \{1,2,\ldots,\mathtt{itp}\}, \forall t \in [d], \end{array}$$

where:

- the inequality (1) guarantees that the size of the considered solution is at most k;
- the inequalities (2) guarantee that the vertices of each module M_i are dominated d times. Specifically, the first sum corresponds to the number of times a vertex in M_i is dominated by vertices of the solution belonging to adjacent modules, and the second sum corresponds to the number of times a vertex in M_i is dominated by vertices of the solution belonging to M_i ;
- the inequalities (3) guarantee that, for each module M_i at most one of the minimum (t,1)-dominating set of G_i , for $t=1,\ldots d$, is chosen (i.e., at most one among $c_{M_i}(1),c_{M_i}(2),\ldots,c_{M_i}(d)$ is chosen). We notice

that when $\sum_{t \in [d]} x_{i,t} = 0$, then no vertex in the solution is a vertex in M_i and then, all the vertices in M_i are dominated by vertices of the solution belonging to adjacent modules (that are by (2) at least d).

To obtain the desired PC algorithm, we are going to use the Frank and Tardos' algorithm [28] that enables to compress linear inequalities to an encoding length that is polynomial in the number of variables.

Theorem 5. [28] There is an algorithm that, given a vector $w \in \mathbb{Q}^r$ and an integer N, in polynomial time finds a vector $\overline{w} \in \mathbb{Z}^r$ with $\|\overline{w}\|_{\infty} \leq 2^{4r^3} N^{r(r+2)}$ such that $sign(w \cdot b) = sign(\overline{w} \cdot b)$ for all vectors $b \in \mathbb{Z}^r$ with $\|b\|_1 \leq N - 1$.

In particular, we will use the same approach as adopted in [21] (see Cor. 2).

Corollary 2. [21] There is an algorithm that, given a vector $w \in \mathbb{Q}^r$ and a rational $W \in \mathbb{Q}$, in polynomial time finds a vector $\overline{w} \in \mathbb{Z}^r$ with $\|\overline{w}\|_{\infty} = 2^{O(r^3)}$ and an integer $\overline{W} \in \mathbb{Z}$ with total encoding length $O(r^4)$, such that $w \cdot x = W$ if and only if $\overline{w} \cdot x = \overline{W}$ for every vector $x \in \{0,1\}^r$.

The following Lemma shows that $I = \langle G, k \rangle$ and the ILP I' are equivalent, that is, G admits a (d, 1)-Dominating set of size at most k if and only if I' admits a feasible solution. Moreover, we can compress I' to a new equivalent instance I'' such that |I''| is bounded by f(itp, d), where f is a polynomial function.

Lemma 5. The (d, 1)-Domination problem, parameterized by itp plus d, admits a PC.

By Lemma 1, we know that $itp(G^r) \leq itp(G)$. Observing that a (d,r)-dominating set of G corresponds to a (d,1)-dominating set of G^r and vice-versa, we have that the above strategy, applied on G^r , allows to obtain a PC parameterized by itp plus d for the (d,r)-DOMINATION problem on G. By Lemma 5, the following result holds.

Theorem 6. The (d,r)-DOMINATION problem, parameterized by itp plus d, admits a PC.

5 A PK for (d, r)-DOMINATION parameterized by nd plus the demand d

Since $nd(G) \ge itp(G)$, Theorem 6 applies also to neighborhood diversity. In the following, we show that in the latter case, we can go further by devising a PK using a straightforward pruning strategy.

Let $I=\langle G,k\rangle$ be an instance of the decision version of the (d,1)-Domination problem on G=(V,E), where G=(V,E) is described by a modular partition $\{M_1,M_2,\ldots,M_{\rm nd}\}$ where ${\rm nd}={\rm nd}(G)$ and can be seen as $G=H(G_1,\ldots,G_{\rm nd})$, for some outline graph H having ${\rm nd}$ vertices, and for each $i\in\{1,2,\ldots,{\rm nd}\},$ $G_i=G[M_i]$ is a clique or an independent set.

The following Lemma shows that there exists an optimal solution S such that for each module, the number of vertices belonging to the solution is bounded to 2d-1.

Lemma 6. Let $G = H(G_1, \ldots, G_{nd})$, in which $G_i = G[M_i]$ is a clique or an independent set. There exists a solution S of the (d, r)-DOMINATION problem for G such that, for each $i \in \{1, 2, \ldots, nd\}$, $|S_i = S \cap M_i| \le 2d - 1$.

Theorem 7. The (d, r)-DOMINATION problem, parameterized by nd plus d, admits a PK.

Proof. Let G = (V, E) be a graph. We will reduce an instance $I = \langle G, k \rangle$ of the decision version of the (d, 1)-DOMINATION problem on G = (V, E), to an instance $I' = \langle G', k \rangle$ of the same problem on a pruned graph G'. We recall that G = (V, E) is described by a modular partition $\{M_1, M_2, \ldots, M_{nd}\}$ where nd = nd(G) and can be seen as $G = H(G_1, \ldots, G_{nd})$, for some outline graph H having nd vertices. Specifically, G' is obtained from G pruning each module M_i , having more than 2d vertices, to any subset of M_i having 2d vertices.

We prove that G admits a (d, r)-dominating set of size at most k if and only if G' admits a (d, r)-dominating set of size at most k.

First, assume that S is a solution of the (d,r)-DOMINATION problem on G and $|S| \le k$. By Lemma 6, we may assume that for each $i \in \{1, 2, ..., nd\}$, $|S_i = S \cap M_i| \le 2d - 1$.

Let $S' = \bigcup_{i=1}^{\operatorname{nd}} S_i'$, where S_i' is any set of $|S_i|$ vertices in M_i . Clearly |S'| = |S|. Since S is a solution of the (d, r)-DOMINATION problem G, then any vertex in M_i is dominated by some vertices in S_i (if G_i is a clique) and by some vertices in S_j with $j \neq i$. In both cases, the choice of nodes in subset S_i , for each $i \in \{1, 2, \dots, \operatorname{nd}\}$ does not matter. The only thing that matters is the cardinality of such sets. Since S' keeps these cardinalities unchanged we have that S' is a solution of the (d, r)-DOMINATION problem on G'.

Assume now that S' is a solution of the (d,r)-DOMINATION problem on G'. Let S=S', since all the nodes in a module share the same neighborhood then it is not hard to verify that S is a solution of the (d,r)-DOMINATION problem on G.

Finally, we note that the number of vertices of G' is at most $2d \times nd(G)$, hence |I'| is bounded by f(nd, d).

References

- [1] D. Bakhshesh, M. Farshi, M. Hasheminezhad. Complexity results for k-domination and α -domination problems and their variants. arXiv:1702 .00533[cs .CC], (2017).
- [2] R. Albert, H. Jeong, A.-L. Barabási. Error and attack tolerance of complex networks. Nature 404, 378–382, (2000).
- [3] J.T. Bean, M.A. Henning, H.C. Swart. On the integrity of distance domination in graphs. Australian Journal of Combinatorics, 10, 29–43, (1994).
- [4] G. Borradaile and H. Le. Optimal Dynamic Program for r-Domination Problems over Tree Decompositions. In Proc. of IPEC'16, 8:1–8:23, (2016).

- [5] G.J. Chang, G.L. Nemhauser. The k-domination and k-stability problem on graphs. Tech. Report 540, Cornell Univ., (1982).
- [6] F. Cicalese, M. Milanic, U. Vaccaro. On the approximability and exact algorithms for vector domination and related problems in graphs. Discrete Appl. Math. 161(6), 750–767, (2013).
- [7] F. Cicalese, G. Cordasco, L. Gargano, M. Milanic, U. Vaccaro. Latency-bounded target set selection in social networks. Theor. Comput. Sci. 535, 1–15, (2014).
- [8] G. Cordasco, L. Gargano and A.A. Rescigno. On finding small sets that influence large networks. Social Network Analysis and Mining 6(11), (2016).
- [9] G. Cordasco, L. Gargano, M. Mecchia, A.A. Rescigno, U. Vaccaro. Discovering Small Target Sets in Social Networks: A Fast and Effective Algorithm. Algorithmica 80(6), 1804–1833, (2018).
- [10] G. Cordasco, L. Gargano, A.A. Rescigno, U. Vaccaro. Evangelism in social networks: Algorithms and complexity. Networks 71(4): 346–357, (2018).
- [11] G. Cordasco, L. Gargano, A.A. Rescigno. Active influence spreading in social networks. Theoretical Computer Science 764, 15–29, (2019).
- [12] G. Cordasco, L. Gargano, M. Lafond, L. Narayanan, A. A. Rescigno, U. Vaccaro, K. Wu. Whom to befriend to influence people. Theoretical Computer Science 810, 26–42, (2020).
- [13] G. Cordasco, L. Gargano, A.A. Rescigno. Parameterized complexity for iterated type partitions and modular-width. In Discrete Applied Mathematics, 350, (2024).
- [14] D. Corneil, M. Habib, C. Paul and M. Tedder. A recursive linear time modular decomposition algorithm via LexBFS. arXiv:0710.3901[cs.DM], (2024).
- [15] B. Das and V. Bharghavan. Routing in Ad-Hoc Networks Using Minimum Connected Dominating Sets. International Conference on Communications, Montreal, Canada, (1997).
- [16] A. Datta, L. Larmore, S. Devismes, K. Heurtefeux, Y. Rivierre. Competitive self-stabilizing k-clustering. In Proc. of ICDCS'12, 476–485, (2012).
- [17] M. Dom, D. Lokshtanov, S. Saurabh. Incompressibility through colors and IDs. In Proc. of 36th ICALP, LNCS 5555, Springer, 378–389, (2009).
- [18] R.G. Downey and M.R. Fellows. Fixed-parameter tractability and completeness. Congressus Numerantium, 87:161–187, (1992).
- [19] R.G. Downey and M.R. Fellows. Parameterized complexity. Springer-Verlag, New York, (1999).

- [20] P.G. Drange, M. Dregi, F.V. Fomin, S. Kreutzer, D. Lokshtanov, M. Pilipczuk, M. Pilipczuk, F. Reidl, F. Sánchez Villaamil, S. Saurabh, S. Siebertz, and S. Sikdar. Kernelization and Sparseness: the Case of Dominating Set. In Proc of STACS'16, LIPIcs 47, 31:1–31:14, (2016).
- [21] M. Etscheid, S. Kratsch, M. Mnich and H. Röglin. Polynomial kernels for weighted problems. J. Comput. Syst. Sci. 84, 1–10, (2017).
- [22] C. Einarson, F. Reidl. A General Kernelization Technique for Domination and Independence Problems in Sparse Classes. In Proc of IPEC 2020, LIPIcs 180, 11:1–11:15, (2020).
- [23] N. Fischer, M. Kunnemann, M. Redzic. The Effect of Sparsity on k-Dominating Set and Related First-Order Graph Properties. CoRR abs/2312.14593, (2023).
- [24] J.F. Fink, M.S. Jacobson. n-Domination in graphs. Graph theory with applications to algorithms and computer science. John Wiley & Sons, 283–300, (1985).
- [25] J. Flum and M. Grohe. Parameterized Complexity Theory. Texts in Theoretical Computer Science. An EATCS Series. Springer-Verlag, Berlin, (2006).
- [26] F.V. Fomin, D. Lokshtanov, S. Saurabh, D.M. Thilikos. Linear kernels for (Connected) Dominating Set on graphs with excluded topological subgraphs. In Proc. of STACS, 20, LIPIcs 20, 92–103, (2013).
- [27] F.V. Fomin, D. Lokshtanov, S. Saurabh, M. Zehavi. Kernelization: Theory of Parameterized Preprocessing. Cambridge University Press, (2019).
- [28] A. Frank, É. Tardos. An application of simultaneous Diophantine approximation in combinatorial optimization. Combinatorica 7(1), 49–65, (1987).
- [29] T. W. Haynes, S. T. Hedetniemi and P. J. Slater. Fundamentals of domination in graphs, New York: Marcel Dekker, Inc, 1998.
- [30] J. Gajarský, M. Lampis, S. Ordyniak. Parameterized Algorithms for Modular-Width. In Proc. of IPEC, LNCS 8246, 163–176, (2013).
- [31] T. Gallai. Transitiv orientierbare Graphen. In Acta Mathematica Academiae Scientiarum Hungarica 18, pp. 26–66, (1967).
- [32] L. Harutyunyan. On the total (k,r)-domination number of random graphs. arXiv:1511.07249, (2015).
- [33] T.W. Haynes, S.T. Hedetniemi, P.J. Slater. Fundamentals of Domination in Graphs. Marcel Dekker. Inc., New York, (1998).
- [34] T.W. Haynes, S.T. Hedetniemi and P.J. Slater. Domination in Graphs Advanced Topics. Marcel Dekker. Inc., New York, (1998).

- [35] M.A. Henning. Distance Domination in Graphs. In Topics in Domination in Graphs. Developments in Mathematics, 64, 10.1007/978-3-030-51117-3_7, (2020).
- [36] T. Ishii, H. Ono, Y. Uno. (Total) Vector domination for graphs with bounded branchwidth. Discrete Applied Mathematics 207, 80–89, (2016).
- [37] G. Jothilakshmi, A.P. Pushpalatha, S. Suganthi, V. Swaminathan. (k,r)-Domination in Graphs. Int. J. Contemp. Math. Sci. 6 (29), 1439–1446, (2011).
- [38] M. Lafond, W. Luo. Parameterized Complexity of Domination Problems Using Restricted Modular Partitions. In MFCS 2023, 61:1–61:14, (2023).
- [39] M. Lafond, W. Luo. Preprocessing complexity for some graph problems parameterized by structural parameters. In Proceedings of LAGOS'23, 130–139, (2023).
- [40] M. Lampis. Algorithmic meta-theorems for restrictions of treewidth. In Algorithmica 64, 19–37, (2012).
- [41] J.K. Lan, G.J. Chang. Algorithmic aspects of the k-domination problem in graphs. Discrete Appl. Math. 161(10–11), 1513–1520, (2013).
- [42] Y. Lu, X. Hou, J.-M. Xu. On the (2,2)-domination number of trees. Discussiones Mathematicae Graph Theory 30.2, 185–199, (2010).
- [43] W. Luo. Polynomial Turing Compressions for Some Graph Problems Parameterized by Modular-Width. In Proceedings of Computing and Combinatorics (COCOON'23). LeNCS 14422, Springer, (2023).
- [44] M. Koutecký. Solving hard problems on Neighborhood Diversity. Master Thesis. Charles University in Prague, (2013).
- [45] M.E.J. Newman, S. Forrest, J. Balthrop. Email networks and the spread of computer viruses. Physical Review E 66, (2002).
- [46] M. Románek. Parameterized algorithms for modular-width. Bachelor's Thesis, Masaryk University, (2013).
- [47] P.J. Slater. R-domination in graphs. J. Assoc. Comp. Mach. 23(3), 446–450, (1976).