


# GraphSeqLM: A Unified Graph Language Framework for Omic Graph Learning

Heming Zhang  
hemingzhang@wustl.edu  
Washington University in St. Louis  
St. Louis, MO, USA

Di Huang  
di.huang@wustl.edu  
Washington University in St. Louis  
St. Louis, MO, USA

Yixin Chen  
ychen25@wustl.edu  
Washington University in St. Louis  
St. Louis, MO, USA

Fuhai Li\*  
fuhai.li@wustl.edu  
Washington University in St. Louis  
St. Louis, MO, USA

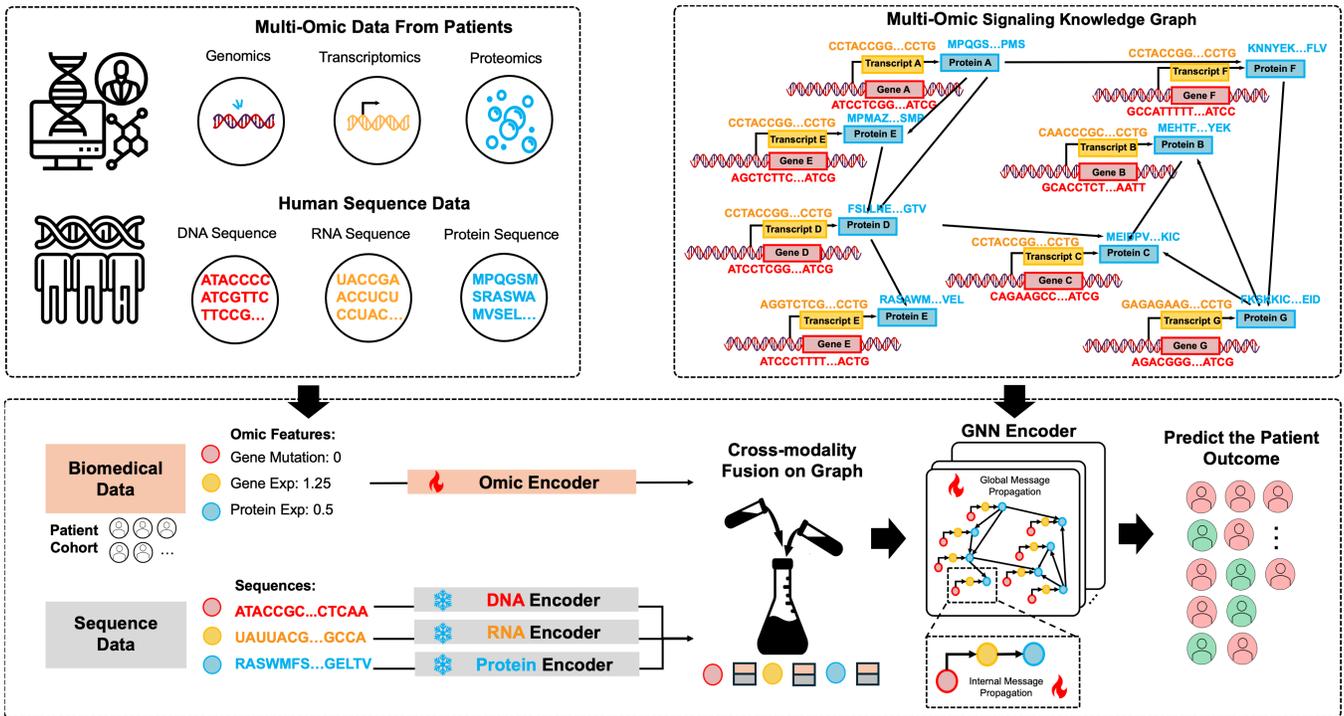

**Figure 1: Overview of GraphSeqLM: The framework integrates multi-omic data and biological sequences into a Multi-Omic Signaling Knowledge Graph, utilizing unified graph language encoder to predict patient outcomes**

## ABSTRACT

The integration of multi-omic data is pivotal for understanding complex diseases, but its high dimensionality and noise present

significant challenges. Graph Neural Networks (GNNs) offer a robust framework for analyzing large-scale signaling pathways and protein-protein interaction networks, yet they face limitations in expressivity when capturing intricate biological relationships. To address this, we propose Graph Sequence Language Model (GraphSeqLM), a framework that enhances GNNs with biological sequence embeddings generated by Large Language Models (LLMs). These embeddings encode structural and biological properties of DNA, RNA, and proteins, augmenting GNNs with enriched features for analyzing sample-specific multi-omic data. By integrating topological, sequence-derived, and biological information, GraphSeqLM

\*Corresponding author

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).  
WWW'25 Companion, Apr 28 - May 02, 2025, Sydney, Australia  
© 2024 Copyright held by the owner/author(s). Publication rights licensed to ACM.  
ACM ISBN 978-1-4503-XXXX-X/18/06...\$15.00  
<https://doi.org/XXXXXXXXXX>

demonstrates superior predictive accuracy and outperforms existing methods, paving the way for more effective multi-omic data integration in precision medicine <sup>1</sup>.

## CCS CONCEPTS

• **Applied computing** → **Bioinformatics**; • **Computing methodologies** → **Artificial intelligence**.

## KEYWORDS

Large Language Models, Graph Neural Networks, Multi-omic Data, Biological Sequences, Precision Medicine

### ACM Reference Format:

Heming Zhang, Di Huang, Yixin Chen, and Fuhai Li. 2025. GraphSeqLM: A Unified Graph Language Framework for Omic Graph Learning. In *Proceedings of (WWW'25 Companion)*. ACM, New York, NY, USA, 4 pages. <https://doi.org/XXXXXXX>

## 1 INTRODUCTION

Graph neural networks (GNNs) have emerged as powerful tools for analyzing graph-structured and relational data, which are prevalent in domains like life science and social networks. In life science and precision medicine, the advent of high throughput multi-omic data, characterizing the variations in genomic, epigenomic, transcriptomic, and proteomic, has enabled deeper and multi-view insights into the pathogenesis of complex diseases. Integrating complex, high-dimensional, and noisy multi-omic datasets remains a significant challenge. Graph-based models, such as Graph Neural Networks (GNNs), have demonstrated effectiveness in addressing this challenge by providing an integrative and interpretable framework for multi-omic data analysis. These models inherently represent complex disease signaling systems through large-scale signaling pathways or protein-protein interaction networks, capturing intricate interactions among extensive sets of genes and proteins, whose activation states are defined by multi-omic features [3, 9, 14, 15, 18, 19]. Advances such as adaptive graph learning [2] and graph attention networks (GATs) for multi-dimensional data integration [12, 19] have further enhanced the capabilities of these approaches. Additionally, the development of multi-omic signaling (MOS) knowledge graphs (KGs) has enabled more integrative and interpretable modeling of biological systems [17]. However, graph encoders still encounter limitations in expressivity when learning and mining patterns within large, complex signaling graphs that involve dense interactions among numerous proteins and genes. A promising strategy to address these challenges is feature augmentation through the incorporation of pre-computed features [1, 10]. Simultaneously, Large Language Models (LLMs) have revolutionized natural language processing (NLP) with their remarkable versatility, scalability, and groundbreaking potential across a wide range of applications. Beyond their textual successes, LLMs have demonstrated extraordinary capabilities in representing complex sequences, including biological sequences such as DNA, RNA, and protein sequences. In this study, we introduce a novel Graph Language Framework, GraphSeqLM, which integrates LLM-generated biological sequence embeddings with Graph Neural Networks (GNNs). This approach encodes the inherent biological

and structural properties of DNA, RNA, and protein sequences, serving as a feature enhancement mechanism. By incorporating these embeddings with sample-specific multi-omic data, GraphSeqLM integrates topological, biological, and sequence-derived information, enabling the model to capture intricate biological patterns with heightened predictive accuracy. This innovative fusion of LLM-driven sequence embeddings and multi-omic data within the framework of Graph Neural Networks (GNNs) represents a novel advancement in the field, surpassing the performance of existing graph-based approaches. Comprehensive evaluation results underscore the efficacy and superiority of our proposed methodology.

## 2 METHODOLOGY

### 2.1 Problem Formulation

This section outlines a detailed methodology addressing the integration of biological sequence data, including DNA, RNA, and protein sequences, into multi-omic datasets within the graph language framework. The proposed integration aims to enhance the representation of complex biological networks by leveraging sequence embeddings derived from LLMs. By combining sequence-level information with multi-omic profiles such as genomic, transcriptomic, and proteomic, this approach seeks to improve the predictive capabilities of graph-based models.

Specifically, given the bulk-seq multi-omic dataset of  $\mathcal{X} = \{\mathcal{X}^{(g)}, \mathcal{X}^{(t)}, \mathcal{X}^{(p)}\}$ , where  $\mathcal{X}^{(g)}$  is the genomic feature set,  $\mathcal{X}^{(t)}$  is the transcriptomic feature set and  $\mathcal{X}^{(p)}$  is the proteomic feature set, these multi-omic features were integrated into MOS-KG by existed gene regulatory network, Kyoto Encyclopedia Genomes and Genes (KEGG[7]), resulting with the sequence-attributed knowledge graph  $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ . In this knowledge graph,  $\mathcal{V} = \{\mathcal{V}^{(g)}, \mathcal{V}^{(t)}, \mathcal{V}^{(p)}\}$  represents the set of vertices, where  $|\mathcal{V}^{(g)}| = n^{(g)}$ ,  $|\mathcal{V}^{(t)}| = n^{(t)}$ , and  $|\mathcal{V}^{(p)}| = n^{(p)}$ . This graph can be decomposed into two sub-graphs:  $\mathcal{G}^{(\text{in})} = (\mathcal{V}^{(\text{in})}, \mathcal{E}^{(\text{in})})$  and  $\mathcal{G}^{(\text{PPI})} = (\mathcal{V}^{(\text{PPI})}, \mathcal{E}^{(\text{PPI})})$ . Here,  $\mathcal{G}^{(\text{in})}$  captures the internal signaling processes for protein translation, with  $\mathcal{V} = \mathcal{V}^{(\text{in})}$  and  $|\mathcal{V}^{(\text{in})}| = n = n^{(g)} + n^{(t)} + n^{(p)}$ , while  $\mathcal{G}^{(\text{PPI})}$  represents the gene regulatory network, structured around protein-protein interactions (PPI), where  $\mathcal{V}^{(\text{PPI})} = \mathcal{V}^{(p)}$ . Additionally, the patient multi-omic feature set is denoted as  $\mathcal{X} = \{X^{(1)}, X^{(2)}, \dots, X^{(m)}, \dots, X^{(M)}\}$ , with  $X^{(m)} \in \mathbb{R}^n$ , and the patient label matrix is represented as  $Y \in \mathbb{R}^M$ .

Aside from the multi-omic feature, the sequence dataset,  $\mathcal{S} = \{S^{(g)}, S^{(t)}, S^{(p)}\}$ , where  $S^{(g)} = [s^{(1)}, s^{(2)}, \dots, s^{(n^{(g)})}]$ ,  $S^{(g)} \in \mathbb{R}^{n^{(g)}}$ , is the DNA sequences for gene nodes  $\mathcal{V}^{(g)}$ ,  $S^{(t)} = [s^{(1)}, s^{(2)}, \dots, s^{(n^{(t)})}]$ ,  $S^{(t)} \in \mathbb{R}^{n^{(t)}}$ , is the RNA sequences for transcript nodes  $\mathcal{V}^{(t)}$  and  $S^{(p)} = [s^{(1)}, s^{(2)}, \dots, s^{(n^{(p)})}]$ ,  $S^{(p)} \in \mathbb{R}^{n^{(p)}}$ , is the protein sequences for protein nodes  $\mathcal{V}^{(p)}$ , was included to improve the graph expressivity for generating the sequence-attributed multi-omic signaling knowledge graph. The ultimate goal is to construct a graph language model,  $f(\cdot)$ , that leverages the integrated features  $\mathcal{X}$ , sequences  $\mathcal{S}$ , and graph edges  $\mathcal{E}$  to predict patient outcomes. The model is defined as follows:

$$\hat{Y} = f(\mathcal{X}, \mathcal{S}, \mathcal{E}) \quad (1)$$

, where  $\hat{Y} \in \mathbb{R}^M$  denotes the predicted patient outcomes.

<sup>1</sup><https://github.com/FuhaiLiAiLab/GraphSeqLM>

## 2.2 Infrastructure of GraphSeqLM

In details, the proposed model, GraphSeqLM, consists of three core components. The Sequence Language Encoders extract embeddings from biological sequences such as DNA, RNA, and proteins, capturing key sequence-level features. These embeddings are fused with multi-omic data within the constructed multi-omic Signaling Knowledge Graph (MOS-KG) to integrate diverse modalities. Finally, a GNN Encoder leverages this enriched graph representation to predict patient outcomes effectively.

**Sequence Language Encoders** To embed the sequence data for each node in the generated MOS-KG,  $\mathcal{G}$ , different sequence language models were considered for various node types, i.e., gene sequences, transcript sequences and protein sequences leverage DNA, RNA and protein encoders. Therefore, sequence embeddings will be generated by

$$Q^{(g)} = \text{DNASequenceEncoder}(S^{(g)}) \quad (2)$$

$$Q^{(t)} = \text{RNASequenceEncoder}(S^{(t)}) \quad (3)$$

$$Q^{(p)} = \text{ProteinSequenceEncoder}(S^{(p)}) \quad (4)$$

, where  $Q^{(g)} \in \mathbb{R}^{n^{(g)} \times d^{(l)}}$ ,  $Q^{(t)} \in \mathbb{R}^{n^{(t)} \times d^{(l)}}$ ,  $Q^{(p)} \in \mathbb{R}^{n^{(p)} \times d^{(l)}}$  are gene, transcript and protein sequence embeddings. Thus, node sequence embeddings  $Q = [Q^{(g)}, Q^{(t)}, Q^{(p)}]$  ( $Q \in \mathbb{R}^{n \times d^{(l)}}$ ) were generated.

**Cross-modality Fusion on Graph** Given the sequence embeddings, the nodes on MOS-KG will be augmented with the initial feature depending on the node types by

$$H^{(m)} = \text{OmicEncoder}(X^{(m)}) \quad (5)$$

$$H'^{(m)} = \text{CrossModalityEncoder}(Q, H^{(m)}) \quad (6)$$

, where  $X^{(m)} = [X_t^{(m)}, X_g^{(m)}, X_p^{(m)}]$  ( $X^{(m)} \in \mathbb{R}^n$ ) is the multi-omic feature matrix and  $X_g^{(m)} \in \mathbb{R}^{n^{(g)}}$ ,  $X_t^{(m)} \in \mathbb{R}^{n^{(t)}}$ ,  $X_p^{(m)} \in \mathbb{R}^{n^{(p)}}$  are genomic, transcriptomic and proteomic feature matrices,  $H^{(m)} \in \mathbb{R}^{n \times d^{(l)}}$  is the multi-omic embeddings and  $H'^{(m)} \in \mathbb{R}^{n \times d^{(l)'}}$  is the merged embeddings on MOS-KG. Therefore, the genomic features and gene sequences, transcriptomic features and transcript sequences, and proteomic features and protein sequences will be merged on the gene nodes,  $\mathcal{V}^{(g)}$ , transcript nodes,  $\mathcal{V}^{(t)}$  and protein nodes,  $\mathcal{V}^{(p)}$ , respectively.

**Graph Neural Network Encoder** With the sequence augmented multi-omic node embeddings,  $\mathcal{H} = \{H^{(1)}, H^{(2)}, \dots, H^{(m)}, \dots, H^{(M)}\}$ , the information will be propagated on the internal path to make sure the information diffused on the protein nodes with consideration of the biological meaning of protein translation process by

$$Z^{(m)} = \text{GNN}_{\text{in}}(H'^{(m)}, \mathcal{E}^{(\text{in})}) \quad (7)$$

, where  $\text{GNN}_{\text{in}}$  is the graph-based internal message propagation to ensure the signaling flow for protein translation and  $Z^{(m)} \in \mathbb{R}^{n \times d}$  denotes the node internal embeddings. Afterwards, the global message propagation will be made by

$$Z'^{(m)} = \text{GNN}_{\text{global}}(Z^{(m)}, \mathcal{E}) \quad (8)$$

, where  $\text{GNN}_{\text{global}}$  is also the graph-based global message propagation for signaling flow over whole regulatory network and  $Z'^{(m)} \in \mathbb{R}^{n \times d}$  denotes the node global embeddings.

**Patient Outcomes Prediction** Finally, with the global node embeddings,  $\mathcal{Z} = \{Z'^{(1)}, Z'^{(2)}, \dots, Z'^{(m)}, \dots, Z'^{(M)}\}$ , the graph prediction will be made by

$$O^{(m)} = \text{MLP}(\text{AVG}(Z'^{(m)})) \quad (9)$$

$$\hat{Y}^{(m)} = \arg \max(O^{(m)}) \quad (10)$$

, where AVG is the average aggregation function, MLP denotes the multi-layer perceptron for linear transformation to predict patient outcomes for this classification task and  $O^{(m)} \in \mathbb{R}^c$ . The final predicted outcome will be extracted by maximum function with  $\hat{Y}^{(m)} \in \{0, 1, \dots, c-1\}$ .

## 3 EXPERIMENT AND EVALUATION

### 3.1 Dataset Collection and Baseline Models

The multi-omic data for cancer patients were obtained from the UCSC Xena browser [5]. After integrating the multi-omic datasets and excluding cancer samples with imbalanced or insufficient data, a final cohort of 826 samples across 6 cancer types was curated (see **Table 1**), each labeled with overall survival status. This dataset forms the basis for a binary classification task ( $c = 2$ ). Additionally, biological sequence data were retrieved from Ensembl [6] using the Python API, and the corresponding biological regulatory networks were sourced from KEGG [7].

**Table 1: Cancer types and sample details**

Cancer Types	Total Samples	# of Survival	# of Death
BLCA	116	60	56
GBM	67	49	18
LUAD	172	79	93
LUSC	103	47	56
SKCM	59	17	42
STAD	309	121	188
Overall	826	373	453

To evaluate improvements over existing GNN models, baseline architectures including GCN [8], GAT [12], GIN [13], and UniMP [11] were used. For GraphSeqLM, DNAGPT [16] and ProtGPT2 [4] served as GPT-based encoders for DNA, RNA, and protein sequences, where DNA and RNA shared the same encoder by substituting thymine (T) with uracil (U) for RNA.

### 3.2 Experiment Settings and Evaluation

The 5-fold cross-validation approach was employed to partition each multi-omic dataset for each cancer type and two evaluation metrics, prediction accuracy and F1-score were utilized. As shown in **Table 2**, the proposed model, GraphSeqLM, consistently outperforms other graph-based encoder models, demonstrating its superior effectiveness. These results emphasize the strength of GraphSeqLM in integrating sequence embeddings and multi-omic data, improving predictive capabilities in complex biological systems.

**Table 2: Model performance (accuracy and F1-scores) for different cancer datasets**

Cancer Types	Metrics	GAT	GCN	GIN	UniMP	GraphSeqLM
BLCA	Accuracy	0.7761 ± 0.0552	0.7152 ± 0.0271	0.7156 ± 0.0379	0.7583 ± 0.0737	<b>0.7841 ± 0.0628</b>
	F1 Score	0.7138 ± 0.263	0.6669 ± 0.2368	0.617 ± 0.3497	0.7084 ± 0.1754	<b>0.7743 ± 0.106</b>
GBM	Accuracy	0.8319 ± 0.1274	0.7879 ± 0.1261	0.833 ± 0.1146	0.7868 ± 0.1492	<b>0.8945 ± 0.0671</b>
	F1 Score	0.8884 ± 0.0884	0.8634 ± 0.0867	0.8839 ± 0.0861	0.8591 ± 0.0991	<b>0.9145 ± 0.0618</b>
LUAD	Accuracy	<b>0.6983 ± 0.0557</b>	0.6803 ± 0.0452	0.6867 ± 0.0714	0.6689 ± 0.0706	0.6746 ± 0.0352
	F1 Score	0.657 ± 0.058	0.6618 ± 0.0727	<b>0.677 ± 0.0335</b>	0.6162 ± 0.1238	0.5918 ± 0.1688
LUSC	Accuracy	0.7186 ± 0.0385	0.6995 ± 0.0592	0.7281 ± 0.0264	0.7086 ± 0.0078	<b>0.7376 ± 0.0287</b>
	F1 Score	0.5889 ± 0.2214	0.4734 ± 0.348	0.6234 ± 0.2321	0.4921 ± 0.2727	<b>0.6245 ± 0.2203</b>
SKCM	Accuracy	0.7788 ± 0.0975	0.7636 ± 0.1065	0.8303 ± 0.0593	0.8121 ± 0.0756	<b>0.8621 ± 0.0836</b>
	F1 Score	0.2943 ± 0.2755	0.2 ± 0.2981	0.4633 ± 0.2931	0.4433 ± 0.2934	<b>0.5332 ± 0.3706</b>
STAD	Accuracy	0.6701 ± 0.0734	0.6605 ± 0.0835	0.6604 ± 0.0644	<b>0.6831 ± 0.0619</b>	0.6734 ± 0.0766
	F1 Score	0.3808 ± 0.2027	0.2767 ± 0.2377	<b>0.4132 ± 0.2433</b>	0.4034 ± 0.1576	0.3319 ± 0.1847

## 4 DISCUSSIONS

The integration of biological sequence data into multi-omic datasets using the proposed GraphSeqLM framework highlights significant advancements in modeling complex biological networks. By leveraging embeddings from LLMs, GraphSeqLM captures sequence-level properties of DNA, RNA, and proteins, which complement multi-omic features such as genomic, transcriptomic, and proteomic data. This cross-modality fusion enhances the expressive power of GNNs, enabling them to better represent intricate interactions in large-scale signaling pathways and protein-protein interaction networks.

Compared to traditional graph-based approaches, GraphSeqLM effectively overcomes limitations in graph encoder expressivity by incorporating enriched node features through sequence embeddings. This integration allows the model to improve predictive accuracy for outcome prediction. Comprehensive evaluation results demonstrate that GraphSeqLM outperforms existing GNN-based frameworks on most datasets, underscoring its potential for advancing precision medicine and facilitating deeper insights into disease mechanisms through multi-omic data analysis.

## ACKNOWLEDGMENTS

This research was partially supported by NLM 1R01LM013902-01A1.

## REFERENCES

- [1] Ralph Abboud, Ismail Ilkan Ceylan, Martin Grohe, and Thomas Lukasiewicz. 2020. The surprising power of graph neural networks with random node initialization. *arXiv preprint arXiv:2010.01179* (2020).
- [2] Ouyang Dong, Yong Liang, Le Li, Ning Ai, Shan Lu, Mingkun Yu, Xiaoying Liu, and Shengli Xie. 2023. Integration of multi-omics data using adaptive graph learning and attention mechanism for patient classification and biomarker identification. *Computers in biology and medicine* 164 (2023), 107303. <https://api.semanticscholar.org/CorpusID:260590059>
- [3] Zehao Dong, Qihang Zhao, Philip R. O. Payne, Michael Province, Carlos Cruchaga, Muhan Zhang, Tianyu Zhao, Yixin Chen, and Fuhai Li. 2023. Highly accurate disease diagnosis and highly reproducible biomarker identification with PathFormer. *Research Square* (2023). <https://api.semanticscholar.org/CorpusID:265462009>
- [4] Noelia Ferruz, Steffen Schmidt, and Birte Höcker. 2022. ProtGPT2 is a deep unsupervised language model for protein design. *Nature communications* 13, 1 (2022), 4348.
- [5] Mary Goldman, Brian Craft, Mim Hastie, Kristupas Repečka, Fran McDade, Akhil Kamath, Ayan Banerjee, Yunhai Luo, Dave Rogers, Angela N Brooks, et al. 2018. The UCSC Xena platform for public and private cancer genomics data visualization and interpretation. *bioRxiv* (2018), 326470.
- [6] Peter W Harrison, M Ridwan Amode, Olanrewaju Austine-Orimoloye, Andrey G Azov, Matthieu Barba, If Barnes, Arne Becker, Ruth Bennett, Andrew Berry, Jyothish Bhai, et al. 2024. Ensembl 2024. *Nucleic acids research* 52, D1 (2024), D891–D899.
- [7] Minoru Kanehisa and Susumu Goto. 2000. KEGG: kyoto encyclopedia of genes and genomes. *Nucleic acids research* 28, 1 (2000), 27–30.
- [8] Thomas N Kipf and Max Welling. 2016. Semi-supervised classification with graph convolutional networks. *arXiv preprint arXiv:1609.02907* (2016).
- [9] Xiao Li, Jie Ma, Ling Leng, Mingfei Han, Mansheng Li, Fuchu He, and Yunping Zhu. 2022. MoGCN: A Multi-Omics Integration Method Based on Graph Convolutional Network for Cancer Subtype Analysis. *Frontiers in Genetics* 13 (2022). <https://api.semanticscholar.org/CorpusID:246445829>
- [10] Derek Lim, Joshua Robinson, Lingxiao Zhao, Tess Smidt, Suvrit Sra, Haggai Maron, and Stefanie Jegelka. 2022. Sign and basis invariant networks for spectral graph representation learning. *arXiv preprint arXiv:2202.13013* (2022).
- [11] Yunsheng Shi, Zhengjie Huang, Shikun Feng, Hui Zhong, Wenjin Wang, and Yu Sun. 2020. Masked label prediction: Unified message passing model for semi-supervised classification. *arXiv preprint arXiv:2009.03509* (2020).
- [12] Petar Veličković, Guillem Cucurull, Arantxa Casanova, Adriana Romero, Pietro Lio, and Yoshua Bengio. 2017. Graph attention networks. *arXiv preprint arXiv:1710.10903* (2017).
- [13] Keyulu Xu, Weihua Hu, Jure Leskovec, and Stefanie Jegelka. 2018. How powerful are graph neural networks? *arXiv preprint arXiv:1810.00826* (2018).
- [14] Bo Yang, Yan Yang, Meng Wang, and Xueping Su. 2023. MRGCN: cancer subtyping with multi-reconstruction graph convolutional network using full and partial multi-omics dataset. *Bioinformatics* 39 (2023). <https://api.semanticscholar.org/CorpusID:258988422>
- [15] Lei Yu, Lei Liu, Zixian Zhang, Hengchang Zhang, and Xing Chen. 2021. MOGONET integrates multi-omics data using graph convolutional networks allowing patient classification and biomarker identification. *Nature Communications* 12, 1 (October 2021), 6510. <https://doi.org/10.1038/s41467-021-26624-7>
- [16] Daoan Zhang, Weitong Zhang, Bing He, Jianguo Zhang, Chenchen Qin, and Jianhua Yao. 2023. DNAGPT: a generalized pretrained tool for multiple DNA sequence analysis tasks. *bioRxiv* (2023), 2023–07.
- [17] Heming Zhang, Dekang Cao, Zirui Chen, Xiuyuan Zhang, Yixin Chen, Cole Sessions, Carlos Cruchaga, Philip Payne, Guangfu Li, Michael Province, and Fuhai Li. 2024. mosGraphGen: a novel tool to generate multi-omics signaling graphs to facilitate integrative and interpretable graph AI model development. *Bioinformatics Advances* 4, 1 (10 2024), vbae151. <https://doi.org/10.1093/bioadv/vbae151>
- [18] Heming Zhang, Yixin Chen, Philip Payne, and Fuhai Li. 2024. Using DeepSignalFlow to mine signaling flows interpreting mechanism of synergy of cocktails. *NPJ systems biology and applications* 10 (08 2024), 92. <https://doi.org/10.1038/s41540-024-00421-w>
- [19] Wenyi Zhao, Xun Gu, Shuqing Chen, Jian Wu, and Zhan Zhou. 2022. MODIG: integrating multi-omics and multi-dimensional gene network for cancer driver gene identification based on graph attention network model. *Bioinformatics* (2022). <https://api.semanticscholar.org/CorpusID:252199074>