

Align Anything: Training All-Modality Models to Follow Instructions with Language Feedback

Jiaming Ji^{1*}, Jiayi Zhou^{1*}, Hantao Lou^{1*}, Boyuan Chen^{1*}, Donghai Hong^{1*}, Xuyao Wang¹, Wenqi Chen¹, Kaile Wang¹, Rui Pan¹, Jiahao Li¹, Mohan Wang¹, Josef Dai^{1,2}, Tianyi Qiu¹, Hua Xu¹, Dong Li³, Weipeng Chen⁴, Jun Song⁵, Bo Zheng⁵, and Yaodong Yang^{1†}

¹Institute for AI, Peking University ²Beijing Academy of Artificial Intelligence (BAAI)
³Huawei Noah's Ark LAB ⁴Baichuan Inc. ⁵Taobao & Tmall Group of Alibaba

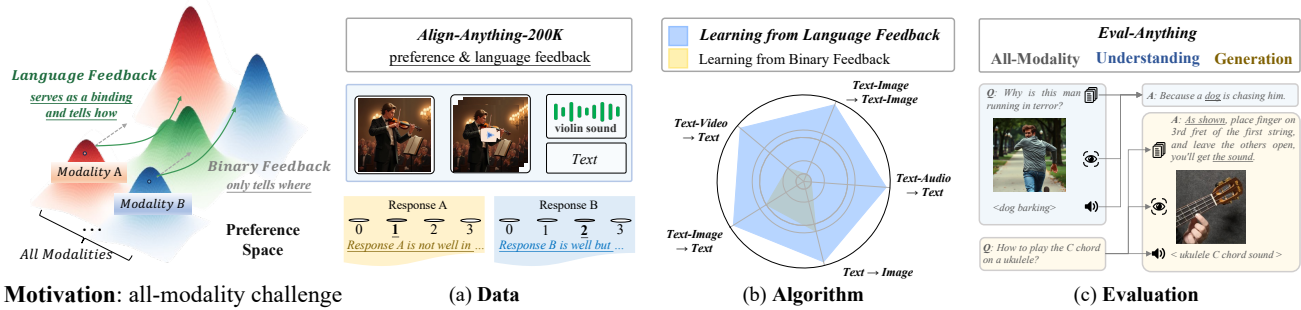


Figure 1. Motivated by the challenge of achieving all-modality human preference alignment, particularly the limitations of binary preferences in accurately reflecting human preferences, we introduce the *align-anything*: **Data**: *align-anything-200k*, which covers text, image, audio, video modalities, and 8+ specific subtasks, annotated with preference and language feedback; **Algorithm**: improving all-modality alignment by learning from language feedback; **Evaluation**: encompassing all-modality understanding and generation.

Abstract

* Reinforcement learning from human feedback (RLHF) has proven effective in enhancing the instruction-following capabilities of large language models; however, it remains underexplored in the cross-modality domain. As the number of modalities increases, aligning all-modality models with human intentions – such as instruction following – becomes a pressing challenge. In this work, we make the first attempt to fine-tune all-modality models (i.e. input and output with any modality, also named *any-to-any* models) using human preference data across all modalities (including text, image, audio, and video), ensuring its behavior aligns with human intentions. This endeavor presents several challenges. First, there is no large-scale all-modality human preference data in existing open-source resources, as most datasets are limited to specific modalities, predom-

inantly text and image. Secondly, the effectiveness of binary preferences in RLHF for post-training alignment in complex all-modality scenarios remains an unexplored area. Finally, there is a lack of a systematic framework to evaluate the capabilities of all-modality models, particularly regarding modality selection and synergy. To address these challenges, we propose the *align-anything* framework, which includes meticulously annotated 200k all-modality human preference data. Then, we introduce an alignment method that learns from unified language feedback, effectively capturing complex modality-specific human preferences and enhancing the model’s instruction-following capabilities. Furthermore, to assess performance improvements in all-modality models after post-training alignment, we construct a challenging all-modality capability evaluation framework – *eval-anything*. All data, models, and code framework have been open-sourced for the community. For more details, please refer to <https://github.com/PKU-Alignment/align-anything>.

*Core authors, †Corresponding author. This is a collaborative project and if you have any questions, please feel free to reach out via email at {jiamg.ji, gaiejj}@stu.pku.edu.cn or yaodong.yang@pku.edu.cn.

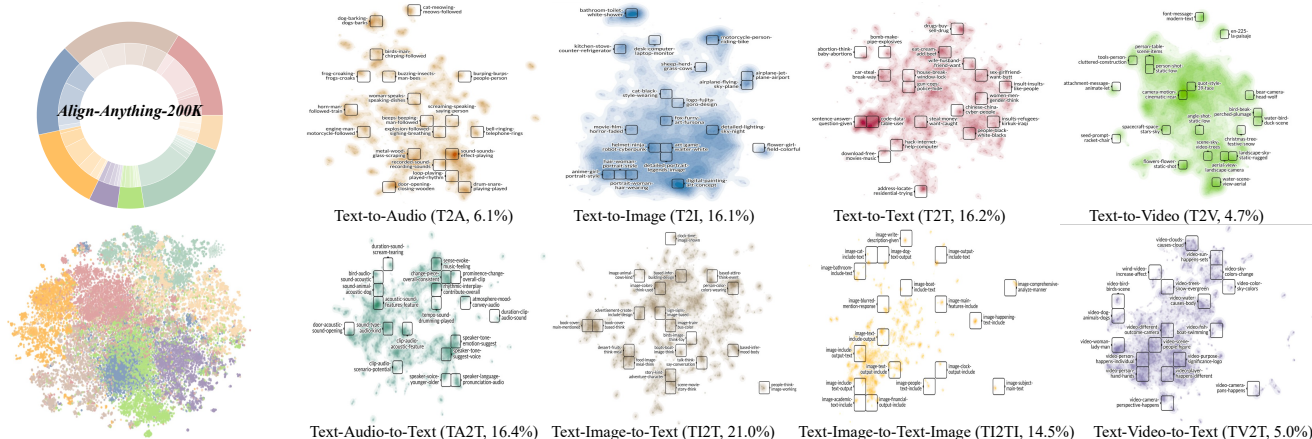


Figure 2. **Composition and distribution of *align-anything-200k*.** Our dataset comprises 8 subtasks across text, image, audio, and video modalities. Each modality exhibits distinct semantic features and distribution patterns, covering various latent spaces. This highlights that all-modality alignment cannot rely solely on data from specific modalities; rather, it requires the integration of data across modalities.

1. Introduction

Our world is inherently multimodal [62, 100, 126]. Humans perceive the world through various sensory organs, acquiring information in multiple modalities such as text, images, audio, video, and others. These different forms of information often complement and interact with each other. Each sensory channel has unique advantages in conveying specific concepts and enhancing our understanding of the world. With the success of large language models (LLMs) [1, 7, 128], researchers aim to extend these models to handle multiple modalities, enabling them to perceive and generate any modality [5, 65, 98, 120]. This would allow the models to respond using the most appropriate modality, achieving truly human-like AI [16, 34, 39, 52, 64, 104, 108, 109, 117].

Consequently, the research community has actively developed foundational models capable of handling arbitrary modalities [58, 108]. Based on LLMs, people use individual image/text encoders or domain-specific decoders for input or output processing [65, 108, 124, 135], leveraging the MoE architecture [60] and diffusion techniques [41]. In this line of work, each modality is encoded by a single encoder, with non-text modality information being mapped to the text space via projection layers. Additionally, Chameleon [98] has experimented with encoding images during the pre-training phase using fully token-based representations to handle both image and text modalities. However, handling more modalities remains a significant challenge.

On the other hand, Reinforcement learning from human feedback (RLHF) plays a significant role in aligning models with human intentions [81]. GPT-4 [1] has effectively boosted the model’s instruction-following using RLHF. LLaMA series models [99] have significantly improved the performance in code, mathematics, and reasoning through the post-training method, *e.g.*, DPO [87]. However, this line of work is limited to single modality. Re-

searchers try to apply RLHF or DPO directly to multimodal scenarios, such as models with text and image modalities [95, 120]. However, these methods, which rely on aligning responses with binary human preferences (*e.g.*, one answer is better than another) [136], struggle to be effective with more complex and diverse modalities. ImageBind [38] propose using single modality information as a *binding*, such as using images as the bridging feature to learn joint embeddings. *So, how can we establish a unified preference modeling to ensure effectiveness across any modalities?*

All-modality models refer to **models capable of accepting input and generating output in any modality**, essentially functioning as any-to-any models. Language can serve not only as a binding across different modalities but also as a natural human preference carrier. In this work, we propose utilizing language feedback to unify human feedback across all modalities, marking the first attempt to extend RLHF/DPO to arbitrary modality space and promoting the development of a general all-modality model. Overall, our work makes the following contributions:

- **Data** (Sec. 2): The first all-modality human preference dataset – *align-anything-200k* – on text, image, audio, and video modalities. Utilizing a two-stage human annotation process, this dataset accurately captures genuine human preferences, aiming to improve the alignment of all-modality models with human intentions.
- **Algorithm** (Sec. 3): The first algorithm applicable to enhance RLHF/DPO across all modalities: *learning from language feedback (LLF)*. Our empirical results demonstrate that LLF enhance RLHF performance across 5 modalities, 5 open-source models, and 7 popular benchmarks, which achieves an average 5.83 times improvement than the baseline RLHF.
- **Evaluation** (Sec. 4): To our knowledge, there is no system specifically designed for all-modality model evalu-

ation. To address this gap, we propose the first evaluation tool (*eval-anything*), tailored for all-modality evaluation. This tool not only meticulously constructs evaluation tasks across various modalities but also emphasizes assessing the unique features of all-modality models, such as modality selection and synergy.

- **Framework and Open Source:** To further the alignment of the all-modality model with human intentions, we have released all of our resources to the public.

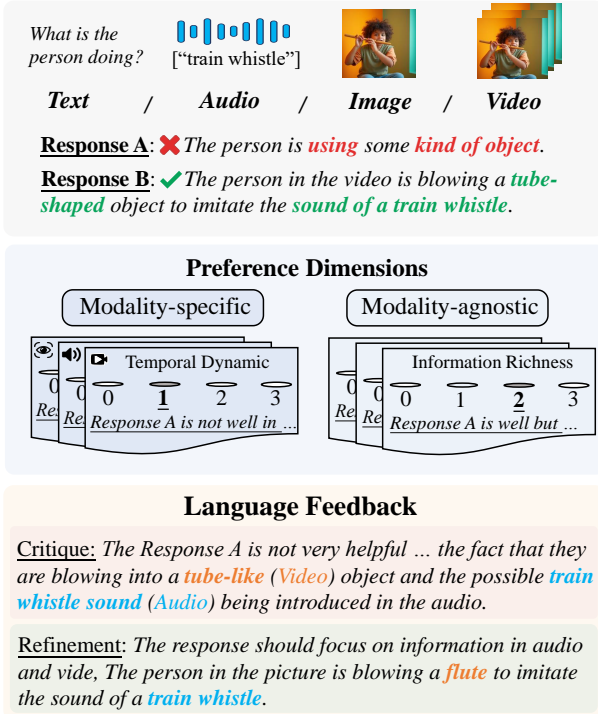


Figure 3. **All-modality preference and language feedback annotation of align-anything-200k.** For all-modality preference annotation, we classify the instruction-following metrics into two categories: *modality-agnostic* and *modality-specific*. Each fine-grained dimension is assigned a corresponding score along with a rationale. Additionally, we offer detailed language feedback, including critiques and refinement suggestions, which integrate information from multiple modalities within the responses.

2. Datasets

A primary challenge lies in the fact that existing preference datasets are predominantly focused on single-modal tasks [26, 52, 73, 120], lacking comprehensive datasets that encompass all modalities, thus limiting further research progress.

In response, we open-source the first all-modality human preference dataset – *align-anything-200k* – to enhance the instruction-following capabilities of all-modality models across tasks such as question answering, complex reasoning, *etc.* During the annotation process, we observed

that introducing additional modal information significantly reduced binary human preference consistency (as shown in Tab. 1). Therefore, in addition to annotating fine-grained binary preferences, we introduce language feedback as an additional constraint to more accurately capture human preferences. In short, our dataset includes the following:

- **All-modality Human Preference Dataset.** We annotate human preference data across various modalities (including text, image, video, and audio) with a focus on instruction-following capabilities (Fig. 2).
- **One More Thing – Language Feedback.** In addition to the widely used binary preferences, we incorporate language feedback (*critique* and *refinement*) to improve human preference consistency across all modalities.

2.1. All-Modality Human Preference Dataset

The *align-anything-200k* aims to capture human preferences across 8 subtasks of all modalities, as shown in Fig. 2. With the increase in modalities, the complexity and inconsistency of human intent preferences rise significantly, driven by the unique semantic characteristics of each modality. To achieve consistent all-modality preference modeling, we decouple annotation targets into two types, which serve as evaluation metrics for instruction-following:

- **Modality-agnostic** refers to dimensions that are applied universally across modalities, including: (1) *Prompt adherence*, which requires responses to be consistent with the input prompts, accurately reflecting the specified elements. (2) *Rule conformity*, where responses adhere to logical, physical, or scientific principles related to the scenario or theme described in the prompt. (3) *Information richness*, which emphasizes that responses should be thorough and detailed in addressing the query.
- **Modality-specific** represents preference dimensions tailored to the characteristics of each modality. For example, in video-related subtasks, we introduce three additional dimensions, *temporal consistency*, *content coherence* and *motion naturalness* to better evaluate the details in the output regarding the duration, dynamics, *etc.*

By decomposing the instruction-following dimensions, we establish the evaluation standards for all-modality preference annotation. More details about the annotation document can be found in Appendix: Datasets.

2.2. One More Thing – Language Feedback

During the annotation process, there exists a decline in human preference consistency when directly conducting binary preference annotations. As illustrated in Tab. 1, the introduction of different modalities makes it challenging for binary preferences to fully capture human preference [47, 59, 90]. To address this issue, we introduce *language feedback*, utilizing natural language to describe discrepan-

	T2T	T12T	T2I	T12TI	TV2T	T2V	TA2T	T2A
w/o Language Feedback (%)	73.2 ± 2.1	62.5 ± 7.3	63.2 ± 6.3	62.7 ± 7.7	62.1 ± 5.7	60.8 ± 4.6	61.8 ± 6.9	58.7 ± 5.8
w/ Language Feedback (%)	74.1 ± 1.2	70.5 ± 3.4	69.2 ± 2.2	68.3 ± 2.1	67.2 ± 1.8	65.8 ± 1.2	68.6 ± 2.4	64.3 ± 1.7

Table 1. **Human preference agreement across different modalities.** The results demonstrate that traditional annotation struggles to capture modality-specific details, whereas language feedback enhances consistency by conveying fine-grained human preferences effectively.

cies between the model’s response and the standard criteria, thereby improving the consistency of human annotation.

Specifically, we provide *language feedback* for each response which includes two parts: *critique*, which assesses the strengths and weaknesses of the response based on detailed criteria, and *refinement*, which offers specific improvement suggestions to enhance the models’ instruction-following capabilities. Through the quality control process with annotators and training verification (Sec. 3), we identify two key advantages of using language feedback: (1) as a natural carrier of human preferences, it clearly identifies fine-grained defects and areas for improvement in the responses, providing clearer guidance compared to binary preferences [10]. (2) as a connecting binding, it bridges human intent across different modalities and creates a unified, modality-agnostic preference modeling approach, capable of handling more modalities than typical methods. Further examples can be referred to in Appendix: Datasets.

2.3. Dataset Construction

We collect initial prompts from 24 multimodal datasets and refine them based on modality-agnostic and modality-specific dimensions with existing multimodal models (e.g., GPT-4o [80]). For example, we emphasize dynamic temporal aspects for video or quality characteristics for audio to better adapt to each modality. Finally, we gather the responses from 27 models for the 8 subtasks. More details can be referred to in Appendix: Datasets.

Annotation Process Inspired by PKU-SafeRLHF [48], we utilize a Human-AI joint annotation process to conduct preference annotations across fine-grained dimensions for each subtask. As shown in Fig. 3, for each fine-grained dimension’s binary preferences, we assign scores from 0 to 3 following strict guidelines and detailed rationales. Additionally, we collect language feedback from human annotators and API-based models. The annotators provide language feedback for each response by defining the critique scope, performing the critique, offering refinement suggestions, and organizing the critique and refinements into comprehensive language feedback. As shown in Fig. 3, language feedback provides more fine-grained improvement directions for cross-modal responses, serving as a carrier for expressing natural human preferences across modalities.

Human and AI Agreement Analysis We integrate API-based multimodal models (e.g., GPT-4o, and others) into human evaluation for binary preferences annotations. To

analyze the consistency of the dataset with human preferences, we sample 100 data pairs from each subtask, with 10 annotators to pair-wise comparisons, and statistically measure the preference consistency, as shown in Tab. 1. The results demonstrate that with the traditional binary preferences annotation pipeline, agreement consistency tends to decline as multimodal information is incorporated. This suggests that the conventional pipeline struggles to scale effectively across all modalities. As language-based feedback offers targeted and fine-grained human preference information, higher consistency is achieved across all modalities.

3. Learning from Language Feedback

In this section, we introduce *learning from language feedback (LLF)*. It utilizes language feedback to optimize responses, synthesizing preference data which can enhance the performance of all-modality alignment. Firstly, we review the RLHF pipeline including PPO [81] and DPO [87], highlighting the limitations of binary preferences feedback. Then we demonstrate how to practically implement LLF, including two main stages, *feedback modeling* and *self improving*. Finally, we empirically verify that LLF achieves an average 5.83 times improvement across 5 modalities, 5 open-sourced models, and 7 popular benchmarks.

3.1. Background and Preliminary

PPO consists of two main stages including: *step 1: preference modeling* and *step 2: policy optimization*. The former involves the collection of comparison data, essential for training the reward model $r_{\text{RM}}(\cdot|\cdot)$. The process starts with response pairs (y_1, y_2) generated by the initial model from shared prompts x . Human annotators are then tasked with selecting their preferred response from each pair, denoted as $y_w \succ y_l | x$, where y_w and y_l denote the preferred and dispreferred answer. The latter (step 2) is guided by the $r_{\text{RM}}(\cdot|\cdot)$. This process is commonly modeled as a bandit setting, where a reward is obtained from the r_{RM} at the end of each response. The RL objective is,

$$\theta_{\text{RL}} = \arg \max_{\theta} \mathbb{E}_{x \sim \mathcal{P}_x, y \sim \pi_{\theta}(\cdot|x)} [r_{\text{RM}}(y | x)].$$

DPO directly fine-tunes the model aligning with preference pairs $y_w \succ y_l | x$. It consolidates the two stages of *preference modeling* and *policy optimization* in RLHF into one stage. Let θ_0 denote the initial model parameters. The opti-

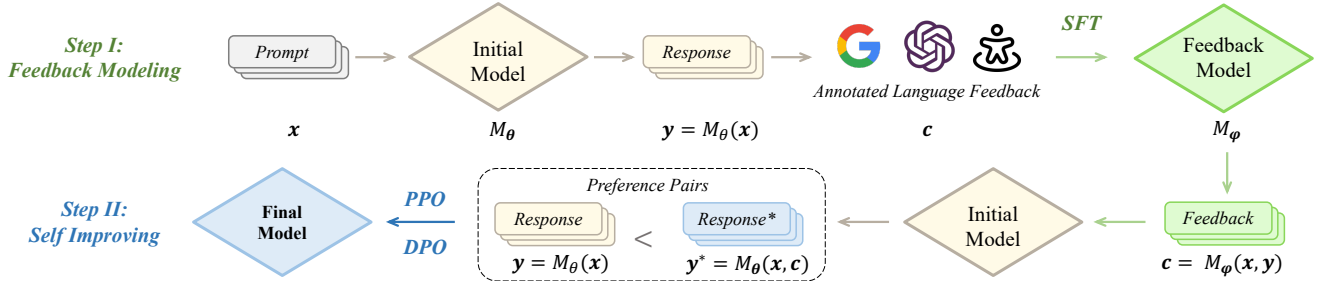


Figure 4. **Learning from language feedback pipeline:** (1). *Feedback Modeling*. We perform SFT on the initial model using annotated language feedback. (2). *Self Improving*. The initial model optimizes responses given the language feedback to synthesize preference pairs.

Modality	Dataset	Focus	Initial Model	Performance				
				Initial Model	DPO	DPO + LLF	PPO	PPO + LLF
TI2T	LLaVA-Bench[65]	Visual QA	LLaVA-1.5-7B	90.03	88.20 (-1.83)	97.36 (+7.33)	92.67 (+2.64)	98.76 (+8.73)
			LLaVA-1.5-13B	90.46	98.36 (+7.90)	100.33 (+9.87)	95.63 (+5.17)	100.59 (+10.13)
	MIA-Bench[84]	Layered Visual QA	LLaVA-1.5-7B	61.15	64.30 (+3.15)	65.32 (+4.17)	70.94 (+9.79)	72.59 (+11.44)
			LLaVA-1.5-13B	70.34	70.72 (+0.38)	75.43 (+5.09)	76.57 (+6.23)	80.26 (+9.92)
T2I	ImageReward[113]	Fine-Grained Preference	Chameleon-7B	-0.80	-0.65 (+0.15)	-0.46 (+0.34)	-0.52 (+0.28)	-0.44 (+0.36)
	HPS v2[109]	Coarse-Grained Preference	Chameleon-7B	25.19	25.56 (+0.37)	25.62 (+0.43)	25.56 (+0.37)	25.71 (+0.52)
TI2TI	InterleavedBench[67]	Text-Image Interleaved QA	Chameleon-7B	1.63	1.65 (+0.02)	1.70 (+0.07)	1.35 (-0.28)	1.78 (+0.15)
TV2T	Video-ChatGPT[72]	Detailed Video QA	Qwen2-VL-7B	3.01	3.03 (+0.02)	3.29 (+0.28)	3.02 (+0.01)	3.05 (+0.04)
TA2T	AIR-Bench[116]	Mixed-Audio QA	Qwen2-Audio-7B	6.61	6.64 (+0.03)	6.71 (+0.10)	6.49 (-0.12)	6.63 (+0.02)

Table 2. **Main experiment results.** We validate that LLF can enhance the performance of RLHF across 5 modalities, 5 open-source models, and 7 popular benchmarks, which achieves an average 5.83 times improvement than the baseline RLHF.

mization objective can be rewritten as,

$$\theta_{\text{RL}} = \arg \max_{\theta} \left[\log \sigma \left(\beta \log \frac{\pi_{\theta}(\mathbf{y}_w | \mathbf{x})}{\pi_{\theta_0}(\mathbf{y}_w | \mathbf{x})} - \beta \log \frac{\pi_{\theta}(\mathbf{y}_l | \mathbf{x})}{\pi_{\theta_0}(\mathbf{y}_l | \mathbf{x})} \right) \right].$$

Since both PPO and DPO are modality-agnostic, intuitively, all-modality alignment can be achieved with preference pairs $\mathbf{y}_w \succ \mathbf{y}_l \mid \mathbf{x}$, and recent works have also validated its effectiveness [3, 24, 95, 132]. However, the preference of coupled responses are trade-off by different dimensions, *e.g.*, their style and correctness. As the number of modalities increases, these dimensions become more complex, making it harder to figure out misaligned behavior with binary preferences [46, 59].

3.2. Practical Implementation

Inspired by Constitutional AI [10], LLF comprises two steps: *feedback modeling* and *self-improving* as shown in Fig. 4. The former employs SFT to train the feedback model, enabling it to provide language feedback based on \mathbf{x} and \mathbf{y} . The latter allows the model to refine its responses based on the language feedback \mathbf{c} .

Feedback Modeling The training process utilizes a dataset $\mathcal{D} = \{(\mathbf{x}_i, \mathbf{y}_i, \mathbf{c}_i)\}_{i=1}^N$, where N is the size of dataset, \mathbf{x}_i denotes the prompt, \mathbf{y}_i represents the response,

and \mathbf{c}_i is the corresponding language feedback. Let $P_{\varphi}(\mathbf{c}_i \mid \mathbf{x}_i, \mathbf{y}_i)$ denote the probability of the target sequence \mathbf{c}_i given the input sequence $(\mathbf{x}_i, \mathbf{y}_i)$ and the model parameters φ , the training objective of the feedback model can be expressed by the cross-entropy loss:

$$\mathcal{L}_{\varphi} = -\mathbb{E}_{(\mathbf{x}_i, \mathbf{y}_i, \mathbf{c}_i) \sim \mathcal{D}} [\log P_{\varphi}(\mathbf{c}_i \mid \mathbf{x}_i, \mathbf{y}_i)]. \quad (1)$$

Self Improving We first collect the initial model’s response \mathbf{y} to the given prompt \mathbf{x} online. Then, we gather feedback $\mathbf{c} = M_{\phi}(\mathbf{x}, \mathbf{y})$ from the feedback model M_{ϕ} . Finally, we have the initial model generate responses $\mathbf{y}^* = M_{\theta}(\mathbf{x}, \mathbf{c})$ conditioned on this feedback. For example, \mathbf{y} may suffer from redundancy and hallucination, while \mathbf{c} will remind the generation of \mathbf{y}^* to avoid these problems. Based on online sampling, it often enables \mathbf{y}^* and \mathbf{y} to exhibit significant differences in certain aspects (*e.g.*, reducing redundancy), thereby generating more learnable preference pairs.

3.3. Experiment

We empirically verify that LLF offers several key advantages over traditional binary feedback: *unified preference*: As language feedback typically optimizes responses along key dimensions, models can easily learn genuine human preference beyond pairs; *rich information*: Since the feedback model can generate a substantial amount of language



Figure 5. **Comparison of DPO+LLF with DPO on varying language feedback amounts.** We trained the feedback models using 25%, 50%, and 75% of the language feedback (LF) compared to binary feedback (BF), then synthesized an equal amount of preference pairs based on them, and subsequently compared the performance of the DPO against the initial model. We find that a small amount of language feedback can synthesize preference pairs that surpass those derived from binary feedback.

Modality	TI2T	TA2T	TV2T	T2I	TI2TI
w/o feedback model	44.8%	47.5%	39.6%	33.4%	41.8%
w/ feedback model	57.8%	64.5%	63.8%	56.9%	67.2%

Table 3. **Ablation study of feedback model.** We compare the win rate of self-improving models against initial models on all-modality hold-out evaluation prompts. The *w/o feedback model* refers to using the initial model as the feedback model, judged by GPT-4o (TI2T, T2T, TI2TI) and Gemini 1.5 Pro (TA2T, TV2T).

feedback, LLF can effectively serve as a robust synthesizer of preference data. Specifically, we train Chameleon-7B [98] for T2I and TI2TI, LLaVA-7B and LLaVA-13B [65] for TI2T, Qwen2-Audio-7B [25] for TA2T, and Qwen2-VL-7B [103] for TV2T based on *align-anything-200k*. For more details about the training setting, please refer to the Appendix: Training Details.

Improvement with Unified Preference As shown in Tab. 2, LLF synthesized preference pairs reflect more unified human preference, enhancing all-modality alignment performance. We observe that DPO and RLHF using binary pairs fall short in some modalities. However, with LLF, they yields positive improvement across all modalities. Interestingly, we find that the improvement of LLF on LLaVA-13B is greater than that on LLaVA-7B. This suggests that LLF performs better on stronger models.

Efficiency with Rich Information LLF provides richer information and supports efficient preference data synthesis. As shown in Fig. 5, despite having only a smaller amount of language feedback, DPO+LLF outperforms DPO with binary feedback. At the same time, the reduction in data amount does not significantly weaken the capabilities of LLF. This suggests that in all-modality alignment, labeling many binary preference pairs is less effective than labeling a smaller amount of language feedback.

Ablation Study: Feedback Model is Necessary As shown in Tab. 3, the feedback model generates language feedback on the initial model’s responses to hold-out evaluation prompts, which is then used to regenerate these responses. Results indicate that this approach yields improvement while replacing the feedback model with the initial model does not achieve comparable positive effects.

4. Evaluation: *Eval-Anything*

Currently, evaluating all-modality models relies on human experts for assessments, which is inefficient and costly. While combining benchmarks for individual modalities could offer a broader evaluation [125], differences in data preparation, post-processing, and metrics across benchmarks hinder accurate performance assessment. Additionally, all-modality models uniquely select the appropriate modalities based on user queries, enabling seamless cross-modal synergy, a capability that traditional single-modality evaluation pipelines fail to capture fully.

To address this gap, we deliver our evaluation framework specifically designed for all-modality models – *eval-anything* – including (1) **all-modality understanding** (AMU) for assess models to simultaneously process and integrate information from all modalities and (2) **all-modality generation** (AMG): evaluate a model’s ability to follow user instructions, autonomously select modalities, and work synergistically across different modalities for output.

4.1. Composition of Evaluation Dataset

4.1.1 All-Modality Understanding

All-modality models aim to both understand individual modalities and combine information across them to generate high-quality responses. To assess their comprehensive multimodal processing, we create 164 test entries, each containing textual, visual (image or video), and auditory (audio or speech) components. These interconnected modalities require the model to integrate all inputs accurately, as failure in any one modality leads to incorrect answers. For instance, as shown in Fig. 6, if a model fails to process visual inputs, it may miss that *the person in the picture is frightened*. Similarly, without auditory processing, it might not understand that the person’s fear is due to *a barking dog*.

We use GPT-4 [1] to evaluate model responses on a scale of 1 to 10. However, previous studies [65, 116] underscore limitations in multimodal evaluation that rely on a single human annotation as a reference. As the number of modalities increases, so does the complexity, making it harder to reach consensus and increasing subjective bias in single annotations. Moreover, since GPT-4 lacks true multimodal

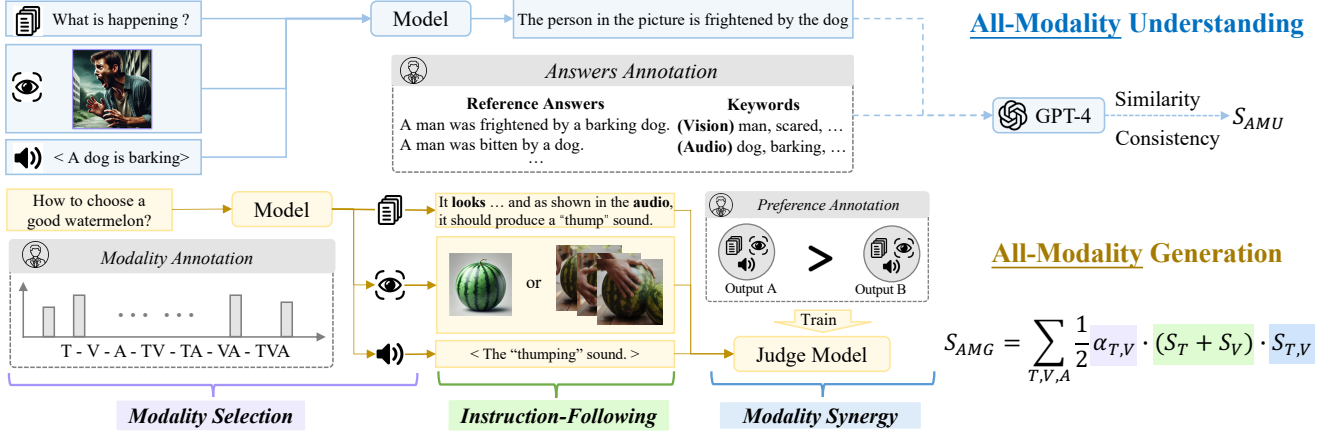


Figure 6. **The eval-anything benchmark consists of two components: (Up) AMU: All-Modality Understanding**, where the model answers open-ended questions by integrating textual instructions, images, videos, and audio. **(Down) AMG: All-Modality Generation** is divided into subtasks of instruction-following, modality selection, and synergy. The model generates outputs for each modality (text, image, video, audio) based on instructions, with human-preferred combinations guiding modality selection metrics. A trained judge model evaluates the relevance, consistency, and synergy across different modalities in the outputs.

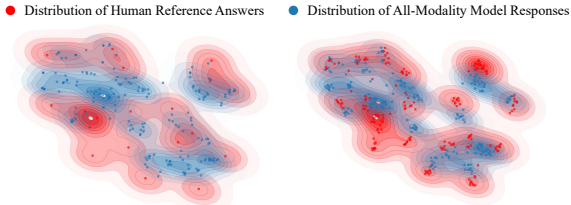


Figure 7. **Distribution of model and human annotation.** In AMU task, comparing the distribution of an all-modality model’s responses (blue) with human annotations (red) reveals that a single annotation inadequately covers the model’s semantic space (left), whereas multiple annotations broaden the red region, improving evaluation coverage by capturing more response diversity (right).

comprehension, evaluating only its text responses doesn’t confirm if essential information from each modality is fully understood. To address this, we gather responses from 10 annotators and extract key terms from each modality. As illustrated in Fig. 7, the distribution of multiple annotations mitigates the bias associated with single-reference evaluation. Additionally, the inclusion of key terms enables GPT-4 to more accurately detect potential errors in its responses. The details for AMU can be found in Appendix: Evaluation.

4.1.2 All-Modality Generation

In generation tasks, all-modality models can outperform single-modal ones by delivering diverse information across multiple formats under the same user query. To achieve this, they must follow *SSI* principles: (1) **Select** relevant modalities automatically to reduce redundancy, (2) **Synergistic** integration for maximum information gain, and (3) **Instruction-following** in each modality. The overall

score for the AMG task is as follows:

$$S_{AMG} = \sum_{T, V, A} \frac{1}{2} \alpha_{T, V} \cdot (S_T + S_V) \cdot S_{T, V} \quad (2)$$

Instruction Following To assess instruction-following, we design 100 prompts per modality. Using GPT-4o, we score the text and image outputs. For audio and video modalities, inspired by TIFA [44] pipeline, we create multiple-choice questions based on the prompts and employ Qwen2-Audio [24] and Qwen2-VL [103] as evaluation models. This process yields independent modality scores S_T, S_V, S_A , each ranging from 0 to 10.

Modality Selection Properly combining modalities in the model’s response can provide rich perspectives while reducing redundant information. We employ 25 crowd-sourced annotators to identify the expected modality combinations for given text instructions. The voting process results in one of the quantitative metrics for AMG task, with appropriate rewards and penalties applied based on the modalities generated by the model. As shown in Fig. 6, α represents the percentage of human votes for each modality combination, and if the model outputs all three modalities, this parameter will be one-third of $\alpha_{T, V, A}$.

Modality Synergy refers to the consistency between different modalities in a model’s responses. We assess modality synergy by training a judge model with human annotations obtained through a data synthesis. Specifically, we develop a data synthesis pipeline centered on LLM-based agents that utilize tools to invoke audio, image, and video generation models, constructing a dataset with textual inputs and multimodal outputs. We employ human annotators to annotate preference data considering the synergy between different modalities in each response, and

Initial Models	All-Modality Understanding				All-Modality Generation								Overall	
	Category				AMU Score	Modality Select	Instruction Following			Modality Synergy				AMG Score
	Perception	Reasoning	IF	Safety			T	V	A	T-V	T-A	V-A		
LLaVA-v1.5-7B [†]	2.66	2.67	2.50	2.90	2.68	0.182	5.62	9.47	4.73	0.29	0.33	0.66	1.56	2.12
Qwen2-VL [†]	2.76	3.07	2.40	4.05	3.07	0.177	6.70	9.51	4.83	0.52	0.57	0.66	2.16	2.62
Qwen2-Audio [†]	3.58	4.53	3.40	2.65	3.54	0.190	5.93	9.30	4.85	0.42	0.46	0.66	1.97	2.75
Chameleon-7B [†]	1.44	2.97	2.80	2.45	2.41	0.156	4.21	9.39	4.66	0.45	0.47	0.70	1.57	1.99
Llama3.1-8B-Instruct [†]	1.05	1.20	1.20	1.35	1.20	0.231	7.69	9.58	5.15	0.55	0.59	0.65	3.08	2.14
Gemini-1.5-Pro [†]	5.36	5.67	6.70	6.70	6.11	0.227	9.45	9.65	6.76	0.44	0.47	0.66	3.05	4.58
GPT-4o [†]	2.66	3.48	4.20	5.15	3.87	0.266	9.51	9.70	6.64	0.51	0.56	0.67	3.96	3.92

Table 4. **The performance of models in the eval-anything benchmark.** Additional input modalities are masked for models that do not support all-modality input. Since most current open-source models lack support for all-modality output, (†) indicates that models are used as agents to invoke AudioLDM2-Large [66] and FLUX.1-schnell[53] for audio and image generation.

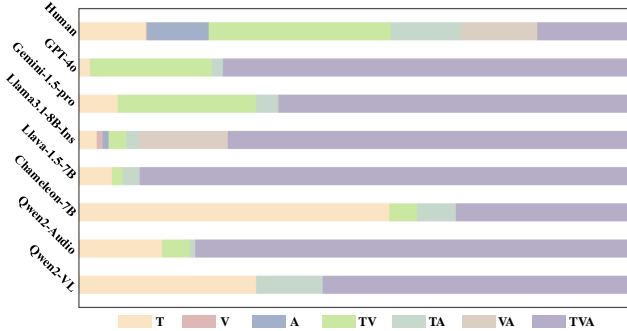


Figure 8. **Performance of models in modality selection metric.** We analyze the model’s modality selection performance across all instructions in AMG task, comparing it to the voting results on preferred modality combinations from 25 human annotators.

then train a judge model that allows all-modality input. As shown in Fig. 6, responses with high synergy scores ($S_{T,V}$, $S_{T,A}$, $S_{V,A}$) should show high relevance and consistency between modalities, with visual and auditory elements enriching the text from various perspectives. More details on training the judge model can be found in Appendix: Evaluation.

4.2. Evaluation Results & Analysis

Human and AI Agreement In the modality synergy task, after training on the 5k preference dataset, the experiment reveals a 66.4% agreement rate between the judging model and human annotators. These figures are consistent with human agreement ratios reported in similar studies on modeling human preferences [113] in the multimodal large language models domain.

Input vs Outputs Most models in Tab. 4 support partial modality input and have baseline scores, but Gemini-1.5-Pro outperforms others due to its ability to process all three modalities. In the AMG task, the average scores is relatively low, with no model demonstrating a clear advantage across all sub-items. The results indicate that, compared to

modality generation, models are more advanced in modality understanding, consistent with the developmental trends of all-modality models.

Truly All-Modality Model Current models still fall far behind all-modality models. For all-modality understanding, models using only a single modality score less than half the maximum points, as shown in Tab. 4. Even Gemini-1.5-Pro, which processes both visual and auditory inputs, fails to attain a perfect score. Unlike humans, who integrate information from multiple modalities, these models are limited by their inability to perceive different modalities in a fully integrated way, even though they perform nearly at the human level within individual modalities. Moreover, models align poorly with human choices when selecting output modalities, as illustrated in Fig. 8. Humans can adaptively choose the best combination of modalities based on the instruction. In contrast, models tend to output either only textual information, resulting in information loss, or all available modalities, causing redundancy. The limited multimodal capability, especially in models trained mainly on text, hampers their ability to synthesize information effectively, making it difficult to balance detail and conciseness.

5. Conclusion

In this work, we make the first exploration of fine-tuning all-modality models using human preference data across diverse modalities, to ensure alignment with human intentions. We have open-sourced the align-anything dataset, incorporating 200k annotated human preference data across modalities. Our proposed alignment method leverages language feedback to capture complex, modality-specific human preferences, significantly enhancing the model’s ability to follow instructions. To assess the all-modality models, we developed an evaluation benchmark: eval-anything. All data, models, and code have been made openly available.

Ethics Impact Our data collection, approved by the Institutional Review Board, will be released under the CC BY-NC 4.0 license. The dataset integrates Q-A data from open-source and API-based models, offering the potential for developing AI aligned with human intentions. However, while it could theoretically be misused for harmful purposes, we are committed to promoting safe AI technology.

Limitations and Future Work Despite having 45 experienced annotators, the team lacks sufficient diversity, which may limit the representativeness of human preferences. To address this, we plan to recruit a more varied group via platforms like Amazon MTurk. Additionally, the absence of all-modality foundational models in open-source restricts validation to individual modalities, so we encourage community efforts to develop such models and aim to expand experiments across more models. This is an ongoing effort, with the goal of scaling the dataset to millions.

References

- [1] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023. 2, 6, 9
- [2] Andrea Agostinelli, Timo I Denk, Zalán Borsos, Jesse Engel, Mauro Verzetti, Antoine Caillon, Qingqing Huang, Aren Jansen, Adam Roberts, Marco Tagliasacchi, et al. Musiclm: Generating music from text. *arXiv preprint arXiv:2301.11325*, 2023. 6
- [3] Daechul Ahn, Yura Choi, Youngjae Yu, Dongyeop Kang, and Jonghyun Choi. Tuning large multimodal models for videos using reinforcement learning from ai feedback. *arXiv preprint arXiv:2402.03746*, 2024. 5, 1
- [4] Huda Alamri, Vincent Cartillier, Abhishek Das, Jue Wang, Anoop Cherian, Irfan Essa, Dhruv Batra, Tim K Marks, Chiori Hori, Peter Anderson, et al. Audio visual scene-aware dialog. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7558–7567, 2019. 2
- [5] Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katherine Millican, Malcolm Reynolds, et al. Flamingo: a visual language model for few-shot learning. *Advances in neural information processing systems*, 35: 23716–23736, 2022. 2
- [6] Elmira Amirloo, Jean-Philippe Fauconnier, Christoph Roesmann, Christian Kerl, Rinu Boney, Yusu Qian, Zirui Wang, Afshin Dehghan, Yinfei Yang, Zhe Gan, et al. Understanding alignment in multimodal llms: A comprehensive study. *arXiv preprint arXiv:2407.02477*, 2024. 1
- [7] Anthropic. Claude 3. <https://www.anthropic.com/news/claude-3-family>, 2024. 2, 3, 4
- [8] Pika art. Pika art. <https://pika.art/>, 2024. 6
- [9] Jinze Bai, Shuai Bai, Yunfei Chu, Zeyu Cui, Kai Dang, Xiaodong Deng, Yang Fan, Wenbin Ge, Yu Han, Fei Huang, et al. Qwen technical report. *arXiv preprint arXiv:2309.16609*, 2023. 4
- [10] Yuntao Bai, Saurav Kadavath, Sandipan Kundu, Amanda Askell, Jackson Kernion, Andy Jones, Anna Chen, Anna Goldie, Azalia Mirhoseini, Cameron McKinnon, et al. Constitutional ai: Harmlessness from ai feedback. *arXiv preprint arXiv:2212.08073*, 2022. 4, 5
- [11] Kevin Black, Michael Janner, Yilun Du, Ilya Kostrikov, and Sergey Levine. Training diffusion models with reinforcement learning. In *The Twelfth International Conference on Learning Representations*, 2023. 1
- [12] Fabian Caba Heilbron, Victor Escorcia, Bernard Ghanem, and Juan Carlos Niebles. Activitynet: A large-scale video benchmark for human activity understanding. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 961–970, 2015. 5
- [13] Guoguo Chen, Shuzhou Chai, Guanbo Wang, Jiayu Du, Wei-Qiang Zhang, Chao Weng, Dan Su, Daniel Povey, Jan Trmal, Junbo Zhang, et al. Gigaspeech: An evolving, multi-domain asr corpus with 10,000 hours of transcribed audio. *arXiv preprint arXiv:2106.06909*, 2021. 6
- [14] Honglie Chen, Weidi Xie, Andrea Vedaldi, and Andrew Zisserman. Vgg-sound: A large-scale audio-visual dataset. In *ICASSP 2020-2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 721–725. IEEE, 2020. 9
- [15] Lin Chen, Jisong Li, Xiaoyi Dong, Pan Zhang, Conghui He, Jiaqi Wang, Feng Zhao, and Dahua Lin. Sharegpt4v: Improving large multi-modal models with better captions. *arXiv preprint arXiv:2311.12793*, 2023. 6
- [16] Lin Chen, Xilin Wei, Jinsong Li, Xiaoyi Dong, Pan Zhang, Yuhang Zang, Zehui Chen, Haodong Duan, Bin Lin, Zhenyu Tang, et al. Sharegpt4video: Improving video understanding and generation with better captions. *arXiv preprint arXiv:2406.04325*, 2024. 2, 6
- [17] Sihan Chen, Xingjian He, Longteng Guo, Xinxin Zhu, Weining Wang, Jinhui Tang, and Jing Liu. Valor: Vision-audio-language omni-perception pretraining model and dataset. *arXiv preprint arXiv:2304.08345*, 2023. 2
- [18] Sihan Chen, Handong Li, Qunbo Wang, Zijia Zhao, Mingzhen Sun, Xinxin Zhu, and Jing Liu. Vast: A vision-audio-subtitle-text omni-modality foundation model and dataset. *Advances in Neural Information Processing Systems*, 36:72842–72866, 2023. 2
- [19] Tsai-Shien Chen, Aliaksandr Siarohin, Willi Menapace, Ekaterina Deyneka, Hsiang-wei Chao, Byung Eun Jeon, Yuwei Fang, Hsin-Ying Lee, Jian Ren, Ming-Hsuan Yang, et al. Panda-70m: Captioning 70m videos with multiple cross-modality teachers. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13320–13331, 2024. 6
- [20] Xinlei Chen, Hao Fang, Tsung-Yi Lin, Ramakrishna Vedantam, Saurabh Gupta, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco captions: Data collection and evaluation server. *arXiv preprint arXiv:1504.00325*, 2015. 6

- [21] Zhiyang Chen, Yousong Zhu, Yufei Zhan, Zhaowen Li, Chaoyang Zhao, Jinqiao Wang, and Ming Tang. Mitigating hallucination in visual language models with visual supervision. *arXiv preprint arXiv:2311.16479*, 2023. 2
- [22] Ethan Chern, Jiadi Su, Yan Ma, and Pengfei Liu. Anole: An open, autoregressive, native large multimodal models for interleaved image-text generation. *arXiv preprint arXiv:2407.06135*, 2024. 3
- [23] Yunfei Chu, Jin Xu, Xiaohuan Zhou, Qian Yang, Shiliang Zhang, Zhijie Yan, Chang Zhou, and Jingren Zhou. Qwen-audio: Advancing universal audio understanding via unified large-scale audio-language models. *arXiv preprint arXiv:2311.07919*, 2023.
- [24] Yunfei Chu, Jin Xu, Qian Yang, Haojie Wei, Xipin Wei, Zhifang Guo, Yichong Leng, Yuanjun Lv, Jinzheng He, Junyang Lin, Chang Zhou, and Jingren Zhou. Qwen2-audio technical report. *arXiv preprint arXiv:2407.10759*, 2024. 5, 7, 1, 2, 3, 4, 6, 8, 9
- [25] Yunfei Chu, Jin Xu, Qian Yang, Haojie Wei, Xipin Wei, Zhifang Guo, Yichong Leng, Yuanjun Lv, Jinzheng He, Junyang Lin, et al. Qwen2-audio technical report. *arXiv preprint arXiv:2407.10759*, 2024. 6
- [26] Ganqu Cui, Lifan Yuan, Ning Ding, Guanming Yao, Wei Zhu, Yuan Ni, Guotong Xie, Zhiyuan Liu, and Maosong Sun. Ultrafeedback: Boosting language models with high-quality feedback. *arXiv preprint arXiv:2310.01377*, 2023. 3, 6
- [27] Josef Dai, Tianle Chen, Xuyao Wang, Ziran Yang, Taiye Chen, Jiaming Ji, and Yaodong Yang. Safesora: Towards safety alignment of text2video generation via a human preference dataset. *arXiv preprint arXiv:2406.14477*, 2024. 1
- [28] Ming Ding, Wendi Zheng, Wenyi Hong, and Jie Tang. Cogview2: Faster and better text-to-image generation via hierarchical transformers. *Advances in Neural Information Processing Systems*, 35:16890–16902, 2022. 3
- [29] Ning Ding, Yulin Chen, Bokai Xu, Yujia Qin, Shengding Hu, Zhiyuan Liu, Maosong Sun, and Bowen Zhou. Enhancing chat language models by scaling high-quality instructional conversations. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 3029–3051, 2023. 6
- [30] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An image is worth 16x16 words: Transformers for image recognition at scale, 2021. 4
- [31] Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024. 6
- [32] Kawin Ethayarajh, Winnie Xu, Niklas Muennighoff, Dan Jurafsky, and Douwe Kiela. Kto: Model alignment as prospect theoretic optimization. *arXiv preprint arXiv:2402.01306*, 2024. 2
- [33] Zach Evans, Julian D Parker, CJ Carr, Zack Zukowski, Josiah Taylor, and Jordi Pons. Stable audio open. *arXiv preprint arXiv:2407.14358*, 2024. 6
- [34] Qingkai Fang, Shoutao Guo, Yan Zhou, Zhengrui Ma, Shaolei Zhang, and Yang Feng. Llama-omni: Seamless speech interaction with large language models. *arXiv preprint arXiv:2409.06666*, 2024. 2
- [35] Chaoyou Fu, Peixian Chen, Yunhang Shen, Yulei Qin, Mengdan Zhang, Xu Lin, Jinrui Yang, Xiawu Zheng, Ke Li, Xing Sun, et al. Mme: A comprehensive evaluation benchmark for multimodal large language models. *arXiv preprint arXiv:2306.13394*, 2023. 2
- [36] Chaoyou Fu, Yuhan Dai, Yondong Luo, Lei Li, Shuhuai Ren, Renrui Zhang, Zihan Wang, Chenyu Zhou, Yunhang Shen, Mengdan Zhang, et al. Video-mme: The first-ever comprehensive evaluation benchmark of multi-modal llms in video analysis. *arXiv preprint arXiv:2405.21075*, 2024. 2
- [37] Oran Gafni, Adam Polyak, Oron Ashual, Shelly Sheynin, Devi Parikh, and Yaniv Taigman. Make-a-scene: Scene-based text-to-image generation with human priors. In *European Conference on Computer Vision*, pages 89–106. Springer, 2022. 4
- [38] Rohit Girdhar, Alaaeldin El-Nouby, Zhuang Liu, Mannat Singh, Kalyan Vasudev Alwala, Armand Joulin, and Ishan Misra. Imagebind: One embedding space to bind them all. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15180–15190, 2023. 2, 11
- [39] Yuan Gong, Hongyin Luo, Alexander H Liu, Leonid Karlinsky, and James Glass. Listen, think, and understand. *arXiv preprint arXiv:2305.10790*, 2023. 2, 6
- [40] Kristen Grauman, Andrew Westbury, Eugene Byrne, Zachary Chavis, Antonino Furnari, Rohit Girdhar, Jackson Hamburger, Hao Jiang, Miao Liu, Xingyu Liu, et al. Ego4d: Around the world in 3,000 hours of egocentric video. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18995–19012, 2022. 6
- [41] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *Advances in neural information processing systems*, 33:6840–6851, 2020. 2
- [42] Jiwoo Hong, Noah Lee, and James Thorne. Reference-free monolithic preference optimization with odds ratio. *arXiv e-prints*, pages arXiv–2403, 2024. 2
- [43] Wenyi Hong, Ming Ding, Wendi Zheng, Xinghan Liu, and Jie Tang. Cogvideo: Large-scale pretraining for text-to-video generation via transformers. In *The Eleventh International Conference on Learning Representations*. 6
- [44] Yushi Hu, Benlin Liu, Jungo Kasai, Yizhong Wang, Mari Ostendorf, Ranjay Krishna, and Noah A Smith. Tifa: Accurate and interpretable text-to-image faithfulness evaluation with question answering. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 20406–20417, 2023. 7, 9
- [45] Qingqiu Huang, Yu Xiong, Anyi Rao, Jiaze Wang, and Dahua Lin. Movienet: A holistic dataset for movie understanding. In *Computer Vision—ECCV 2020: 16th European*

- Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part IV 16*, pages 709–727. Springer, 2020. 6
- [46] Minyoung Huh, Brian Cheung, Tongzhou Wang, and Phillip Isola. The platonic representation hypothesis. *arXiv preprint arXiv:2405.07987*, 2024. 5, 2
- [47] Jiaming Ji, Tianyi Qiu, Boyuan Chen, Borong Zhang, Hantao Lou, Kaile Wang, Yawen Duan, Zhonghao He, Jiayi Zhou, Zhaowei Zhang, et al. Ai alignment: A comprehensive survey. *arXiv preprint arXiv:2310.19852*, 2023. 3
- [48] Jiaming Ji, Donghai Hong, Borong Zhang, Boyuan Chen, Josef Dai, Boren Zheng, Tianyi Qiu, Boxun Li, and Yaodong Yang. Pku-saferlhf: A safety alignment preference dataset for llama family models. *arXiv preprint arXiv:2406.15513*, 2024. 4, 6
- [49] Yuxin Jiang, Yufei Wang, Xingshan Zeng, Wanjuan Zhong, Liangyou Li, Fei Mi, Lifeng Shang, Xin Jiang, Qun Liu, and Wei Wang. FollowBench: A multi-level fine-grained constraints following benchmark for large language models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 4667–4688, Bangkok, Thailand, 2024. Association for Computational Linguistics. 9
- [50] Liqiang Jing, Ruosen Li, Yunmo Chen, Mengzhao Jia, and Xinya Du. Faithscore: Evaluating hallucinations in large vision-language models. *arXiv preprint arXiv:2311.01477*, 2023. 2
- [51] Chris Dongjoo Kim, Byeongchang Kim, Hyunmin Lee, and Gunhee Kim. Audiocaps: Generating captions for audios in the wild. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 119–132, 2019. 6
- [52] Yuval Kirstain, Adam Polyak, Uriel Singer, Shahbuland Matiana, Joe Penna, and Omer Levy. Pick-a-pic: An open dataset of user preferences for text-to-image generation. *Advances in Neural Information Processing Systems*, 36: 36652–36663, 2023. 2, 3, 1, 6
- [53] Black Forest Labs. black-forest-labs/flux (github repository). <https://github.com/black-forest-labs/flux>, 2024. 8
- [54] Guangyao Li, Yake Wei, Yapeng Tian, Chenliang Xu, Ji-Rong Wen, and Di Hu. Learning to answer questions in dynamic audio-visual scenarios. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 19108–19118, 2022. 2
- [55] Kunchang Li, Yali Wang, Yanan He, Yizhuo Li, Yi Wang, Yi Liu, Zun Wang, Jilan Xu, Guo Chen, Ping Luo, et al. Mvbench: A comprehensive multi-modal video understanding benchmark. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 22195–22206, 2024. 2
- [56] Lei Li, Zhihui Xie, Mukai Li, Shunian Chen, Peiyi Wang, Liang Chen, Yazheng Yang, Benyou Wang, Lingpeng Kong, and Qi Liu. Vfeedback: A large-scale ai feedback dataset for large vision-language models alignment. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 6227–6246, 2024. 1
- [57] Yifan Li, Yifan Du, Kun Zhou, Jinpeng Wang, Wayne Xin Zhao, and Ji-Rong Wen. Evaluating object hallucination in large vision-language models. *arXiv preprint arXiv:2305.10355*, 2023. 2
- [58] Yunxin Li, Shenyuan Jiang, Baotian Hu, Longyue Wang, Wanqi Zhong, Wenhan Luo, Lin Ma, and Min Zhang. Unimoe: Scaling unified multimodal llms with mixture of experts. *arXiv preprint arXiv:2405.11273*, 2024. 2
- [59] Youwei Liang, Junfeng He, Gang Li, Peizhao Li, Arseniy Klimovskiy, Nicholas Carolan, Jiao Sun, Jordi Pont-Tuset, Sarah Young, Feng Yang, et al. Rich human feedback for text-to-image generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 19401–19411, 2024. 3, 5, 1, 2
- [60] Bin Lin, Zhenyu Tang, Yang Ye, Jiayi Cui, Bin Zhu, Peng Jin, Junwu Zhang, Munan Ning, and Li Yuan. Moe-llava: Mixture of experts for large vision-language models. *arXiv preprint arXiv:2401.15947*, 2024. 2
- [61] Haohe Liu, Zehua Chen, Yi Yuan, Xinhao Mei, Xubo Liu, Danilo Mandic, Wenwu Wang, and Mark D Plumbley. Audioldm: Text-to-audio generation with latent diffusion models. *arXiv preprint arXiv:2301.12503*, 2023. 11, 12
- [62] Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 26296–26306, 2024. 2, 3, 4, 6
- [63] Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. Llava-next: Improved reasoning, ocr, and world knowledge, 2024. 6
- [64] Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. Llava-next: Improved reasoning, ocr, and world knowledge, 2024. 2, 3, 4
- [65] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *Advances in neural information processing systems*, 36, 2024. 2, 5, 6, 4
- [66] Haohe Liu, Yi Yuan, Xubo Liu, Xinhao Mei, Qiuqiang Kong, Qiao Tian, Yuping Wang, Wenwu Wang, Yuxuan Wang, and Mark D Plumbley. Audioldm 2: Learning holistic audio generation with self-supervised pretraining. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 2024. 8, 6, 12
- [67] Minqian Liu, Zhiyang Xu, Zihao Lin, Trevor Ashby, Joy Rimchala, Jiabin Zhang, and Lifu Huang. Holistic evaluation for interleaved text-and-image generation. *arXiv preprint arXiv:2406.14643*, 2024. 5
- [68] Xingchao Liu, Chengyue Gong, Lemeng Wu, Shujian Zhang, Hao Su, and Qiang Liu. Fusedream: Training-free text-to-image generation with improved clip+ gan space optimization. *arXiv preprint arXiv:2112.01573*, 2021. 3
- [69] Xin Liu, Yichen Zhu, Jindong Gu, Yunshi Lan, Chao Yang, and Yu Qiao. Mm-safetybench: A benchmark for safety evaluation of multimodal large language models, 2024. 2
- [70] Xin Liu, Yichen Zhu, Yunshi Lan, Chao Yang, and Yu Qiao. Safety of multimodal large language models on images and text. *arXiv preprint arXiv:2402.00357*, 2024. 2

- [71] Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, et al. Mmbench: Is your multimodal model an all-around player? *arXiv preprint arXiv:2307.06281*, 2023. 2
- [72] Muhammad Maaz, Hanoona Rasheed, Salman Khan, and Fahad Shahbaz Khan. Video-chatgpt: Towards detailed video understanding via large vision and language models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (ACL 2024)*, 2024. 5, 3
- [73] Navonil Majumder, Chia-Yu Hung, Deepanway Ghosal, Wei-Ning Hsu, Rada Mihalcea, and Soujanya Poria. Tango 2: Aligning diffusion-based text-to-audio generations through direct preference optimization. *arXiv preprint arXiv:2404.09956*, 2024. 3, 1, 6
- [74] Hui Mao, Ming Cheung, and James She. Deepart: Learning joint representations of visual arts. In *Proceedings of the 25th ACM international conference on Multimedia*, pages 1183–1191. ACM, 2017. 6
- [75] Xinhao Mei, Chutong Meng, Haohe Liu, Qiuqiang Kong, Tom Ko, Chengqi Zhao, Mark D Plumbley, Yuexian Zou, and Wenwu Wang. Wavcaps: A chatgpt-assisted weakly-labelled audio captioning dataset for audio-language multimodal research. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 2024. 6
- [76] Yu Meng, Mengzhou Xia, and Danqi Chen. Simpo: Simple preference optimization with a reference-free reward. *arXiv preprint arXiv:2405.14734*, 2024. 2
- [77] mixkit. mixkit. <https://mixkit.co/>, 2024. 6
- [78] Alexander Quinn Nichol, Prafulla Dhariwal, Aditya Ramesh, Pranav Shyam, Pamela Mishkin, Bob McGrew, Ilya Sutskever, and Mark Chen. Glide: Towards photorealistic image generation and editing with text-guided diffusion models. In *International Conference on Machine Learning*, pages 16784–16804. PMLR, 2022. 3
- [79] Munan Ning, Bin Zhu, Yujia Xie, Bin Lin, Jiayi Cui, Lu Yuan, Dongdong Chen, and Li Yuan. Video-bench: A comprehensive benchmark and toolkit for evaluating video-based large language models. *arXiv preprint arXiv:2311.16103*, 2023. 2
- [80] OpenAI. GPT4o. <https://openai.com/index/hello-gpt-4o/>, 2024. 4, 3, 6, 8, 9
- [81] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35: 27730–27744, 2022. 2, 4, 1, 6
- [82] Baolin Peng, Chunyuan Li, Pengcheng He, Michel Galley, and Jianfeng Gao. Instruction tuning with gpt-4. *arXiv preprint arXiv:2304.03277*, 2023. 4
- [83] Dustin Podell, Zion English, Kyle Lacey, Andreas Blattmann, Tim Dockhorn, Jonas Müller, Joe Penna, and Robin Rombach. Sdxl: Improving latent diffusion models for high-resolution image synthesis. In *The Twelfth International Conference on Learning Representations*. 6
- [84] Yusu Qian, Hanrong Ye, Jean-Philippe Fauconnier, Peter Grasch, Yinfei Yang, and Zhe Gan. Mia-bench: Towards better instruction following evaluation of multimodal llms. *arXiv preprint arXiv:2407.01509*, 2024. 5, 4
- [85] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021. 4
- [86] Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine McLeavey, and Ilya Sutskever. Robust speech recognition via large-scale weak supervision. In *International conference on machine learning*, pages 28492–28518. PMLR, 2023. 4
- [87] Rafael Rafailov, Archit Sharma, Eric Mitchell, Christopher D Manning, Stefano Ermon, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model. *Advances in Neural Information Processing Systems*, 36, 2024. 2, 4, 1
- [88] Machel Reid, Nikolay Savinov, Denis Teplyashin, Dmitry Lepikhin, Timothy Lillicrap, Jean-baptiste Alayrac, Radu Soricut, Angeliki Lazaridou, Orhan Firat, Julian Schrittwieser, et al. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context. *arXiv preprint arXiv:2403.05530*, 2024. 3, 6, 8
- [89] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 10684–10695, 2022. 3, 6, 11, 12
- [90] Jérémy Scheurer, Jon Ander Campos, Tomasz Korbak, Jun Shern Chan, Angelica Chen, Kyunghyun Cho, and Ethan Perez. Training language models with language feedback at scale. *arXiv preprint arXiv:2303.16755*, 2023. 3
- [91] Christoph Schuhmann, Romain Beaumont, Richard Vencu, Cade Gordon, Ross Wightman, Mehdi Cherti, Theo Coombes, Aarush Katta, Clayton Mullis, Mitchell Wortsman, et al. Laion-5b: An open large-scale dataset for training next generation image-text models. *Advances in Neural Information Processing Systems*, 35:25278–25294, 2022. 4
- [92] Idan Schwartz, Alexander G Schwing, and Tamir Hazan. A simple baseline for audio-visual scene-aware dialog. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 12548–12558, 2019. 2
- [93] Dustin Schwenk, Apoorv Khandelwal, Christopher Clark, Kenneth Marino, and Roozbeh Mottaghi. A-okvqa: A benchmark for visual question answering using world knowledge. In *European conference on computer vision*, pages 146–162. Springer, 2022. 2
- [94] Quan Sun, Yufeng Cui, Xiaosong Zhang, Fan Zhang, Qiyang Yu, Yueze Wang, Yongming Rao, Jingjing Liu, Tiejun Huang, and Xinlong Wang. Generative multimodal models are in-context learners. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14398–14409, 2024. 3

- [95] Zhiqing Sun, Sheng Shen, Shengcao Cao, Haotian Liu, Chunyuan Li, Yikang Shen, Chuang Gan, Liang-Yan Gui, Yu-Xiong Wang, Yiming Yang, et al. Aligning large multimodal models with factually augmented rlhf. *arXiv preprint arXiv:2309.14525*, 2023. 2, 5, 1
- [96] Changli Tang, Wenyi Yu, Guangzhi Sun, Xianzhao Chen, Tian Tan, Wei Li, Lu Lu, Zejun Ma, and Chao Zhang. Salmonn: Towards generic hearing abilities for large language models. *arXiv preprint arXiv:2310.13289*, 2023. 3
- [97] Rohan Taori, Ishaan Gulrajani, Tianyi Zhang, Yann Dubois, Xuechen Li, Carlos Guestrin, Percy Liang, and Tatsunori B Hashimoto. Stanford alpaca: An instruction-following llama model, 2023. 6
- [98] Chameleon Team. Chameleon: Mixed-modal early-fusion foundation models. *arXiv preprint arXiv:2405.09818*, 2024. 2, 6, 3, 4
- [99] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shrutit Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023. 2, 6
- [100] Matthew Turk. Multimodal interaction: A review. *Pattern recognition letters*, 36:189–195, 2014. 2
- [101] Masatoshi Uehara, Yulai Zhao, Tommaso Biancalani, and Sergey Levine. Understanding reinforcement learning-based fine-tuning of diffusion models: A tutorial and review. *arXiv preprint arXiv:2407.13734*, 2024. 1
- [102] Chen Wang, Minpeng Liao, Zhongqiang Huang, Jinliang Lu, Junhong Wu, Yuchen Liu, Chengqing Zong, and Jiajun Zhang. B1sp: Bootstrapping language-speech pre-training via behavior alignment of continuation writing. *arXiv preprint arXiv:2309.00916*, 2023. 3
- [103] Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Yang Fan, Kai Dang, Mengfei Du, Xuancheng Ren, Rui Men, Dayiheng Liu, Chang Zhou, Jingren Zhou, and Junyang Lin. Qwen2-vl: Enhancing vision-language model’s perception of the world at any resolution. *arXiv preprint arXiv:2409.12191*, 2024. 6, 7, 2, 4, 8, 9
- [104] Wenhao Wang and Yi Yang. Vidprom: A million-scale real prompt-gallery dataset for text-to-video diffusion models. *arXiv preprint arXiv:2403.06098*, 2024. 2, 6
- [105] Xinpeng Wang, Xiaoyuan Yi, Han Jiang, Shanlin Zhou, Zhihua Wei, and Xing Xie. Tovilag: Your visual-language generative model is also an evildoer. *arXiv preprint arXiv:2312.11523*, 2023. 2
- [106] Zijie J Wang, Evan Montoya, David Munechika, Haoyang Yang, Benjamin Hoover, and Duen Horng Chau. Diffusiondb: A large-scale prompt gallery dataset for text-to-image generative models. *arXiv preprint arXiv:2210.14896*, 2022. 6
- [107] Benno Weck, Iliaria Manco, Emmanouil Benetos, Elio Quinton, George Fazekas, and Dmitry Bogdanov. Muchomusic: Evaluating music understanding in multimodal audio-language models. *arXiv preprint arXiv:2408.01337*, 2024. 2
- [108] Shengqiong Wu, Hao Fei, Leigang Qu, Wei Ji, and Tat-Seng Chua. NEXt-GPT: Any-to-any multimodal LLM. In *Forty-first International Conference on Machine Learning*, 2024. 2, 3
- [109] Xiaoshi Wu, Yiming Hao, Keqiang Sun, Yixiong Chen, Feng Zhu, Rui Zhao, and Hongsheng Li. Human preference score v2: A solid benchmark for evaluating human preferences of text-to-image synthesis. *arXiv preprint arXiv:2306.09341*, 2023. 2, 5, 1, 6
- [110] Junbin Xiao, Xindi Shang, Angela Yao, and Tat-Seng Chua. Next-qa: Next phase of question-answering to explaining temporal actions. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 9777–9786, 2021. 6
- [111] Can Xu, Qingfeng Sun, Kai Zheng, Xiubo Geng, Pu Zhao, Jiazhan Feng, Chongyang Tao, and Daxin Jiang. Wizardlm: Empowering large language models to follow complex instructions. *arXiv preprint arXiv:2304.12244*, 2023. 6
- [112] Can Xu, Qingfeng Sun, Kai Zheng, Xiubo Geng, Pu Zhao, Jiazhan Feng, Chongyang Tao, Qingwei Lin, and Daxin Jiang. WizardLM: Empowering large pre-trained language models to follow complex instructions. In *The Twelfth International Conference on Learning Representations*, 2024. 6
- [113] Jiazheng Xu, Xiao Liu, Yuchen Wu, Yuxuan Tong, Qinkai Li, Ming Ding, Jie Tang, and Yuxiao Dong. Imagereward: Learning and evaluating human preferences for text-to-image generation. *Advances in Neural Information Processing Systems*, 36, 2024. 5, 8, 1, 4
- [114] An Yang, Baosong Yang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Zhou, Chengpeng Li, Chengyuan Li, Dayiheng Liu, Fei Huang, et al. Qwen2 technical report. *CoRR*, 2024. 4
- [115] Pinci Yang, Xin Wang, Xuguang Duan, Hong Chen, Runze Hou, Cong Jin, and Wenwu Zhu. Avqa: A dataset for audio-visual question answering on videos. In *Proceedings of the 30th ACM international conference on multimedia*, pages 3480–3491, 2022. 2
- [116] Qian Yang, Jin Xu, Wenrui Liu, Yunfei Chu, Ziyue Jiang, Xiaohuan Zhou, Yichong Leng, Yuanjun Lv, Zhou Zhao, Chang Zhou, et al. Air-bench: Benchmarking large audio-language models via generative comprehension. *arXiv preprint arXiv:2402.07729*, 2024. 5, 6, 2
- [117] Zhuoyi Yang, Jiayan Teng, Wendi Zheng, Ming Ding, Shiyu Huang, Jiazheng Xu, Yuanming Yang, Wenyi Hong, Xiaohan Zhang, Guanyu Feng, et al. Cogvideox: Text-to-video diffusion models with an expert transformer. *arXiv preprint arXiv:2408.06072*, 2024. 2, 6, 11, 12
- [118] Shukang Yin, Chaoyou Fu, Sirui Zhao, Ke Li, Xing Sun, Tong Xu, and Enhong Chen. A survey on multimodal large language models. *arXiv preprint arXiv:2306.13549*, 2023. 6
- [119] Fisher Yu, Haofeng Chen, Xin Wang, Wenqi Xian, Yingying Chen, Fangchen Liu, Vashisht Madhavan, and Trevor Darrell. Bdd100k: A diverse driving dataset for heterogeneous multitask learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 2636–2645, 2020. 6
- [120] Tianyu Yu, Yuan Yao, Haoye Zhang, Taiwen He, Yifeng Han, Ganqu Cui, Jinyi Hu, Zhiyuan Liu, Hai-Tao Zheng,

- Maosong Sun, et al. Rlhf-v: Towards trustworthy mllms via behavior alignment from fine-grained correctional human feedback. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13807–13816, 2024. 2, 3, 1, 6
- [121] Tianyu Yu, Haoye Zhang, Yuan Yao, Yunkai Dang, Da Chen, Xiaoman Lu, Ganqu Cui, Taiwen He, Zhiyuan Liu, Tat-Seng Chua, et al. Rlaif-v: Aligning mllms through open-source ai feedback for super gpt-4v trustworthiness. *arXiv preprint arXiv:2405.17220*, 2024. 2
- [122] Weihao Yu, Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Zicheng Liu, Xinchao Wang, and Lijuan Wang. Mm-vet: Evaluating large multimodal models for integrated capabilities. *arXiv preprint arXiv:2308.02490*, 2023. 2
- [123] Heeseung Yun, Youngjae Yu, Wonsuk Yang, Kangil Lee, and Gunhee Kim. Pano-avqa: Grounded audio-visual question answering on 360deg videos. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 2031–2041, 2021. 2
- [124] Hang Zhang, Xin Li, and Lidong Bing. Video-llama: An instruction-tuned audio-visual language model for video understanding. *arXiv preprint arXiv:2306.02858*, 2023. 2
- [125] Kaichen Zhang, Bo Li, Peiyuan Zhang, Fanyi Pu, Joshua Adrian Cahyono, Kairui Hu, Shuai Liu, Yuanhan Zhang, Jingkang Yang, Chunyuan Li, et al. Lmms-eval: Reality check on the evaluation of large multimodal models. *arXiv preprint arXiv:2407.12772*, 2024. 6
- [126] Renrui Zhang, Jiaming Han, Chris Liu, Peng Gao, Aojun Zhou, Xiangfei Hu, Shilin Yan, Pan Lu, Hongsheng Li, and Yu Qiao. Llama-adapter: Efficient fine-tuning of language models with zero-init attention. *arXiv preprint arXiv:2303.16199*, 2023. 2
- [127] Ruohong Zhang, Liangke Gui, Zhiqing Sun, Yihao Feng, Keyang Xu, Yuanhan Zhang, Di Fu, Chunyuan Li, Alexander Hauptmann, Yonatan Bisk, et al. Direct preference optimization of video large multimodal models from language model reward. *arXiv preprint arXiv:2404.01258*, 2024. 1
- [128] Wayne Xin Zhao, Kun Zhou, Junyi Li, Tianyi Tang, Xiaolei Wang, Yupeng Hou, Yingqian Min, Beichen Zhang, Junjie Zhang, Zican Dong, et al. A survey of large language models. *arXiv preprint arXiv:2303.18223*, 2023. 2
- [129] Kaizhi Zheng, Xuehai He, and Xin Eric Wang. Minigpt-5: Interleaved vision-and-language generation via generative vokens. *arXiv preprint arXiv:2310.02239*, 2023. 3
- [130] Yaowei Zheng, Richong Zhang, Junhao Zhang, Yanhan Ye, Zheyang Luo, Zhangchi Feng, and Yongqiang Ma. Llamafactory: Unified efficient fine-tuning of 100+ language models. *arXiv preprint arXiv:2403.13372*, 2024. 5
- [131] Zangwei Zheng, Xiangyu Peng, Tianji Yang, Chenhui Shen, Shenggui Li, Hongxin Liu, Yukun Zhou, Tianyi Li, and Yang You. Open-sora: Democratizing efficient video production for all, 2024. 6
- [132] Chunting Zhou, Pengfei Liu, Puxin Xu, Srinivasan Iyer, Jiao Sun, Yuning Mao, Xuezhe Ma, Avia Efrat, Ping Yu, Lili Yu, et al. Lima: Less is more for alignment. *Advances in Neural Information Processing Systems*, 36, 2024. 5
- [133] Jeffrey Zhou, Tianjian Lu, Swaroop Mishra, Siddhartha Brahma, Sujoy Basu, Yi Luan, Denny Zhou, and Le Hou. Instruction-following evaluation for large language models. *arXiv preprint arXiv:2311.07911*, 2023. 9
- [134] Yiyang Zhou, Chenhang Cui, Rafael Rafailov, Chelsea Finn, and Huaxiu Yao. Aligning modalities in vision large language models via preference fine-tuning. *arXiv preprint arXiv:2402.11411*, 2024. 1
- [135] Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. MiniGPT-4: Enhancing vision-language understanding with advanced large language models. In *The Twelfth International Conference on Learning Representations*, 2024. 2
- [136] Daniel M Ziegler, Nisan Stiennon, Jeffrey Wu, Tom B Brown, Alec Radford, Dario Amodei, Paul Christiano, and Geoffrey Irving. Fine-tuning language models from human preferences. *arXiv preprint arXiv:1909.08593*, 2019. 2

Align Anything: Training All-Modality Models to Follow Instructions with Language Feedback

Supplementary Material

6. Ethic Responsibility

Our data collection has been approved by an Institutional Review Board (IRB). The IRB file contains institutional information. To maintain anonymity in the double-blind review process, we did not upload the IRB documents alongside the supplementary materials. If needed, we are willing to discuss the IRB file further with the Ethics Reviewer, provided it does not compromise the double-blind review protocol.

7. Open-Source Assets and License

All datasets examples, codes, and demos have been attached to our supplementary material. In Sec. 6, we discuss potential risks and mitigation strategies related to model open-sourcing in detail. After the double-blind review process, we will actively engage with community feedback regarding the data, framework, and code and promptly address any issues related to version inconsistencies to further advance scientific research on large model alignment.

The following assets are planned for open-source release after the double-blind review process:

- Datasets
 - Prompt (see dataset in supplementary material)
 - Response
 - Preference Data (view a subset of the samples in supplementary material)
- Algorithms
 - Learning from language feedback algorithms, covering text-to-text (T2T), text-image-to-text (TI2T), text-to-image (T2I), text-video-to-text (TV2T), text-audio-to-text (TA2T) modalities.
 - Baseline alignment algorithms, covering supervised fine-tuning (SFT), reward modeling, and reinforcement learning from human feedback (RLHF), along with well-tuned hyper-parameters, in over 8 modalities.
- Evaluation
 - Dataset: Test entries, including text instructions and corresponding multi-modal data of AMU task and AMG task.
 - Model: A judge model used for the modality synergy evaluation in AMG task.
 - Codebase: The codebase of the *eval-anything* benchmark. Moreover, an all-modality evaluation framework, covering 8 modalities, 30+ benchmarks, and 2 inference backends.

To provide reviewers with detailed data references, we

have included samples from each modality of the dataset, along with additional related materials. After the double-blind review process, we will release all content as open source.

8. More Details of Related Works

Building on the success of large language models (LLMs) and the latest advancements in multimodal large language models (MLLMs), there is growing anticipation for integrating multiple modalities into a single model to achieve truly all-modality capabilities, *i.e.*, all-modality models. However, numerous challenges must be overcome to reach this goal. We will introduce the related works from the aspects of dataset, algorithms, and evaluation.

Dataset Recently, several studies have proposed preference datasets for multimodal models, encompassing both understanding and generation tasks [6, 101]. However, current preference datasets are restricted to specific modalities and tasks, and they lack comprehensive cross-modal annotations. In the domain of Text-Image-to-Text (TI2T) understanding, existing preference datasets primarily aim to reduce hallucinations and enhance helpfulness in MLLMs [56, 95, 120, 134]. In the Text-to-Image (T2I) domain, most existing studies employ binary human ratings or preference rankings to reflect authentic human preferences [52, 109, 113]. Liang et al. [59], in contrast, gathers more comprehensive feedback, focusing on misaligned regions and key terms. In the video and audio domains, aside from datasets such as LLaVA-Hound [127], SafeSora [27], and Audio-Alpaca [73], which provide binary human preference data, further research on preferences remains relatively scarce.

Algorithms Recent all-modality alignment algorithms directly extend the RLHF pipeline to the corresponding modality, since both PPO [81] and DPO [87] are modality-agnostic. RLHF-V [120] have used human feedback to annotate image-question-answering data, significantly reducing hallucinations of MLLMs. Similarly, Qwen2-Audio-7B-Instruct [24] have attempted to apply this approach to audio language models, improving audio comprehension and question-answering tasks. Similar strategies have also been practiced in video question-answering [3], image-generation [11], and video generation [27] tasks. However, the preference of coupled responses are trade-off by different dimensions, *e.g.*, their style and correctness. As the

number of modalities increases, these dimensions become more complex, making it harder to figure out misaligned behavior with binary preferences [46, 59]. Due to the increased difficulty and cost of annotating all-modality data [121], there is an urgent need for an alignment algorithm that more efficiently utilizes human feedback.

Evaluation Current benchmarks for all-modality models primarily focus on evaluating individual modalities. Numerous benchmarks are developed to assess the capabilities of large vision models across multiple dimensions, including image perception [35, 71, 93, 122], object hallucination [21, 50, 57], and safety performance [69, 70, 105]. For the video modality, Fu et al. [36], Li et al. [55], Ning et al. [79] develop various benchmarks to assess large vision models. Furthermore, in the audio domain, there are dedicated evaluation datasets for large audio models [107, 116]. However, these studies are not specifically designed to assess their cross-modal comprehensive understanding capabilities. Existing evaluation methods are primarily based on a series of tasks, such as Audio-Visual Question Answering [54, 115, 123], Audio-Visual Scene-aware Dialog [4, 92], and Audio-Visual Retrieval [17, 18]. Although involving multiple modalities, these tasks are not specifically designed to assess the all-modality capabilities of MLLMs.

9. Align-Anything Framework

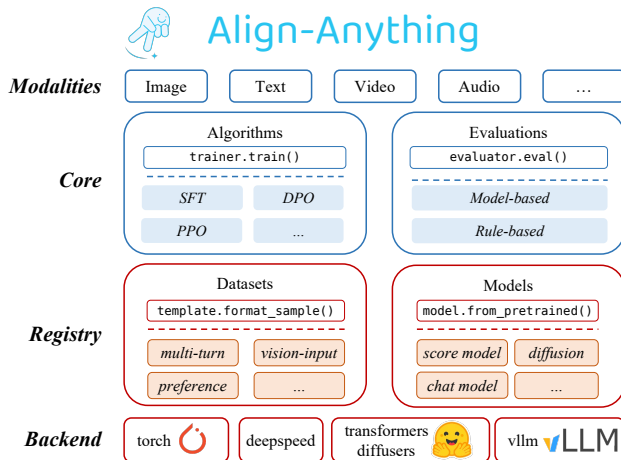


Figure 9. The open-sourced framework of align-anything.

Our work is built on the framework of align-anything, which is designed for training and evaluation across all modalities. As shown in Fig. 9, the align-anything framework aims to align all-modality large models, including large language models (LLMs), vision language models (VLMs), and others, with human intentions and values. Overall, this framework has the following characteristics:

- **High Modularity.** Its versatility stems from the abstraction of different algorithm types and well-designed APIs, allowing users to easily modify and customize the code for different tasks.
- **Support for Various Model Fine-Tuning.** This framework includes fine-tuning for models such as LLaMA [99], LLaVA [62, 65], Qwen2-VL [103], Qwen2-Audio [24]², Chameleon [98]³, and others.
- **Support Fine-Tuning across Any Modality.** It supports fine-tuning alignments for different modality models, including LLMs, VLMs, and other modalities
- **Support Different Alignment Methods.** The framework supports different alignment algorithms, including SFT, DPO [87], PPO [81], and others.

9.1. Training Part

The align-anything framework integrates all-modality alignment algorithms (e.g., Reinforcement Learning from Human Feedback, RLHF), supporting SFT, RM, DPO, and PPO. Additionally, align-anything implements KTO [32], SimPO [76], and ORPO [42] in the text-to-text modality. Besides, align-anything offers a highly scalable model registration mechanism and currently supports the training and deploying over 25 models. For more details, please refer to the align-anything-code/README.md file of our supplementary materials.

9.2. Evaluation Part

The align-anything evaluation framework now supports over 30 commonly used benchmarks, covering all common modalities. For more details, please refer to the align-anything-code/README.md file of our supplementary materials.

10. Training Details

This section will introduce the implementation details of *learning from language feedback (LLF)*, hyper-parameter settings, case studies, and the computational devices involved in the experiments.

10.1. Implementation Details

LLF comprises two primary steps: *feedback modeling* and *self improving*. The first step employs maximum likelihood to enable the model to learn from *align-anything-200k* how to generate language feedback for a given prompt and response. This includes evaluating the response (critique part) and providing suggestions for improvement (refinement part). During the self improving phase, when opti-

²To the best of our knowledge, align-anything is the first and, until the CVPR submission deadline, the only framework that supports Qwen2-Audio RLHF fine-tuning.

³The same, currently, align-anything is the only framework that supports Chameleon fine-tuning and RLHF with image generation capability.

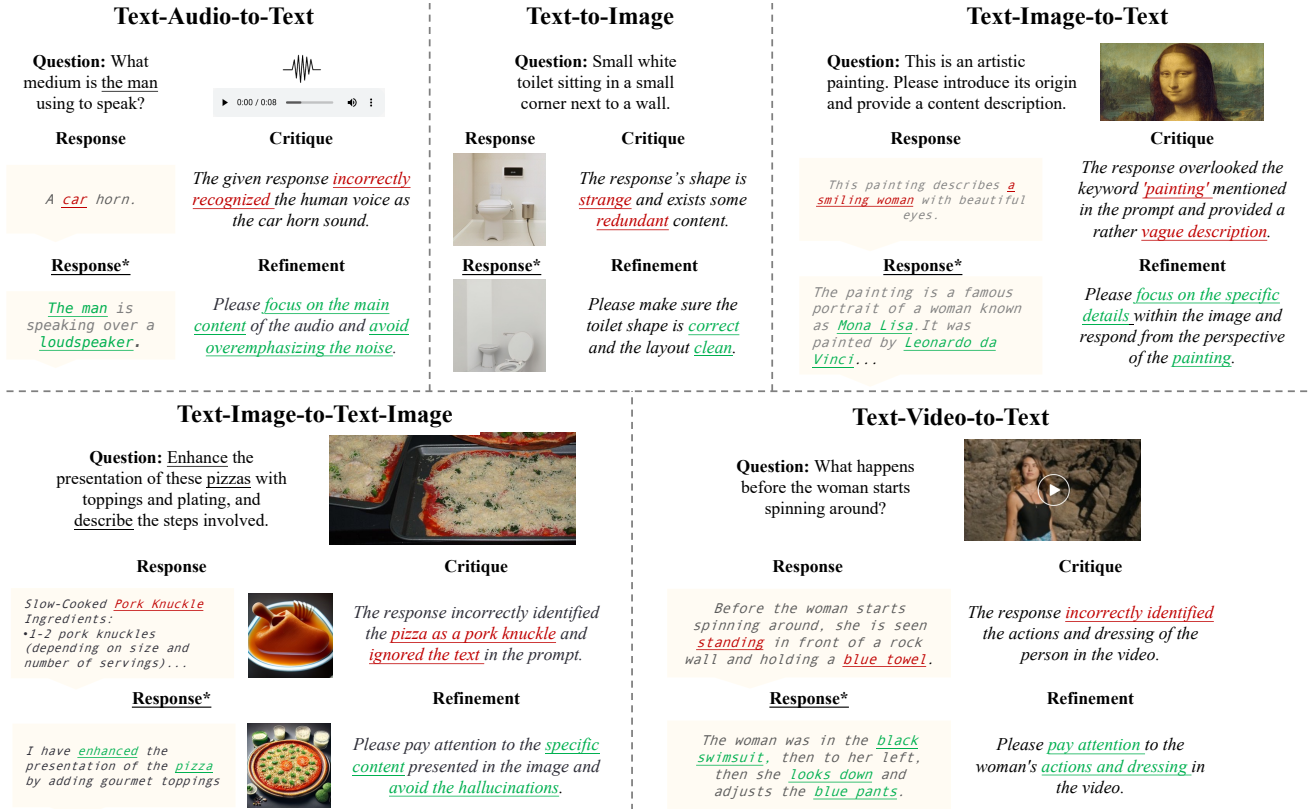


Figure 10. **Examples of LLF synthesized preference pairs.** The responses from current models are often not perfect. Using language feedback to enhance prompts can improve responses in certain dimensions, synthesizing more learnable preference pairs.

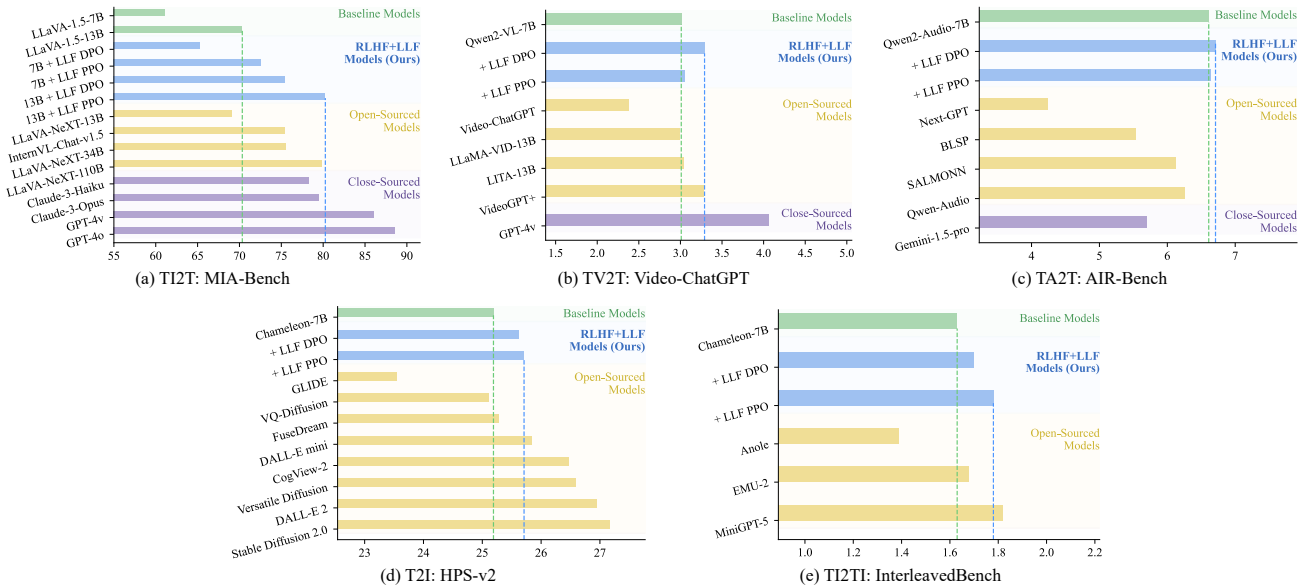


Figure 11. **Further experiment results of LLF on TI2T, TV2T, TA2T, T2I and TI2TI modalities.** We conducted comparisons of LLF with common open-source [22–24, 28, 62, 64, 68, 78, 89, 94, 96, 98, 102, 108, 129] and closed-source models [7, 72, 80, 88].

mizing the response, we incorporate the refinement into the

prompt to guide the model in generating better responses on

specific dimensions, thereby creating preference pairs with the original response.

In the RLHF phase, we synthesized a preference dataset of the same size as the baseline data (detailed size for each modality can be found at Fig. 12). We will open-source this preference dataset synthesized by LLF. Fig. 10 provides a simple example.

10.2. Further Comparison

This section will compare LLF with other open-source and closed-source models. These comparison results reveal two surprising phenomena. For modalities with initially weaker models, such as TI2T, LLF can significantly enhance their performance. As shown in Fig. 11, on the MIA-Bench [84], although the initial model LLaVA-1.5-13B [62] is not outstanding, after fine-tuning with LLF-based PPO, it surpasses open-source models with much larger parameter sizes (e.g., LLaVA-NeXT-110B [64]) and even some closed-source models (e.g., Claude-3-Opus [7]). Meanwhile, for modalities with initially stronger models, like TA2T, LLF can still further improve their performance.

10.3. Models

LLF pipeline requires multimodal models with language understanding capabilities. Considering popularity, performance, and open-source availability, we select the following models for our experiment.

- *LLaVA-1.5-7B & LLaVA-1.5-13B* [62] are visual language models validated their performance across 11 benchmarks. their base language models are Vicuna-7B-v1.5 and Vicuna-13B-v1.5 [82], with CLIP-ViT-L-336px [85] as the visual encoder and MLP as the multimodal projection layer. The 13B version is trained on approximately 1.2M publicly available data. They excel at extracting effective information from inputs that combine language and images. Then they provide answers by integrating the world knowledge of the language model.
- *Qwen2-Audio-7B-Instruct* [24] is a large-scale audio-language model, which can process diverse audio signal inputs to perform audio analysis or generate direct textual responses to speech instructions. Qwen2-Audio-7B-Instruct uses Whisper-large-v3 [86] as the audio encoder and Qwen-7B [9] as the language model. It was pre-trained on over 520k audio QA data and completed SFT and DPO alignment, achieving outstanding performance on 9 benchmarks.
- *Chameleon-7B* [98] is an early-fusion, token-based multimodal model designed for unified image and text understanding and generation. Chameleon-7B employs a newly trained image tokenizer, based on [37], to encode 512×512 images into 1024 discrete tokens. The model was pre-trained using a Llama2-style language model architecture on text-image interleaved data with this en-

coder. The original paper introduced two model variants: Chameleon-7B and Chameleon-34B. Due to computational constraints, we focused on evaluating our method using Chameleon-7B. However, the full Chameleon-7B parameters with image generation capabilities were not open-sourced by the authors. To address this limitation, we used the Align-Anything framework to finetune the original Chameleon-7B model on the LAION-Art dataset [91]. This resulted in the AA-Chameleon-7B-base model, which integrates both image generation and understanding capabilities. For simplicity, we refer to this model as Chameleon-7B throughout our paper.

- *Qwen2-VL-7B-Instruct* [103] is a large multimodal model that employs a unified paradigm for processing both images and videos, representing a significant advancement in video understanding capabilities. Through its innovative approach to visual processing, the model can effectively analyze video content using the same architecture that handles static images, creating a seamless integration of temporal and spatial information for comprehensive video comprehension. Qwen2-VL-7B-Instruct uses Vision Transformer [30] as the vision encoder and Qwen2-7B [114] as the language model. Trained on 1.4 trillion tokens and fine-tuned through SFT, the model demonstrates exceptional video comprehension capabilities.

10.4. Benchmarks

- *LLaVA-Bench (COCO)* [65] is a benchmark designed to evaluate the alignment behavior and capabilities of models with consistent visual inputs. It utilizes a subset of the COCO-Val-2014 dataset, selecting 30 images and generating three distinct types of questions for each image: conversation, detailed description, and complex reasoning. This results in a total of 90 questions, crafted using a specialized data generation pipeline. The benchmark aims to assess how effectively models can follow user instructions and handle diverse question types.
- *MIA-Bench* [84] is a pioneering benchmark designed to assess the capabilities of VLMs in adhering to complex, layered instructions. This benchmark features a diverse collection of 400 meticulously crafted image-prompt pairs, each intended to rigorously test the models' ability to generate responses that precisely follow intricate directives. Through comprehensive evaluations of various state-of-the-art VLMs, MIA-Bench uncovers significant disparities in performance, thereby identifying key areas for enhancement in instruction fidelity.
- *ImageReward* [113] is a general-purpose T2I human preference reward benchmark. Trained on 137k expert-annotated comparisons, the ImageReward model utilizes a systematic annotation pipeline emphasizing alignment, fidelity, and harmlessness in generated images. It significantly outperforms prior metrics like CLIP and FID

in capturing human preferences, achieving higher consistency with human rankings. The benchmark demonstrates robustness across various datasets, establishing itself as a promising metric for evaluating T2I generative models.

- *Human Preference Score v2 (HPS v2)* [109] is a benchmark designed to evaluate the alignment of T2I models with human preferences. It is built upon Human Preference Dataset v2 (HPD v2), a comprehensive dataset comprising 798k human-annotated pairwise comparisons across nine generative models and real images from the COCO dataset. HPS v2 trains a fine-tuned CLIP-based preference prediction model, demonstrating superior generalization and sensitivity to algorithmic improvements compared to prior metrics such as Inception Score and Fréchet Inception Distance (FID Score).
- *InterleavedBench* [67] is a holistic benchmark designed for evaluating the interleaved generation of text and images. It encompasses diverse real-world use cases, including storytelling, marketing, and multimodal script generation, with 815 instances distributed across 10 categories. Unlike prior benchmarks, InterleavedBench emphasizes arbitrary interleaving of text and images within both inputs and outputs. Its evaluation metric, InterleavedEval, powered by GPT-4, assesses five dimensions: text quality, perceptual quality, image coherence, text-image coherence, and helpfulness.
- *Video-ChatGPT* [72] contains a sophisticated framework for evaluating the text generation capabilities of video-based conversational models, leveraging the ActivityNet-200 [12] dataset’s rich collection of videos with dense descriptive captions. This comprehensive evaluation system employs GPT-3.5 to assess model outputs on a 1-5 scale across five fundamental dimensions: Correctness of Information (verifying factual accuracy and alignment with video content), Detail Orientation (examining response completeness and specificity), Contextual Understanding (assessing comprehension of overall video context), Temporal Understanding (evaluating grasp of event sequences), and Consistency (measuring reliability across similar queries).
- *AIR-Bench* [116] is designed to assess the audio-centric interaction capabilities of Large Audio-Language Models (LALMs). Unlike previous benchmarks that primarily focus on fundamental tasks like automatic speech recognition, AIR-Bench offers a comprehensive evaluation of LALMs’ ability to understand and interact with various audio signals, including human speech, natural sounds, and music, in a textual format. It comprises two main components: the foundation benchmark, which includes 19 tasks with approximately 19,000 single-choice questions to test basic single-task abilities, and the chat benchmark, featuring 2,000 instances of open-ended QA data to evaluate complex audio comprehension and instruction-

following capabilities, utilizing advanced language models such as GPT-4 for scoring. Since Qwen2-Audio-Instruct is a chat model, our experiment results come from its open-ended QA part.

10.5. Hyper-Parameters

The hyper-parameters involved in our experiment are as follows. Their selection was based on community implementations [95, 130] and our experimental observations. They may not be optimal, but we have confirmed that they do not affect the correctness of the training. These hyper-parameters vary across different modalities, but we ensure consistency between language feedback and binary feedback scenarios.

Hyperparameters	TI2T	T2I	TI2TI	TV2T	TA2T
Epochs	3	3	3	3	3
Batch Size Per Device	4	4	4	3	4
Learning Rate	1.e-6	1.e-6	1.e-6	1.e-7	1.e-6
Scheduler Type	cosine	cosine	cosine	cosine	cosine
Warmup Ratio	0.03	0.03	0.03	0.1	0.03
Gradient Accumulation	1	2	2	1	1
Weight Decay	0.00	0.00	0.00	0.00	0.00
Max Token Length	4096	4096	4096	4096	4096
BFloat16	True	True	True	True	True

Table 5. Hyper-parameters for feedback modeling.

Hyperparameters	TI2T	T2I	TI2TI	TV2T	TA2T
Epochs	3	3	3	3	3
Batch Size Per Device	4	4	4	1	4
Learning Rate	1.e-6	5.e-6	5.e-7	1.e-6	1.e-6
Scheduler Type	cosine	cosine	cosine	cosine	cosine
Warmup Ratio	0.03	0.03	0.03	0.01	0.03
Gradient Accumulation	1	2	2	1	1
Weight Decay	0.00	0.00	0.00	0.00	0.00
Max Token Length	2048	4096	4096	4096	2048
BFloat16	True	True	True	True	True

Table 6. Hyper-parameters for reward modeling.

Hyperparameters	TI2T	T2I	TI2TI	TV2T	TA2T
Epochs	2	2	2	2	2
Batch Size Per Device	4	4	2	3	4
Learning Rate	1.e-6	5.e-7	5.e-7	1.e-7	1.e-6
Scheduler Type	cosine	cosine	cosine	cosine	cosine
Warmup Ratio	0.03	0.03	0.03	0.1	0.03
Gradient Accumulation	1	2	2	1	1
Weight Decay	0.00	0.00	0.00	0.00	0.00
Max Token Length	2048	4096	4096	4096	2048
BFloat16	True	True	True	True	True
Scale Coefficient	0.10	0.10	0.10	0.10	0.10

Table 7. Hyper-parameters for DPO.

Hyperparameters	TI2T	T2I	TI2TI	TV2T	TA2T
Epochs	3	3	3	3	3
Batch Size Per Device	4	4	4	1	4
Actor Learning Rate	1.e-5	1.e-5	1.e-5	5.e-8	1.e-6
Actor Scheduler Type	cosine	cosine	cosine	cosine	cosine
Actor Warmup Ratio	0.03	0.03	0.03	0.03	0.03
Critic Learning Rate	5.e-6	5.e-6	5.e-6	5.e-8	5.e-6
Critic Scheduler Type	constant	constant	constant	constant	constant
Critic Warmup Ratio	0.03	0.03	0.03	0.03	0.03
Gradient Accumulation	1	4	4	1	1
Weight Decay	0.01	0.0	0.0	0.0	0.01
Max Token Length	2048	4096	4096	2048	2048
BFloat16	True	True	True	True	True
Sampling Temperature	1.0	0.2	0.2	1.0	1.0

Table 8. **Hyper-parameters for PPO.**

11. Dataset Card

11.1. Dataset Overview

As the number of modalities increases, current all-modality models encounter significant challenges in effectively following instructions. These challenges include difficulties in comprehending multimodal instructions and generating outputs that align with the intended directives [73, 118, 120]. While RLHF has demonstrated its effectiveness in addressing such issues for specific modalities, such as text and images [120], its applicability to all-modality scenarios remains uncertain.

Furthermore, existing preference datasets predominantly focus on single-modal tasks, lacking the comprehensive information required to capture the intricacies of all-modality features. In response, we introduce *align-anything-200k*, the first all-modality human preference dataset designed to enhance the instruction-following capabilities of all-modality models. This dataset encompasses eight sub-tasks across text, image, audio, and video modalities (see Fig. 12). For the examples please refer to the `dataset/dataset_examples` included in the supplementary materials.

To ensure consistent modality preference modeling, we categorize targets into *modality-agnostic* and *modality-specific* types, which act as evaluation metrics for instruction-following (see Sec. 11.2). A comprehensive dataset collection and annotation pipeline are outlined in Sec. 11.3, while Sec. 11.4 provides a detailed analysis of dataset features, including prompt semantics, preference features *etc.*. Additionally, examples from the *align-anything-200k* dataset are presented in Sec. 11.5.

11.2. Instruction-Following Dimensions

In the context of text modality, instruction-following refers to the ability of LLMs to effectively execute human-provided instructions, such as answering questions or summarizing text. This capability enables them to function as helpful, harmless, and honest assistants [81, 99]. However,

Tasks	Datasets	Models
T2T	UltraFeedback [26], PKU-SafeRLHF [48], Evol-Instruct [112]	UltraLM [29], WizardLM [111], Alpaca-7B, Alpaca2-7B, Alpaca3-8B LLaMA2-7B/13B/70B-Chat [99]
	RLHF-V [120], ShareGPT4V [15], ART500K [74], MovieNet [45], LLaVA-Instruct-150K [62]	Llama 3.2-Vision-11B [31], LLaVA-v1.5-7B [62], GPT-4o [80], LLaVA-v1.6-Vicuna-13B [63]
T2I	HPDv2 [109], Pick-a-Pic-v2 [52], MS COCO[20], DiffusionDB [106]	Stable Diffusion XL [83], Stable Diffusion v2-1 [89], FLUX.1-schnell, Chameleon-7B [98]
TI2TI	RLHF-V [120], LLaVA-Instruct-150K [62]	Chameleon-7B [98]
TV2T	BDD100K [119], Ego4D [40], NExTQA [110], Panda-70M [19] ShareGPT4Video [16]	Gemini 1.5 Pro [88], Qwen2-VL-7B [103]
T2V	VidProm [104], mixkit [77], ShareGPT4Video [16]	CogVideoX-5B [117], CogVideo [43], Open-Sora [131], Pika [8]
TA2T	Wavcaps [75] GigaSpeech [13] OpenQA [39], MusicCaps [2],	Gemini 1.5 Pro [88], Qwen2-Audio-7B [24]
T2A	Wavcaps [75], Audio-Alpaca [73], AudioCaps [51]	AudioLDM 2-large [66], Tango 2 [73], Stable Audio Open 1.0 [33]

Table 9. **Related datasets and models for each subtask.** We extensively collect datasets of various modalities and enhance the prompt sources for these datasets, resulting in the final prompt sources of *align-anything-200k*. We also widely gather the generation results from both open-source and closed-source models. Llama2-7B and Llama3-8B is fine-tuned with Alpaca-52K[97], resulting in Alpaca2-7B and Alpaca3-8B.

as the number of modalities increases, establishing a unified metric for instruction-following across all modalities becomes increasingly challenging. While the goal is for an all-modality model to effectively perform instructions across various modalities, each specific modality (*e.g.*, video) may have unique requirements, such as ensuring temporal consistency in video outputs.

To address the diversity inherent in the concept of instruction-following within an all-modality alignment setting, we decompose instruction-following into *modality-agnostic* and *modality-specific* dimensions. The modality-agnostic dimensions are universally applicable across all modalities, while the modality-specific dimensions represent preference criteria tailored to the unique characteristics of each modality. For the annotation prompts of each sub-task, please refer to `dataset/annotation_prompts` included in the supplementary materials.

11.2.1 Modality-Agnostic Dimensions

In this section, we provide a detailed overview of modality-agnostic dimensions for evaluating instruction-following in all-modality scenarios.

Prompt adherence Prompt adherence refers to the extent to which responses align with the given input prompts, accurately reflecting the specified elements, themes, or in-

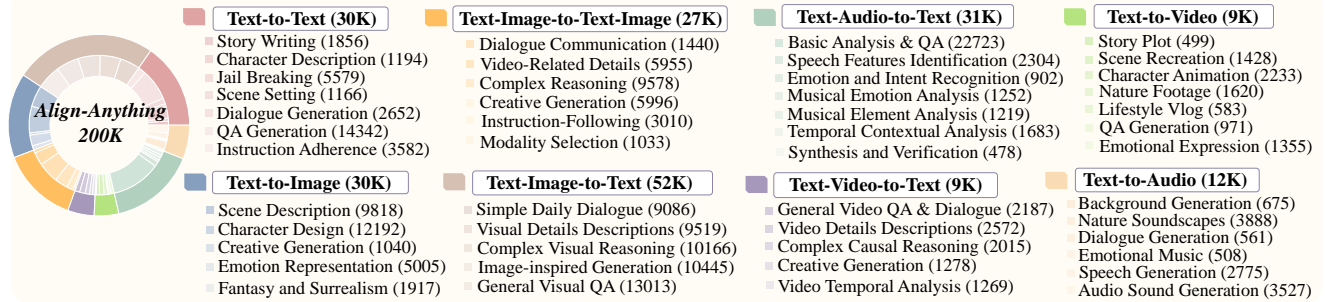


Figure 12. **Composition of align-anything-200k preference dataset.** The composition of enhanced prompts encompasses text, image, video, and audio modalities, aiming to improve the instruction-following capabilities of foundational all-modality models. In addition, We visualize the overall text prompt distribution across all tasks, demonstrating that the data covers different semantic embedding spaces.

structions. This ensures that the output remains faithful to the user’s intent and maintains relevance to the multimodal content of prompts.

Rule conformity Rule conformity refers to the compliance of responses with logical, physical, biological, or scientific principles that are applicable to the scenario or theme described in the prompt. This metric evaluates the response’s consistency with established rules and modality-specific constraints, ensuring realism and plausibility.

Information richness Information richness evaluates the depth and detail provided in responses, emphasizing the thoroughness and comprehensiveness with which the problem or query is addressed. High-quality responses should offer nuanced insights, detailed explanations, and well-rounded coverage of the topic.

11.2.2 Modality-Specific Dimensions

In the following part, we provide a detailed overview of the instruction-following standards designed based on the unique characteristics of different modalities, along with the subtasks to which they apply.

Clarity Clarity refers to the degree to which responses are clear, comprehensible, and easy to understand. It emphasizes overall coherence, language quality, and grammatical correctness, ensuring that the output effectively communicates its intended meaning without ambiguity. This metric applies to subtasks such as T2T, TI2T, TI2TI, TA2T, and TV2T, where textual response quality plays a critical role in achieving successful multimodal communication.

Aesthetics Aesthetics refers to the evaluation of the visual and auditory appeal of multimodal outputs, including images, videos, and audio. It encompasses the sensory and emotional impact these outputs deliver to the audience.

For image-related subtasks (e.g., T2I, TI2TI), aesthetics involves analyzing aspects such as lighting, color harmony, richness of detail, creativity, and the overall emotional resonance or enjoyment the image evokes. In audio subtasks (e.g., T2A), the focus lies on sound quality, emphasizing clarity, smoothness, and the absence of disruptive elements like noise or distortion. For video subtasks (e.g., T2V), aesthetics includes the evaluation of visual appeal and aesthetic quality, taking into account factors like lighting, color harmony, the richness of detail, and the emotional or immersive experience the video provides.

Cross-modal Consistency Cross-modal consistency refers to the degree of alignment and harmony between all output modalities. For the TI2TI subtask, this involves ensuring that the text and image are consistent in terms of content, style, and message, so the modalities complement each other and produce a coherent, unified output.

Audio Consistency Audio consistency evaluates the coherence of an audio output’s acoustic qualities, focusing on smooth transitions along the time axis, natural flow, and the absence of abrupt changes. This metric ensures that the audio maintains a steady tone and rhythm, enhancing the listening experience which is applied in the T2A subtask.

Temporal Consistency Temporal consistency assesses the smoothness of transitions between video frames, ensuring a natural and fluid progression without sudden jumps or erratic changes in motion. This metric is critical for maintaining the visual flow and is applied in the T2V subtask.

Content Coherence Content coherence measures the semantic and narrative alignment within a video, ensuring that all elements logically work together to deliver a clear and cohesive message. This metric prevents disjointed or illogical segments and is used in the T2V subtask.

Motion Naturalness Motion naturalness evaluates the realism and fluidity of object and character movements in a video. It ensures that movements adhere to realistic physical laws, resulting in actions that appear natural, smooth, and believable. This metric is applied in the T2V subtask.

11.3. Details of Dataset Construction

11.3.1 Annotation Pipeline Overview

In this subsection, we detail the annotation pipeline of the dataset. For text and image modalities, we rely on GPT-4o [80] to support the human-AI joint annotation process, while for video and audio modalities, we utilize Gemini-1.5-Pro [88], as these models currently provide the highest-quality multimodal annotations

Data Pairs Collection To comprehensively cover all-modality tasks and diverse prompt distributions, in constructing *align-anything-200k*, we first collect open-source multimodal datasets, followed by a refined secondary screening of the corresponding text prompts, videos, and audio. Based on this carefully curated multimodal content, we then utilize advanced multimodal models [24, 80, 88, 103] to enhance prompts to fit with all-modality alignment requirements, ensuring a strong focus on instruction-following capabilities across modalities. We then gather the responses from open-source and API-based models. The related datasets and models are listed in Tab. 9.

Fine-grained Preference Annotation We apply a detailed preference annotation process to each question-answer pair, combining insights from both GPT-4o and human annotators. The approach ensures a thorough assessment across *modality-agnostic* and *modality-specific* dimensions, with each dimension scored from 0 to 3 based on strict criteria. Annotators also provide justifications and rationales after providing scores, significantly enhancing the consistency and reliability of the annotation process.

Language Feedback Annotation To refine response quality further, we implement a comprehensive language feedback annotation process. The process involves defining the critique scope for each response, conducting a structured critique, and offering targeted refinement suggestions. Both human annotators and AI models contribute to this feedback, which is organized into cohesive guidance that addresses specific improvement areas considering different modalities. This feedback process captures fine-grained, modality-related preferences and effectively serves as a rich source of natural human preference across all modalities.

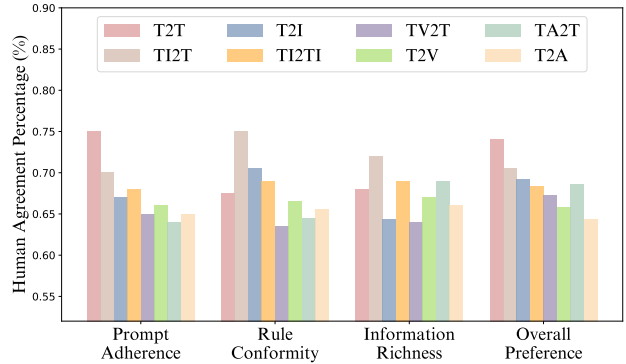


Figure 13. **Human-AI preference consistency analysis of modality-agnostic dimensions and overall preference.**

11.3.2 Annotation Agreement Analysis

We evaluate the consistency between AI and human preferences across two dimensions: modality-agnostic and modality-specific. For each subtask, 100 data pairs are randomly selected with 10 annotators for pair-wise comparisons. We assess both preference consistency for modality-agnostic preferences and overall preferences. Additionally, we examine the consistency of modality-specific preferences for each subtask, observing that AI can partially replace human judgment and perform effectively in certain modality-specific tasks. However, our findings reveal that both consistency and accuracy between AI and human preferences decline in multimodal scenarios, suggesting that incorporating multimodal information heightens the complexity of preference judgment. In Fig. 13, we illustrate the *modality-agnostic* dimensions consistency across 8 subtasks and overall consistency considering *modality-agnostic* and *modality-specific* dimensions.

11.4. Statistical Properties of Preference Dataset

We analyze the composition of the dataset, including the tasks associated with each modality and the categories of prompts. Based on the characteristics of each modality, we enhance the prompts along instruction-following dimensions. These enhancements cover a variety of types, such as question-answering, multimodal generation, emotional expression, modality selection, and complex reasoning, leveraging advanced multimodal models [24, 80, 88, 103]. For more details, please refer to Fig. 12.

11.5. Examples of Align-anything-200k

In Fig. 14, we showcase the training data across 8 subtasks. For each task, we provide detailed fine-grained preferences and evaluation rationales. Furthermore, we include language feedback annotations for each response. Each response is accompanied by specific critique and refinement feedback, focusing on modality information and directions

for improvement. Additionally, the total language feedback further specifies how each response should be revised. For more examples of our dataset, please refer to the `dataset` folder in the supplementary materials.

12. Evaluation

12.1. All-Modality Understanding

12.1.1 Dataset Composition

The AMU dataset is partially derived from the test set of VGGSound [14], supplemented with additional data collected from the internet and generated using generative models. The data is categorized into perception, reasoning, instruction following, and safety, with each category encompassing various types of content. For perception, reasoning, and instruction following, image+audio and video+audio pairs are sourced from VGGSound, while other materials, including manually curated multimedia such as videos, audio, and images, are gathered from the internet. For the safety category, the dataset integrates both internet-sourced content and data generated using generative models.

12.1.2 Annotation Details

To collect human responses for evaluating the AMU task, we instruct crowdworkers to provide detailed answers and annotations for each test sample. As shown in Fig. 15, each test instance in our dataset consists of one visual data (image or video), one auditory data (audio or speech), and one text question. For video, audio and speech content, we maintain a consistent duration of approximately 10 seconds. Each test instance is annotated by 10 human annotators who are instructed to provide detailed responses according to the following requirements:

1. A direct answer to the text question.
2. A comprehensive explanation of their reasoning process (minimum 30 characters), detailing how they arrive at their answer.
3. Keywords extracted from visual and auditory modalities (2 keywords for each modality).

For data in the instruction following category, annotators are required to follow the instructions strictly when providing responses. In contrast, for data in the safety category, annotators are encouraged to make their own judgments based on their personal values regarding whether the content in the given scenario is appropriate to respond to. If the content is deemed sensitive and unsuitable for a response, annotators should politely decline the request to answer.

12.1.3 Evaluation Details

The default evaluation system prompt consists of two sections. The first section contains instructions for GPT-4, outlining the content it should consider during evaluation and specifying the expected output format. The last section includes reference answers and keywords for each question.

To assess response scores, we guide GPT-4 to evaluate from multiple perspectives, using keywords to determine if it correctly interprets multimodal information. Additionally, multiple manually annotated reference answers are provided to evaluate the alignment between the model’s responses and human response distributions.

Due to the unique nature of the safety and instruction following components, we design additional system prompts to evaluate response safety and instruction following. For safety evaluation, GPT-4 should check whether it needs to refuse to answer based on the distribution of human references. For instruction following, GPT-4 should examine whether the response follows the special instructions in the test cases by checking if the reference answers have a special output format. All instruction-following related guidelines and evaluation methods are referenced from IFEval [133] and FollowBench [49] respectively. The prompts for AMU task are shown in the `evaluation/prompt` directory included in the supplementary materials.

12.2. All-Modality Generation

Due to the limitations of current all-modal generation models, we employ LLMs as agents to perform multimodal tool calls during experiments, allowing models to generate outputs in non-textual modalities. The prompt for LLM agents is shown in the `evaluation/prompt` directory included in the supplementary materials.

12.2.1 Instruction Following

To evaluate the instruction-following capability of multimodal models in different modality generation tasks, we design a pipeline for evaluating instruction-following across various modalities. For the four modalities—text, image, video, and audio—we consider various tasks and dimensions of instruction-following and meticulously design 100 instruction-following prompts for each modality. During the evaluation phase of the generated content, since different modalities have different evaluation models, we use GPT-4 [1] and GPT-4o [80] for text and image modalities to directly assess the instruction-following level of the generated content using a scalar score from 0 to 10. For audio and video modalities, inspired by the TIFA [44] pipeline, we design multiple-choice questions closely related to the instruction to capture the information in the prompts in more detail. We use Qwen2-Audio [24] and Qwen2-VL [103] as evaluation models to assess the generated audio and video, scor-

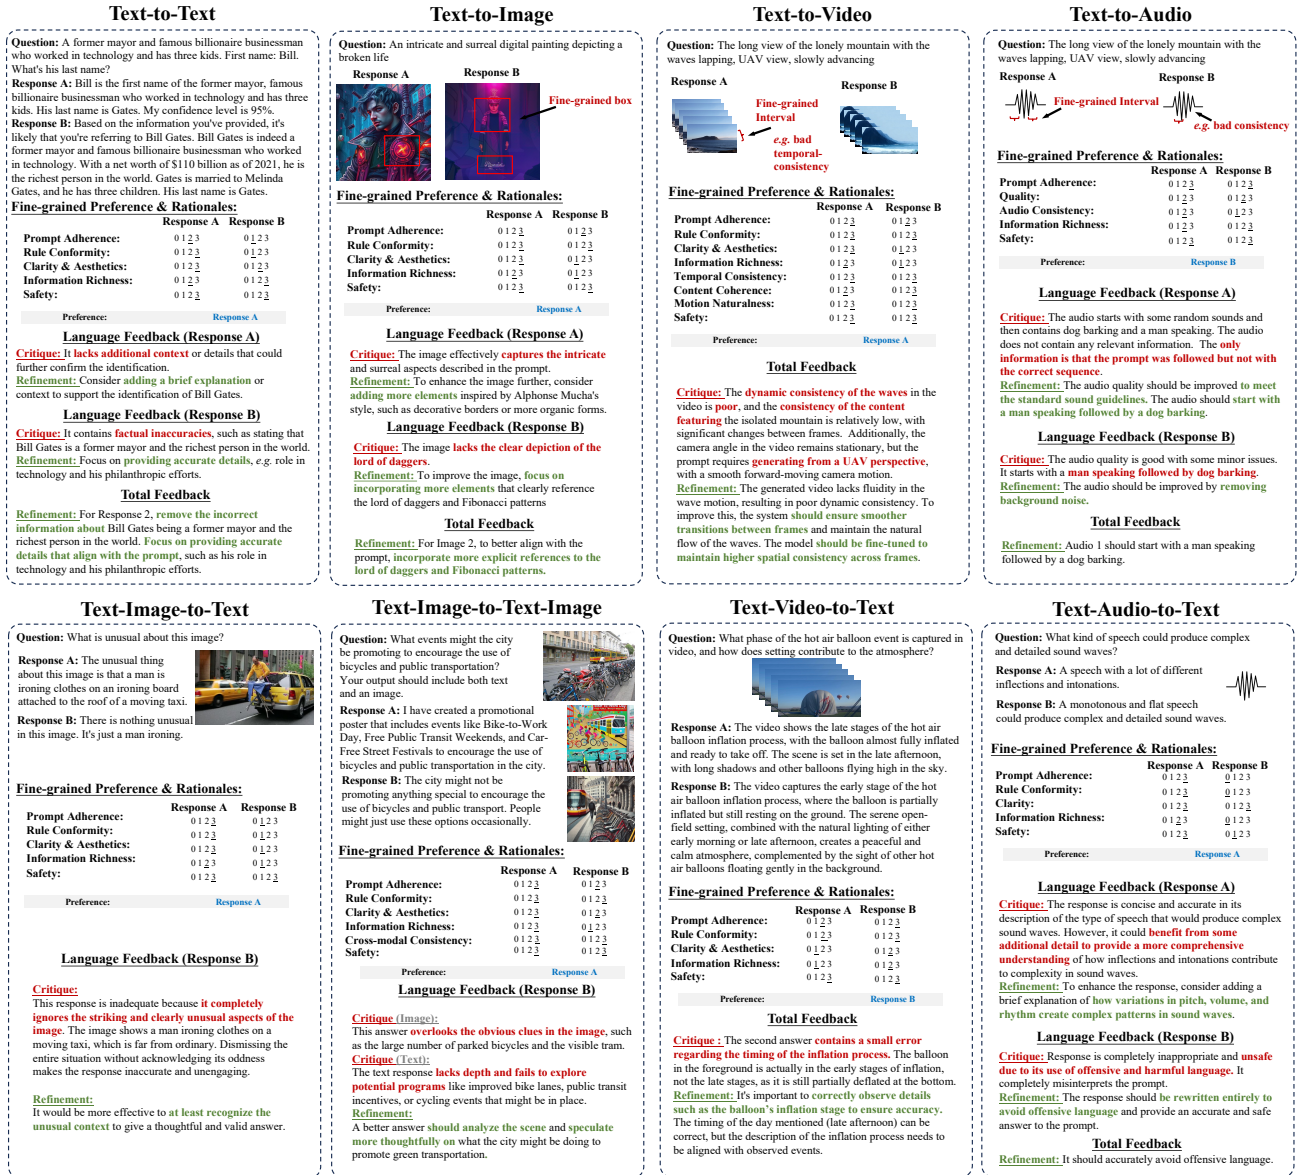


Figure 14. Examples from the align-anything-200k dataset. We present the training data across 8 subtasks, showcasing fine-grained preferences, evaluation rationales, and detailed language feedback (critique and refinement) for each response. The feedback highlights modality-specific suggestions and directions for improvement.

ing based on the accuracy of the multiple-choice answers, with scores ranging from 0 to 10. The system prompts involved in the entire scoring process can be found in the evaluation/prompt directory included in the supplementary materials

12.2.2 Modality Selection

To assess the model's flexibility in choosing different modality combinations based on textual instructions, we engage human crowdworkers to annotate the expected output

modality for each of the 100 prompts. Specifically, each instruction is annotated through multiple-choice selections by 25 human annotators across options like text, image, audio, and text, video, and audio. This process produces a distribution of votes for each instruction, reflecting preferences for the expected output modalities. Modality combinations that closely align with human preferences earn additional points in the modality selection metric. The human annotation criteria are as follows:

- **Information Richness:** Annotators should specify the desired modality of the model output for a given text-

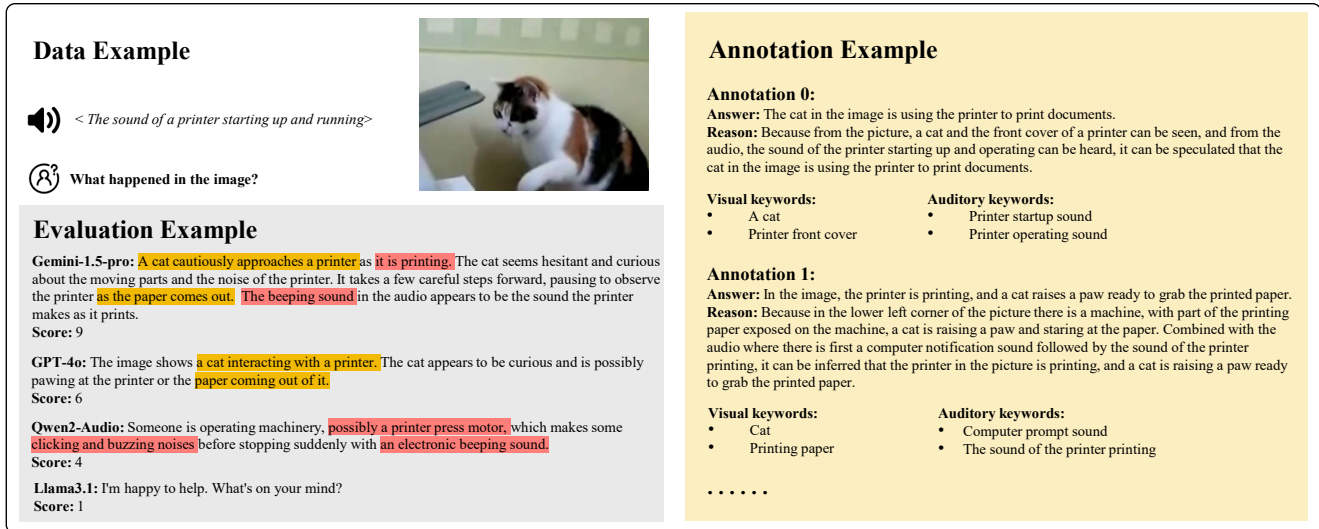


Figure 15. **Example of AMU task.** The top left corner shows a sample of test data, which includes a piece of visual information, a piece of auditory information, and a question. The right side presents an example of annotations provided by annotators. For an open-ended question, each annotator’s response may differ. However, as long as the answer correctly addresses the multimodal information, it will be accepted as a reference answer. The bottom left corner displays the responses of various models to the test data. The more modalities a model can recognize, the more details its reply can incorporate, resulting in higher quality and, consequently, a higher score.

tual instruction to maximize information gain in the response.

- **Necessity & Conciseness:** When choosing modality combinations, necessity and conciseness should guide the selection. If a modality adds no significant information, it should be excluded based on the principle of conciseness.

Modality synergy is a complex attribute, and currently, no simple or objective method exists to uniformly evaluate information across different modalities. While human evaluation or the use of AI under strictly defined annotation guidelines are feasible solutions, they introduce additional costs and complexities. Therefore, we meticulously construct training data for the Modality Synergy task and train a judge model. The judge model can evaluate the synergy metrics of multi-modal information generated according to the task instructions.

- **Data Collection** Due to the current immaturity of end-to-end multimodal generation models, generating high-quality training data remains a challenge. To address this, we develop a data generation system centered on an LLM Agent. Upon receiving user instructions, the agent calls image, audio, or video generation models through tool usage, producing the corresponding modality information and responding to the user’s instructions in conjunction with text.
- **Data Annotation** As there is currently no fully automated annotation tool for all modalities information, we develop a comprehensive human annotation pipeline

specifically for the modality synergy task. Human annotators receive data pairs consisting of one instruction and outputs from two models, where the model outputs involve any two modalities in text, image, video, audio. Annotators evaluate the two responses based on relevance and consistency, assigning preference annotations in line with the annotation guidelines. Detailed annotation guidelines. please refer to Sec. 12.2.4.

- **RM Training** Referring to reward model training in the text-only modality, the base model of our judge model is Llama3-8B, equipped with a score head. ImageBind [38] and independent projectors for each modality enable the model to achieve multimodal understanding. The training process has two stages: first, the parameters of the LLM and ImageBind are frozen, and only the projector is trained; second, both the LLM and projector are updated simultaneously.

12.2.3 More Experiment Results

To evaluate agent performance across various multimodal generative models, we conduct supplementary experiments. Specifically, the LLM-based agent invoke Stable-Diffusion-v1-5 [89], AudioLDM-Small-full-v2 [61], and CogVideoX-2B [117] for image, audio, and video generation, respectively. The results of these experiments are presented in Tab. 10 and Tab. 11.

The two tables align with the conclusions in Section 4.2, emphasizing that current models have limitations, and no single model exhibits a clear advantage in the AMG task.

Initial Models	All-Modality Understanding				All-Modality Generation								Overall	
	Category				AMU Score	Modality Select	Instruction Following			Modality Synergy				AMG Score
	Perception	Reasoning	IF	Safety			T	V	A	T-V	T-A	V-A		
LLaVA-v1.5-7B [†]	2.66	2.67	2.50	2.90	2.68	0.153	5.62	8.00	4.73	0.33	0.37	0.67	1.29	1.99
Qwen2-VL [†]	2.76	3.07	2.40	4.05	3.07	0.143	6.70	7.97	4.83	0.55	0.59	0.68	1.69	2.38
Qwen2-Audio [†]	3.58	4.53	3.40	2.65	3.54	0.135	5.93	7.95	4.85	0.35	0.38	0.67	1.18	2.36
Chameleon-7B [†]	1.44	2.97	2.80	2.45	2.41	0.153	4.21	7.71	4.66	0.60	0.62	0.69	1.62	2.02
Llama3.1-8B-Instruct [†]	1.05	1.20	1.20	1.35	1.20	0.212	7.69	7.87	5.15	0.72	0.75	0.67	3.13	2.17
Gemini-1.5-Pro [†]	5.36	5.67	6.70	6.70	6.11	0.193	9.45	7.95	6.76	0.70	0.72	0.68	3.27	4.69
GPT-4o [†]	2.66	3.48	4.20	5.15	3.87	0.163	9.51	7.91	6.64	0.55	0.57	0.67	2.33	3.10

Table 10. **The performance of models in the eval-anything benchmark.** The models performance in AMU task is the same as Tab. 4. (†) indicates that models are used as agents to invoke **AudioLDM2-Large** [66] and **CogVideoX-2B** [117] for audio and video generation.

Initial Models	All-Modality Understanding				All-Modality Generation								Overall	
	Category				AMU Score	Modality Select	Instruction Following			Modality Synergy				AMG Score
	Perception	Reasoning	IF	Safety			T	V	A	T-V	T-A	V-A		
LLaVA-v1.5-7B [†]	2.66	2.67	2.50	2.90	2.68	0.182	5.62	6.78	5.31	0.32	0.38	0.68	1.49	2.08
Qwen2-VL [†]	2.76	3.07	2.40	4.05	3.07	0.177	6.70	7.06	5.14	0.60	0.62	0.66	2.09	2.58
Qwen2-Audio [†]	3.58	4.53	3.40	2.65	3.54	0.190	5.93	6.78	5.02	0.53	0.62	0.67	2.04	2.79
Chameleon-7B [†]	1.44	2.97	2.80	2.45	2.41	0.156	4.21	6.85	4.81	0.55	0.60	0.65	1.49	1.95
Llama3.1-8B-Instruct [†]	1.05	1.20	1.20	1.35	1.20	0.231	7.69	6.76	5.21	0.76	0.79	0.67	3.37	2.29
Gemini-1.5-Pro [†]	5.36	5.67	6.70	6.70	6.11	0.227	9.45	7.52	4.93	0.48	0.52	0.67	2.70	4.41
GPT-4o [†]	2.66	3.48	4.20	5.15	3.87	0.266	9.51	6.77	5.02	0.70	0.73	0.67	3.98	3.92

Table 11. **The performance of models in the eval-anything benchmark.** The models performance in AMU task is the same as Tab. 4. (†) indicates that models are used as agents to invoke **AudioLDM-Small-full-v2** [61] and **Stable-Diffusion-v1-5** [89] for audio and image generation.

As for the instruction-following metric, the performance of close-sourced llm-based agent declines significantly when the capability of tool models decrease. Analysis of specific test cases shows that close-sourced models often generate more fine-grained instructions for identical test prompts compared to the open-sourced model. Stronger tool models effectively use these fine-grained instructions to produce outputs that meet the test requirements. In contrast, weaker tool models struggle with overly complex and detailed instructions, leading to reduced output quality and lower instruction-following scores. This issue is especially evident in tasks such as video and audio generation, which rely heavily on temporal sequencing. The two closed-source models often offer instructions refined to the temporal dimension. However, the corresponding video and audio generation models are unable to fully adhere to the required temporal sequences, leading to the loss of critical information. Conversely, open-sourced models, through more generalized instructions, better guide tool models to produce outputs closely follow with the test instructions.

12.2.4 Human Annotation for Modality Synergy Task

This guide outlines the process for evaluating multimodal outputs generated by two different models. Your task is to assess the correlation and consistency between the outputs of `{modality_1}` and `{modality_2}` for each model

and assign a score to reflect how effectively these outputs complement one another. When scoring, it is important to distinguish between the two models’ outputs, avoiding identical scores for both models unless absolutely necessary.

Evaluation Criteria

- **Correlation** Evaluate whether the outputs from different modalities are clearly related to the same topic or object.
- **Consistency** Ensure that the information presented across modalities is coherent and does not contradict itself, maintaining uniformity in description or explanation.

Scoring Guidelines

- **Score 5:** The outputs reveal clear contradictions or conflicts between modalities. Either the modalities focus on entirely different topics or objects, or they describe the same topic in an incompatible manner. Such inconsistencies undermine the coherence and trustworthiness of the message, creating confusion.
- **Score 4:** The outputs relate to the same topic or object but address independent aspects or dimensions. Although there is no direct contradiction, the modalities fail to complement or overlap meaningfully, resulting in a weak connection.

Instruction-Following

Modality Selection & Synergy

Figure 16. **Examples of AMG task.** We create two distinct instruction test sets for evaluating the three metrics of the AMG task, dividing the instruction-following section into four modality-based subsets. The rationale is that in multimodal scenarios, evaluating instruction-following requires specific instructions to assess the model’s ability to generate content that aligns with the instructions. Conversely, for modality selection and modality synergy tasks, the instructions should enable open-ended responses to assess the model’s autonomous use of modalities. For detailed example analysis, please refer to Sec. 12.2.5

- **Score 3:** The outputs display basic correlation and consistency. Both modalities describe the same topic or object but do not offer additional insights or value when combined. The information is redundant, and no significant gain is observed from their interaction.
- **Score 2:** The outputs demonstrate strong correlation and consistency, addressing the same topic or object. While minor variations in presentation may exist, they do not conflict but instead provide additional perspectives that moderately enhance understanding. The interaction between modalities is effective, though not as impactful as in the 5-point case.
- **Score 1:** The outputs exhibit an exceptional level of correlation and consistency. Each modality significantly enhances the other, providing unique yet complementary information. Together, they form a cohesive and synergistic combination, offering insights beyond the sum of their individual contributions.

Important Notes

- Focus your evaluation on the primary content of each modality, disregarding minor imperfections such as small image distortions, slight spelling errors, or minor audio glitches.
- If the outputs contain factual inaccuracies or irrelevant information, score them based on the correlation between the modalities, but cap the maximum score at 4 points (since no meaningful information gain is possible).
- The prompt provides contextual background information and should not influence your assessment.
- Your evaluation should be limited to the interplay between {modality_1} and {modality_2}, excluding considerations of other modalities.

12.2.5 Evaluation Examples

Examples of modality synergy evaluation in AMG task refer to Fig. 16.

In the *Instruction-Following* module, we evaluate the

model's ability to follow instructions across text, visual (images and videos), and audio modalities. For the text and image modalities, the generated content aligns well with the requirements in the instructions, resulting in high scores in the evaluation. However, the generated content fails to match the instructions for the video and audio modalities. For example, the video does not depict the action of a woman standing up, and the audio does not reflect the sound transition process. As a result, the model can only correctly complete part of the multiple-choice questions related to the original instructions, leading to lower scores.

In the left part of the *Modality Selection & Synergy* module, the text on the left describes elements such as *sunlight*, *a magnificent temple*, and *glowing symbols*, all of which are effectively mirrored in the corresponding image. In contrast, the image on the right fails to depict key features like *the hidden entrance and seaweed forest* mentioned in the text. This highlights the superior modality synergy of the left response.

In the right part of *Modality Selection & Synergy* module, the synergy between text and image modalities shows that the left text aligns with its corresponding image, while the right image depicts a similar scene to the left. However, the lack of visual description in the right text creates a significant disparity in their modality synergy score. In terms of text and audio synergy, both responses feature nearly identical audio content. However, the absence of rain and wave sound descriptions in the left text results in a lower score compared to the right. Regarding image and audio synergy, the information conveyed by the images and audio is nearly identical in both responses, resulting in comparable scores.