

MATHEMATICS AND MACHINE CREATIVITY: A SURVEY ON BRIDGING MATHEMATICS WITH AI

SHIZHE LIANG*, WEI ZHANG†, TIANYANG ZHONG+, AND TIANMING LIU‡

ABSTRACT. This paper presents a comprehensive overview on the applications of artificial intelligence (AI) in mathematical research, highlighting the transformative role AI has begun to play in this domain. Traditionally, AI advancements have heavily relied on theoretical foundations provided by mathematics and statistics. However, recent developments in AI, particularly in reinforcement learning (RL) and large language models (LLMs), have demonstrated the potential for AI to contribute back to mathematics by offering flexible algorithmic frameworks and powerful inductive reasoning capabilities that support various aspects of mathematical research. This survey aims to establish a bridge between AI and mathematics, providing insights into the mutual benefits and fostering deeper interdisciplinary understanding.

In particular, we argue that while current AI and LLMs may struggle with complex deductive reasoning, their *inherent creativity*, the ability to generate outputs at high throughput based on recognition of shallow patterns, holds significant potential to support and inspire mathematical research. This creative capability, often overlooked, could be the key to unlocking new perspectives and methodologies in mathematics. Furthermore, we address the lack of cross-disciplinary communication: mathematicians may not fully comprehend the latest advances in AI, while AI researchers frequently prioritize benchmark performance over real-world applications in frontier mathematical research. This paper seeks to close that gap, offering a detailed exploration of AI fundamentals, its strengths, and its emerging applications in the mathematical sciences.

1. INTRODUCTION

In this transformative era, Artificial Intelligence (AI) has emerged as a catalyst for profound advancements, painting a vivid picture of a promising future of scientific discoveries [Zhong et al., 2024, Yang et al., 2024, Wang et al., 2024b]. From deep neural networks (DNNs) enhancing human decision-making to uncovering fascinating correlations within vast datasets [Samek et al., 2021], AI continues to revolutionize human approaches to complex challenges. More recently, the development of Large Language Models (LLMs) has marked a paradigm shift in AI, introducing unparalleled proficiency in processing and generating human-like language. This innovation has spurred significant progress across a wide array of domains, including healthcare, public health, engineering, science, agriculture, education, creative arts, humanities, and even mathematics, by automating complex problem-solving processes and enabling nuanced analysis of specialized texts [Zhong et al., 2024]. In mathematics and sciences, LLMs are paving the way for deeper exploration of the interplay between linguistic constructs and logic, thereby fostering new methods for tackling age-old problems.

*Institute of Plant Breeding, Genetics & Genomics, University of Georgia, Athens, USA.

†School of Computer and Cyber Sciences, Augusta University, Augusta, GA, USA.

+Department of Mathematical and Statistical Sciences, University of Alberta, Edmonton, Canada.

‡School of Computing, University of Georgia, GA, USA.

Mathematical problems often present as intricate challenges without straightforward solutions, requiring individuals to rely on their reasoning and strategic planning to develop solutions [Säfström et al., 2024]. Unlike routine tasks that can be addressed through established templates, procedures or algorithms, mathematical problems demand creativity, abstract thinking, and advanced reasoning skills. Engaging with such challenges pushes individuals beyond rote memorization, encouraging them to deeply understand mathematical principles and apply them innovatively. This process cultivates genuine proficiency by fostering an ability to tackle unfamiliar scenarios through flexible and dynamic reasoning. A compelling example is Dr. Andrew Wiles’s proof of Fermat’s Last Theorem, which exemplifies the essence of mathematical problem-solving. Wiles dedicated nearly seven years to this enigmatic problem, initially pursuing a conventional approach similar to Euler’s. When this method proved insufficient, he pivoted to an innovative framework of Algebraic Number Theory. This shift in perspective ultimately led to his groundbreaking proof [Kilani, 2023]. Wiles’ journey highlights the profound nature of mathematical problem-solving, where success often requires breaking free from established methods to explore uncharted intellectual territories. This willingness to innovate and adapt defines the core of mathematical inquiry and discovery.

Current LLMs are primarily engineered to simulate human reasoning and planning within the confines of language structures [Cai et al., 2024]. However, LLMs do not truly reason like humans; instead, they learn patterns from training datasets and recombine them in a self-consistent manner. This limitation affects their capability in mathematical reasoning, as they may not fully grasp the underlying logical structures inherent in mathematical logic [Xu et al., 2023]. This phenomenon leads to significant rigidity when facing diverse and evolving problem sets. For instance, tasks requiring logical deductions, such as discerning relationships, performing numerical comparisons, or tallying specific elements, often indicate LLMs’ dependency on undynamic strategies. These tasks might appear straightforward, yet LLMs frequently revert to canned responses, leading to errors when confronted with more intricate scenarios. This inflexibility starkly contrasts with human problem-solving, which is inherently iterative and adaptive, allowing individuals to derive rules from specific instances and apply them deductively in novel contexts [Liu et al., 2024]. Moreover, LLMs struggle with tasks that necessitate dynamic adjustment or multi-step reasoning. While they can perform well on narrowly defined problems, their efficacy diminishes against challenges that evolve or require integrating multiple reasoning strategies, especially in extensive reasoning scenarios [Cai et al., 2024]. This is particularly evident in complex multi-step inferences or scenarios demanding a balance of different logical approaches. Although advancements in prompting designs such as Chain of Thought (CoT) [Wei et al., 2022], Tree-of-Thought (ToT) [Yao et al., 2024], Temperature-Tree-of-Thought (T2oT) [Cai et al., 2024], and Graph-of-Thought (GoT) [Besta et al., 2024], LLMs still fall short in dynamically and flexibly adjusting their reasoning, struggling with complex and intricate tasks. This limitation further underscores current LLMs are not comparable to the nuanced flexibility of human cognition in mathematic problem solving. As LLMs continue to push the boundaries of what they can achieve, enhancing our in-depth understanding of LLMs in reasoning and planning capabilities remains a critical frontier in AI.

Given the significant limitations of the AI system’s reasoning capabilities, mathematicians may argue that AI is inherently incapable of contributing to mathematic research, a domain that relies on nuanced, deep reasoning and the ability to navigate abstract concepts. Notably, this survey challenges this perspective by presenting a fresh narrative: AI can indeed make meaningful contributions to mathematic research, albeit not in the conventional ways one might expect. Rather than replacing human ingenuity, AI can be a complementary technology, rendering powerful linguistic capabilities, advanced pattern recognition, theoretical exploration, and explicit construction of mathematical objects. Through this overview, we aim to bridge

the gap between the mathematical and AI communities, fostering a deeper understanding of how these fields can collaborate to drive innovation.

This article is organized as follows. In Section 2, we trace the development of AI from its traditional roots to statistical machine learning and the advent of generative AI, culminating in the transformative capabilities of Large Language Models (LLMs). We also define and discuss we call the *inherent creativity* of generative AI in this section. In Section 3, we present a traditional application of AI in mathematical research – machine-assisted proofs. In Section 4, we present how statistical machine learning techniques have facilitated theoretical discoveries and the formulation of mathematical conjectures, highlighting the synergy between data-driven insights and abstract reasoning. In Section 5, we discuss a more recent application, where AI is employed to explicitly construct mathematical objects. This application showcases the creative potential of modern AI systems, particularly through the in-context learning abilities of LLMs [OpenAI, 2020]. In Section 6, we discuss the acceptance and integration of these new technologies within the math community, examining their broader impact on pedagogy and practice. Finally, in Section 7, we address the challenges and open questions that remain, before concluding with reflections on the future of this interdisciplinary collaboration.

2. BACKGROUND

This section offers a concise overview of the AI techniques featured in this survey, delving into their underlying principles, methodologies, and classical applications. Additionally, we explore the background of recent controversies regarding the mathematical capabilities of modern Large Language Models (LLMs). We then articulate our perspective and motivation for composing this article, aiming to contribute constructively to this ongoing dialogue and to highlight the potential synergies between AI and mathematics.

2.1. Background on AI. The evolution of artificial intelligence (AI) from traditional AI to generative AI marks a profound shift in computational paradigms. Traditional AI is established on the foundation of symbolic reasoning [Taghvaie et al., 2023]; Machine Learning (ML) provided powerful tools for data-driven analysis [Mahesh, 2020]; Reinforcement Learning (RL) offered novel approaches to dynamic decision-making [Kaelbling et al., 1996], and generative AI opened new frontiers in automation and discovery [Cao et al., 2023]. As AI technologies continue to evolve, their integration with mathematics promises further advances in theory, application, and innovation.

Traditional AI. Traditional AI relies on rule-based systems and symbolic reasoning, focusing on explicitly programmed logic and decision-making frameworks. These techniques prioritize deterministic solutions and are heavily rooted in formal logic and representation.

Search algorithms form the backbone of traditional AI, particularly in addressing combinatorial and optimization problems. For example, *breadth-first search* [Beamer et al., 2013] and *depth-first search* [Tarjan, 1972] were among the earliest strategies for exploring solution spaces systematically. However, naive exploration is inefficient or impractical when the search space is prohibitively large or dynamically changing, such as in games and complex decision-making scenarios. In such cases, heuristic search methods (a.k.a. *best-first search*), pruning methods [Fuller et al., 1973], and other optimization techniques are employed to narrow the search space, improving efficiency without compromising accuracy.

Some traditional AI algorithms are used to solve combinatorial optimization problems, including those in graph theory [Zhang et al., 2017] and integer programming [Zhang et al., 2023]. Advanced search techniques such as *Monte-Carlo Tree Search (MCTS)* [Coulom, 2007] will be frequently mentioned in Section 3.

Machine Learning (ML). The advent of Machine Learning marked a transition from rule-based approaches to data-driven methodologies, emphasizing pattern recognition and statistical inference.

In the era of statistical ML, mathematics and statistics offered solid theoretical foundations to fuel the advancements of AI technologies. For instance, *ridge regression* [Hoerl and Kennard, 1970] extends traditional least squares regression by introducing a regularization term to prevent overfitting, making it well-suited for high-dimensional data or scenarios where multicollinearity exists. *Logistic regression* [Nick and Campbell, 2007] is commonly employed for binary classification problems and models the probability of outcomes using the logistic function, bridging linear regression and probability theory. Nonlinear models such as *random forests* [Breiman, 2001], rooted in decision tree theory and bootstrap sampling, excel in handling high-dimensional data and capturing complex, nonlinear relationships. *Support Vector Machines (SVMs)* [Jakkula, 2006] rely on geometric optimization principles to find a hyperplane that maximally separates classes in feature space. By using kernel functions, SVMs can handle nonlinear boundaries, making them versatile for classification and regression tasks.

Building on the foundations established by statistical ML, deep learning represents another significant leap forward in AI. While statistical ML algorithms like ridge regression and SVMs rely on handcrafted features constrained by domain knowledge, deep learning automates hierarchical feature extraction using neural networks. Deep learning models, such as *convolutional neural networks (CNNs)* [Li et al., 2021] for image data and *recurrent neural networks (RNNs)* [Grossberg, 2013] for sequential data like language, thrive in large-scale data environments where traditional ML algorithms may falter. By leveraging parameter optimization techniques such as *gradient descent* [Andrychowicz et al., 2016] and its variants [Netrapalli, 2019] (e.g., *stochastic gradient descent*, *Adam optimization*), deep learning achieves remarkable performance in tasks such as image classification, natural language processing, and speech recognition. In this article we will examine applications of both statistical ML models and deep learning models.

Reinforcement Learning (RL). Reinforcement Learning formalizes learning as a sequential, dynamical decision-making process [Kaelbling et al., 1996], rooted in mathematical principles of Markov Decision Processes (MDPs) and dynamic programming. At its core, RL involves an intelligent agent interacting with an environment, where each *action* taken yields a corresponding *reward*. RL builds on Bellman’s Optimality Principle, optimizing cumulative rewards over time [Giuseppi and Pietrabissa, 2022]. The development of Q-Learning [Watkins and Dayan, 1992] introduced a breakthrough in RL by introducing model-free learning, where agents directly approximate the overall value of actions. Further advancements such as Policy gradient methods [Sutton et al., 1999] extended RL to continuous action spaces, using stochastic calculus for gradient estimation. RL’s versatility has made it a powerful tool in solving complex, real-world problems, as we will explore through its applications in Sections 3 and 5.

Generative AI and Large Language Models (LLMs). Generative AI represents the latest phase of AI evolution, characterized by its ability to generate contents across multiple modalities.

Transformers [Vaswani et al., 2017] revolutionized AI, establishing them as foundational to generative AI. At the heart of their success lies the *attention mechanism*, a key innovation that empowers these models to achieve outstanding performance in sequence-processing tasks. The attention mechanism allows the model to dynamically focus on different parts of the input sequence, thereby enhancing its ability to capture and utilize contextual information effectively. Unlike traditional sequence models such as RNNs, attention does not require sequential processing, enabling parallel computation and better handling of long-range dependencies.

The scalability of the transformer architecture has paved the way for the development of Large Language Models (LLMs), such as GPT [Radford et al., 2019] and BERT [Devlin et al., 2019]. These models, built on the transformer framework and equipped with billions of parameters, are specifically designed to understand natural language and generate coherent, high-quality text resembling human communication. By leveraging extensive pre-training on large-scale datasets and fine-tuning for specific applications, LLMs demonstrate remarkable adaptability to a wide range of natural language processing tasks, including machine translation, sentiment analysis, creative writing, and text summarization. Moreover, advanced models extend beyond text-based tasks to support multi-modal capabilities, generating outputs such as images, audio, and code from textual prompts.

LLMs exhibit remarkable *in-context* or *few-shot learning* capabilities, meaning they can infer and apply patterns from just a handful of examples provided within the same prompt. By examining these examples, the model effectively “learns on the fly” without requiring explicit tuning of parameters. Consequently, these models can rapidly adapt to unfamiliar tasks, translating new instructions and minimal context into coherent outputs, a feature that has significantly broadened their range of applications across various domains. The in-context/few-shot learning capabilities of LLMs will be frequently mentioned throughout this article

Reasoning capabilities of LLMs. The reasoning capabilities of LLMs have been the focus of considerable research interest. Some studies suggest that LLMs can answer knowledge-intensive questions and solve complex problems requiring logical reasoning [Liu et al., 2023]. Techniques such as specialized prompting methods (i.e., tailored input formatting) have been shown to elicit step-by-step reasoning behaviors in LLMs [OpenAI, 2020, Wei et al., 2022, Kojima et al., 2024, Saparov and He, 2023]. However, other evidences indicate that the reasoning abilities of LLMs remain superficial [Helwe et al., 2021] and generally unreliable [Bubeck et al., 2023, Wu et al., 2024, Yan et al., 2024, Nezhurina et al., 2024]. Their performance in mathematical reasoning has been particularly criticized [Bubeck et al., 2023, Frieder et al., 2023]. While state-of-the-art models, such as OpenAI’s o1, have nearly saturated performance on traditional mathematical benchmarks like GSM [Cobbe et al., 2021], newer and more challenging benchmarks [Mirzadeh et al., 2024, Glazer et al., 2024] continue to highlight their limitations when faced with unfamiliar or complex mathematical problems.

2.2. Our contributions. The question of whether AI can genuinely perform mathematical reasoning remains a subject of active debate. Critics emphasize their limitations in handling abstract concepts and question their capacity for meaningful contributions to mathematical research, whereas proponents highlight its promise as a complementary tool for exploration and discovery. By positioning our work within this dialogue, we aim to provide a balanced perspective that acknowledges both the limitations and opportunities of these models.

We contend that AI, particularly generative AI, can substantially enhance mathematical research despite its various limitations. Moreover, a key advantage of generative AI-based approaches over traditional AI-based methods arises from a seemingly tautological observation: generative AI is, by definition, designed for generation. This foundational capability underpins what we describe as generative AI’s *inherent creativity*: whereas human creativity involves recognizing complex patterns, abstracting concepts, and forming mental models of the world, machine creativity stems from the high-throughput generation of outputs guided by relatively shallow pattern recognition. In this sense, AI-driven creativity can complement human ingenuity, broadening the scope of mathematical investigation and opening up novel pathways for discovery.

This article examines three key applications of AI in mathematical research:

- Machine-assisted proofs (Section 3).

- Pattern recognition and theoretical exploration (Section 4).
- Explicit construction of mathematical objects (Section 5).

Our contributions are two-fold:

- **Bridging Disciplinary Gaps.** AI researchers often focus on benchmark performance and overlook the potential applications of AI in mathematical research. On the other hand, mathematicians may lack a deep understanding of AI’s evolving capabilities. This survey aims to foster a shared knowledge base, bridge the divide between these communities and promote interdisciplinary collaboration.
- **Highlighting the Potential of AI Creativity.** Traditional views of AI’s role in mathematics emphasize computational assistance and logical verification. This survey seeks to shed light on the underexplored creative potential of AI in generating novel conjectures, insights, and mathematical objects, paving the way for transformative advances.

Through this exploration, we hope to catalyze innovation in AI-driven mathematics and inspire future collaborations between the fields of mathematics and AI, unlocking new possibilities for both disciplines.

3. MACHINE-ASSISTED PROOFS

Theorem-proving is a cornerstone of mathematics. Machine-assisted theorem-proving is probably one of the most intuitive applications of Artificial Intelligence (AI) in mathematics, yet it is also one of the most misunderstood. The term ”machine-assisted proofs” actually encompasses a wide range of different tasks. In particular, the naive interpretation of this term, namely, ”fully independent, end-to-end, whole proof generation”, is a rather controversial one in this domain. In this section, we provide a comprehensive overview of the current landscape of machine-assisted proofs.

3.1. Motivation and foundational tools. The history of automated reasoning dates back to the 1950-60s [Newell and Simon, 1956, Davis, 1957, Davis and Putnam, 1960], and some practical mathematical tools became available in the 1970s [de Bruijn, 1970, Trybulec, 1991]. The motivation for developing such tools stemmed from the fact that proofs for some complex mathematical problems may be extremely lengthy, involving numerous logical steps or extensive case-by-case analysis (a.k.a. proof by exhaustion). For example, the proof of the four-color theorem, one of the most famous mathematical problems solved with computer assistance, involved the analysis of over 600 subcases [Gonthier, 2008]. Computer algorithms, embedded with rigorous deductive rules, could assist mathematicians by verifying the correctness of a proof or by automatically handling the proof-by-exhaustion steps. It is important to note that in these practices the machine’s role is complementary. Human users would provide all the creative reasoning steps, and machines would primarily support routine computation or verification. This stands in contrast to certain logic solvers, such as SAT (Boolean satisfiability problem) solvers or other first-order logic solvers, where machines independently produce answers without human intervention. These solvers are commonly referred to as automatic theorem provers (ATPs), and some notable examples include E [Schulz, 2002] and Vampire [Riazanov and Voronkov, 2002]. These tools have been shown to be useful in many situations and have been integrated into higher-level systems to solve first-order subproblems [Böhme and Nipkow, 2010]. For a comprehensive overview of early automated reasoning and machine-assisted proof approaches, see the detailed article [Harrison et al., 2014].

The basic tools in the field of machine-assisted proofs include a *formal language* for expressing mathematical statements and a back-end program which interprets this language. We will refer to the back-end program as *proof engine*. The formal language and the proof engine,

much like a programming language and its interpreter, provide an unambiguous automated verification system. These tools are usually organized into an interactive theorem-proving (ITP) environment, known as a *proof assistant*, where the user manually inputs the formal proof, and the proof engine performs verification. Some of the most popular proof assistants include Mizar [Trybulec, 1991], Metamath [Megill, 2006], Isabelle/HOL [Nipkow et al., 2002], Coq [The Coq development team, 2004] and Lean [Moura and Ullrich, 2021].

Proof assistants remain the most widely used paradigm today, yet they have two notable limitations:

- (1) The machine itself cannot generate the reasoning steps; it merely verifies the steps provided by the user. Though there are some early tools for automated reasoning step generation (e.g. Sledgehammer [Meng and Paulson, 2008]), more recent AI-based tools have exceeded them in many aspects.
- (2) Learning the formal language can be time-consuming, and even for proficient users, inputting complex mathematical statements and proofs is exceedingly slow. Terence Tao, a Field medalist and one of the world’s most renowned mathematicians, once noted that using the Lean proof assistant reduced his working speed by a factor of 25 [Tao, 2023a].

Figure 1 shows a Lean 4 (web version) formal proof for the simple statement that if a, b are natural numbers satisfying $a^2 = b^2$, then $a = b$. Despite the statement’s simplicity, its formal proof is both lengthy and difficult to interpret without familiarity with Lean’s syntax. This example highlights the challenges that have prevented proof assistants from achieving broader popularity.

The screenshot shows the Lean 4 web interface. On the left, a formal proof is displayed in a code editor. The proof starts with a lemma `sq_strict_mono` and a main theorem `eq_of_sq_eq_sq`. The proof uses `cases` to handle the order relation between a and b , and `elim` to derive contradictions from the assumption $a^2 = b^2$ when $a < b$ or $a > b$. The final step is `exact b_eq_a.symm`.

On the right, the feedback from the proof engine is shown. It indicates that the proof is complete, with the message "No goals". The interface also shows the current tactic state and a list of messages.

FIGURE 1. A Lean 4 (web version) formal proof for the simple fact that if a, b are natural numbers and $a^2 = b^2$, then $a = b$. The left side contains the formal proof, and the right side shows the feedback from the proof engine. Currently the feedback is “No goals”, meaning the proof is complete.

Despite the limitations, proof assistants achieved notable successes in theoretical mathematics research. The most renowned example is the verification of the proof of the famous four-color theorem [Gonthier, 2008]. It is worth noting that the original proof claimed by Appel and Haken [Appel and Haken, 1976] also involved computer computations, but was not verified by a proof assistant and, therefore, faced challenges in acceptance. Another landmark proof verified by a proof assistant is that of Kepler’s conjecture [Hales et al., 2017]. Terence Tao and Peter Scholze, both being Field medalist, reported to use the Lean proof assistant to verify the proofs in their recent projects [Tao, 2023b, xenaproject, 2020].

3.2. Automated formal proof generation. This subsection discusses recent advancements in addressing limitation 1, that traditional proof assistants are not effective at generating reasoning steps. New tools have been proposed with the capability of automatically generating proof steps or even complete proofs. Many such tools share several key characteristics:

- **Formal input and output:** Both their inputs and outputs are formatted in formal languages, ensuring compatibility with proof engines.
- **Interfacing with proof assistants:** They interface with (or are integrated into) existing proof assistants, which verify the correctness of the generated proof steps to ensure reliability.
- **Use of Machine Learning:** Many of these tools incorporate machine learning techniques to predict plausible proof steps.

Many tools that use deep learning and reinforcement learning for proof generation tasks. For example, Holophrasm [Whalen, 2016] is an automated theorem proving tool that generates proofs in Metamath formal language [Megill, 2006], and interfaces with Metamath’s proof engine to ensure correctness. It employs recurrent neural networks (RNNs) to predict proof steps and can use tree search strategies to produce complete proofs. HOList [Bansal et al., 2019] is built on top of the HOL Light proof assistant [Harrison, 1996]. It follows a reinforcement learning paradigm when training the model to perform proof step generation, and uses simple breadth-first-search to find the correct sequence of proof steps during test time.

GamePad [Huang et al., 2018] is an environment designed to explore various machine learning methods while interfacing with Coq [The Coq development team, 2004] proof assistant. The authors experimented multiple machine learning models for the task of predicting proof length and the task of predicting proof steps. ASTactic [Yang and Deng, 2019] also interfaces with Coq. It uses TreeLSTM [Tai et al., 2015] to train the proof step prediction model, and uses simple depth-first-search to find the correct sequence of proof steps during test time. Tactician [Blaauwbroek et al., 2020a, Blaauwbroek et al., 2020b] directly integrates with Coq. As an interactive tool, Tactician can makes proof step suggestions while empowers users to accept, modify, or reject the suggested steps. Tactician employs lightweight machine learning methods to predict proof steps, and is capable to generating complete proofs by utilizing search processes. The interactive nature of Tactician can be favorable to working mathematicians, and is embraced by some later works.

TacticToe [Gauthier et al., 2021] and TacticZero [Wu et al., 2021] interface with the HOL4 proof assistant [Slind and Norrish, 2008]. The former uses lightweight machine learning techniques for proof step prediction, and employs Monte Carlo Tree Search (MCTS) to produce complete proofs. The later leverages the deep reinforcement learning methodology to learn to perform proof step prediction as well as complete proof generation.

Recently, inspired by the wide applications of Large Language Models (LLMs) in scientific fields, many studies employed transformer-based language models for developing automated theorem proving tools. One advantage of such approaches is that language models can effectively

process sequential data of various formats, and can be trained with little human-label data, greatly simplifies the data pre-processing and labeling process of earlier approaches.

GPT-f [Polu and Sutskever, 2020] is a language model-based automated theorem proving tool interfacing with Metamath. By training on a large collection of mathematical data (e.g. math-related articles) and existing Metamath proofs, GPT-f is able to generate formal proof steps that adhere to the syntactic and semantic rules of Metamath. It employs a search process for whole proof generation by sampling multiple proof steps at each state. Proof Artifact Co-training (PACT) [Han et al., 2021] built on similar methodology of GPT-f, but transferred to the Lean formal language. To mitigate the data-scarcity problem during the model training phase, the authors introduced a novel joint training methodology for extracting self-supervised auxiliary tasks alongside the proof step prediction task.

Thor [Jiang et al., 2022] is a language model-based automated theorem-proving tool that interfaces with the Isabelle proof assistant. In addition to ordinary proof step generation, it incorporates a hammer-based approach, which solves subproblems by invoking an external solver. Utilizing external solvers can enhance the precision of the generated proof steps. One of the most popular tools for this purpose is Sledgehammer [Meng and Paulson, 2008] for Isabelle, which converts a higher-order logic subproblem into a first-order logic problem and then invokes an external first-order logic solver to solve it. Traditionally, users manually invoke Sledgehammer by including it as a proof step. Thor, however, trains a language model on examples of Sledgehammer calls to learn when to make such invocations. Thor employs a best-first search process to generate complete proofs.

HyperTree Proof Search (HTPS) [Lample et al., 2022] proposed a more advanced proof search framework, which is guided by a policy model and a critic model, both being transformers. The policy model, which predicts possible proof steps, and the critic model, which predicts the likelihood of success, are trained via a process reminiscent to the training of AlphaZero [Silver et al., 2017].

Baldur [First et al., 2023] employs a more direct approach: it fine-tuned an existing LLM (e.g. Minerva [Lewkowycz et al., 2022]) on formal proofs written in Isabelle/HOL [Nipkow et al., 2002]. During test time, the LLM generates a formal proof in one go, skipping the proof search process completely. The generated formal proof is the verified by Isabelle/HOL, and in the case of failure, the error message is used to post-prompt the LLM for proof repair. COPRA [Thakur et al., 2024] also takes a powerful existing LLM (GPT-4-turbo [OpenAI, 2024]), but generate proofs step by step using an agentic approach: COPRA repeatedly queries the LLM for formal proof steps, which are then fed into a proof assistant for verification. Incorrect steps along with the error message will be used to post-prompt the LLM for regeneration.

LeanDojo [Yang et al., 2023] is a comprehensive toolkit integrated within Lean. A core component is a theorem-proving model, ReProver, which is trained on Lean proofs and utilizes advanced retrieval techniques to enhance its proof step generation capability. LeanDojo provides an interactive experience similar to GPT-f and Tactician.

POETRY [Wang et al., 2024a] is a tool with a different flavor. While most methods generate a proof step-by-step, POETRY employs a recursive, level-by-level paradigm. Their motivation is to avoid “short-sighted heuristics”. With a LLM architecture trained with Isabelle proofs, it learns to first generate proof sketches, and recursively fill-in the missing details. Such paradigm is not complete novel, as it already appeared in [Jiang et al., 2023b], which will be discussed later.

Recently, Google announced that their new math problem-solving model, AlphaProof, achieved a silver-medal standard in solving International Mathematical Olympiad (IMO) problems [AlphaProof and AlphaGeometry teams, 2024]. The model includes a component designed for automated proof generation in Lean. While detailed information about their model has not yet

been disclosed (as of December 2024), it has been reported that the proof generation component was trained using the AlphaZero [Silver et al., 2017] paradigm. AlphaProof will be discussed further later in this work.

There are many other automated theorem proving tools not covered in this list [Paliwal et al., 2019, Zheng et al., 2024, Wang et al., 2023a, Wang et al., 2023b, Azerbayev et al., 2024, Lin et al., 2024, Kumarappan et al., 2024]. One of the main challenges for automated formal proof generation is the lack of high quality data. As mentioned, proof written in formal language can be very different from natural language proofs, and hence not too many working mathematicians write formal proofs. Although strategies such as data synthesis and auxiliary training [Han et al., 2021] have been adopted to alleviate this shortfall, the need for high-quality, example-based proof resources remains critical for the advancement of more powerful automated theorem-proving systems.

3.3. Autoformalization. This subsection introduces recent advancements in addressing limitation 2, the learning cost of formal languages. Imagine a scenario where a mathematician wants to use a proof assistant to verify the correctness of a proof written in natural language. To do so, the user must first rewrite, or “formalize”, the theorem and its proof in the corresponding formal language. However, formalization is “notoriously labor-intensive” [Han et al., 2021]. For example, the formalization of the Kepler conjecture [Hales et al., 2017] took over 20 man-years of work [Szegedy, 2020]. Recently, *autoformalization* — the development of systems that can automatically translate natural language mathematics into formal language — has garnered significant interest among mathematicians and AI researchers. Conversely, the reverse process, known as *autoinformalization*, involves translating formal mathematics into natural language. This task is generally easier to automate than autoformalization [Jiang et al., 2023a] and holds potential utility in specific contexts.

Despite some early rule-based [Bancerek and Carlson, 1994, Bancerek, 2006] or statistical learning-based [Kaliszyk et al., 2015, Kaliszyk et al., 2017] approaches, [Wang et al., 2018, Wang et al., 2020] were the first to apply deep learning approaches to translating informal mathematics written in L^AT_EX into formal mathematics written in Mizar [Trybulec, 1991]. They formulated autoinformalization as a neural translation task, and utilized recurrent neural networks to handle it. However, the fundamental difficulty is the scarcity of high quality natural language - formal language (NL-FL) datasets — datasets consisting of pairs of sequences expressing the same meaning in natural language and formal language.

Large Language Models (LLMs) provide a new opportunity to this domain. [Wu et al., 2022] noticed that existing LLMs (e.g. PaLM [Google Research, 2022] and Codex [Chen et al., 2021]) are capable of autoformalizing natural language statements into formal languages like Isabelle with merely in-context/few-shot learning. Their observations were confirmed by [Agrawal et al., 2022], who in addition used Codex to perform autoformalization of proofs. [Jiang et al., 2023b] experimented a slightly different autoformalization task on proofs: instead of asking the LLM to autoformalize all the details, they only ask for a formal proof sketch, that is, a partial proof that outlines high-level conjecture statements. They later invoked existing theorem proving tools to fill-in the gaps. We will revisit this work in the next subsection. Llemma [Azerbayev et al., 2024] is a series of LLMs trained primarily on mathematical contents (a.k.a. domain-specific LLMs for math). In addition to other mathematical reasoning tasks, it is able to autoformalize informal proofs into Isabelle formal language when provided with inputs of the format of (*informal theorem*, *formal theorem*, *informal proof*)-triples.

[Patel et al., 2024], inspired by an error analysis provided in [Wu et al., 2022] that a majority of the autoformalization errors were due to the mismatch between natural language and formal definitions, experimented with a two-stage approach: (1) autoformalizing theorems to a formal language with placeholder names and (2) linking the placeholders to the actual definitions. [Lu

et al., 2024b] introduced another technique, process-supervised verifier, which is trained using the feedback from the Lean 4 proof engine when training the autoformalization model. This verifier is able to generate labels to the current autoformalization model’s outputs, which will be used for further fine-tuning.

Some studies also aimed at providing NL-FL datasets. For example, ProofNet [Azerbaiyev et al., 2023] collected 371 (*natural language theorem, formalized Lean theorem, natural language proof*)-triples in undergraduate mathematics for autoformalization and formal theorem proving studies. [Jiang et al., 2023a] created a synthetic dataset MMA of 332K multilingual (*natural language theorem, formalized Lean theorem*)-pairs by autoinformalizing existing formal statement datasets (in different formal languages) into natural language statements. Lean Workbook [Ying et al., 2024] used a more advanced data synthesis pipeline to generate 57K Lean formalizations of natural language theorems in high-school contest-level. Datasets like these have been used to fine-tune existing LLMs or train language models from scratch [Azerbaiyev et al., 2023, Jiang et al., 2023a, Ying et al., 2024, Wang et al., 2024d].

Another difficulty comes from the fact that autoformalization, unlike automated theorem proving, cannot be verified by deterministic programs. Even though the a formal language proof engine can check the syntactical correctness of the output, it is difficult to guarantee that the output is semantically equivalent to the original statement. [Lu et al., 2024a] proposed a novel automated evaluation of autoformalization tasks. Their method outputs a certainty score of the translation as well as a similarity score that measures the difference between the hidden embeddings of the informal input and the formal output.

In addition to aiding mathematical research, the “autoformalization + symbolic verifier” framework has the potential to aid more general reasoning tasks. This topic is discussed in [Szegedy, 2020] and [Zhou et al., 2024a]

3.4. End-to-End proof generation. In this last subsection we discuss end-to-end proof generation, by which we mean the process of taking as input a natural language mathematical statement and outputting a complete proof (in natural or formal language).

Given that autoformalization can translate natural language statements to formal statements, and that many formal theorem-proving tools have reached reliable capabilities, a natural way is to combine these two components. Indeed many approaches followed this pipeline, though there are two clear difficulties:

- (i) This approach critically depends on the correctness of the autoformalization step.
- (ii) The formal language output is not easily understandable to humans.

We start by discussing the recent announcement from Google regarding their new math problem-solving model, AlphaProof, which reportedly achieved a silver-medal standard in IMO 2024 [AlphaProof and AlphaGeometry teams, 2024]. The model comprises two main components: a formalizer network and a solver network. The formalizer network is designed to translate natural language problems into Lean formal language, while the solver network generates formal proofs for these problems.

However, we argue that AlphaProof’s reported performance on IMO 2024 may be overestimated, and the claims surrounding it are exaggerated. First, it has been reported that during testing, the problems were not autoformalized by the formalizer, but were instead manually translated into formal language, and hence avoided difficulty (i) completely. Second, while official IMO participants solve problems within two sessions of 4.5 hours each, AlphaProof required up to three days to solve certain problems. These limitations highlight the need for a more cautious assessment of AlphaProof’s capability of independently solving mathematical problems.

Draft, Sketch, and Proof (DSP) [Jiang et al., 2023b] is a model that employs a similar but slightly different pipeline. They proposed using informal proofs to guide the generation of formal proofs. More precisely, DSP’s workflow is divided into three stages: first, given an informal input, a human or an LLM writes an informal proof; second, an LLM is invoked to generate a formal proof sketch of the informal proof, that is, a partial proof that outlines high-level conjecture statements; lastly, existing automated theorem proving tools are invoked to fill-in the gaps. TheoremLlama [Wang et al., 2024d] introduces a framework to fine-tune existing LLMs for end-to-end proof generation tasks, producing outputs in Lean. A key innovation of their approach is also a combination of informal proofs with formal ones: they integrated natural language proofs into Lean code as comments, effectively embedding informal reasoning within formal proofs. These two methods leverage the LLMs’ natural language reasoning capabilities to enhance their performance in formal theorem proving.

One more direct approach of employing LLMs for end-to-end proof generation tasks is to simply query them to write proofs in natural language, and hence mitigates difficulty (ii). An example in this category is NaturalProver [Welleck et al., 2022], which was shown to outperform GPT3 [OpenAI, 2020] on the dataset NaturalProofs [Welleck et al., 2021], which consists of natural language theorems and proofs. During inference time, this model is capable of predicting natural language proof steps, and use various search methods to produce complete proofs.

The controversies surrounding the later approach stem from substantial evidence suggesting that LLMs do not inherently understand reasoning but instead rely heavily on pattern memorization. These pattern-matching capabilities enable LLMs to excel in tasks like auto-formalization or suggesting formal proof steps, which can subsequently be verified by more reliable tools like proof engines. However, this does not imply that LLMs are capable of independently producing sound reasoning steps. For instance, [Mirzadeh et al., 2024] introduced GSM-Symbolic, a dataset of syntactic variants of grade-school math problems derived from the GSM8K dataset [Cobbe et al., 2021]. Their findings showed a significant drop in the performance of major LLMs on these variants. Additionally, when irrelevant information was included in problem statements, performance declined even further, indicating that these models rely heavily on contextual cues and struggle with abstraction. More recently, [Glazer et al., 2024] presented a benchmark featuring research-level mathematics problems designed to be entirely novel, thereby eliminating the risk of data contamination. These problems are exceptionally challenging, and most current LLMs (as of December 2024) achieve less than 2% correctness on this benchmark — apart from the newly announced OpenAI o3 model, which reportedly achieves 25% — confirming the limitations in the mathematical reasoning capabilities of LLMs.

4. PATTERN RECOGNITION AND THEORETICAL EXPLORATION

Theorem proving is not the only task of mathematics. Terence Tao, one of the most renowned mathematicians, once noted that “there’s more to mathematics than rigor and proofs” [Tao, 2016]. Indeed, theoretical breakthroughs often hinge on the ability to recognize hidden patterns, uncover deep connections between seemingly unrelated concepts, and develop intuitive frameworks that guide further exploration. In this section, we explore how AI can facilitate math theoretical discoveries through collaboration with human researchers.

As data technologies continue to advance and computational power steadily increases, the process of achieving theoretical breakthroughs in mathematics and other scientific disciplines is shifting. Traditional bottom-up, first-principle-driven methodologies are increasingly complemented by top-down, data-driven approaches [He, 2018, He, 2021, He, 2024]. In some subfields of mathematics, such as Combinatorics and Number Theory, large datasets, containing discrete but complex high-dimensional data, are becoming increasingly prevalent. While human researchers may struggle with identifying patterns within such data, supervised machine learning

models, which are inherently designed as powerful function approximators, excel at uncovering patterns and relationships in data.

The complementarity between machine and human strengths forms the basis for a natural collaboration framework. Machines, leveraging their ability to detect patterns in mathematical data, serve as powerful exploratory tools. Humans, in turn, analyze, interpret, and filter these machine-generated patterns to extract meaningful insights, propose new conjectures, or develop theories. A series of studies [He, 2018, He, 2021, Berman et al., 2022, Berglund et al., 2021, He, 2024] have explored the application of this framework to datasets from diverse fields, including Differential Geometry, Mathematical Physics, Algebraic Geometry, Representation Theory, Combinatorics, and Number Theory.

Building on the studies discussed above, [Davies et al., 2021, Davies et al., 2024, Blundell et al., 2022] formalized the human-machine collaboration framework and achieved significant breakthroughs in two distinct areas: Hyperbolic Knot Theory and Representation Theory. They trained supervised learning models using large mathematical datasets available in these fields, analyzed the resulting model to gain insights, and then formulated and proved new formulas or introduced new open conjectures. A simplified version of their framework with a simple graph-theoretical example is illustrated in Figure 2. Similarly, [Dong et al., 2024] employed this paradigm in the study of affine Deligne–Lusztig varieties, uncovering new formulas and expanding the theoretical understanding of this area.

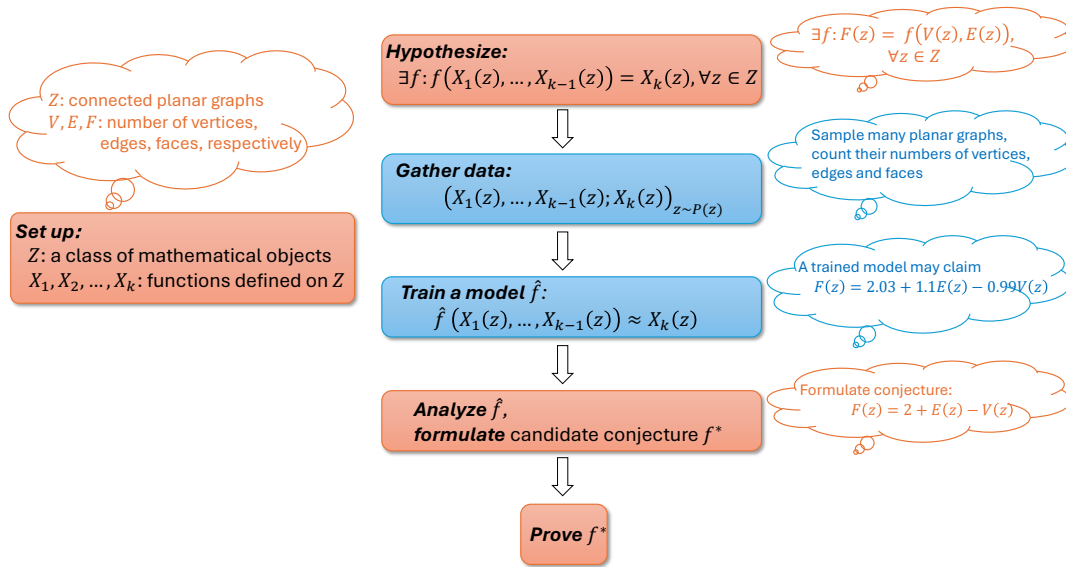


FIGURE 2. A simplified version of the human-AI collaboration framework from [Davies et al., 2021], illustrating the discovery process of Euler’s formula for planar graphs: suppose Z is a class of mathematical objects, and X_1, \dots, X_k are functions defined on Z , mathematicians begin by hypothesizing that X_k is related to X_1, \dots, X_{k-1} by some function f . They then use computer programs to sample a large dataset from certain distribution over Z . Next, a supervised model \tilde{f} is trained to approximate these data. Finally, mathematicians analyze \tilde{f} to formulate a candidate conjecture f^* and proceed to prove it.

Though supervised learning has seen wide applications in theoretical exploration, generative AI has yet to achieve comparable prominence. To name a few, [Johansson and Smallbone, 2023] experimented with using Large Language Models (LLMs) for conjecture generation within the Isabelle/HOL formal language [Nipkow et al., 2002]. [Gao et al., 2024] explored the potential of combining transformer models and diffusion models to forecast complex dynamical systems. Given the relative scarcity of applications of generative models in research-level mathematics, we propose that mathematicians collaborate with AI experts to design novel machine-human collaboration frameworks that leverage the unique capabilities of generative AI. Generative models, particularly LLMs, have demonstrated significant inductive reasoning capabilities, such as formulating hypotheses based on limited observations [Urban and Jakubův, 2020, Rabe et al., 2020, Qiu et al., 2024, Zhou et al., 2024b]. By integrating these capabilities into mathematical workflows, researchers could foster a deeper synergy between human intuition and AI-driven insights, and hence significantly boost the efficiency of conjecture generation and theoretical exploration.

5. EXPLICIT CONSTRUCTION OF MATHEMATICAL OBJECTS

In this section, we examine how AI can assist in the explicit construction of mathematical objects. Here “object” is a generic term and we refrain from giving a precise definition. It can refer to examples/counterexamples, functions, sequences of operations, or even algorithms, as long as they are explicit and definitive. While this task shares similarities with the hypothesis search discussed in Section 4, it has a distinct focus: instead of suggesting patterns that later can be verified by humans, this task aims to construct objects explicitly. Notably, this area has already seen the development of two established frameworks: one leveraging reinforcement learning (RL) and the other utilizing language model-based search.

5.1. Reinforcement Learning (RL)-based Construction. Reinforcement learning (RL), the branch of AI centered on decision-making and sequential optimization, achieved great successes in games, such as the model AlphaZero [Silver et al., 2017] in the game of Go. Due to the flexibility of the RL-framework, recent studies have applied it for construction of mathematical objects.

A series of studies [Gukov et al., 2020, Gukov et al., 2023] applied RL to Knot Theory. Recall that a *knot* is an embedding of the circle in the 3-D space. The standard embedding of the circle is also called the *unknot*. One of the fundamental computational question is to determine if a given knot is equivalent to the unknot, i.e. if a given knot can be continuously deformed into the unknot. [Gukov et al., 2020] used an RL framework to solve the problem of constructing a sequence of allowed operations that deforms a given knot to the unknot. [Gukov et al., 2023] applied this paradigm to a similar problem, where the knot is allowed to be deformed into more than one unknot, by allowing one more operation than before.

A more profound framework was introduced in [Wagner, 2021], where the author applied RL to the construction of counterexamples to open conjectures in Combinatorics and Graph Theory. In this work, construction is formulated as a sequential decision-making process, where an object is constructed one piece at a time (e.g. a graph is constructed by adding one edge at a time). Some human-designed heuristics (i.e. reward functions) will determine how good a state or construction step is and hence will guide the construction process. Using this framework, Wagner successfully constructed counterexamples of high complexity that far surpassed what had been achieved through human efforts. A similar approach was used in [Mehraban et al., 2024] to for explicit construction in extremal graph theory.

In addition, RL was also used in [Fawzi et al., 2022] for constructing faster algorithms for matrix multiplication, in [Bidi et al., 2023] for constructing stabilizing controls for dynamic systems, and in [Farahmand et al., 2017] for designing PDE controls.

5.2. Language Model-based Construction. While RL can be applied to construction tasks where the construction process can be formulated a sequential decision-making process, language model-based approaches offer another versatile framework. It is within this framework that AI’s inherent creativity is most fully showcased. Through this creative capacity, language models can suggest a vast array of potential construction steps, and when combined with external verifiers or evaluators, they form a robust and adaptable methodology.

Some studies trained transformer-based language model from scratch for construction tasks. The basic methodology is to start with a dataset of existing examples, and train the model in a supervised fashion.

[Alfarano et al., 2024] focused on the construction of Lyapunov functions for dynamical systems of the form $\dot{x} = f(x)$, where $f \in C^1(\mathbb{R}^n, \mathbb{R}^n)$ and satisfies $f(0) = 0$. One classical problem is to determine if $x = 0$ is a stable equilibrium, i.e. if x stays close to 0 if it starts near 0. A classical result by Lyapunov states that such a system is stable provided that there is function $V \in C^1(\mathbb{R}^n, \mathbb{R}_+)$ that satisfies three conditions:

- (1) $V(0) = 0$ and $V(x) > 0$ if $x \neq 0$.
- (2) $\lim_{|x| \rightarrow \infty} V(x) = \infty$.
- (3) $\nabla V(x) \cdot f(x) \leq 0$ for all x .

While some classical algorithms are able to construct Lyapunov functions for a restricted subclass of dynamical systems, [Alfarano et al., 2024] aims to leverage language modeling to tackle this problem in greater generality. They trained a small transformer decoder network on a rather large dataset (> 2 million sample points) of synthesized examples. During test time, the model will be prompted with a system and generate a candidate Lyapunov function one token at a time, in a beam search fashion. Though the distribution of the generated examples may have certain bias, their trained model showed good performance on out-of-distribution test samples, and exceeded the performance of classical algorithms and human subjects.

[Charton et al., 2024] focused on a collection of construction problems in Combinatorics and Graph Theory. The problem settings are different from that of the previous example in that instead of aiming to construct objects satisfying an exact, predetermined property, the authors now have some score function (usually designed by humans) and aim to construct examples with scores as high as possible. In their work, they trained small transformer decoder networks from scratch on a small dataset of known “good” examples, i.e. examples with relatively high scores, created by random generation followed by selection. During test time, the generation process will be divided into two phases: during the first (“global”) phase, the model will be prompted to generate many times (e.g. 100,000 times in one of their problems), and the outputs, which may contain errors, will be filtered, modified and adjusted by humans or another program during the second (“local”) phase. The best outputs can be used to further train the model.

Rather than using trained-from-scratch models, some studies also leveraged existing large language models (LLMs) for construction tasks. The key in this approach is to use the in-context/few-shot learning capability emergent in LLMs with sufficiently many parameters [OpenAI, 2020]. In other words, for large enough models, when the user provide a few examples in the prompt, the model can detect the patterns in them and generate outputs demonstrating similar patterns. Such “analogical reasoning” capabilities of LLMs have been confirmed and studied in multiple works [Webb et al., 2023, Mirchandani et al., 2023, Wang et al., 2024c, Yasunaga et al., 2024].

FunSearch [Romera-Paredes et al., 2024] designed an elegant and versatile pipeline for construction problems in Combinatorics. In their work, they aimed to construct computer programs (e.g. python functions) that will perform constructions for certain extremal Combinatorics and Combinatorial optimization problems. In this pipeline, one starts by directly prompting an existing LLM to generate many candidate programs for a construction problem. The correctness and performance of these programs will be evaluated by an external verifier, and the correct one will be stored in a program database. In the future rounds, the LLM will be prompted with high-performing examples from the database, and generate again. In principle, the in-context learning capability of the LLM would empower it to combine the strengths from the examples and generate better candidates. During test time, the best performing examples from the database will be used to perform construction. A streamlined depiction of this pipeline is illustrated in Figure 3

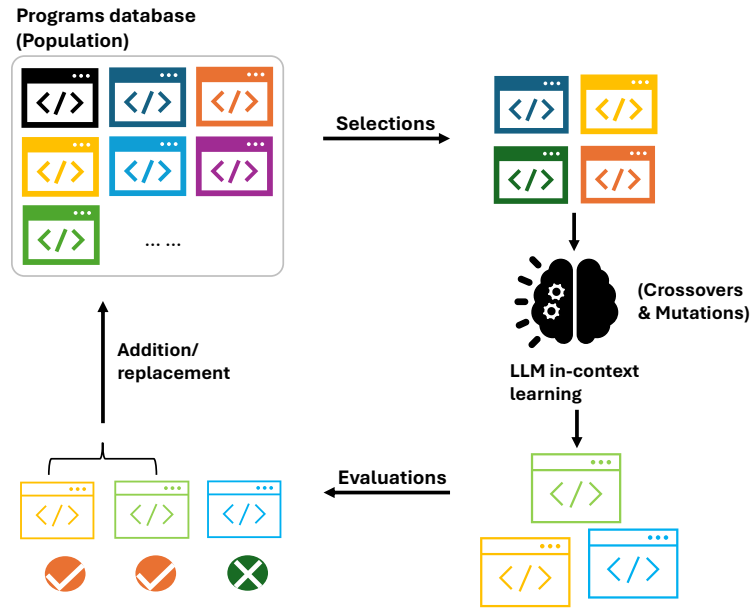


FIGURE 3. The FunSearch pipeline proposed in [Romera-Paredes et al., 2024].

Remark 5.1. As already noted in [Romera-Paredes et al., 2024], their pipeline is greatly reminiscent to *Genetic Programming (GP)* [Koza, 1994]. GP is a member of the evolutionary algorithm family [Eiben and Smith, 2015], which is a class of search and optimization methods utilizing an evolutionary process similar to natural selection. GP, in particular, is a search and optimization framework for programs. A typical GP workflow involves several steps: it starts with a collection (a.k.a. *population*) of candidate programs (a.k.a. *individuals*). Each individual in the population is evaluated by some human-designed *fitness* function. The best-performing individuals are (stochastically) selected for reproduction, where human-defined operations like crossover (combining features of multiple individuals) and mutation (introducing random variation) are applied to generate new individuals. Poor individuals are eliminated and replaced by better-performing ones. This process is repeated over for multiple generations, with the population gradually evolving towards more optimal programs.

In FunSearch [Romera-Paredes et al., 2024], the programs database plays a similar role to the population in GP, with the external verifier being the fitness function. Once best-performing

ones are (stochastically) selected, the LLM will perform an operation similar to a combination of crossover and mutation via in-context learning. The possibility of integrating LLMs into evolutionary algorithms was also investigated in [Meyerson et al., 2024]. Moreover, [Romera-Paredes et al., 2024] also commented that this LLM-based GP enjoys several advantages over traditional GP, such as allowing for more versatile representations of programs and avoiding human-defined crossover and mutation operations.

Finally, we observe that this GP framework has been applied in areas beyond mathematics. For example, Greenblatt [Greenblatt, 2024] employed a similar methodology to tackle the ARC-AGI benchmark [Chollet et al., 2024] — an abstract reasoning test so challenging that AI has yet to exceed the human baseline. By using GPT-4o to generate Python programs that address these problems, Greenblatt’s method achieved notably high scores.

6. PUBLIC ACCEPTANCE AND IMPACTS ON EDUCATION

6.1. Public acceptance of new technologies for mathematics. Although computational tools have long been used to assist mathematical research, recent advancements in generative AI and Large Language Models (LLMs) have sparked an unprecedented surge of interest. In February 2024, Andrew Granville, a distinguished number theorist at the University of Montreal, posed a pivotal question at a UCLA workshop: “We’re looking at a particular question: will machines change math?” Mathematics community are now engaging with this topic. Geordie Williamson of University of Sydney, for example, wrote “there is great potential for interaction between mathematics and machine learning”, though “in [his] experience, it remains hard to use deep learning to aid [his] mathematical research.” [Williamson, 2023] Kevin Buzzard of Imperial College London noted, “the fact that we have people like Fields medalists and other very famous big-shot mathematicians interested in the area now is an indication that it is ‘hot’ in a way that it did not used to be.” [Castelvecchi, 2023] One such Fields Medalist, Terence Tao, has closely followed the advancements in AI-driven reasoning. Recently, he shared his insights: “I have played a little bit with OpenAI’s novel iteration of GPT, GPT-o1-preview, which performs an initial reasoning step before running the LLM. It is certainly a more capable technology than previous iterations, though still struggling with the most advanced research mathematical tasks.” [Tao, 2024]

Despite this growing interest and promising developments, awareness of these tools remains uneven. Marijn Heule, a computer scientist at Carnegie Mellon University, observed that “most mathematicians are completely unaware of these opportunities.” [Castelvecchi, 2023] As AI continues to evolve and refine its capabilities, it will likely challenge mathematicians to reconsider their methods, goals, and conceptual frameworks. In doing so, it may usher in a new era of mathematical exploration and collaboration — one in which human reasoning and machine-generated insight interact to shape the future of the discipline.

6.2. Limits of AI capabilities. Although AI is steadily gaining traction in mathematical research, the prospect of AI independently conducting cutting-edge inquiries remains a significant challenge [Castelvecchi, 2023, He, 2024]. While future systems may become adept at generating sound proofs and mathematical objects, many researchers question whether they can truly innovate — devising the kind of conceptual breakthroughs that define genuine mathematical creativity. At a recent symposium, experts stressed that current large language models (LLMs), which integrate symbolic and machine learning architectures, primarily operate within the confines of established structures drawn from their training data [Castelvecchi, 2023]. Such systems excel at rearranging learned information in linear or nonlinear forms to solve specific problems, but they have yet to demonstrate the capacity to introduce transformative new strategies akin to Galois’s foundational use of group theory in polynomial analysis.

Erika Abraham, a computer scientist at RWTH Aachen University, further remarked, “An AI system is only as smart as we program it to be.” She elaborated that while AI might manage to prove certain theorems, it struggles to generate the abstract concepts that give rise to those theorems — an integral component of mathematical innovation [Castelvecchi, 2023]. Melanie Mitchell, a cognitive scientist at the Santa Fe Institute, similarly observed that although AI can confirm the truth of established results, it falters at deriving the high-level abstractions needed to seed fundamentally new mathematical ideas [Castelvecchi, 2023].

These shortcomings are especially evident when AI tackles unsolved challenges like those presented in the new FrontierMath benchmark [Glazer et al., 2024]. Solving such complex problems often requires proposing entirely novel concepts and strategies, which current AI systems are not yet equipped to handle [Zaman, 2024].

6.3. Impacts on mathematics education. For decades, mathematics educators have grappled with how best to incorporate emerging technologies into their teaching and assessment practices [Kasneji et al., 2023, Engelbrecht and Borba, 2024]. Initially, tools like calculators were integrated into curricula to encourage the development and application of higher-order problem-solving skills, moving beyond rote computation and memorization. More recently, widely accessible digital resources — including search engines and applications like Desmos or Photomath — have further expanded the landscape of knowledge acquisition and problem-solving in mathematical education. As AI-driven tools and large language models (LLMs) such as GPT-4o and o1 grow in sophistication, educators face a new set of challenges and opportunities [Kasneji et al., 2023].

While AI can efficiently answer questions and deliver personalized learning experiences, it is crucial for educators to ensure that students engage with these technologies in ways that spark creativity, encourage collaboration, and inspire intellectual exploration, rather than simply relying on them as shortcuts to bypass meaningful learning [Zafrullah et al., 2023]. Recognizing that AI models can “hallucinate” and produce mathematically incorrect yet plausible-sounding responses, educators are increasingly committed to helping students develop the critical thinking skills necessary to detect and counter such errors. Importantly, the potential benefits of AI should not be dismissed. [Kumar et al., 2023] reported that LLM-based explanations positively impacted the study of high school-level mathematics. Moreover, despite the presence of arithmetic errors and incorrect final answers, LLM-based explanations can still provide learning gain. For college-level mathematics education, [Collins et al., 2024] reported that, while machine-generated answers are sometimes incomplete or inaccurate, proactive interaction with these tools can still enrich students’ learning experiences. This suggests the need for educators to reconsider their teaching methods and assessment strategies. Rather than assigning standardized, mechanically solvable exercises, teachers can encourage students to create their own examples, scrutinize the validity of AI-derived solutions, and actively reflect on their own reasoning.

From an educational ethics point of view, ensuring equitable access to AI technologies has emerged as a critical priority, as disparities in technology availability risk deepening existing educational inequalities [Engelbrecht and Borba, 2024]. Achieving this equity will require thoughtful policymaking, strategic resource allocation, and sustained efforts by educators, administrators, and governments. Organizations like the International Society for Technology in Education (ISTE) have begun providing guidance, encouraging teachers to carefully consider the full range of AI capabilities, potential risks, and ethical implications before integrating these tools into their classrooms [Zafrullah et al., 2023].

Additionally, AI’s heavy reliance on large training corpora brings concerns about bias to the forefront. Since these models naturally mirror patterns embedded in their training data, they can inadvertently perpetuate stereotypes, inaccuracies, or other misleading notions. To counter

these risks, it is essential for educators to equip students with the critical thinking skills needed to identify and question biased or unfounded assumptions arising from AI-generated solutions [Engelbrecht and Borba, 2024, Zafrullah et al., 2023].

As AI continues to advance, it stands poised to profoundly reshape mathematics education. By approaching these innovations thoughtfully—balancing efficiency with critical engagement, striving for widespread accessibility, and consistently emphasizing conceptual depth—educators can foster more meaningful, personalized, and transformative learning experiences. This integration of AI into mathematics teaching is far more than a simple technical upgrade; it represents a valuable opportunity for educators, policymakers, and researchers to reevaluate fundamental educational objectives, ultimately paving the way for a richer, more inclusive future in mathematics learning.

7. CONCLUSION

The evolving relationship between artificial intelligence and mathematics heralds a new era of collaborative inquiry. Yet, significant opportunities remain largely untapped, owing to challenges on both sides of the divide. On the one hand, despite AI models having reached saturation on many standard mathematical benchmarks, they often fall short when it comes to precise computation and advanced deductive reasoning, particularly in natural language contexts. Whether supplying models with more natural language data — a common approach among AI researchers — will lead to substantial improvements remains a subject of debate. On the other hand, many mathematicians are not fully aware of the capabilities modern AI systems offer.

While present-day AI tools may still struggle with high-level reasoning and the creation of genuinely novel mathematical ideas, this article has shown that they excel at tasks such as suggesting formal proof steps, identifying patterns, generating plausible conjectures, and constructing mathematical objects — especially when integrated with other problem-solving tools. These strengths underscore that AI’s role as a complementary resource that can enhance our intellectual pursuits.

Instead of either overestimating the potential of AI based solely on scaling laws or completely dismissing its usefulness, we argue that AI researchers and mathematicians must engage in more profound and sustained dialogue. By doing so, they can jointly develop new frameworks and methodologies for effective human–machine collaboration. Such an interdisciplinary effort will help bridge existing gaps in understanding and communication, ultimately enabling groundbreaking advancements that neither domain could achieve in isolation.

Moreover, weaving AI into the fabric of mathematics education has the potential to democratize knowledge, foster critical thinking, and promote creative problem-solving. Nonetheless, this must be done responsibly. Ethical concerns—such as inherent biases in AI models and unequal access to technological resources—must be addressed to ensure that the benefits of this integration are distributed fairly and equitably.

In the final analysis, the true promise of AI in mathematics lies not in supplanting human insight, but in amplifying it. As we continue refining these technologies and their applications, thoughtful and strategic integration of AI will lead to a richer, more inclusive, and more innovative future for the mathematical sciences.

REFERENCES

- [Agrawal et al., 2022] Agrawal, A., Gadgil, S., Goyal, N., Narayanan, A., and Tadipatri, A. (2022). Towards a mathematics formalisation assistant using large language models. *arXiv preprint arXiv:2211.07524*.
- [Alfarano et al., 2024] Alfarano, A., Charton, F., and Hayat, A. (2024). Global lyapunov functions: a long-standing open problem in mathematics, with symbolic transformers. *arXiv preprint arXiv:2410.08304*.

- [AlphaProof and AlphaGeometry teams, 2024] AlphaProof and AlphaGeometry teams (2024). Ai achieves silver-medal standard solving international mathematical olympiad problems. <https://deepmind.google/discover/blog/ai-solves-imo-problems-at-silver-medal-level/>.
- [Andrychowicz et al., 2016] Andrychowicz, M., Denil, M., Gomez, S., Hoffman, M. W., Pfau, D., Schaul, T., Shillingford, B., and De Freitas, N. (2016). Learning to learn by gradient descent by gradient descent. *Advances in neural information processing systems*, 29.
- [Appel and Haken, 1976] Appel, K. and Haken, W. (1976). Every planar map is four colorable. *Bulletin of the American Mathematical Society*, 82(5):711–712.
- [Azerbaiyev et al., 2023] Azerbaiyev, Z., Piotrowski, B., Schoelkopf, H., Ayers, E. W., Radev, D., and Avigad, J. (2023). Proofnet: Autoformalizing and formally proving undergraduate-level mathematics. *arXiv preprint arXiv:2302.12433*.
- [Azerbaiyev et al., 2024] Azerbaiyev, Z., Schoelkopf, H., Paster, K., Santos, M. D., McAleer, S., Jiang, A. Q., Deng, J., Biderman, S., and Welleck, S. (2024). Llemma: An open language model for mathematics. *arXiv preprint arXiv:2310.10631*.
- [Bancerek, 2006] Bancerek, G. (2006). Automatic translation in formalized mathematics. *Mechanized Mathematics and its Applications*, 5(2).
- [Bancerek and Carlson, 1994] Bancerek, G. and Carlson, P. (1994). Mizar and the machine translation of mathematics documents. https://mizar.uwb.edu.pl/project/banc_carl193.pdf.
- [Bansal et al., 2019] Bansal, K., Loos, S. M., Rabe, M. N., Szegedy, C., and Wilcox, S. (2019). Holist: An environment for machine learning of higher-order theorem proving (extended version). *arXiv preprint arXiv:1904.03241*.
- [Beamer et al., 2013] Beamer, S., Asanović, K., and Patterson, D. (2013). Direction-optimizing breadth-first search. *Scientific Programming*, 21(3-4):137–148.
- [Berglund et al., 2021] Berglund, P., Campbell, B., and Jejjala, V. (2021). Machine learning kreuzer-skarke calabi-yau threefolds. *arXiv preprint arXiv:2112.09117*.
- [Berman et al., 2022] Berman, D. S., He, Y.-H., and Hirst, E. (2022). Machine learning calabi-yau hypersurfaces. *Physical Review D*, 105(6).
- [Besta et al., 2024] Besta, M., Blach, N., Kubicek, A., Gerstenberger, R., Podstawski, M., Gianinazzi, L., Gajda, J., Lehmann, T., Niewiadomski, H., Nyczyk, P., et al. (2024). Graph of thoughts: Solving elaborate problems with large language models. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38 (16), pages 17682–17690.
- [Bidi et al., 2023] Bidi, K. A., Coron, J.-M., Hayat, A., and Lichtlé, N. (2023). Reinforcement learning in control theory: A new approach to mathematical problem solving. *arXiv preprint arXiv:2310.13072*.
- [Blaauwbroek et al., 2020a] Blaauwbroek, L., Urban, J., and Geuvers, H. (2020a). Tactic learning and proving for the coq proof assistant. *arXiv preprint arXiv:2003.09140*.
- [Blaauwbroek et al., 2020b] Blaauwbroek, L., Urban, J., and Geuvers, H. (2020b). The tactician (extended version): A seamless, interactive tactic learner and prover for coq. *arXiv preprint arXiv:2008.00120*.
- [Blundell et al., 2022] Blundell, C., Buesing, L., Davies, A., cković, P. V., and Williamson, G. (2022). Towards combinatorial invariance for kazhdan-lusztig polynomials. *Representation Theory of the American Mathematical Society*, 26(37):1145–1191.
- [Böhme and Nipkow, 2010] Böhme, S. and Nipkow, T. (2010). Sledgehammer: Judgement day. In Giesl, J. and Hähnle, R., editors, *Automated Reasoning*, pages 107–121, Berlin, Heidelberg. Springer Berlin Heidelberg.
- [Breiman, 2001] Breiman, L. (2001). Random forests. *Machine Learning*, 45:5–32.
- [Bubeck et al., 2023] Bubeck, S., Chandrasekaran, V., Eldan, R., Gehrke, J., Horvitz, E., Kamar, E., Lee, P., Lee, Y. T., Li, Y., Lundberg, S., Nori, H., Palangi, H., Ribeiro, M. T., and Zhang, Y. (2023). Sparks of artificial general intelligence: Early experiments with gpt-4. *arXiv preprint arXiv:2303.12712*.
- [Cai et al., 2024] Cai, C., Zhao, X., Liu, H., Jiang, Z., Zhang, T., Wu, Z., Hwang, J.-N., and Li, L. (2024). The role of deductive and inductive reasoning in large language models. *arXiv preprint arXiv:2410.02892*.
- [Cao et al., 2023] Cao, Y., Li, S., Liu, Y., Yan, Z., Dai, Y., Yu, P. S., and Sun, L. (2023). A comprehensive survey of ai-generated content (aigc): A history of generative ai from gan to chatgpt. *arXiv preprint arXiv:2303.04226*.
- [Castelvecchi, 2023] Castelvecchi, D. (2023). How will ai change mathematics? *Nature*, 615:15–16.
- [Charton et al., 2024] Charton, F., Ellenberg, J. S., Wagner, A. Z., and Williamson, G. (2024). Patternboost: Constructions in mathematics with a little help from ai. *arXiv preprint arXiv:2411.00566*.
- [Chen et al., 2021] Chen, M., Tworek, J., Jun, H., Yuan, Q., de Oliveira Pinto, H. P., Kaplan, J., Edwards, H., Burda, Y., Joseph, N., Brockman, G., Ray, A., Puri, R., Krueger, G., Petrov, M., Khlaaf, H., Sastry, G., Mishkin, P., Chan, B., Gray, S., Ryder, N., Pavlov, M., Power, A., Kaiser, L., Bavarian, M., Winter, C., Tillet, P., Such, F. P., Cummings, D., Plappert, M., Chantzis, F., Barnes, E., Herbert-Voss, A., Guss, W. H., Nichol, A., Paino, A., Tezak, N., Tang, J., Babuschkin, I., Balaji, S., Jain, S., Saunders, W., Hesse, C., Carr, A. N., Leike, J., Achiam, J., Misra, V., Morikawa, E., Radford, A., Knight, M., Brundage, M., Murati, M., Mayer,

- K., Welinder, P., McGrew, B., Amodei, D., McCandlish, S., Sutskever, I., and Zaremba, W. (2021). Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*.
- [Chollet et al., 2024] Chollet, F., Knoop, M., Kamradt, G., and Landers, B. (2024). Arc prize 2024: Technical report. *arXiv preprint arXiv:2412.04604*.
- [Cobbe et al., 2021] Cobbe, K., Kosaraju, V., Bavarian, M., Chen, M., Jun, H., Kaiser, L., Plappert, M., Tworek, J., Hilton, J., Nakano, R., Hesse, C., and Schulman, J. (2021). Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*.
- [Collins et al., 2024] Collins, K. M., Jiang, A. Q., Frieder, S., Wong, L., Zilka, M., Bhatt, U., Lukasiewicz, T., Wu, Y., Tenenbaum, J. B., Hart, W., Gowers, T., Li, W., Weller, A., and Jamnik, M. (2024). Evaluating language models for mathematics through interactions. *Proceedings of the National Academy of Sciences*, 121(24):e2318124121.
- [Coulom, 2007] Coulom, R. (2007). Efficient selectivity and backup operators in monte-carlo tree search. In *Computers and Games*, pages 72–83, Berlin, Heidelberg. Springer Berlin Heidelberg.
- [Davies et al., 2021] Davies, A., cković, P. V., Buesing, L., Blackwell, S., Zheng, D., sev, N. T., Tanburn, R., Battaglia, P., Blundell, C., Juhász, A., Lanckenby, M., Williamson, G., Hassabis, D., and Kohli, P. (2021). Advancing mathematics by guiding human intuition with ai. *Nature*, 600:70–74.
- [Davies et al., 2024] Davies, A., Juhász, A., Lackenby, M., and sev, N. T. (2024). The signature and cusp geometry of hyperbolic knots. *Geometry and Topology*, 28(5):2313–2343.
- [Davis, 1957] Davis, M. (1957). A computer program for Presburger’s algorithm. *Summaries of Talks Presented at the Summer Institute for Symbolic Logic*.
- [Davis and Putnam, 1960] Davis, M. and Putnam, H. (1960). A computing procedure for quantification theory. *Journal of the ACM (JACM)*, 7(3):201–215.
- [de Bruijn, 1970] de Bruijn, N. (1970). The mathematical language automath, its usage, and some of its extensions. In *Proceedings of the Symposium on Automatic Demonstration*.
- [Devlin et al., 2019] Devlin, J., Chang, M.-W., Lee, K., and Toutanova, K. (2019). Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*.
- [Dong et al., 2024] Dong, B., He, X., Jin, P., Schremmer, F., and Yu, Q. (2024). Machine learning assisted exploration for affine deligne–lusztig varieties. *Peking Mathematical Journal*.
- [Eiben and Smith, 2015] Eiben, A. E. and Smith, J. E. (2015). *Introduction to Evolutionary Computing*. Springer Publishing Company, Incorporated, 2nd edition.
- [Engelbrecht and Borba, 2024] Engelbrecht, J. and Borba, M. C. (2024). Recent developments in using digital technology in mathematics education. *ZDM–Mathematics Education*, 56(2):281–292.
- [Farahmand et al., 2017] Farahmand, A.-m., Nabi, S., and Nikovski, D. N. (2017). Deep reinforcement learning for partial differential equation control. In *2017 American Control Conference (ACC)*, pages 3120–3127.
- [Fawzi et al., 2022] Fawzi, A., Balog, M., Huang, A., Hubert, T., Romera-Paredes, B., Barekatin, M., Novikov, A., Ruiz, F. J. R., Schrittwieser, J., Swirszcz, G., Silver, D., Hassabis, D., and Kohli, P. (2022). Discovering faster matrix multiplication algorithms with reinforcement learning. *Nature*, 610:47–53.
- [First et al., 2023] First, E., Rabe, M. N., Ringer, T., and Brun, Y. (2023). Baldur: Whole-proof generation and repair with large language models. *arXiv preprint arXiv:2303.04910*.
- [Frieder et al., 2023] Frieder, S., Pinchetti, L., Chevalier, A., Griffiths, R.-R., Salvatori, T., Lukasiewicz, T., Petersen, P. C., and Berner, J. (2023). Mathematical capabilities of chatgpt. *arXiv preprint arXiv:2301.13867*.
- [Fuller et al., 1973] Fuller, S. H., Gaschnig, J. G., Gillogly, J., et al. (1973). *Analysis of the alpha-beta pruning algorithm*. Department of Computer Science, Carnegie-Mellon University.
- [Gao et al., 2024] Gao, H., Kaltenbach, S., and Koumoutsakos, P. (2024). Generative learning for forecasting the dynamics of high-dimensional complex systems. *Nature Communication*, 15. 8904.
- [Gauthier et al., 2021] Gauthier, T., Kaliszky, C., Urban, J., Kumar, R., and Norrish, M. (2021). Tactictoe: Learning to prove with tactics. *Journal of Automated Reasoning*, 65(2):257–286.
- [Giuseppi and Pietrabissa, 2022] Giuseppi, A. and Pietrabissa, A. (2022). Bellman’s principle of optimality and deep reinforcement learning for time-varying tasks. *International Journal of Control*, 95(9):2448–2459.
- [Glazer et al., 2024] Glazer, E., Erdil, E., Besiroglu, T., Chicharro, D., Chen, E., Gunning, A., Olsson, C. F., Denain, J.-S., Ho, A., de Oliveira Santos, E., Järviemi, O., Barnett, M., Sandler, R., Vrzala, M., Sevilla, J., Ren, Q., Pratt, E., Levine, L., Barkley, G., Stewart, N., Grechuk, B., Grechuk, T., Enugandla, S. V., and Wildon, M. (2024). Frontiermath: A benchmark for evaluating advanced mathematical reasoning in ai. *arXiv preprint arXiv:2411.04872*.
- [Gonthier, 2008] Gonthier, G. (2008). Formal proof - the four-color theorem. *Notices of the AMS*, 55(11):1382–1393.
- [Google Research, 2022] Google Research (2022). Palm: Scaling language modeling with pathways. *arXiv preprint arXiv:2204.02311*.
- [Greenblatt, 2024] Greenblatt, R. (2024). Getting 50% (sota) on arc-agi with gpt-4o.

- [Grossberg, 2013] Grossberg, S. (2013). Recurrent neural networks. *Scholarpedia*, 8(2):1888.
- [Gukov et al., 2023] Gukov, S., Halverson, J., Manolescu, C., and Ruehle, F. (2023). Searching for ribbons with machine learning. *arXiv preprint arXiv:2304.09304*.
- [Gukov et al., 2020] Gukov, S., Halverson, J., Ruehle, F., and kowski, P. S. (2020). Learning to unknot. *arXiv preprint arXiv:2010.16263*.
- [Hales et al., 2017] Hales, T., Adams, M., Bauer, G., Dang, T., Harrison, J., Hoang, L., Kaliszzyk, C., Margron, V., McLaughlin, S., Nguyen, T., and et al. (2017). A formal proof of the kepler conjecture. *Forum of Mathematics, Pi*, 5:e2.
- [Han et al., 2021] Han, J. M., Rute, J., Wu, Y., Ayers, E. W., and Polu, S. (2021). Proof artifact co-training for theorem proving with language models. *arXiv preprint arXiv:2102.06203*.
- [Harrison, 1996] Harrison, J. (1996). Hol light: A tutorial introduction. *Proceedings of the International Conference on Formal Methods in Computer-Aided Design*.
- [Harrison et al., 2014] Harrison, J., Urban, J., and Wiedijk, F. (2014). History of interactive theorem proving. In *Computational Logic*, volume 9 of *Handbook of the History of Logic*, pages 135–214. North-Holland.
- [He, 2018] He, Y.-H. (2018). Deep-learning the landscape. *arXiv preprint arXiv:1706.02714*.
- [He, 2021] He, Y.-H. (2021). Machine-learning mathematical structures. *arXiv preprint arXiv:2101.06317*.
- [He, 2024] He, Y.-H. (2024). Ai-driven research in pure mathematics and theoretical physics. *Nature Reviews Physics*, 6(9):546–553.
- [Helwe et al., 2021] Helwe, C., Clavel, C., and Suchanek, F. M. (2021). Reasoning with transformer-based models: Deep learning, but shallow reasoning. In *3rd Conference on Automated Knowledge Base Construction*.
- [Hoerl and Kennard, 1970] Hoerl, A. E. and Kennard, R. W. (1970). Ridge regression: Biased estimation for nonorthogonal problems. *Technometrics*, 12(1):55–67.
- [Huang et al., 2018] Huang, D., Dhariwal, P., Song, D., and Sutskever, I. (2018). Gamepad: A learning environment for theorem proving. *arXiv preprint arXiv:1806.00608*.
- [Jakkula, 2006] Jakkula, V. (2006). Tutorial on support vector machine (svm). *School of EECS, Washington State University*, 37(2.5):3.
- [Jiang et al., 2023a] Jiang, A. Q., Li, W., and Jamnik, M. (2023a). Multilingual mathematical autoformalization. *arXiv preprint arXiv:2311.03755*.
- [Jiang et al., 2022] Jiang, A. Q., Li, W., Tworowski, S., Czechowski, K., Odrzygóźdź, T., Miloś, P., Wu, Y., and Jamnik, M. (2022). Thor: Wielding hammers to integrate language models and automated theorem provers. *arXiv preprint arXiv:2205.10893*.
- [Jiang et al., 2023b] Jiang, A. Q., Welleck, S., Zhou, J. P., Li, W., Liu, J., Jamnik, M., Lacroix, T., Wu, Y., and Lample, G. (2023b). Draft, sketch, and prove: Guiding formal theorem provers with informal proofs. *arXiv preprint arXiv:2210.12283*.
- [Johansson and Smallbone, 2023] Johansson, M. and Smallbone, N. (2023). Exploring mathematical conjecturing with large language models. In *NeSy*, pages 62–77.
- [Kaelbling et al., 1996] Kaelbling, L. P., Littman, M. L., and Moore, A. W. (1996). Reinforcement learning: A survey. *Journal of artificial intelligence research*, 4:237–285.
- [Kaliszyk et al., 2015] Kaliszzyk, C., Urban, J., and Vyskočil, J. (2015). Learning to parse on aligned corpora (rough diamond). In *Interactive Theorem Proving*, pages 227–233. Springer International Publishing.
- [Kaliszyk et al., 2017] Kaliszzyk, C., Urban, J., and Vyskočil, J. (2017). Automating formalization by statistical and semantic parsing of mathematics. In *Interactive Theorem Proving*, pages 12–27. Springer International Publishing.
- [Kasneci et al., 2023] Kasneci, E., Sefler, K., Küchemann, S., Bannert, M., Dementieva, D., Fischer, F., Gasser, U., Groh, G., Günemann, S., Hüllermeier, E., et al. (2023). Chatgpt for good? on opportunities and challenges of large language models for education. *Learning and individual differences*, 103:102274.
- [Kilani, 2023] Kilani, I. (2023). Fermat’s last theorem: A historical and mathematical overview. *Authorea Preprints*.
- [Kojima et al., 2024] Kojima, T., Gu, S. S., Reid, M., Matsuo, Y., and Iwasawa, Y. (2024). Large language models are zero-shot reasoners. In *Proceedings of the 36th International Conference on Neural Information Processing Systems, NIPS ’22*, Red Hook, NY, USA. Curran Associates Inc.
- [Koza, 1994] Koza, J. R. (1994). Genetic programming as a means for programming computers by natural selection. *Statistics and Computing*, 4:87–112.
- [Kumar et al., 2023] Kumar, H., Rothschild, D. M., Goldstein, D. G., and Hofman, J. (2023). Math education with large language models: Peril or promise? <https://ssrn.com/abstract=4641653>.
- [Kumarappan et al., 2024] Kumarappan, A., Tiwari, M., Song, P., George, R. J., Xiao, C., and Anandkumar, A. (2024). Leanagent: Lifelong learning for formal theorem proving. *arXiv preprint arXiv:2410.06209*.
- [Lample et al., 2022] Lample, G., Lachaux, M.-A., Lavril, T., Martinet, X., Hayat, A., Ebner, G., Rodriguez, A., and Lacroix, T. (2022). Hypertree proof search for neural theorem proving. *arXiv preprint arXiv:2205.11491*.

- [Lewkowycz et al., 2022] Lewkowycz, A., Andreassen, A., Dohan, D., Dyer, E., Michalewski, H., Ramasesh, V., Slone, A., Anil, C., Schlag, I., Gutman-Solo, T., Wu, Y., Neyshabur, B., Gur-Ari, G., and Misra, V. (2022). Solving quantitative reasoning problems with language models. *arXiv preprint arXiv:2206.14858*.
- [Li et al., 2021] Li, Z., Liu, F., Yang, W., Peng, S., and Zhou, J. (2021). A survey of convolutional neural networks: analysis, applications, and prospects. *IEEE transactions on neural networks and learning systems*, 33(12):6999–7019.
- [Lin et al., 2024] Lin, H., Sun, Z., Yang, Y., and Welleck, S. (2024). Lean-star: Learning to interleave thinking and proving. *arXiv preprint arXiv:2407.10040*.
- [Liu et al., 2024] Liu, E., Neubig, G., and Andreas, J. (2024). An incomplete loop: Deductive, inductive, and abductive learning in large language models. *arXiv preprint arXiv:2404.03028*.
- [Liu et al., 2023] Liu, Z., Jiang, H., Zhong, T., Wu, Z., Ma, C., Li, Y., Yu, X., Zhang, Y., Pan, Y., Shu, P., Lyu, Y., Zhang, L., Yao, J., Dong, P., Cao, C., Xiao, Z., Wang, J., Zhao, H., Xu, S., Wei, Y., Chen, J., Dai, H., Wang, P., He, H., Wang, Z., Wang, X., Zhang, X., Zhao, L., Liu, Y., Zhang, K., Yan, L., Sun, L., Liu, J., Qiang, N., Ge, B., Cai, X., Zhao, S., Hu, X., Yuan, Y., Li, G., Zhang, S., Jiang, X., Zhang, T., Shen, D., Li, Q., Liu, W., Li, X., Zhu, D., and Liu, T. (2023). Holistic evaluation of gpt-4v for biomedical imaging.
- [Lu et al., 2024a] Lu, J., Wan, Y., Huang, Y., Xiong, J., Liu, Z., and Guo, Z. (2024a). Formalalign: Automated alignment evaluation for autoformalization. *arXiv preprint arXiv:2410.10135*.
- [Lu et al., 2024b] Lu, J., Wan, Y., Liu, Z., Huang, Y., Xiong, J., Liu, C., Shen, J., Jin, H., Zhang, J., Wang, H., Yang, Z., Tang, J., and Guo, Z. (2024b). Process-driven autoformalization in lean 4. *arXiv preprint arXiv:2406.01940*.
- [Mahesh, 2020] Mahesh, B. (2020). Machine learning algorithms-a review. *International Journal of Science and Research (IJSR) [Internet]*, 9(1):381–386.
- [Megill, 2006] Megill, N. (2006). *Metamath*, pages 88–95. Springer Berlin Heidelberg, Berlin, Heidelberg.
- [Mehrabian et al., 2024] Mehrabian, A., Anand, A., Kim, H., Sonnerat, N., Balog, M., Comanici, G., Berariu, T., Lee, A., Ruoss, A., Bulanova, A., Toyama, D., Blackwell, S., Paredes, B. R., Veličković, P., Orseau, L., Lee, J., Naredla, A. M., Precup, D., and Wagner, A. Z. (2024). Finding increasingly large extremal graphs with alphazero and tabu search. *arXiv preprint arXiv:2311.03583*.
- [Meng and Paulson, 2008] Meng, J. and Paulson, L. C. (2008). Translating higher-order clauses to first-order clauses. *Journal of Automated Reasoning*, pages 35–60.
- [Meyerson et al., 2024] Meyerson, E., Nelson, M. J., Bradley, H., Gaier, A., Moradi, A., Hoover, A. K., and Lehman, J. (2024). Language model crossover: Variation through few-shot prompting. *ACM Trans. Evol. Learn. Optim.* Just Accepted.
- [Mirchandani et al., 2023] Mirchandani, S., Xia, F., Florence, P., Ichter, B., Driess, D., Arenas, M. G., Rao, K., Sadigh, D., and Zeng, A. (2023). Large language models as general pattern machines. *arXiv preprint arXiv:2307.04721*.
- [Mirzadeh et al., 2024] Mirzadeh, I., Alizadeh, K., Shahrokhi, H., Tuzel, O., Bengio, S., and Farajtabar, M. (2024). Gsm-symbolic: Understanding the limitations of mathematical reasoning in large language models. *arXiv preprint arXiv:2410.05229*.
- [Moura and Ullrich, 2021] Moura, L. d. and Ullrich, S. (2021). The lean 4 theorem prover and programming language. In Platzer, A. and Sutcliffe, G., editors, *Automated Deduction – CADE 28*, pages 625–635, Cham. Springer International Publishing.
- [Netrapalli, 2019] Netrapalli, P. (2019). Stochastic gradient descent and its variants in machine learning. *Journal of the Indian Institute of Science*, 99(2):201–213.
- [Newell and Simon, 1956] Newell, A. and Simon, H. (1956). The logic theory machine—a complex information processing system. *IRE Transactions on Information Theory*, 2(3):61–79.
- [Nezhurina et al., 2024] Nezhurina, M., Cipolina-Kun, L., Cherti, M., and Jitsev, J. (2024). Alice in wonderland: Simple tasks showing complete reasoning breakdown in state-of-the-art large language models. *arXiv preprint arXiv:2406.02061*.
- [Nick and Campbell, 2007] Nick, T. G. and Campbell, K. M. (2007). Logistic regression. *Topics in biostatistics*, pages 273–301.
- [Nipkow et al., 2002] Nipkow, T., Wenzel, M., and Paulson, L. C. (2002). *Isabelle/HOL: a proof assistant for higher-order logic*. Springer-Verlag, Berlin, Heidelberg.
- [OpenAI, 2020] OpenAI (2020). Language models are few-shot learners. *arXiv preprint arXiv:2005.14165*.
- [OpenAI, 2024] OpenAI (2024). Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*.
- [Paliwal et al., 2019] Paliwal, A., Loos, S., Rabe, M., Bansal, K., and Szegedy, C. (2019). Graph representations for higher-order logic and theorem proving. *arXiv preprint arXiv:1905.10006*.
- [Patel et al., 2024] Patel, N., Saha, R., and Flanigan, J. (2024). A new approach towards autoformalization. *arXiv preprint arXiv:2310.07957*.

- [Polu and Sutskever, 2020] Polu, S. and Sutskever, I. (2020). Generative language modeling for automated theorem proving. *arXiv preprint arXiv:2009.03393*.
- [Qiu et al., 2024] Qiu, L., Jiang, L., Lu, X., Sclar, M., Pyatkin, V., Bhagavatula, C., Wang, B., Kim, Y., Choi, Y., Dziri, N., and Ren, X. (2024). Phenomenal yet puzzling: Testing inductive reasoning capabilities of language models with hypothesis refinement. *arXiv preprint arXiv:2310.08559*.
- [Rabe et al., 2020] Rabe, M. N., Lee, D., Bansal, K., and Szegedy, C. (2020). Mathematical reasoning via self-supervised skip-tree training. *arXiv preprint arXiv:2006.04757*.
- [Radford et al., 2019] Radford, A., Wu, J., Child, R., Luan, D., Amodei, D., Sutskever, I., et al. (2019). Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9.
- [Riazanov and Voronkov, 2002] Riazanov, A. and Voronkov, A. (2002). The design and implementation of vampire. *AI Commun.*, 15(2,3):91–110.
- [Romera-Paredes et al., 2024] Romera-Paredes, B., Barekatin, M., Novikov, A., Balog, M., Kumar, M. P., Dupont, E., Ruiz, F. J. R., Ellenberg, J. S., Wang, P., Fawzi, O., Kohli, P., and Fawzi, A. (2024). Mathematical discoveries from program search with large language models. *Nature*, 625:468–475.
- [Säfstrom et al., 2024] Säfstrom, A. I., Lithner, J., Palm, T., Palmberg, B., Sidenvall, J., Andersson, C., Boström, E., and Granberg, C. (2024). Developing a diagnostic framework for primary and secondary students’ reasoning difficulties during mathematical problem solving. *Educational Studies in Mathematics*, 115(2):125–149.
- [Samek et al., 2021] Samek, W., Montavon, G., Lapuschkin, S., Anders, C. J., and Müller, K.-R. (2021). Explaining deep neural networks and beyond: A review of methods and applications. *Proceedings of the IEEE*, 109(3):247–278.
- [Saparov and He, 2023] Saparov, A. and He, H. (2023). Language models are greedy reasoners: A systematic formal analysis of chain-of-thought. In *The Eleventh International Conference on Learning Representations*.
- [Schulz, 2002] Schulz, S. (2002). E - a brainiac theorem prover. *AI Commun.*, 15(2,3):111–126.
- [Silver et al., 2017] Silver, D., Hubert, T., Schrittwieser, J., Antonoglou, I., Lai, M., Guez, A., Lanctot, M., Sifre, L., Kumaran, D., Graepel, T., Lillicrap, T. P., Simonyan, K., and Hassabis, D. (2017). Mastering chess and shogi by self-play with a general reinforcement learning algorithm. *arXiv preprint arXiv:1712.01815*.
- [Slind and Norrish, 2008] Slind, K. and Norrish, M. (2008). A brief overview of hol4. In *Proceedings of the 21st International Conference on Theorem Proving in Higher Order Logics*, TPHOLs ’08, pages 28–32, Berlin, Heidelberg. Springer-Verlag.
- [Sutton et al., 1999] Sutton, R. S., McAllester, D., Singh, S., and Mansour, Y. (1999). Policy gradient methods for reinforcement learning with function approximation. *Advances in neural information processing systems*, 12.
- [Szegedy, 2020] Szegedy, C. (2020). A promising path towards autoformalization and general artificial intelligence. In *Intelligent Computer Mathematics*, pages 3–20. Springer International Publishing.
- [Taghvaie et al., 2023] Taghvaie, A., Warnakulasuriya, T., Kumar, D., Zare, F., Sharma, R., and Vilathgamuwa, D. M. (2023). A comprehensive review of harmonic issues and estimation techniques in power system networks based on traditional and artificial intelligence/machine learning. *IEEE Access*, 11:31417–31442.
- [Tai et al., 2015] Tai, K. S., Socher, R., and Manning, C. D. (2015). Improved semantic representations from tree-structured long short-term memory networks. *arXiv preprint arXiv:1503.00075*.
- [Tao, 2016] Tao, T. (2016). There’s more to mathematics than rigour and proofs. <https://terrytao.wordpress.com/career-advice/theres-more-to-mathematics-than-rigour-and-proofs/>. [Online; accessed 21-Nov-2024].
- [Tao, 2023a] Tao, T. (2023a). <https://mathstodon.xyz/@tao/111252123637176099>. [Online; accessed 18-Nov-2024].
- [Tao, 2023b] Tao, T. (2023b). <https://mathstodon.xyz/@tao/111287749336059662>. [Online; accessed 20-Nov-2024].
- [Tao, 2024] Tao, T. (2024). Machine assisted proof. *Notices of the American Mathematical Society*, to appear.
- [Tarjan, 1972] Tarjan, R. (1972). Depth-first search and linear graph algorithms. *SIAM journal on computing*, 1(2):146–160.
- [Thakur et al., 2024] Thakur, A., Tsoukalas, G., Wen, Y., Xin, J., and Chaudhuri, S. (2024). An in-context learning agent for formal theorem-proving. *arXiv preprint arXiv:2310.04353*.
- [The Coq development team, 2004] The Coq development team (2004). *The Coq proof assistant reference manual*. LogiCal Project. Version 8.0.
- [Trybulec, 1991] Trybulec, A. (1991). The mizar project. *Bulletin of the Section of Logic*, 20(3/4):90–91.
- [Urban and Jakubův, 2020] Urban, J. and Jakubův, J. (2020). First neural conjecturing datasets and experiments. *arXiv preprint arXiv:2005.14664*.
- [Vaswani et al., 2017] Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., Kaiser, L., and Polosukhin, I. (2017). Attention is all you need. *arXiv preprint arXiv:1706.03762*.

- [Wagner, 2021] Wagner, A. Z. (2021). Constructions in combinatorics via neural networks. *arXiv preprint arXiv:2104.14516*.
- [Wang et al., 2024a] Wang, H., Xin, H., Liu, Z., Li, W., Huang, Y., Lu, J., Yang, Z., Tang, J., Yin, J., Li, Z., and Liang, X. (2024a). Proving theorems recursively. *arXiv preprint arXiv:2405.14414*.
- [Wang et al., 2023a] Wang, H., Xin, H., Zheng, C., Li, L., Liu, Z., Cao, Q., Huang, Y., Xiong, J., Shi, H., Xie, E., Yin, J., Li, Z., Liao, H., and Liang, X. (2023a). Lego-prover: Neural theorem proving with growing libraries. *arXiv preprint arXiv:2310.00656*.
- [Wang et al., 2023b] Wang, H., Yuan, Y., Liu, Z., Shen, J., Yin, Y., Xiong, J., Xie, E., Shi, H., Li, Y., Li, L., Yin, J., Li, Z., and Liang, X. (2023b). DT-solver: Automated theorem proving with dynamic-tree sampling guided by proof-level value function. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 12632–12646, Toronto, Canada. Association for Computational Linguistics.
- [Wang et al., 2024b] Wang, J., Jiang, H., Liu, Y., Ma, C., Zhang, X., Pan, Y., Liu, M., Gu, P., Xia, S., Li, W., et al. (2024b). A comprehensive review of multimodal large language models: Performance and challenges across different tasks. *arXiv preprint arXiv:2408.01319*.
- [Wang et al., 2020] Wang, Q., Brown, C., Kaliszky, C., and Urban, J. (2020). Exploration of neural machine translation in autoformalization of mathematics in mizar. In *Proceedings of the 9th ACM SIGPLAN International Conference on Certified Programs and Proofs, CPP 2020*, pages 85–98, New York, NY, USA. Association for Computing Machinery.
- [Wang et al., 2018] Wang, Q., Kaliszky, C., and Urban, J. (2018). First experiments with neural translation of informal to formal mathematics. *arXiv preprint arXiv:1805.06502*.
- [Wang et al., 2024c] Wang, R., Zelikman, E., Poesia, G., Pu, Y., Haber, N., and Goodman, N. D. (2024c). Hypothesis search: Inductive reasoning with language models. *arXiv preprint arXiv:2309.05660*.
- [Wang et al., 2024d] Wang, R., Zhang, J., Jia, Y., Pan, R., Diao, S., Pi, R., and Zhang, T. (2024d). Theorem-lama: Transforming general-purpose llms into lean4 experts. *arXiv preprint arXiv:2407.03203*.
- [Watkins and Dayan, 1992] Watkins, C. J. and Dayan, P. (1992). Q-learning. *Machine learning*, 8:279–292.
- [Webb et al., 2023] Webb, T., Holyoak, K. J., and Lu, H. (2023). Emergent analogical reasoning in large language models. *Nature Human Behaviour*, 7:1526–1541.
- [Wei et al., 2022] Wei, J., Wang, X., Schuurmans, D., Bosma, M., Xia, F., Chi, E., Le, Q. V., Zhou, D., et al. (2022). Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems*, 35:24824–24837.
- [Welleck et al., 2021] Welleck, S., Liu, J., Bras, R. L., Hajishirzi, H., Choi, Y., and Cho, K. (2021). Natural-proofs: Mathematical theorem proving in natural language. *arXiv preprint arXiv:2104.01112*.
- [Welleck et al., 2022] Welleck, S., Liu, J., Lu, X., Hajishirzi, H., and Choi, Y. (2022). Naturalprover: Grounded mathematical proof generation with language models. *arXiv preprint arXiv:2205.12910*.
- [Whalen, 2016] Whalen, D. (2016). Holophrasm: a neural automated theorem prover for higher-order logic. *arXiv preprint arXiv:1608.02644*.
- [Williamson, 2023] Williamson, G. (2023). Is deep learning a useful tool for the pure mathematician? *arXiv preprint arXiv:2304.12602*.
- [Wu et al., 2021] Wu, M., Norrish, M., Walder, C., and Dezfouli, A. (2021). Tacticzero: Learning to prove theorems from scratch with deep reinforcement learning. *arXiv preprint arXiv:2102.09756*.
- [Wu et al., 2022] Wu, Y., Jiang, A. Q., Li, W., Rabe, M. N., Staats, C., Jamnik, M., and Szegedy, C. (2022). Autoformalization with large language models. *arXiv preprint arXiv:2205.12615*.
- [Wu et al., 2024] Wu, Z., Qiu, L., Ross, A., Akyürek, E., Chen, B., Wang, B., Kim, N., Andreas, J., and Kim, Y. (2024). Reasoning or reciting? exploring the capabilities and limitations of language models through counterfactual tasks. *arXiv preprint arXiv:2307.02477*.
- [xenaproject, 2020] xenaproject (2020). Liquid tensor experiment. <https://xenaproject.wordpress.com/2020/12/05/liquid-tensor-experiment/>. [Online; accessed 20-Nov-2024].
- [Xu et al., 2023] Xu, F., Lin, Q., Han, J., Zhao, T., Liu, J., and Cambria, E. (2023). Are large language models really good logical reasoners? a comprehensive evaluation from deductive, inductive and abductive views. *arXiv preprint arXiv:2306.09841*.
- [Yan et al., 2024] Yan, J., Wang, C., Huang, J., and Zhang, W. (2024). Do large language models understand logic or just mimick context? *arXiv preprint arXiv:2402.12091*.
- [Yang and Deng, 2019] Yang, K. and Deng, J. (2019). Learning to prove theorems via interacting with proof assistants. *arXiv preprint arXiv:1905.09381*.
- [Yang et al., 2023] Yang, K., Swope, A. M., Gu, A., Chalamala, R., Song, P., Yu, S., Godil, S., Prenger, R., and Anandkumar, A. (2023). Leandojo: Theorem proving with retrieval-augmented language models. *arXiv preprint arXiv:2306.15626*.

- [Yang et al., 2024] Yang, Z., Liu, Z., Zhang, J., Lu, C., Tai, J., Zhong, T., Li, Y., Zhao, S., Yao, T., Liu, Q., Yang, J., Liu, Q., Li, Z., Wang, K., Ma, L., Zhu, D., Ren, Y., Ge, B., Zhang, W., Qiang, N., Zhang, T., and Liu, T. (2024). Analyzing nobel prize literature with large language models. *arXiv preprint arXiv:2410.18142*.
- [Yao et al., 2024] Yao, S., Yu, D., Zhao, J., Shafran, I., Griffiths, T., Cao, Y., and Narasimhan, K. (2024). Tree of thoughts: Deliberate problem solving with large language models. *Advances in Neural Information Processing Systems*, 36.
- [Yasunaga et al., 2024] Yasunaga, M., Chen, X., Li, Y., Pasupat, P., Leskovec, J., Liang, P., Chi, E. H., and Zhou, D. (2024). Large language models as analogical reasoners. *arXiv preprint arXiv:2310.01714*.
- [Ying et al., 2024] Ying, H., Wu, Z., Geng, Y., Wang, J., Lin, D., and Chen, K. (2024). Lean workbook: A large-scale lean problem set formalized from natural language math problems. *arXiv preprint arXiv:2406.03847*.
- [Zafrullah et al., 2023] Zafrullah, Z., Hakim, M. L., and Angga, M. (2023). Chatgpt open ai: Analysis of mathematics education students learning interest. *Journal of Technology Global*, 1(01):1–10.
- [Zaman, 2024] Zaman, B. U. (2024). Discover a proof of goldbach’s conjecture. *Authorea Preprints*.
- [Zhang et al., 2023] Zhang, J., Liu, C., Li, X., Zhen, H.-L., Yuan, M., Li, Y., and Yan, J. (2023). A survey for solving mixed integer programming via machine learning. *Neurocomputing*, 519:205–217.
- [Zhang et al., 2017] Zhang, W., Chien, J., Yong, J., and Kuang, R. (2017). Network-based machine learning and graph theory algorithms for precision oncology. *NPJ precision oncology*, 1(1):25.
- [Zheng et al., 2024] Zheng, C., Wang, H., Xie, E., Liu, Z., Sun, J., Xin, H., Shen, J., Li, Z., and Li, Y. (2024). Lyra: Orchestrating dual correction in automated theorem proving. *arXiv preprint arXiv:2309.15806*.
- [Zhong et al., 2024] Zhong, T., Liu, Z., Pan, Y., Zhang, Y., Zhou, Y., Liang, S., Wu, Z., Lyu, Y., Shu, P., Yu, X., et al. (2024). Evaluation of openai o1: Opportunities and challenges of agi. *arXiv preprint arXiv:2409.18486*.
- [Zhou et al., 2024a] Zhou, J. P., Staats, C., Li, W., Szegedy, C., Weinberger, K. Q., and Wu, Y. (2024a). Don’t trust: Verify – grounding llm quantitative reasoning with autoformalization. *arXiv preprint arXiv:2403.18120*.
- [Zhou et al., 2024b] Zhou, Y., Liu, H., Srivastava, T., Mei, H., and Tan, C. (2024b). Hypothesis generation with large language models. *arXiv preprint arXiv:2404.04326*.