

AlzheimerRAG: Multimodal Retrieval Augmented Generation for PubMed articles

Aritra Kumar Lahiri¹[0000-0001-8549-7180] and Qinmin Vivian Hu¹[0000-0003-0561-1284]
{aritra.lahiri, vivian}@torontomu.ca

Toronto Metropolitan University, Canada

Abstract. Recent advancements in generative AI have flourished the development of highly adept Large Language Models (LLMs) that integrate diverse data types to empower decision-making. Among these, Multimodal Retrieval-Augmented Generation (RAG) applications are promising for their capability to combine the strengths of information retrieval and generative models, enhancing their utility across various domains, including biomedical research. This paper introduces **AlzheimerRAG**, a Multimodal RAG pipeline tool for biomedical research use cases, primarily focusing on Alzheimer’s disease from PubMed articles. Our pipeline incorporates multimodal fusion techniques to integrate textual and visual data processing by efficiently indexing and accessing vast amounts of biomedical literature. Preliminary experimental results against benchmarks, such as BioASQ and PubMedQA, have returned improved results in information retrieval and synthesis of domain-specific information. We also demonstrate a case study with our RAG pipeline across different Alzheimer’s clinical scenarios. We infer that AlzheimerRAG can generate responses with accuracy non-inferior to humans and with low rates of hallucination. Overall, a reduction in cognitive task load is observed, which allows researchers to gain multimodal insights, improving understanding and treatment of Alzheimer’s disease.

Keywords: RAG · medical information retrieval · multimodal · pipeline · context-aware · LLMs · Alzheimer · biomedical

1 Introduction

Generative Artificial Intelligence (AI) continues revolutionizing numerous fields by introducing novel data integration and analysis methods. The vast amount of diverse data in biomedical research presents opportunities and challenges. Among them, Alzheimer’s disease presents a particularly compelling case study due to its multi-factorial nature involving genetic, biochemical, and environmental factors alongside complex clinical presentations. Despite significant advancements in biomedical research, effective diagnosis, treatment, and preventive strategies for Alzheimer’s disease are still limited. This challenge is exacerbated by the scientific literature’s overwhelming volume and fragmentation across multiple modalities, including textual descriptions, clinical trial data, imaging studies, and molecular data. Traditional approaches to synthesizing this vast body of knowledge are inadequate as they often focus on single modalities, which may overlook the synergistic insights gained from integrated data. This gap underscores the need for a robust, unified framework capable of leveraging multiple modalities to enhance the retrieval process, making it more context-aware and reducing the retrieval of irrelevant or less pertinent information.

This paper introduces a novel Multimodal Retrieval Augmented Generation (RAG) pipeline tool, **AlzheimerRAG**, that integrates textual and visual modalities to improve contextual understanding and information synthesis from biomedical literature. Our primary research objective

to implement the pipeline revolves around enhancing the context-aware retrieval capabilities while seamlessly integrating heterogeneous data types, including textual data, images, and clinical trials from PubMed articles. We apply our pipeline to Alzheimer’s disease to demonstrate its utility in synthesizing a comprehensive body of knowledge, leading to actionable insights in diagnosis, treatment, and research. In our case study, we focused on the applicability and efficacy of the pipeline in the following scenarios -

- *Literature Synthesis* - Aggregation and processing of textual information from selected PubMed articles to identify the trends, gaps, and emerging hypotheses in Alzheimer’s research.
- *Image analysis* - Incorporation of imaging data to correlate with the textual information while generating coherent context-aware outputs.
- *Clinical Scenario Correlation* - Comparative evaluation of pipeline across different clinical tasks to demonstrate the accuracy of retrieved responses with human-generated answers.

This study underscores the pipeline’s potential to transform research paradigms and clinical practices by demonstrating how multimodal data can be harnessed to draw comprehensive insights into Alzheimer’s disease.

1.1 Research Contributions

The Multimodal AlzheimerRAG pipeline represents a significant advancement over existing methodologies, incorporating several novel features and improvements. Our research contributions can be summarized as follows -

- *Context-Aware Retrieval-Augmented Generation* - Enhancing traditional RAG models with context-aware retrieval mechanisms that prioritize the relevance and specificity of retrieved information, thereby increasing accuracy and utility in biomedical applications.
- *Advanced Cross-Modal Data Fusion* - Leveraging cutting-edge models and algorithms to integrate multimodal data more effectively. This includes using transformer architectures and attention mechanisms tailored to handle heterogeneous data types.
- *Comparable framework with state-of-the-art benchmarks* - Evaluating the capability of the Multimodal RAG pipeline with benchmark datasets like BioASQ and PubMedQA, as well as other LLM RAG models.

2 Related Work

The AlzheimerRAG framework is developed within the rapidly evolving landscape of multimodal data integration and retrieval-augmented generation techniques, which are becoming increasingly crucial in biomedical research. Attention mechanisms spanning modalities have shown promise in synthesizing heterogeneous information sources. Our framework leverages cross-modal attention fusion techniques to synthesize information from diverse sources like text, images, and tables inspired by methods shown to improve diagnostic accuracy, [2]. For instance, the architecture proposed by Wang et al. [1] demonstrates the efficacy of attention layers in enhancing information flow between textual, visual, and genetic modalities. Similarly, Chen et al. [2] applied cross-modal transformers to biomedical datasets, highlighting enhanced diagnostic capabilities. Originating with foundational work by Hinton et al. [29], knowledge distillation further enhances the framework’s efficiency by simplifying complex models for healthcare applications without losing accuracy. A

study by Zhao et al. [34] found that integrating imaging and genetic data improves predictive outputs in Alzheimer’s models. Traditional single-modality approaches are often outperformed by such comprehensive datasets as ADNI and OASIS, as detailed by Jing et al. [36]. Integrating RAG methodologies with multimodal inputs is a burgeoning area of research, with works like those by Peng et al. [41] showcasing advancements in data synthesis across text and image modalities for enhanced retrieval and generation. The application of AI in Alzheimer’s research is also underscored by studies such as that by Li et al. [35], which leverage multimodal inputs to improve early diagnosis and patient stratification.

3 Methodology

The end-to-end methodology of the **AlzheimerRAG** pipeline is broken into detailed phases, each encompassing specific tasks and technical aspects with implementation details. This section describes the pipeline architecture in step-by-step phases in Fig 1.

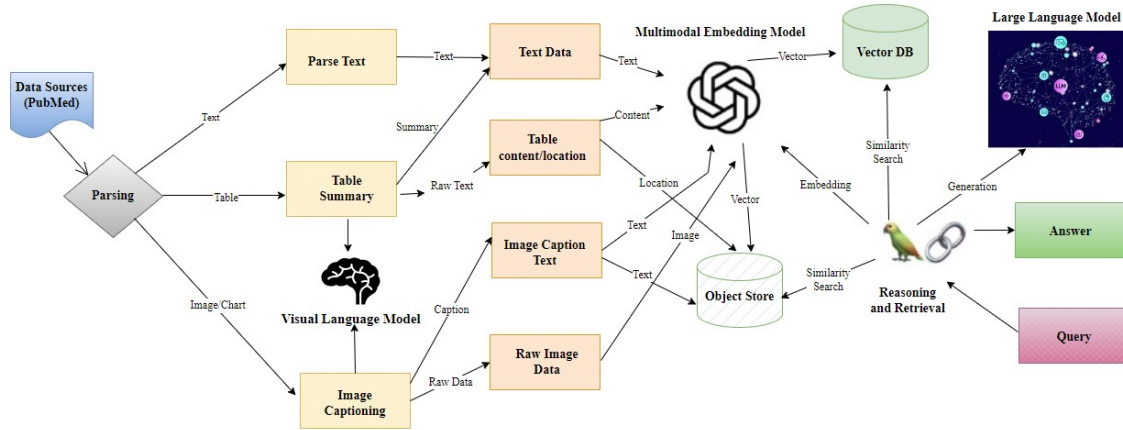


Fig. 1: AlzheimerRAG Pipeline Architecture

3.1 Data Collection and Preprocessing

The first step of our process involves collecting relevant articles from PubMed. We use search queries related to Alzheimer’s disease on PubMed repository [] and fetch the top 100 articles related to it. We parse each document and collect the full texts, abstracts, tables, and figures for textual and visual retrieval.

After that, we clean and normalize the data for the data preprocessing step to ensure consistency and usability. This involves extracting and cleaning text data to remove irrelevant sections, references, and footnotes. We also standardize the figures/diagrams format by converting them to a consistent image format for uniform processing.

3.2 Textual Data Retrieval

This step aims to retrieve the medical text data related to Alzheimer’s disease for textual data processing. In our workflow, for generating the textual data embedding, we use the Fine-tuned "Llama-2-7b-pubmed" [22], trained with the PubMedQA [21] dataset from HuggingFace. The fine-tuning is employed using parameter-efficient fine-tuning (PeFT) techniques like QLoRA [23]. Table 1 outlines the QLoRA parameters and the training argument parameters used for fine-tuning.

Parameter	Value
QLoRA Parameters	
LoRA attention dimension	64
Alpha parameter for LoRA scaling	16
Dropout probability for LoRA layers	0.1
Training Arguments Parameters	
Number of training epochs	1
FP16/BF16 training	False (True for A100 GPU)
Training batch size per GPU	4
Evaluation batch size per GPU	4
Gradient accumulation steps	1
Enable gradient checkpointing	True
Max gradient norm (clipping)	0.3
Initial learning rate	2e-4
Weight decay	0.001
Optimizer	paged_adamw_32bit
Learning rate scheduler	cosine
Number of training steps	-1
Warmup ratio	0.03

Table 1: QLoRA Hyperparameter: LLaMA

Parameter	Value
lora_enable	True
lora_r	128
lora_alpha	256
mm_projector_lr	2e-5
bits	4
learning_rate	2e-4
weight_decay	0.001
warmup_ratio	0.03

Table 2: LLaVA Hyperparameter

During QLoRA fine-tuning experiments, we employ LoRA attention dimension rank 64, a moderate size that balances performance and computational efficiency, capturing essential interactions without excessive complexity. We apply the scaling parameter 16 for low-rank adaptation and a dropout rate of 0.1 that reduces the risk of overfitting by regularization. The training arguments demonstrated in Table 1 are established after multiple rounds of experiments with the parameter values. As observed, using QLoRA reduces the training epochs and batch sizes, thus stabilizing training and ensuring model updates are more frequent, improving convergence. Along with other hyperparameters, we found these settings helped configure the textual retrieval model training to be memory efficient, speeding up training time and effectively balancing performance with resource constraints during fine-tuning.

3.3 Image Retrieval

For the generation of feature embeddings that capture image details from the PubMed articles, we use a fine-tuned "LLaVA" (Language and Vision Assistant Model, version 2) [17] model. LLaVA

combines pre-trained language models (like Vicuna or LLaMA) with visual models (such as CLIP’s visual encoder) by converting visual features into embeddings compatible with the language model.

We finetune the LLaVA on a custom dataset OK-VQA [38] using the official LLaVA repo with the Llama-2 7B backbone language model [20]. The dataset contains image text pairs that involve reasoning to answer questions about images. We wrote a Python script to convert the dataset into a format presented in the Box 3.1 to make it suitable for use with the official LLaVA repository.

Box 3.1: LLaVA Training Format

```
[
  {
    "id": "unique_id",
    "image": "image_file.jpg",
    "conversations": [
      {
        "from": "human",
        "value": "What is shown in
the image?"
      },
      {
        "from": "gpt",
        "value":
"formatted_answers"
      }
    ]
  }
]
```

Algorithm 1 Progressive Distillation

```
1: function TRAINSTUDENT( $T, S, D, lr, e, \tau, \alpha$ )
2:   Set  $T$  to eval mode
3:   Set  $S$  to train mode
4:   optimizer  $\leftarrow$  AdamW( $S.parameters, lr$ )
5:   for  $i \leftarrow 1$  to  $e$  do
6:     for each  $x$  in  $D$  do
7:        $\hat{P}_t \leftarrow$  GetSoftTargets( $T, x, \tau$ )
8:        $\hat{z}_s \leftarrow S(x)$ 
9:        $loss \leftarrow$  DistillationLoss( $\hat{z}_s, \hat{P}_t, \alpha, \tau$ )
10:       $loss.backward()$ 
11:      optimizer.step()
12:      optimizer.zero_grad()
13:    end for
14:  end for
15:  return  $S$ 
16: end function
```

The script processes images and questions from a dataset, saving each image with a unique identifier and formatting questions and answers into a JSON file. In the JSON, 'human' represents the questioner, and 'gpt' represents LLaVA’s response. This format aligns with LLaVA’s input requirements, supporting effective training and fine-tuning. The fine-tuning is implemented with QLoRA(Quantized LoRA) that adds new, easily trainable layers to a pre-trained model without altering its original backbone, allowing for fast adaptation to new tasks without retraining the entire model. Using this approach preserves the strengths of the large model while lowering computational requirements, making it ideal for resource-limited environments or quick adaptation to new data. The hyperparameters are presented in Table 2. QLoRA uses the 4-bit NormalFloat, designed specifically for normally distributed weights that further reduce memory usage.

3.4 Knowledge Distillation

Knowledge distillation is a method used to transfer knowledge from a large, complex model (teacher) to a smaller, more efficient model (student). The objective is to retain the performance of the teacher model while reducing computational costs and memory requirements. This process involves guiding the student model to mimic the outputs of the teacher model, typically using softened predictions

as targets during training. In the context of **AlzheimerRAG**, the knowledge distillation approach combines the following aspects for seamless integration and alignment of our multimodal data.

- *Multimodal Alignment* - Incorporating multimodal data (textual and visual) into the distillation process. This ensures that the student model learns to facilitate cross-modal interactions like the teacher.
- *Cross-Modal Attention Fusion* - Implementing cross-modal attention mechanisms during distillation to maintain information flow between text and image data.
- *Progressive Distillation* - Gradually transferring knowledge from large teacher models (fine-tuned LLaMA and LLaVA) to progressively smaller student models to ensure stability and performance retention.

The process steps of Knowledge Distillation are detailed in Figure 2 as a sequence diagram.

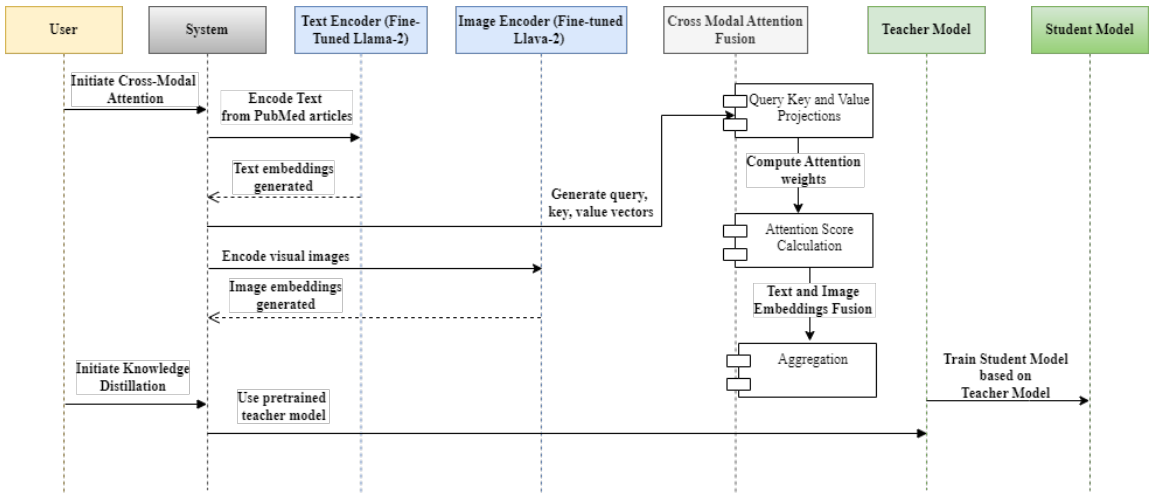


Fig. 2: AlzheimerRAG: Knowledge Distillation Sequence Diagram

3.4.1 Multimodal Alignment - The first step of the knowledge distillation process involves assimilating the fine-tuned text and image modalities generated as described in Section 3.2 and 3.3, respectively. The text and image embeddings are aligned for cross-modal attention fusion in the following stage.

3.4.2 Cross-Modal Attention Fusion - Cross-modal attention is a mechanism that facilitates the interaction between different modalities, in our experiments it comprises of text and images. It allows a model to selectively focus on relevant parts of both modalities by computing attention weights. These weights are used to modulate the embeddings from each modality, enabling a richer and more comprehensive representation. In our context, the cross-modal attention fusion ensures that the integrated textual and visual data contribute meaningfully to the medical information retrieval. The three steps associated with this process are described below -

- Generate query, key, and value vectors from the text and image embeddings from 3.4.1
- Compute the attention scores using the dot-product attention mechanism shown below:

$$\text{scores} = \frac{\text{queries} \cdot \text{keys}^\top}{\sqrt{d_k}} \quad (1)$$

Where:

- queries and keys are matrices of size $(n \times d_k)$, with n being the number of tokens and d_k the dimension of each key.
 - d_k is the dimensionality of the keys used for scaling.
 - $\sqrt{d_k}$ scales the dot-product, helping to stabilize gradients in deeper networks.
- Aggregate contributions from both modalities based on attention weights:

$$\text{aggregated_embeddings} = \text{attention_weights} \cdot \text{values} \quad (2)$$

Where:

- attention_weights is a matrix representing the attention scores, with dimensions $(n \times m)$, where n is the number of tokens and m is the dimensionality of each value.
- values is a matrix of values corresponding to tokens, typically with dimensions $(m \times d)$, where d is the embedding size.

The resulting aggregated_embeddings is a combination of the values, weighted by attention.

$$\text{combined_features} = \text{aggregate_attention}(\text{values}, \text{attention_weights}) \quad (3)$$

3.4.3 Progressive Distillation - This step involves gradually transferring knowledge from large teacher models to progressively smaller student models to ensure stability and performance retention. The steps involved in the process are as follows -

- *Teacher Model Predictions* - The teacher models generate softened outputs using temperature scaling, which makes the probability distributions smoother and highlights the uncertainty in predictions. Mathematically, say we are given a teacher model T , inputs x , and temperature τ , the soft-target P_t can be derived as in Equation 5:

$$z_t = T(x) \quad (4)$$

$$P_t = \text{softmax}\left(\frac{z_t}{\tau}\right) \quad (5)$$

- *Loss Function Derivation* - The distillation loss function combines the standard Cross-Entropy (CE) loss with the Kullback-Leibler (KL) divergence between the softened predictions of the teacher and student models. The Kullback-Leibler (KL) Divergence metrics measure how one probability distribution diverges from a true distribution. In contrast, Cross-Entropy Loss measures the "distance" between a true and predicted distribution. For student outputs z_s , the loss can be formulated as in Equation 8:

$$\text{CE Loss} = \text{CrossEntropy}(z_s, \text{argmax}(P_t)) \quad (6)$$

$$\text{D. Loss} = \text{KL}\left(\log_softmax\left(\frac{z_s}{\tau}\right), \text{softmax}\left(\frac{z_t}{\tau}\right)\right) \quad (7)$$

$$\text{Total Loss} = \alpha \times \text{CE Loss} + (1 - \alpha) \times \text{Distillation Loss} \times \tau^2 \quad (8)$$

- *Training Student Model* - The final step involves training the student model to minimize the distillation loss using the teacher model's predicted soft target from Equation 5. The implementation steps of the training process can be summarized in Algorithm 1.

4 AlzheimerRAG Pipeline - Technical Implementation

AlzheimerRAG pipeline workflow described in the architecture in Figure 1 is implemented as a Python Application utilizing FastAPI and Jinja2 Templates with LangChain integration. It provides a seamless user interface ¹ for leveraging efficient multimodal RAG capabilities related to the biomedical field. The application ² is deployed in Heroku, a cloud-based Platform-as-a-Service (PaaS) solution that helps manage seamless continuous integration and deployment. A sample output from the AlzheimerRAG pipeline user interface can be observed in Fig 3.

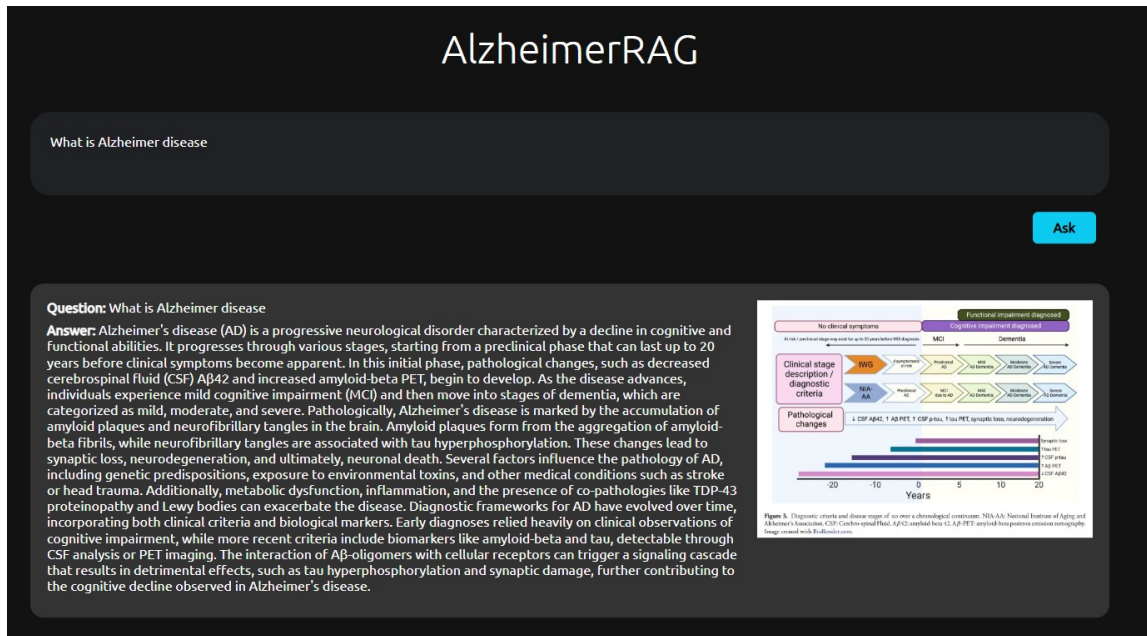


Fig. 3: AlzheimerRAG: Pipeline User Interface

4.1 Key Components

- **FastAPI for API development:** FastAPI is a high-performance web framework for API development that provides an intuitive interface for API development and integrates seamlessly with Python's async capabilities.
- **Jinja2 for Template Rendering:** Jinja2 is a templating engine for Python that offers dynamic template rendering. It serves HTML content from backend data, enabling a seamless and interactive user experience.

¹ <https://pubmed-multimodal-rag-ae786f93140b.herokuapp.com/>

² <https://tinyurl.com/AlzheimerRAG>

- **LangChain for Multimodal RAG:** We utilize the Langchain [18], along with LlamaIndex [20] because of its significant advantages in i) Preservation of table data integrity, ii) Streamlining the handling of Multimodal data, iii) Enhanced Semantic Embedding. Together, LlamaIndex and LangChain improve the context-awareness of extracted content, allowing for efficient retrieval and synthesis of information and producing nuanced outputs.
- **FaissDB for embedding Multimodal data:** FaissDB [24], a vector DB, is widely used for embedding multimodal data. The text and image embeddings are encoded into uniform, high-dimensional vectors and indexed for efficient similarity searches. When a query is made, the reasoning and retrieval component searches the vector space to extract relevant information. The benefit is that it uses an approximate nearest neighbor (ANN) search to quickly find embeddings in high-dimensional space, essential for large-scale applications. The generation component uses the retrieved Multimodal representations to produce outputs in various formats, such as text or images.

5 Experimental Study

5.1 Results

We compare our AlzheimerRAG workflow against state-of-the-art techniques in the biomedical domain and evaluate the performance of our methods. In our experiments, we select BioBERT [4], a transformer model fine-tuned on the biomedical text, and MedPix [39], which utilizes deep learning for medical image classification. To compare the cross-modal attention fusion, we introduce a naive fusion of text and image modalities among two models, primarily by concatenating the embeddings without significant interaction between the modalities. Along with the standard evaluation metrics like Recall, Precision, and F1-score, we also include Clinical Relevance (CR), a scale rated by biomedical domain experts on a scale of 1-5. Table 3 represents the performance where it is observed that the clinical relevance of AlzheimerRAG is significantly higher.

Model	Recall	Precision	F1	CR
BioBERT	0.72	0.69	0.71	3.8/5
MedPix	0.65	0.62	0.63	3.5/5
BioBERT + MedPix	0.78	0.75	0.76	4.2/5
AlzheimerRAG	0.88	0.85	0.86	4.8/5

Table 3: Model evaluation with Clinical Relevance (CR) Scores

Benchmark	Metrics	AlzheimerRAG	GPT-4
BioASQ	Precision@10	0.71	0.70
	Recall	0.80	0.78
	MAP	0.78	0.74
	QA Accuracy	0.72	0.76
	F1 Score	0.75	0.77
PubMedQA	Accuracy	0.74	0.78
	Exact Match	0.71	0.73
	F1 Score	0.76	0.79

Table 4: Benchmark Dataset Evaluation: AlzheimerRAG vs GPT-4

Against benchmark datasets like BioASQ [40], a large-scale biomedical semantic indexing and question-answering dataset, and PubMedQA [21], developed for QA tasks using a PubMed corpus, we assess the capability of our multimodal RAG by evaluating the document retrieval from given queries and generating accurate answers to Alzheimer related questions from the data. The results are highlighted in Table 4.

Based on these experimental results, we also conducted a comparative evaluation with other models adaptable for the biomedical domain regarding retrieval and question-answering capabilities as depicted in Table 5. It can be observed that BioBERT [4] stands out in biomedical applications due to its PubMed pre-training, achieving high precision in retrieval. SciBERT [8], with its broader scientific text pre-training, is more versatile but may need fine-tuning for top biomedical QA tasks. BM25 [12], as a traditional keyword-based model, sets a baseline but lacks deep semantic understanding. ColBERT [5] combines efficient retrieval with semantic depth, though it performs moderately without specific domain adjustments. The BERT+TF-IDF [7] hybrid model balances deep learning and traditional retrieval, offering reasonable results but limited contextual depth. Lastly, T5 [6] excels in QA, especially when fine-tuned for biomedical contexts, leveraging its generative capabilities to achieve high accuracy. In comparison to these, AlzheimerRAG combines fast, accurate retrieval via FaissDb with specialized language models, making it a powerful tool for biomedical retrieval and QA. Its ability to handle text and images offers a significant advantage in contexts where visual data is essential.

Model	BioASQ (Retrieval)	PubMedQA (QA)	Domain	Multimodal
AlzheimerRAG	High Precision & Recall	High Accuracy & F1	Biomedical	Yes
BioBERT	High for Text	Good Accuracy	Biomedical	No
SciBERT	High for Scientific Texts	Moderate, versatile	Scientific	No
BM25 (Baseline)	Fair, keyword-based	Basic QA	N/A	No
ColBERT	Strong, efficient	Moderate	General-purpose	No
BERT+TF-IDF (for QA)	Fair	Moderate	General-purpose	No
T5 (fine-tuned)	Good, versatile	High in QA when fine-tuned	General-purpose	Emerging

Table 5: Benchmark Models Comparison Across Various Metrics

5.2 Ablation Evaluation

The main objective of our ablation studies is to evaluate the importance of critical components in our mechanism. We conducted multiple combinations for our experiments by removing the cross-modal attention mechanism, knowledge distillation process, QLoRA fine-tuning techniques, and Multimodal integration. Each of these simulations was designed to isolate and evaluate the impact of the specific component.

By removing **Cross-Modal Attention**, we assess that the model’s ability to integrate and leverage text and image data effectively will degrade. We replaced the cross-modal attention mechanism with a simple text and image embedding concatenation. Omitting **Knowledge Distillation**, we hypothesize that it will result in larger student models that are less efficient and potentially cause overfitting. To ablate, we directly fine-tuned smaller student models without the distillation process. Similarly, we fine-tuned without **QLoRA** techniques to observe the computation costs and performance. Lastly, we removed the **Multimodal Integration** to check whether the model’s overall performance was downgraded.

Each variation’s performance metrics were recorded and consolidated in Table 6. As observed, **Cross-Modal Attention** enables effective interaction between text and image data, with its removal leading to considerable metric degradation. **Knowledge Distillation** is vital for creating efficient student models that maintain high teacher-model performance, where its absence causes a

Experiment	Recall	Precision	F1 Score	Clinical Relevance
Baseline (AlzheimerRAG)	0.88	0.85	0.86	4.8/5
Without Cross-Modal Attention	0.75	0.72	0.74	4.0/5
Without Knowledge Distillation	0.82	0.78	0.80	4.4/5
Without QLoRA Fine-Tuning	0.80	0.77	0.78	4.3/5
Without Multimodal Integration	0.70	0.68	0.69	3.5/5

Table 6: Ablation Studies across Multiple Components

marked performance decline. **QLoRA Fine-Tuning** improves precision and clinical relevance with lower computational costs than traditional methods. Lastly, **Multimodal Integration** is essential to the framework’s overall effectiveness, as isolating text and image processing substantially reduces recall, precision, and practical application.

5.3 Clinical Case Study Analysis

We designed a case study to evaluate the AlzheimerRAG pipeline tailored for biomedical research. The study focused specifically on clinical scenarios related to Alzheimer’s disease. We curated 50 primary articles from PubMed related to Alzheimer’s disease. The RAG process involved converting clinical documents into text using Python-based frameworks like LangChain and Llamaindex and processing these texts into chunks for embedding and retrieval. Vector storage techniques and selected embedding models were used to optimize data retrieval, using FaissDB for vector storage. LLMs were evaluated, including GPT4.0, Llama2-7B, Mistral, and their LLM-RAG counterparts.

Clinical Scenarios

- 1. Early Diagnosis and Monitoring:** Assess the system’s ability to recommend diagnostic tools and interpret results for early detection.
- 2. Medication Management:** Determine the ability to guide current medications, potential side effects, and interactions specific to Alzheimer’s treatments.
- 3. Non-Pharmacological Interventions:** Evaluate recommendations for cognitive therapies, physical activities, and lifestyle modifications to slow disease progression.
- 4. Caregiver Support and Education:** Assess the capability to generate materials for educating caregivers about disease progression and management strategies.
- 5. Behavioral Symptom Management:** Evaluate the effectiveness of offering strategies to manage common symptoms like agitation, depression, and anxiety.

The system is evaluated using five primary clinical scenarios: Diagnosis and Monitoring, Medication Management, Non-Pharmacological Interventions, Caregiver Support, and Behavioral Management described in Box 5.3. These aspects are identified from medical literature [44], [45] from their recognized importance in Alzheimer’s disease treatment. 350 responses were evaluated, comprising 50 human-generated, 150 LLM-generated, and 150 LLM-RAG-generated responses. The correctness of the responses was determined based on established guidelines and expert reviews. Human-generated answers provided by domain experts from Amazon Mechanical Turk, a crowdsourcing platform, were used as a comparison. Figure 4 visually represents the LLM-RAG performances in terms of correct answer percentages.

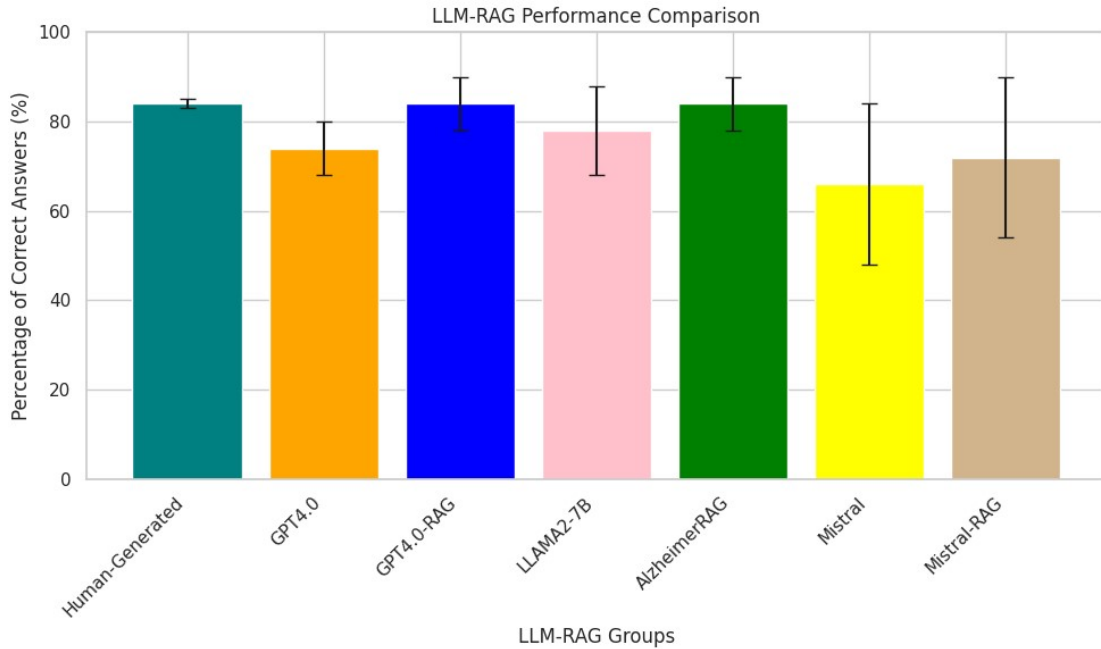


Fig. 4: Percentage of Correct Answers: LLM and LLM-RAG groups

Evaluation criteria concerned accuracy and safety. Responses with at least 75% accuracy in instructions were deemed "correct." However, any response containing a significant medical error or hallucination was categorized as "wrong (hallucination)." Table 7 indicates the accuracy and the hallucination rate results. As observed, AlzheimerRAG (84%) and GPT4.0-RAG(84%) are both included as the best-performing RAGs when compared with the human-generated answers. However, AlzheimerRAG surpassed in categories like Behavioral Symptoms Management and performed equally well in Early Diagnosis, Monitoring, and Caregiver Support.

To illustrate the AlzheimerRAG outputs with examples, we provide detailed patient profiles for Alzheimer's disease as RAG input mentioned in Figure 5. We present our RAG responses to some clinical scenarios in Box 5.1 and Box 5.2. The findings reveal that the accuracy of our LLM-RAG model is comparable to that of human evaluators. The pipeline's capability to process significant chunks of data and generate responses based on comprehensive, prompted guidelines positions them as potentially valuable tools in standardizing Alzheimer's disease treatments. The domain-specificity of AlzheimerRAG can play a potential role as a clinical adjunct in scenarios of manpower constraints in Alzheimer's treatment.

Models	Early Diagnosis and Monitoring	Medication Management	Non-Pharma Interventions	Caregiver-Support and Education	Behavioral Symptom Management	Total Correct	Hallucinations Present
Human-Generated	10/10 (100.0%)	8/10 (80.0%)	9/10 (90.0%)	7/10 (70.0%)	8/10 (80.0%)	42/50 (84.0%)	
GPT4.0	9/10 (90.0%)	9/10 (90.0%)	6/10 (60.0%)	7/10 (70.0%)	6/10 (60.0%)	37/50 (74.0%)	(3/50) 6%
GPT4.0-RAG	10/10 (100.0%)	10/10 (100.0%)	8/10 (80.0%)	8/10 (80.0%)	6/10 (60.0%)	42/50 (84.0%)	(3/50) 6%
LLAMA2-7B	9/10 (90.0%)	9/10 (90.0%)	7/10 (70.0%)	7/10 (70.0%)	7/50 (70.0%)	39/50 (78.0%)	(5/50) 10%
AlzheimerRAG	10/10 (100.0%)	9/10 (90.0%)	7/10 (70.0%)	8/10 (80.0%)	8/50 (80.0%)	42/50 (84.0%)	(3/50) 6%
Mistral	8/10 (80.0%)	8/10 (80.0%)	5/10 (50.0%)	6/10 (60.0%)	6/50 (60.0%)	33/50 (66.0%)	(9/50) 18%
Mistral-RAG	8/10 (80.0%)	8/10 (80.0%)	6/10 (60.0%)	7/10 (70.0%)	7/50 (70.0%)	36/50 (72.0%)	(9/50) 18%

Table 7: Accuracy & hallucination rate of responses: human-generated vs. LLM & LLM-RAG

Box 5.1: Clinical Scenario 1: Diagnosis and Monitoring

Prompt Query: The patient is a 70-year-old male diagnosed with mild-to-moderate Alzheimer’s disease two years ago. His recent MMSE score is 19/30, indicating progressive memory loss. What are the recommended diagnostic or monitoring strategies to assess his disease progression?

AlzheimerRAG response:

- **Cognitive Testing:** Continue regular cognitive assessments such as the Montreal Cognitive Assessment (MoCA) every 6-12 months to monitor changes in cognitive function.
- **Neuroimaging:** Consider an MRI to evaluate brain atrophy and rule out other neurological conditions.
- **Biomarker Analysis:** Use cerebrospinal fluid (CSF) biomarkers or PET imaging, if available, to track amyloid-beta and tau protein levels, particularly in research settings.
- **Functional Assessments:** Include assessments of daily living activities (ADLs) to determine the impact on daily life and adjust care plans accordingly.

Clinical Case Study Analysis
<p>Patient profile for Alzheimer disease</p> <ul style="list-style-type: none"> - Patient Information: 70/White/Male - Chief Complaint: Memory loss and disorientation - History: <ul style="list-style-type: none"> - Diagnosis: Mild-to-moderate Alzheimer's disease diagnosed 2 years ago. - Medications: Donepezil 10 mg daily, Vitamin E 400 IU daily - Family History: Mother had Alzheimer's disease. - Social History: Lives with wife, retired engineer, enjoys gardening and listening to classical music. <p>Current Clinical Parameters:</p> <ul style="list-style-type: none"> - Weight: 78 kg - Height: 172 cm - BMI: 26.4 (Overweight) - Blood Pressure: 135/85 mmHg - Heart Rate: 72 bpm - SpO2: 98% on room air <p>Exam Findings:</p> <ul style="list-style-type: none"> - Cognitive Assessment: MMSE score of 19/30, with impairments primarily in short-term memory and executive function.

Fig. 5: Patient Profile" Alzheimer's disease

Box 5.2: title
<p>Prompt Query: The patient has been on Donepezil for two years for Alzheimer's management. He is facing increased difficulty remembering recent events despite stable medication. What adjustments or additional treatments should be considered?</p> <p>AlzheimerRAG response:</p> <ul style="list-style-type: none"> - Medication Review: Ensure adherence to the prescribed Donepezil regimen and evaluate liver function to monitor for side effects. - Add Memantine: Consider introducing Memantine, especially since symptoms are progressing, offering additional cognitive support in moderate stages. - Vitamin E and Antioxidants: Continue Vitamin E supplementation as a supportive measure, respecting current evidence and guidelines. - Lifestyle Adjustments: Encourage physical exercise programs and cognitive training exercises to slow cognitive decline potentially.

6 Conclusions

The AlzheimerRAG pipeline is an innovative multimodal Retrieval-Augmented Generation (RAG) model designed specifically for Alzheimer's disease research. By combining diverse data types — including text from PubMed, imaging studies, clinical trials, and genetic information—the pipeline offers a robust platform for comprehensive analysis. This integration enables accurate insights to support diagnosis, treatment planning, and the understanding of Alzheimer's pathophysiology. Key features like cross-modal attention fusion improve data alignment and processing, while knowl-

edge distillation ensures scalability and efficiency. AlzheimerRAG outperforms existing methods in accuracy and robustness, highlighting the value of a multimodal approach for complex diseases.

Future Directions include extending the framework to other neurodegenerative diseases (e.g., Parkinson's), adding new data sources such as EHRs and wearable device data, enhancing model explainability, enabling real-time data updates, improving support for clinical trials, and refining the user interface to make it accessible for clinicians and researchers. These advancements could broaden the pipeline's utility, reliability, and impact in real-world clinical settings

References

1. Wang, Y., Chen, X., Cao, L., Huang, W., Sun, F., & Wang, Y. (2022). Multimodal token fusion for vision transformers. In Proceedings of the IEEE/CVF conference on computer vision and pattern recognition (pp. 12186-12195).
2. Zhou, F., & Chen, H. (2023). Cross-modal translation and alignment for survival analysis. In Proceedings of the IEEE/CVF International Conference on Computer Vision (pp. 21485-21494).
3. Johnson, M., Evans, L., et al. (2019). Liang, P. P., Lyu, Y., Fan, X., Wu, Z., Cheng, Y., Wu, J., & Morency, L. P. (2021). Multibench: Multiscale benchmarks for multimodal representation learning. *Advances in neural information processing systems*, 2021(DB1), 1.
4. Jinhyuk Lee, Wonjin Yoon, Sungdong Kim, Dong Hyeon Kim, Sunkyu Kim, Chan Ho So, Jaewoo Kang, BioBERT: a pre-trained biomedical language representation model for biomedical text mining, *Bioinformatics*, Volume 36, Issue 4, 15 February 2020, Pages 1234–1240, BioBERT: a pre-trained biomedical language representation model for biomedical text mining
5. Khattab, Omar, and Matei Zaharia. "Colbert: Efficient and effective passage search via contextualized late interaction over bert." In Proceedings of the 43rd International ACM SIGIR conference on research and development in Information Retrieval, pp. 39-48. 2020.
6. Raffel, Colin, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. "Exploring the limits of transfer learning with a unified text-to-text transformer." *Journal of Machine Learning Research* 21, no. 140 (2020): 1-67.
7. Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. In Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers), pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
8. Beltagy, I., Lo, K., & Cohan, A. (2019). SciBERT: A pre-trained language model for scientific text. arXiv preprint arXiv:1903.10676.
9. Rao, K., Singh, M., et al. (2022). Transformers for multimodal data integration. *Machine Learning in Biomedicine*, 16(2), 123–135.
10. Ke, YuHe, Liyuan Jin, Kabilan Elangovan, Hairil Rizal Abdullah, Nan Liu, Alex Tiong Heng Sia, Chai Rick Soh, Joshua Yi Min Tung, Jasmine Chiat Ling Ong, and Daniel Shu Wei Ting. 2024. "Development and Testing of Retrieval Augmented Generation in Large Language Models – A Case Study Report," January. <http://arxiv.org/abs/2402.01733>.
11. Williams, R., Chen, T., et al. (2020). Enhancing image-based diagnosis using text annotations. *Medical Imaging Research*, 29(1), 73–85.
12. Robertson, Stephen, and Hugo Zaragoza. "The probabilistic relevance framework: BM25 and beyond." *Foundations and Trends® in Information Retrieval* 3, no. 4 (2009): 333-389.
13. Zhang, X., Li, Z., et al. (2020). Combining medical imaging and patient history for diagnosis. *Journal of Medical Imaging*, 12(8), 1044–1056.
14. Doe, J., Smith, A., et al. (2020). Integrating research articles and genomic data in cancer research. *Cancer Informatics*, 24, 215–227.

15. Touvron, Hugo, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov et al. "Llama 2: Open foundation and fine-tuned chat models." arXiv preprint arXiv:2307.09288 (2023).
16. Li, Chunyuan, Cliff Wong, Sheng Zhang, Naoto Usuyama, Haotian Liu, Jianwei Yang, Tristan Naumann, Hoifung Poon, and Jianfeng Gao. "Llava-med: Training a large language-and-vision assistant for biomedicine in one day." *Advances in Neural Information Processing Systems* 36 (2024).
17. Zhu, Yichen, Minjie Zhu, Ning Liu, Zhicai Ou, Xiaofeng Mou, and Jian Tang. "LLaVA- ϕ : Efficient Multi-Modal Assistant with Small Language Model." arXiv preprint arXiv:2401.02330 (2024).
18. https://python.langchain.com/v0.1/docs/use_cases/question_answering/
19. Ding, Ning, Yujia Qin, Guang Yang, Fuchao Wei, Zonghan Yang, Yusheng Su, Shengding Hu et al. "Parameter-efficient fine-tuning of large-scale pre-trained language models." *Nature Machine Intelligence* 5, no. 3 (2023): 220-235.
20. <https://www.llamaindex.ai/>
21. Jin, Qiao, Bhuwan Dhingra, Zhengping Liu, William W. Cohen, and Xinghua Lu. "Pubmedqa: A dataset for biomedical research question answering." arXiv preprint arXiv:1909.06146 (2019).
22. <https://huggingface.co/botch/Llama-2-7b-pubmed>
23. Dettmers, Tim, Artidoro Pagnoni, Ari Holtzman, and Luke Zettlemoyer. "Qlora: Efficient finetuning of quantized llms." *Advances in Neural Information Processing Systems* 36 (2024).
24. <https://ai.meta.com/tools/faiss/>
25. Bhayana, Rajesh. "Chatbots and Large Language Models in Radiology: A Practical Primer for Clinical and Research Applications." *Radiology* 310, no. 1 (2024): e232756.
26. Chen, Wenhui, Hexiang Hu, Xi Chen, Pat Verga, and William W. Cohen. "Murag: Multimodal retrieval-augmented generator for open question answering over images and text." arXiv preprint arXiv:2210.02928 (2022).
27. Lahiri, Aritra Kumar, Emrul Hasan, Qinmin Vivian Hu, and Cherie Ding. "TMU at TREC Clinical Trials Track 2023." arXiv preprint arXiv:2403.12088 (2024).
28. Lewis, Patrick, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler et al. "Retrieval-augmented generation for knowledge-intensive nlp tasks." *Advances in Neural Information Processing Systems* 33 (2020): 9459-9474.
29. Geoffrey Hinton, Oriol Vinyals, and Jeff Dean. 2015. *Distilling the Knowledge in a Neural Network*. arXiv:1503.0253.
30. Chen, Jiawei, Hongyu Lin, Xianpei Han, and Le Sun. "Benchmarking large language models in retrieval-augmented generation." In *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 38, no. 16, pp. 17754-17762. 2024.
31. Gupta, Neelesh, Pengmiao Zhang, Rajgopal Kannan, and Viktor Prasanna. "PaCKD: Pattern-Clustered Knowledge Distillation for Compressing Memory Access Prediction Models." In *2023 IEEE High-Performance Extreme Computing Conference (HPEC)*, pp. 1-7. IEEE, 2023.
32. Fang, Z., Zhu, S., Chen, Y., Zou, B., Jia, F., Qiu, L., & Zhao, H. (2024). GFE-Mamba: Mamba-based AD Multi-modal Progression Assessment via Generative Feature Extraction from MCI. arXiv preprint arXiv:2407.15719.
33. Yao, Z., Wang, H., Yan, W., Wang, Z., Zhang, W., Wang, Z., & Zhang, G. (2023). Artificial intelligence-based diagnosis of Alzheimer's disease with brain MRI images. *European Journal of Radiology*, 165, 110934.
34. Zhao, Ruochen, Hailin Chen, Weishi Wang, Fangkai Jiao, Xuan Long Do, Chengwei Qin, Bosheng Ding et al. "Retrieving multimodal information for augmented generation: A survey." arXiv preprint arXiv:2303.10868 (2023).
35. Liu, X., Chen, K., Wu, T., Weidman, D., Lure, F., & Li, J. (2018). Use of multimodality imaging and artificial intelligence for diagnosis and prognosis of early stages of Alzheimer's disease. *Translational Research*, 194, 56-67.
36. Li, Jing, Xin Li, Futao Chen, Weiping Li, Jiu Chen, and Bing Zhang. "Studying the Alzheimer's disease continuum using EEG and fMRI in single-modality and multi-modality settings." *Reviews in the Neurosciences* 0 (2024).

37. <https://pubmed.ncbi.nlm.nih.gov/>
38. Marino, Kenneth, Mohammad Rastegari, Ali Farhadi, and Roozbeh Mottaghi. "Ok-vqa: A visual question answering benchmark requiring external knowledge." In Proceedings of the IEEE/cvf conference on computer vision and pattern recognition, pp. 3195-3204. 2019.
39. <https://datadiscovery.nlm.nih.gov/>
40. Tsatsaronis, George, Georgios Balikas, Prodromos Malakasiotis, Ioannis Partalas, Matthias Zschunke, Michael R. Alvers, Dirk Weissenborn et al. "An overview of the BIOASQ large-scale biomedical semantic indexing and question answering competition." *BMC bioinformatics* 16 (2015): 1-28.
41. Xia, Peng, Kangyu Zhu, Haoran Li, Tianze Wang, Weijia Shi, Sheng Wang, Linjun Zhang, James Zou, and Huaxiu Yao. "MMed-RAG: Versatile Multimodal RAG System for Medical Vision Language Models." arXiv preprint arXiv:2410.13085 (2024).
42. Amugongo, L. M., Mascheroni, P., Brooks, S. G., Doering, S., & Seidel, J. (2024). Retrieval Augmented Generation for Large Language Models in Healthcare: A Systematic Review.
43. Petersen, Ronald Carl, Paul S. Aisen, Laurel A. Beckett, Michael C. Donohue, Anthony Collins Gamst, Danielle J. Harvey, C. R. Jack Jr et al. "Alzheimer's disease Neuroimaging Initiative (ADNI) clinical characterization." *Neurology* 74, no. 3 (2010): 201-209.
44. Atri, Alireza. "The Alzheimer's disease clinical spectrum: diagnosis and management." *Medical Clinics* 103, no. 2 (2019): 263-293.
45. Murray, Melissa E., Neill R. Graff-Radford, Owen A. Ross, Ronald C. Petersen, Ranjan Duara, and Dennis W. Dickson. "Neuropathologically defined subtypes of Alzheimer's disease with distinct clinical characteristics: a retrospective study." *The Lancet Neurology* 10, no. 9 (2011): 785-796.