

Towards a Unified Paradigm: Integrating Recommendation Systems as a New Language in Large Models

Kai Zheng Qingfeng Sun Can Xu* Peng Yu Qingwei Guo*

Microsoft

{zhengkai,qins,adrianyu,qingwei.guo}@microsoft.com nlpXuCan@gmail.com

Abstract

This paper explores the use of Large Language Models (LLMs) for sequential recommendation, which predicts users' future interactions based on their past behavior. We introduce a new concept, "Integrating Recommendation Systems as a New Language in Large Models" (RSLLM), which combines the strengths of traditional recommenders and LLMs. RSLLM uses a unique prompting method that combines ID-based item embeddings from conventional recommendation models with textual item features. It treats users' sequential behaviors as a distinct language and aligns the ID embeddings with the LLM's input space using a projector. We also propose a two-stage LLM fine-tuning framework that refines a pretrained LLM using a combination of two contrastive losses and a language modeling loss. The LLM is first fine-tuned using text-only prompts, followed by target domain fine-tuning with unified prompts. This trains the model to incorporate behavioral knowledge from the traditional sequential recommender into the LLM. Our empirical results validate the effectiveness of our proposed framework.

1 Introduction

The field of sequential recommendation (Fang et al., 2019; Wang et al., 2020) has long been focused on predicting users' future interactions with items based on their historical engagement sequences (Hidasi et al., 2015; Kang and McAuley, 2018; Tang and Wang, 2018). This task is crucial for enhancing user experience and satisfaction in various online platforms, such as e-commerce, streaming services, and social media. The ability to accurately predict what a user will interact with next can significantly improve the relevance of recommendations, thereby increasing user engagement and retention.

Recently, the advent of Large Language Models (LLMs) (Zheng et al., 2023b; Touvron et al., 2023) has opened new avenues for sequential recommendation by conceptualizing it as a form of language modeling. This innovative approach leverages the powerful capabilities of LLMs to understand and generate human-like text, thereby offering a novel perspective on recommendation systems (Bao et al., 2023; Cui et al., 2022; Dai et al., 2023; Geng et al., 2023). LLMs, such as GPT-3 (Brown et al., 2020) and BERT, have demonstrated remarkable proficiency in capturing complex patterns and relationships within textual data, making them well-suited for the task of sequential recommendation.

Traditional methods in sequential recommendation have typically represented items within LLMs' input prompts as either ID indices (Geng et al., 2023; Hua et al., 2023) or textual metadata (Bao et al., 2023; Cui et al., 2022; Hou et al., 2023; Song et al., 2023; Li et al., 2023b). While these approaches have shown promise, they often fall short in encapsulating comprehensive world knowledge or demonstrating a deep understanding of user behavior. ID-based representations can be limited in their ability to convey rich semantic information about items, while textual metadata may not fully capture the nuances of user interactions and preferences.

To address these limitations, we propose a paradigm-shifting framework that integrates recommendation systems as a new language within large models, termed "Integrating Recommendation Systems as a New Language in Large Models" (RSLLM). The novelty of RSLLM lies in its unified prompting method, which combines ID-based item embeddings, learned by conventional recommendation models, with textual item features. By treating the "sequential behaviors of users" as a distinct language beyond text, RSLLM introduces a projector to align the traditional recommender's ID embeddings with the LLM's input space. This in-

* Corresponding author.

novative approach allows the model to seamlessly incorporate behavioral knowledge from traditional sequential recommenders into the LLM, thereby enhancing its ability to predict user interactions more accurately.

Furthermore, we propose a two-stage fine-tuning framework for LLMs that introduces the alignment of user and item representations through a two-tower contrastive training approach. This framework refines a pretrained LLM using a combination of two contrastive losses and a language modeling loss. The initial stage of fine-tuning employs text-only prompts, aligning with the LLM’s inherent language modeling capabilities. Subsequently, the framework undergoes target domain fine-tuning with unified prompts, effectively integrating behavioral knowledge from traditional recommenders. This two-stage process ensures the LLM’s ability to leverage both textual and behavioral information, resulting in a robust and accurate recommendation system. At the ID level, we align the traditional recommender’s ID embeddings with the LLM’s input space using a projector, effectively integrating user behavioral patterns. At the token level, the LLM processes textual item features, utilizing its extensive world knowledge to enhance the recommendation process. At the user/item level, we employ a two-tower contrastive learning method to seamlessly incorporate behavioral knowledge from the traditional sequential recommender into the LLM, enabling effective understanding and prediction of user behaviors based on their historical engagement sequences.

Empirical results (Harper et al., 2016; Kang and McAuley, 2018; Cantador et al., 2011) substantiate the efficacy of our proposed framework, demonstrating significant improvements in prediction accuracy and user satisfaction. By integrating recommendation systems as a new language within large models, RSLLM represents a significant step towards a unified paradigm in sequential recommendation, offering a novel and effective approach to capturing user behavioral patterns and world knowledge. This paradigm shift has the potential to revolutionize the field of recommendation systems, paving the way for more intelligent and context-aware recommendations that better serve users’ needs and preferences.

Contributions of this work are three-fold: (1) To the best of our knowledge, it is the first work to investigate the multi-granularity (ID, token, user/item) alignment of pre-trained large language

Methods	ID Level	Token Level	Item/User Level
GRU4Rec	✓	✗	✓
Caser	✓	✗	✓
SASRec	✓	✗	✗
Llama2	✗	✓	✗
GPT-4	✗	✓	✗
MoRec	✗	✓	✗
TALLRec	✗	✓	✗
LLaRA	✓	✓	✗
RSLLM	✓	✓	✓

Table 1: Comparison of different methods.

models on sequential recommendation tasks. We explore this task on a sparse dataset that aligns with real-world scenarios, where recommendation systems (RS) and LLMs have distinct input formats. (2) We introduce a novel framework, RSLLM, which is capable of aligning RS and LLM at multiple granularity levels. (3) Our RSLLM approach outperforms state-of-the-art LLM sequence recommendation methods on various popular benchmarks.

2 Related Work

Large Language Models LLMs like GPT-4 (OpenAI et al., 2024) and Llama (Touvron et al., 2023) have transformed fields such as natural language processing, machine learning, and information retrieval (Ouyang et al., 2022; Zhao et al., 2023; He et al., 2023; Xu et al., 2023; Guo et al., 2023; Zheng et al., 2023a; Li et al., 2023a). Pretrained on extensive text and fine-tuned for specific tasks, LLMs excel at capturing complex patterns and relationships in textual data. They can generate human-like text and understand intricate semantic relationships (Luo et al., 2023; Ma et al., 2023; Hu et al., 2023; Zhu et al., 2023; Wu et al., 2023). We utilize these capabilities to treat sequential recommendation as a form of language modeling.

LLMs for Sequential Recommendation LLMs are a new direction in sequential recommendation systems (Hou et al., 2024; Li et al., 2023b; Liu et al., 2023; Zhang et al., 2024; Zhao et al., 2024). They address the limitations of traditional methods like collaborative filtering and content-based methods (Wu et al., 2022; Hidasi et al., 2015) by treating sequential recommendation as language modeling. Several studies represent items in prompts as either ID indices or textual metadata. For example, Geng et al. (2023) use an ID number for each item, while Hua et al. (2023) use a randomly-initialized ID token. Other models use textual metadata such as titles (Bao et al., 2023; Cui et al., 2022) and descriptions (Hou et al., 2023; Li et al., 2023b). These models have improved recommendation accuracy. However, existing approaches often fall

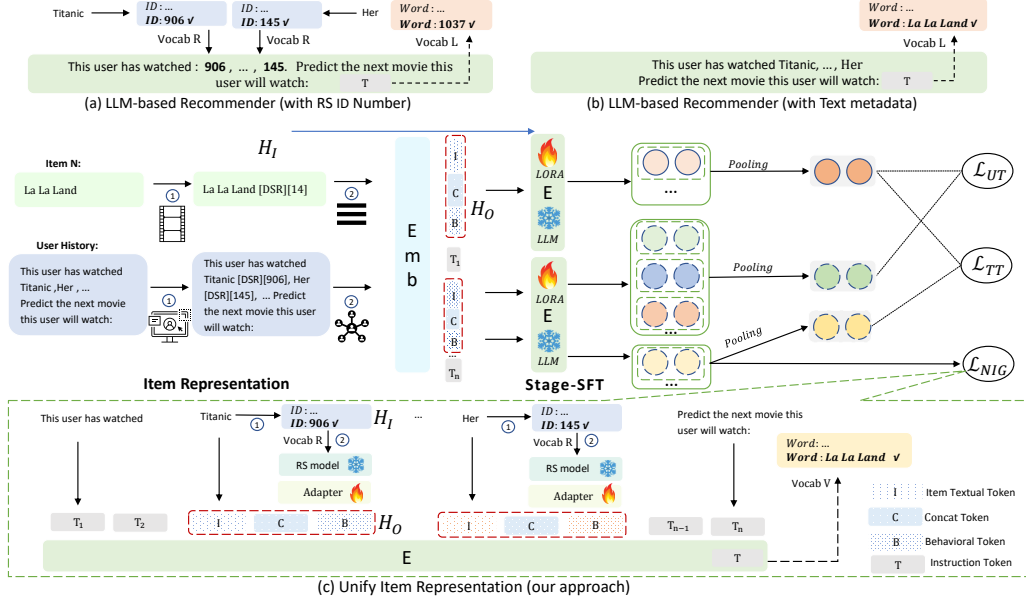


Figure 1: An illustration of prior item representation methods and ours. (a) ID Number: represents an item with a numerical index. (b) Text Metadata: represents an item with its textual features, such as item title. (c) An illustration of our proposed RSLLM approach: integrates both textual tokens and behavioral tokens derived from the ID-based item embedding learned by traditional recommender models

short in encapsulating comprehensive world knowledge or demonstrating a deep understanding of user behavior. ID-based representations may not convey rich semantic information about items, and textual metadata may not fully capture the nuances of user interactions and preferences. To address these limitations, we propose RSLLM, a framework that introduces a unified prompting method combining ID-based item embeddings with textual item features. RSLLM treats "sequential behaviors of users" as a distinct language beyond text, incorporating behavioral knowledge from traditional sequential recommenders into the LLM. This enhances the LLM's ability to predict user interactions more accurately. We also propose a two-stage fine-tuning framework that aligns user and item representations through a two-tower contrastive training approach, leveraging both textual and behavioral information.

3 Problem Formalization

Task Formulation. Given a user $u \in \mathcal{U}$ who has an interaction sequence that consists of a sequence of n items $U = \{I_1, I_2, \dots, I_n\}$ in chronological order, predict the next item I_{n+1} , where n is the length of U and $I \in \mathcal{I}$. Each item I has its corresponding ID and text information (e.g. title, etc.).

4 Methodology

This section introduces the two important components in proposed RSLLM, including i) Unified Prompting Method; ii) Two-Stage Fine-Tuning Framework. Figure 1 shows the overall RSLLM.

4.1 Unified Prompting Method

4.1.1 Prompt Construction

The proposed method utilizes titles to describe items and uses item titles from historical interactions to describe users. Uniquely, to integrate collaborative information, we introduce additional user and item ID-related fields.

Text-ID Prompting. For the ID numeric representation of the RS, we introduce the Text-ID Prompting approach for Large Language Model (LLM) instruction tuning. Items are represented via their textual metadata and ID numeric data within the prompt, as illustrated as follows (**Example 4.1**):

Example 4.1: Text-ID prompt of RSLLM

#Input Prompt#: This user has watched **Titanic [DSR] [IID906]**, **City of Angels [DSR] [IID35]**, ..., **Her [DSR] [IID145]** in the previous. Please predict the next movie this user will watch. The movie title candidates are **Avatar [DSR] [IID3]**, **Schindler's List [DSR] [IID78]**, ..., **Beastly [DSR] [IID903]**, ..., **The Godfather [DSR] [IID566]**, recommend one movie for this user to watch next. The movie title you recommend is

#Output#: La La Land

In this template, “red font” represents the list of item titles that the user interacted with, as a textual description of the user’s preferences. “Blue font” refers to the title of the target item to be predicted, where the <DSR> token indicates that the following is a textual description of the recommendation ID, denoted by <IID>. The <IID> represents the IDs of the recommended items, to inject collaborative information. To maintain semantic consistency when integrating item IDs, we treat them as a feature of the item in the prompt.

Hybrid Prompting. For the vector representation of the recommendation systems, we propose the Hybrid Prompting approach. This method integrates both textual and collaborative information from the recommendation systems into the prompts. It maintains the same prompt structure as Text-ID Prompting, but replaces the <IID> tokens with behavioral token representations obtained through the Hybrid Encoding module (**Example 4.2**).

4.1.2 Hybrid Encoding

The Hybrid Encoding component is used to convert the input prompt into latent vectors, i.e., embeddings suitable for LLM processing. We employ a hybrid encoding approach, where for all textual content, we use the LLM’s built-in tokenization and embedding mechanism to convert it into tokens and subsequent token embeddings. In contrast, when dealing with the item ID fields, we leverage an **Adapter** module, as illustrated in Figure 1(c), built with a conventional collaborative recommender, to extract collaborative information for the LLM to utilize.

Formally, for a prompt corresponding to the sample $(u, i) \in \mathcal{D}$, we first use the LLM Tokenizer to tokenize its textual content. The tokenization result is denoted as $P = \{t_1, t_2, \dots, t_n, i, \dots, t_K\}$ where t_k represents a text token, and i signifies the item (ID) placed within the respective fields. We then further encode the prompt into a sequence of embeddings: $E = \{e_{t_1}, \dots, e_{t_k}, e_i, \dots, e_{t_K}\}$, where $e_{t_k} \in \mathcal{R}^{1 \times d}$ denotes the token embedding for t_k in the LLM with dimension d , obtained via embedding lookup, and the embeddings for the item IDs, denoted as $e_i \in \mathcal{R}^{1 \times d}$, are obtained via the Adapter module.

To facilitate alignment, we project the ID-based item representation e_s^i into the LLM space using a trainable projector, **Proj** (i.e., two-layer perceptions). This results in a behavioral token representation, $\langle e_p^i \rangle = \text{Proj}(e_s^i; \theta_p)$, where θ_p are the

parameters of the projector.

Hybrid Token Representation. Upon obtaining the textual tokens $\langle e_t^i \rangle$ and the behavioral token $\langle e_p^i \rangle$ for item i , we integrate these two components. This integration provides a comprehensive representation of item i , effectively combining the distinct yet complementary aspects captured by each token. A specific concat $\langle e_h^i \rangle$ is used in this process (where the c token indicates that the following subsequence is a representation of the recommendation ID):

$$\langle e_h^i \rangle = \text{Concat}(\langle e_t^i \rangle; \langle e_c^i \rangle; \langle e_p^i \rangle) \quad (1)$$

Example 4.2: Hybrid prompt of RSLLM

#Input Prompt#: This user has watched Titanic [DSR] $[e_p^{906}]$, City of Angels [DSR] $[e_p^{35}]$, ..., Her [DSR] $[e_p^{145}]$ in the previous. Please predict the next movie this user will watch. The movie title candidates are Avatar [DSR] $[e_p^3]$, Schindler’s List [DSR] $[e_p^{78}]$, ..., Beastly [DSR] $[e_p^{903}]$, ..., The Godfather [DSR] $[e_p^{566}]$, recommend one movie for this user to watch next. The movie title you recommend is

#Output#: La La Land

Algorithm 1 Two-Stage Optimization Algorithm

Require: s : number of training iterations

- 1: \mathcal{D} : dataset
 - 2: M : model
 - 3: $N \leftarrow 1$
 - 4: $H_I \leftarrow \text{GEN}(\mathcal{D}, I) \quad \triangleright$ Text-ID Prompting
 - 5: $H_O \leftarrow \text{GEN}(H_I, O) \quad \triangleright$ Hybrid Prompting
 $\quad \triangleright$ Stage 1: Text-Only Fine-Tuning
 - 6: **for** $i = 1$ to s **do**
 - 7: Update M by minimizing the loss function in Eq.5 on H_I
 - 8: **end for**
 $\quad \triangleright$ Stage 2: Target Domain Fine-Tuning
 - 9: **for** $i = 1$ to s **do**
 - 10: Update M by minimizing the loss function in Eq.5 on H_O
 - 11: **end for**
 - 12: **return** M
-

4.2 Two-Stage Fine-Tuning Framework

Our Two-Stage Fine-Tuning Framework refines a pretrained LLM using two contrastive losses and a language modeling loss. It consists of two stages: **Text-Only Fine-Tuning** The LLM is fine-tuned using text-only prompts, aligning with its inherent

language modeling capabilities. Items are represented via their textual metadata, allowing the LLM to better understand and interpret the textual features of the items.

Target Domain Fine-Tuning A subsequent round of fine-tuning is performed with unified prompts, integrating ID-based item embeddings from conventional recommendation models with textual item features. This trains the model to incorporate behavioral knowledge from traditional sequential recommenders.

By sequentially fine-tuning the LLM, the model can understand and interpret both the textual features of items and the behavioral patterns of users, resulting in a more robust and effective RS. To strike a balance between efficiency and efficacy, we conduct LoRA (Hu et al., 2021) tuning as introduced in for the LLM, while training the projector at the same time. The training objective remains the same in both stages.

4.2.1 Contrastive Alignment

We now delve into the methodology for optimizing the model’s parameters. The primary objective we employ for fine-tuning Large Language Models (LLMs) is the Next Item Prediction (NIP) Objective. The NIP objective is designed to predict the textual description of the subsequent item based on the historical sequence of items described in text. Let us represent the tokenized user sequence as (u_1, u_2, \dots, u_n) , where n denotes the length of the sequence. The first m tokens correspond to all items except the last one, with the remaining $n - m$ tokens dedicated to the target item. Our proposed objective for adapting LLMs to sequential recommendation is formulated as follows:

$$\mathcal{L}_{\mathcal{N}} = -\mathbb{E} \sum_{j=m+1}^n [\log_{\mathcal{M}_{\theta}}(P(u_j|u_{1:j-1}; \theta))] \quad (2)$$

where θ encompasses all trainable parameters within the LLM.

To address the limitation of NIP, which operates on a token level rather than an item/user level, we introduce Contrastive Alignment. This involves an auxiliary contrastive objective that functions at the item/user level. We employ a two-tower training framework: one tower processes the target item, yielding a mean-pooled feature g^I , while the other incorporates the entire user sequence, resulting in features g^U for the user history and g^{IU} for the target item conditioned on the user history. We experiment with two contrastive losses for user-

and item-level alignments, both inspired by the InfoNCE loss, a robust choice in contrastive learning (van den Oord et al., 2018; Li et al., 2022, 2023c; Gao et al., 2021; Chen et al., 2020):

$$\mathcal{L}_{\mathcal{I}} = -\frac{1}{N} \sum_{i=1}^N \log \frac{e^{(\cos(g_i^{IU}, g_i^I)/\tau_c)}}{\sum_{j=1}^N e^{(\cos(g_j^{IU}, g_i^I)/\tau_c)}} \quad (3)$$

$$\mathcal{L}_{\mathcal{U}} = -\frac{1}{N} \sum_{i=1}^N \log \frac{e^{(\cos(g_i^U, g_i^I)/\tau_c)}}{\sum_{j=1}^N e^{(\cos(g_j^U, g_i^I)/\tau_c)}} \quad (4)$$

where in-batch negative samples are used, N represents the batch size, $\cos(\cdot, \cdot)$ denotes the cosine similarity, and τ_c is the temperature parameter for contrastive alignments. Our final training objective combines $\mathcal{L}_{\mathcal{N}}$ with the contrastive losses as depicted in Figure 1c:

$$\mathcal{L} = \mathcal{L}_{\mathcal{N}} + \gamma \mathcal{L}_{\mathcal{I}} + \beta \mathcal{L}_{\mathcal{U}} \quad (5)$$

5 Experiments

This section first introduces the experimental settings in Section 5.1, and then presents the main experimental results in Section 5.2. Ablation studies were conducted in Section 5.3. In Section 5.4, we compare RSLLM with different representation and recommendation models.

5.1 Experimental Setup

Following the experiment setting in LLaRA (Liao et al., 2024), we conduct experiments on three real-world datasets: MovieLens (Harper et al., 2016), Steam (Kang and McAuley, 2018), and LastFM (Cantador et al., 2011), detailed statistics of the datasets are provided in Table 3. For each benchmark, we conduct experiment following (Liao et al., 2024): For each sequence, we randomly select 20 non-interacted items to construct the candidate set, ensuring the inclusion of the correct subsequent item. RSLLM and other baseline models aim to identify the correct item from this candidate set, and their performance is evaluated using the HitRatio@1 metric. And LLM-based metric: valid ratio. It quantifies the proportion of valid responses (i.e., items in the candidate set) across all sequences, serving as a measure of the models’ capability of instruction following. We repeated the experiment 5 times and averaged the results according to the previous works (Kang and McAuley, 2018; Harper

Models	MovieLens		Steam		LastFM		Ave.	
	ValidRatio	HitRatio@1	ValidRatio	HitRatio@1	ValidRatio	HitRatio@1	ValidRatio	HitRatio@1
<i>Traditional</i>								
GRU4Rec	1.0000	0.3750	1.0000	0.4168	1.0000	0.2616	1.0000	0.3511
Caser	1.0000	0.3861	1.0000	0.4368	1.0000	0.2233	1.0000	0.3487
SASRec	1.0000	0.3444	1.0000	0.4010	1.0000	0.2233	1.0000	0.3229
<i>LLM-based</i>								
Llama2	0.4421	0.0421	0.1653	0.0135	0.3443	0.0246	0.3172	0.0267
GPT-4	0.9895	0.2000	0.9798	0.3626	1.0000	0.3770	0.9897	0.3132
MoRec	1.0000	0.2822	1.0000	0.3911	1.0000	0.1652	1.0000	0.2795
TALLRec	0.9263	0.3895	0.9840	0.4637	0.9836	0.4180	0.9646	0.4237
LLaRA (GRU4Rec)	0.9684	0.4421	0.9975	0.4924	0.9836	0.4344	0.9831	0.4563
LLaRA (Caser)	0.9684	0.4737	0.9966	0.4874	0.9918	0.4344	0.9856	0.4651
LLaRA (SASRec)	0.9684	0.4421	0.9975	0.4949	1.0000	0.4508	0.9886	0.4626
<i>Ours</i>								
RSLLM (GRU4Rec)	0.9698	0.4947	0.9980	0.5130	0.9919	0.4649	0.9865	0.4908
RSLLM (Caser)	0.9701	0.5273	0.9968	0.4953	0.9939	0.4646	0.9869	0.4957
RSLLM (SASRec)	0.9700	<u>0.5005</u>	0.9982	0.5241	1.0000	0.4980	0.9894	0.5075

Table 2: The Results of RSLLM compared with traditional sequential recommender models and LLMs-based methods. **Bold** and underline are the significant best and the second-best results compared to the **Baseline** model (paired student’s t-test with p -value < 0.05 , Ave. stands for average result).

Dataset	MovieLens	Steam	LastFM
# Sequence	943	11,938	1,220
# Item	1,682	3,581	4,606
# Interaction	100,000	274,726	73,510
# Sparsity	93.7%	99.4%	98.7%

Table 3: Statistics of all datasets.

et al., 2016). The **Baseline** models include both traditional sequential recommender models such as GRU4Rec (Hidasi et al., 2016), Caser (Tang and Wang, 2018), and SASRec (Kang and McAuley, 2018), and LLM-based Models such as Llama2 (Touvron et al., 2023), GPT-4 (OpenAI et al., 2024), MoRec (Yuan et al., 2023), TALLRec (Bao et al., 2023) and MetaST (Wang et al., 2021a), a SOTA LLM-based sequence recommendation method.

Implementation Details Our method uses a task description prompt/template (primary prompt) for the prediction of each task. We use Adam optimizer with learning rate $1e-5$, warm-up rate of 0.1 and weight decay $1e-3$ in training. The embedding dimension d is 64. We set 256 as batch size. We train RSLLM maximum of 3 epochs in Stage 1, and then further fine-tune the model for Stage 2. The γ , β in Eq.5 are 0.3, 0.4. and adopt $\tau_c = 0.5$ (see Eq.3 and Eq.4). Early stopping on validation is adopted as a regularization strategy. All the hyper parameters are determined by grid search. To mitigate the impact of randomness, we report the average outcomes of five runs using different random seeds.

5.2 Main Results

As shown in Table 2, our proposed RSLLM significantly outperforms all baseline models across the three datasets in terms of HitRatio@1 and ValidRatio metrics. Specifically, on the MovieLens dataset, RSLLM surpasses the best baseline by 4.3% in HitRatio@1. Similar trends are observed on the other two datasets, with RSLLM exceeding the next best method by 3.0% on Steam and 4.8% on LastFM in

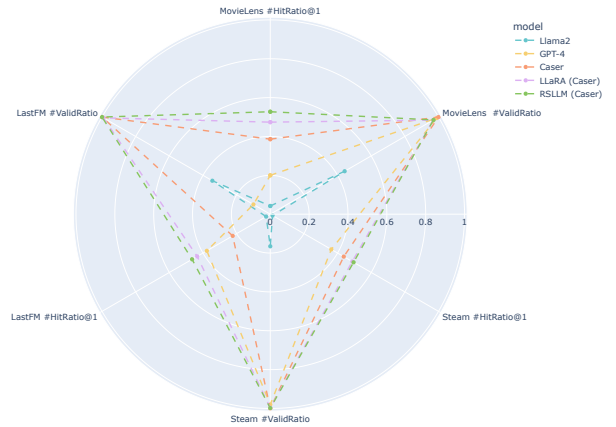


Figure 2: Results of recommendation model efficiency analysis. We compare RSLLM with strong baselines with Caser backbone. The GRU4Rec and SASRec result are presented in Appendix A.1.

HitRatio@1.

The traditional sequential recommendation models, such as GRU4Rec, Caser, and SASRec, yield lower HitRatio@1 scores compared to RSLLM. These models generate predictions solely based on users’ behavioral patterns, without incorporating any semantic information about the items. This highlights the importance of integrating world knowledge about items into the recommendation process.

Performance of LLM-based Methods Regarding LLM-based methods, two key observations emerge from the results. Firstly, the underperformance of the standalone LLMs (i.e., Llama2 and GPT-4) emphasizes the need to adapt these models to recommendation tasks to boost their performance in this domain. Secondly, the LLM4Rec methods (i.e., MoRec and TALLRec) show slight improvements over the standalone LLM methods, but their recommendation capability, as indicated by the HitRatio@1 metric, is still inferior to that of RSLLM. This highlights the necessity for a comprehensive

Models	MovieLens		Steam		LastFM	
	ValidRatio	HitRatio@1	ValidRatio	HitRatio@1	ValidRatio	HitRatio@1
Baseline♣	0.9684	0.4421	0.9975	0.4949	1.0000	0.4508
RSLLM	0.9700	0.5005	0.9982	0.5241	1.0000	0.4980
<i>Ablation For Item Representation</i>						
w/o Textual Feature (Titles,etc.) Representation♣	0.9369	0.4010	0.9501	0.4201	0.9135	0.2230
w/o Item ID (IID/Embedding) Representation †	0.9421	0.4152	0.9735	0.4794	0.9811	0.4317
w/o IID Tokens	0.9669	0.4316	0.9801	0.4890	0.9811	0.4347
w/o Pre-loading item Embeddings.	0.9608	0.4343	0.9866	0.4905	0.9818	0.4388
<i>Ablation For User – Item Alignment</i>						
RSLLM (U-I Only)	0.9686	0.4754	0.9980	0.5005	1.0000	0.4849
RSLLM (I-I Only)	0.9695	0.4701	0.9978	0.4989	1.0000	0.4831
RSLLM (w/o. Contrastive Alignment)	0.9675	0.4544	0.9978	0.4958	0.9970	0.4765
<i>Different Learning Strategies</i>						
Stage1 only ‡	0.9608	0.4073	0.9866	0.4905	0.9818	0.4388
Stage2 only ‡	0.9684	0.4231	0.9962	0.5148	1.0000	0.4974
RSLLM (Two-stage)	0.9700	0.5005	0.9982	0.5241	1.0000	0.4980

Table 4: The ablation result over MovieLens, Steam and LastFM. w/o. denotes that we only remove one component from RSLLM. ♣ results taken from (Liao et al., 2024).

approach that combines the strengths of both LLMs and traditional recommendation models.

Validity of Recommendations RSLLM achieves a high validity ratio exceeding 96.9% across all datasets, demonstrating the model’s proficiency in adhering to instructions when generating recommendations. It is worth noting that all generative methods that incorporate LLMs might produce invalid answers. For instance, the backbone LLM of RSLLM, Llama2, only achieves valid ratios of 0.4421, 0.1653, and 0.3443 on the MovieLens, Steam, and LastFM datasets, respectively. The substantial improvement in valid ratios by RSLLM can be attributed to the fact that RSLLM has been instruction-tuned on the sequential recommendation task. This underscores the effectiveness of instruction-tuning in enhancing the validity of recommendations.

The results demonstrate the superiority of RSLLM in sequential recommendation tasks compared to both traditional and LLM-based baselines. RSLLM’s strong performance can be attributed to its ability to effectively incorporate item-level semantic information and its instruction-tuning on the recommendation task, which enhances the validity of the generated recommendations. These findings highlight the potential of combining the strengths of LLMs and traditional recommendation models to achieve state-of-the-art performance in sequential recommendation.

5.3 Ablation Study

Item Representation As shown in Table 4, without Textual Feature Representation, we directly fine-tune the model on behavioral data without using textual features such as titles and descriptions. Without Item ID Representation, we remove the item ID representations, which are crucial for capturing the unique identity and sequential relationships of items. Without IID Tokens, we limit the

model by not using the <IID> tokens, which typically represent the IDs of the items in the dataset. Without Pre-loading Item Embeddings, we disregard the preloaded embeddings that are typically used to inject prior knowledge about items into the model. As shown in the results, the fully fine-tuned PLMs without textual feature representation perform worse than our proposed RSLLM method (16.8% HitRatio@1 lower average, specifically drop 27.5% HitRatio@1 and 9.7% ValidRatio in LastFM), showing the positive contribution of textual features for accurate recommendations. Further, removing item ID representation or IID tokens also delegate the performance by 7.4% and 6.4% average, showing the importance of using these components to learn a reasonable item representation. Similarly, without pre-loading item embeddings, the model achieves similar performance as when the embeddings are included. It is recommended to directly train the item representation parameters.

Contrastive Alignment Next, we show the effect of different user-item alignment strategies in our RSLLM framework. The RSLLM (U-I Only) and RSLLM (I-I Only) configurations only retain the user-tower to target-tower alignment and the target-tower to target-tower alignment, respectively. As shown in Table 4, these two alignments successfully boost up the model performance(2.3% HitRatio@1 gain average compare with Baseline, specifically in MovieLens and LastFM). However, their corresponding models perform worse than the ones supported by the full RSLLM. This shows that alignment from different views provide meaningful and different training signals to the models. Interestingly, models trained on the Target-Tower to User-Tower Alignment (I-I Only) perform better than the ones trained on the User-Tower to Target-Tower Alignment (U-I Only), indicating that the

reciprocal alignment from the user-tower to the target-tower might be more instrumental in capturing the bidirectional relationship between user history and item preferences. Finally, the trained model removing Contrastive Alignment perform worse than RSLLM (3.1% HitRatio@1 lower average), showing the importance of Contrastive Alignment.

Impact of Two-stage Training Finally, we examine the effect of the two-stage training framework in our RSLLM model. In Table 4, we show the model performance with only the first stage (Stage 1 Only), only the second stage (Stage 2 Only), and with both stages (RSLLM Two-stage). The two-stage training has an important effect on the model performance. Without integrating behavioral knowledge, the performance gap almost disappears. The sequential fine-tuning also has a positive effect on the model performance. In particular, in the MovieLens dataset, the model performance increases significantly after the second stage. This shows that the initial text-only fine-tuning provides a necessary foundation for the subsequent target domain fine-tuning to be most effective. The results validate the hypothesis that a phased approach, which first establishes a strong textual understanding and then refines this with behavioral knowledge, leads to the most accurate and robust sequential recommendation model.

5.4 Discussions

Evaluation of item representation methods We conduct a comprehensive empirical evaluation of prevalent item representation methods in sequential recommendation tasks, including numerical indexing, behavior tokens, text feature representation, and the unified representation utilized in our RSLLM framework. As shown in Figure 3, the results demonstrate that the item representation method employed by RSLLM outperforms the other approaches in terms of HitRatio@1 across all three datasets. This not only validates the effectiveness of RSLLM’s innovative item representation technique, but also highlights the advantages of its more comprehensive alignment between the LLM and the recommendation system, compared to conventional single-faceted item representation methods.

Regarding the limitations of the individual methods: Numerical Indexing: For numerical indexing, LLMs do not initially store any inherent information. These indices are processed as plain

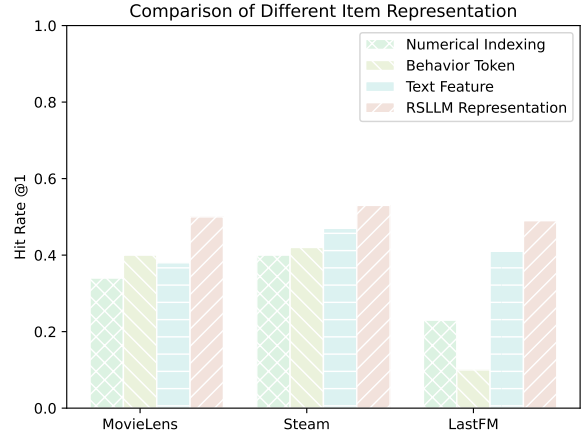


Figure 3: The performance comparison of different item representation methods (i.e., numerical index, behavioral token, textual feature, LLaRA and RSLLM representation) in datasets: MovieLens, Steam and LastFM.

text by the LLMs, causing the tokenizer to divide them into multiple tokens, which may limit the model’s understanding. Behavior Token: When using behavior tokens, LLMs primarily exploit the distribution of the input behavioral embeddings, without effectively extracting the knowledge encapsulated within the LLMs. Text Feature: In the case of text features, the absence of user behavior patterns allows the LLM to solely infer the correlations among items in a user’s historical interactions, guided solely by the background knowledge of these items preserved in the LLM. In contrast, RSLLM’s unified item representation integrates both world knowledge and sequential information, thereby enhancing performance in sequential recommendation. By fusing item ID, behavior tokens, and text tokens, RSLLM is able to capture a more comprehensive representation of items, which leads to superior recommendation capabilities compared to the other approaches.

Discussion for Different recommendation model

We evaluate our proposed RSLLM framework using item embeddings derived from three traditional sequential recommendation backbones: GRU4Rec, Caser, and SASRec. These models represent the three main categories of recommendation models : RNN-based, CNN-based and self-attention-based.

The empirical results in Figure 2 and Appendix A.1 show that RSLLM outperforms all baseline models (RS, GPT-4, LLM-based model) and using SASRec as the backbone achieves the best performance, outperforming the other backbones. This validates that self-attention is better able to capture both local and global dependencies in user-item interactions compared to RNNs and CNNs. However,

the performance gains of SASRec over GRU4Rec and Caser are marginal in some cases, indicating the sequential patterns captured by different backbones do not vary dramatically. The key factor for RSLLM's improved performance is the unified prompting and fine-tuning approach not backbone.

6 Conclusion

In this paper, we introduce a novel and effectiveness framework: RSLLM. Experiments on various benchmarks show the effectiveness of RSLLM. In the future, we plan to expand RSLLM to other recommendation tasks, like conversational recommendation and multi-modal recommendation.

Limitations

The RSLLM fine-tuning process and the integration of ID-based item embeddings with textual item features can be computationally intensive, which requires large GPU memory.

References

- Keqin Bao, Jizhi Zhang, Yang Zhang, Wenjie Wang, Fuli Feng, and Xiangnan He. 2023. [Tallrec: An effective and efficient tuning framework to align large language model with recommendation](#). In *Proceedings of the 17th ACM Conference on Recommender Systems*, RecSys '23. ACM.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. [Language models are few-shot learners](#). *CoRR*, abs/2005.14165.
- Ivan Cantador, Peter Brusilovsky, and Tsvi Kuflik. 2011. [Second workshop on information heterogeneity and fusion in recommender systems \(hetrec2011\)](#). In *Proceedings of the Fifth ACM Conference on Recommender Systems*, RecSys '11, page 387–388, New York, NY, USA. Association for Computing Machinery.
- Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. 2020. [A simple framework for contrastive learning of visual representations](#). In *Proceedings of the 37th International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, pages 1597–1607. PMLR.
- Zeyu Cui, Jianxin Ma, Chang Zhou, Jingren Zhou, and Hongxia Yang. 2022. [M6-rec: Generative pretrained language models are open-ended recommender systems](#). *Preprint*, arXiv:2205.08084.
- Sunhao Dai, Ninglu Shao, Haiyuan Zhao, Weijie Yu, Zihua Si, Chen Xu, Zhongxiang Sun, Xiao Zhang, and Jun Xu. 2023. [Uncovering chatgpt's capabilities in recommender systems](#). In *Proceedings of the 17th ACM Conference on Recommender Systems*, RecSys '23. ACM.
- Hui Fang, Danning Zhang, Yiheng Shu, and Guibing Guo. 2019. [Deep learning-based sequential recommender systems: Concepts, algorithms, and evaluations](#). *CoRR*, abs/1905.01997.
- Tianyu Gao, Xingcheng Yao, and Danqi Chen. 2021. [SimCSE: Simple contrastive learning of sentence embeddings](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 6894–6910, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Shijie Geng, Shuchang Liu, Zuohui Fu, Yingqiang Ge, and Yongfeng Zhang. 2023. [Recommendation as language processing \(rlp\): A unified pretrain, personalized prompt & predict paradigm \(p5\)](#). *Preprint*, arXiv:2203.13366.
- Zhen Guo, Peiqi Wang, Yanwei Wang, and Shangdi Yu. 2023. [Dr. llama: Improving small language models in domain-specific qa via generative data augmentation](#).
- F. Maxwell Harper, Joseph A. Konstan, and Joseph A. 2016. [The movielens datasets: History and context](#). *ACM Trans. Interact. Intell. Syst.*, 5:19:1–19:19.
- Xingwei He, Zheng-Wen Lin, Yeyun Gong, Alex Jin, Hang Zhang, Chen Lin, Jian Jiao, Siu Ming Yiu, Nan Duan, and Weizhu Chen. 2023. [Annollm: Making large language models to be better crowdsourced annotators](#). *ArXiv*, abs/2303.16854.
- Balázs Hidasi, Alexandros Karatzoglou, Linas Baltrunas, and Domonkos Tikk. 2015. [Session-based recommendations with recurrent neural networks](#). *CoRR*, abs/1511.06939.
- Balázs Hidasi, Alexandros Karatzoglou, Linas Baltrunas, and Domonkos Tikk. 2016. [Session-based recommendations with recurrent neural networks](#). In *4th International Conference on Learning Representations, ICLR 2016, San Juan, Puerto Rico, May 2-4, 2016, Conference Track Proceedings*.
- Yupeng Hou, Zhankui He, Julian McAuley, and Wayne Xin Zhao. 2023. [Learning vector-quantized item representation for transferable sequential recommenders](#). *Preprint*, arXiv:2210.12316.
- Yupeng Hou, Junjie Zhang, Zihan Lin, Hongyu Lu, Ruobing Xie, Julian McAuley, and Wayne Xin Zhao. 2024. [Large language models are zero-shot rankers for recommender systems](#). *Preprint*, arXiv:2305.08845.
- Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2021. [Lora: Low-rank adaptation of large language models](#). *Preprint*, arXiv:2106.09685.
- Zhiqiang Hu, Yihuai Lan, Lei Wang, Wanyu Xu, Ee-Peng Lim, Roy Ka-Wei Lee, Lidong Bing, and Soujanya Poria. 2023. [Llm-adapters: An adapter family for parameter-efficient fine-tuning of large language models](#). *ArXiv*, abs/2304.01933.
- Wenyue Hua, Shuyuan Xu, Yingqiang Ge, and Yongfeng Zhang. 2023. [How to index item ids for recommendation foundation models](#). In *Proceedings of*

the Annual International ACM SIGIR Conference on Research and Development in Information Retrieval in the Asia Pacific Region, SIGIR-AP '23. ACM.

- Wang-Cheng Kang and Julian J. McAuley. 2018. [Self-attentive sequential recommendation](#). *CoRR*, abs/1808.09781.
- Jia Li, Ge Li, Yongming Li, and Zhi Jin. 2023a. Enabling programming thinking in large language models toward code generation.
- Jiacheng Li, Ming Wang, Jin Li, Jinmiao Fu, Xin Shen, Jingbo Shang, and Julian McAuley. 2023b. [Text is all you need: Learning language representations for sequential recommendation](#). *Preprint*, arXiv:2305.13731.
- Yaoyiran Li, Ching-Yun Chang, Stephen Rawls, Ivan Vulić, and Anna Korhonen. 2023c. [Translation-enhanced multilingual text-to-image generation](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 9174–9193, Toronto, Canada. Association for Computational Linguistics.
- Yaoyiran Li, Fangyu Liu, Nigel Collier, Anna Korhonen, and Ivan Vulić. 2022. [Improving word translation via two-stage contrastive learning](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 4353–4374, Dublin, Ireland. Association for Computational Linguistics.
- Jiayi Liao, Sihang Li, Zhengyi Yang, Jiancan Wu, Yancheng Yuan, Xiang Wang, and Xiangnan He. 2024. [Llara: Large language-recommendation assistant](#). *Preprint*, arXiv:2312.02445.
- Junling Liu, Chao Liu, Peilin Zhou, Renjie Lv, Kang Zhou, and Yan Zhang. 2023. [Is chatgpt a good recommender? a preliminary study](#). *Preprint*, arXiv:2304.10149.
- Ziyang Luo, Can Xu, Pu Zhao, Xiubo Geng, Chongyang Tao, Jing Ma, Qingwei Lin, and Daxin Jiang. 2023. [Augmented large language models with parametric knowledge guiding](#). *ArXiv*, abs/2305.04757.
- Huan Ma, Changqing Zhang, Yatao Bian, Lemao Liu, Zhirui Zhang, Peilin Zhao, Shu Zhang, H. Fu, Qinghua Hu, and Bing Wu. 2023. [Fairness-guided few-shot prompting for large language models](#). *ArXiv*, abs/2303.13217.
- OpenAI, Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altschmidt, Sam Altman, Shyamal Anadkat, Red Avila, Igor Babuschkin, Suchir Balaji, Valerie Balcom, Paul Baltescu, Haiming Bao, Mohammad Bavarian, Jeff Belgum, Irwan Bello, Jake Berdine, Gabriel Bernadett-Shapiro, Christopher Berner, Lenny Bogdonoff, Oleg Boiko, Madelaine Boyd, Anna-Luisa Brakman, Greg Brockman, Tim Brooks, Miles Brundage, Kevin Button, Trevor Cai, Rosie Campbell, Andrew Cann, Brittany

Carey, Chelsea Carlson, Rory Carmichael, Brooke Chan, Che Chang, Fotis Chantzis, Derek Chen, Sully Chen, Ruby Chen, Jason Chen, Mark Chen, Ben Chess, Chester Cho, Casey Chu, Hyung Won Chung, Dave Cummings, Jeremiah Currier, Yunxing Dai, Cory Decareaux, Thomas Degry, Noah Deutsch, Damien Deville, Arka Dhar, David Dohan, Steve Dowling, Sheila Dunning, Adrien Ecoffet, Atty Eleti, Tyna Eloundou, David Farhi, Liam Fedus, Niko Felix, Simón Posada Fishman, Juston Forte, Isabella Fulford, Leo Gao, Elie Georges, Christian Gibson, Vik Goel, Tarun Gogineni, Gabriel Goh, Rapha Gontijo-Lopes, Jonathan Gordon, Morgan Grafstein, Scott Gray, Ryan Greene, Joshua Gross, Shixiang Shane Gu, Yufei Guo, Chris Hallacy, Jesse Han, Jeff Harris, Yuchen He, Mike Heaton, Johannes Heidecke, Chris Hesse, Alan Hickey, Wade Hickey, Peter Hoeschele, Brandon Houghton, Kenny Hsu, Shengli Hu, Xin Hu, Joost Huizinga, Shantanu Jain, Shawn Jain, Joanne Jang, Angela Jiang, Roger Jiang, Haozhun Jin, Denny Jin, Shino Jomoto, Billie Jonn, Heewoo Jun, Tomer Kaftan, Łukasz Kaiser, Ali Kamali, Ingmar Kanitscheider, Nitish Shirish Keskar, Tabarak Khan, Logan Kilpatrick, Jong Wook Kim, Christina Kim, Yongjik Kim, Jan Hendrik Kirchner, Jamie Kiros, Matt Knight, Daniel Kokotajlo, Łukasz Kondraciuk, Andrew Kondrich, Aris Konstantinidis, Kyle Kosic, Gretchen Krueger, Vishal Kuo, Michael Lampe, Ikai Lan, Teddy Lee, Jan Leike, Jade Leung, Daniel Levy, Chak Ming Li, Rachel Lim, Molly Lin, Stephanie Lin, Mateusz Litwin, Theresa Lopez, Ryan Lowe, Patricia Lue, Anna Makanju, Kim Malfacini, Sam Manning, Todor Markov, Yaniv Markovski, Bianca Martin, Katie Mayer, Andrew Mayne, Bob McGrew, Scott Mayer McKinney, Christine McLeavey, Paul McMillan, Jake McNeil, David Medina, Aalok Mehta, Jacob Menick, Luke Metz, Andrey Mishchenko, Pamela Mishkin, Vinnie Monaco, Evan Morikawa, Daniel Mossing, Tong Mu, Mira Murati, Oleg Murk, David Mély, Ashvin Nair, Reiichiro Nakano, Rajeef Nayak, Arvind Neelakantan, Richard Ngo, Hyeonwoo Noh, Long Ouyang, Cullen O'Keefe, Jakub Pachocki, Alex Paino, Joe Palermo, Ashley Pantuliano, Giambattista Parascandolo, Joel Parish, Emy Parparita, Alex Passos, Mikhail Pavlov, Andrew Peng, Adam Perelman, Filipe de Avila Belbute Peres, Michael Petrov, Henrique Ponde de Oliveira Pinto, Michael, Pokorny, Michelle Pokrass, Vitchyr H. Pong, Tolly Powell, Alethea Power, Boris Power, Elizabeth Proehl, Raul Puri, Alec Radford, Jack Rae, Aditya Ramesh, Cameron Raymond, Francis Real, Kendra Rimbach, Carl Ross, Bob Rotsted, Henri Roussez, Nick Ryder, Mario Saltarelli, Ted Sanders, Shibani Santurkar, Girish Sastry, Heather Schmidt, David Schnurr, John Schulman, Daniel Selsam, Kyla Sheppard, Toki Sherbakov, Jessica Shieh, Sarah Shoker, Pranav Shyam, Szymon Sidor, Eric Sigler, Maddie Simens, Jordan Sitkin, Katarina Slama, Ian Sohl, Benjamin Sokolowsky, Yang Song, Natalie Staudacher, Felipe Petroski Such, Natalie Summers, Ilya Sutskever, Jie Tang, Nikolas Tezak, Madeleine B. Thompson, Phil Tillet, Amin Tootoonchian, Elizabeth Tseng, Preston Tuggle, Nick Turley, Jerry Tworek, Juan Fe-

- lpe Cerón Uribe, Andrea Vallone, Arun Vijayvergiya, Chelsea Voss, Carroll Wainwright, Justin Jay Wang, Alvin Wang, Ben Wang, Jonathan Ward, Jason Wei, CJ Weinmann, Akila Welihinda, Peter Welinder, Jiayi Weng, Lilian Weng, Matt Wiethoff, Dave Willner, Clemens Winter, Samuel Wolrich, Hannah Wong, Lauren Workman, Sherwin Wu, Jeff Wu, Michael Wu, Kai Xiao, Tao Xu, Sarah Yoo, Kevin Yu, Qiming Yuan, Wojciech Zaremba, Rowan Zellers, Chong Zhang, Marvin Zhang, Shengjia Zhao, Tianhao Zheng, Juntang Zhuang, William Zhuk, and Barret Zoph. 2024. [Gpt-4 technical report](#). *Preprint*, arXiv:2303.08774.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. 2022. Training language models to follow instructions with human feedback. *Advances in Neural Information Processing Systems*, 35:27730–27744.
- Kunzhe Song, Qingfeng Sun, Can Xu, Kai Zheng, and Yaming Yang. 2023. [Self-supervised multi-modal sequential recommendation](#). *ArXiv*, abs/2304.13277.
- Jiayi Tang and Ke Wang. 2018. [Personalized top-n sequential recommendation via convolutional sequence embedding](#). *CoRR*, abs/1809.07426.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajwal Bhargava, Shrutu Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. 2023. [Llama 2: Open foundation and fine-tuned chat models](#). *Preprint*, arXiv:2307.09288.
- Aäron van den Oord, Yazhe Li, and Oriol Vinyals. 2018. [Representation learning with contrastive predictive coding](#). *CoRR*, abs/1807.03748.
- Shoujin Wang, Liang Hu, Yan Wang, Longbing Cao, Quan Z. Sheng, and Mehmet A. Orgun. 2020. [Sequential recommender systems: Challenges, progress and prospects](#). *CoRR*, abs/2001.04830.
- Le Wu, Xiangnan He, Xiang Wang, Kun Zhang, and Meng Wang. 2022. A survey on accuracy-oriented neural recommendation: From collaborative filtering to information-rich recommendation. *IEEE Transactions on Knowledge and Data Engineering*, 35(5):4425–4445.
- Shijie Wu, Ozan Irsoy, Steven Lu, Vadim Dabravolski, Mark Dredze, Sebastian Gehrmann, Prabhanjan Kam-badur, David Rosenberg, and Gideon Mann. 2023. [Bloomberggpt: A large language model for finance](#). *Preprint*, arXiv:2303.17564.
- Can Xu, Qingfeng Sun, Kai Zheng, Xiubo Geng, Pu Zhao, Jiazhan Feng, Chongyang Tao, and Daxin Jiang. 2023. [Wizardlm: Empowering large language models to follow complex instructions](#). *ArXiv*, abs/2304.12244.
- Zheng Yuan, Fajie Yuan, Yu Song, Youhua Li, Junchen Fu, Fei Yang, Yunzhu Pan, and Yongxin Ni. 2023. [Where to go next for recommender systems? id-vs. modality-based recommender models revisited](#). *Preprint*, arXiv:2303.13835.
- An Zhang, Yuxin Chen, Leheng Sheng, Xiang Wang, and Tat-Seng Chua. 2024. [On generative agents in recommendation](#). *Preprint*, arXiv:2310.10108.
- Wayne Xin Zhao, Kun Zhou, Junyi Li, Tianyi Tang, Xiaolei Wang, Yupeng Hou, Yingqian Min, Beichen Zhang, Junjie Zhang, Zican Dong, Yifan Du, Chen Yang, Yushuo Chen, Z. Chen, Jinhao Jiang, Ruiyang Ren, Yifan Li, Xinyu Tang, Zikang Liu, Peiyu Liu, Jianyun Nie, and Ji rong Wen. 2023. A survey of large language models. *ArXiv*, abs/2303.18223.
- Yuyue Zhao, Jiancan Wu, Xiang Wang, Wei Tang, Dingxian Wang, and Maarten de Rijke. 2024. [Let me do it for you: Towards llm empowered recommendation via tool learning](#).
- Kai Zheng, Qingfeng Sun, Yaming Yang, Tengchao Lv, Yeyong Pi, Changlin Zhao, Fei Xu, and Qi Zhang. 2023a. [Adversarial knowledge stimulated contrastive prompting for few-shot language learners](#). In *Annual Meeting of the Association for Computational Linguistics*.
- Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric Xing, et al. 2023b. [Judging llm-as-a-judge with mt-bench and chatbot arena](#). *arXiv preprint arXiv:2306.05685*.
- Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. 2023. [Minigt-4: Enhancing vision-language understanding with advanced large language models](#). *ArXiv*, abs/2304.10592.

A Appendix

A.1 GRU4Rec and SASRec result in Figure 3

Figure 4 and Figure 5 presents the results of recommendation model efficiency analysis with GRU4Rec and SASRec in the Figure 3.

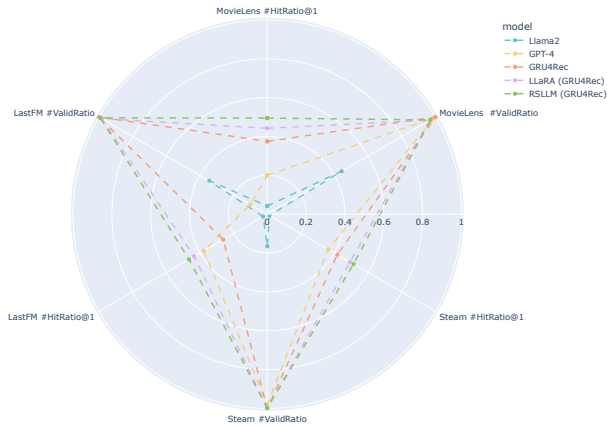


Figure 4: Results of recommendation model efficiency analysis. We compare RSLLM with strong baselines with GRU4Rec backbone.

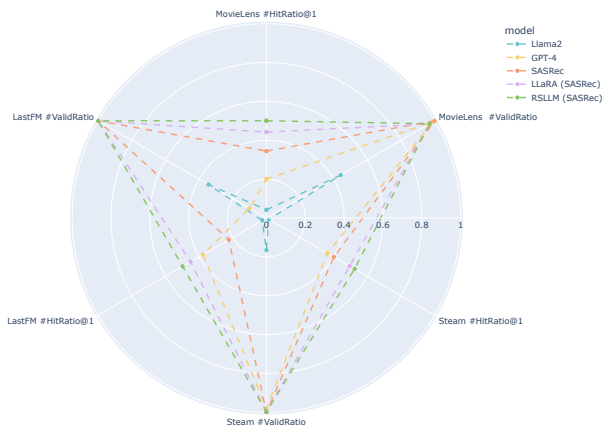


Figure 5: Results of recommendation model efficiency analysis. We compare RSLLM with strong baselines with SASRec backbone.