M-Ped: Multi-Prompt Ensemble Decoding for Large Language Models

Jiaxin GUO, Daimeng Wei, Yuanchang Luo, Shimin Tao, Hengchao Shang, Zongyao Li

Shaojun Li, Jinlong Yang, Zhanglin Wu, Zhiqiang Rao and Hao Yang

{jiaxinguo1,weidaimeng,luoyuanchang1,taoshimin,shanghengchao,lizongyao}@huawei.com {lishaojun18,yangjinlong7,wuzhanglin2,raozhiqiang,yanghao30}@huawei.com

Huawei Translation Services Center, Beijing, China

Abstract

With the widespread application of Large Language Models (LLMs) in the field of Natural Language Processing (NLP), enhancing their performance has become a research hotspot. This paper presents a novel multi-prompt ensemble decoding approach designed to bolster the generation quality of LLMs by leveraging the aggregation of outcomes from multiple prompts. Given a unique input X, we submit n variations of prompts with X to LLMs in batch mode to decode and derive probability distributions. For each token prediction, we calculate the ensemble probability by averaging the *n* probability distributions within the batch, utilizing this aggregated probability to generate the token. This technique is dubbed Inner-Batch Ensemble. To facilitate efficient batch inference, we implement a Left-Padding strategy to maintain uniform input lengths across the n prompts. Through extensive experimentation on diverse NLP tasks, including machine translation, code generation, and text simplification, we demonstrate the efficacy of our method in enhancing LLM performance. The results show substantial improvements in BLEU scores, pass@k rates, and LENS metrics over conventional methods.

1 Introduction

Large Language Models (LLMs) (OpenAI, 2023; Touvron et al., 2023a,b; Bai et al., 2023; Yang et al., 2024) have demonstrated exceptional capabilities in understanding and generating natural language through extensive data pre-training, becoming the core driving force in the field of Natural Language Processing (NLP). Prompt technology (Jiang et al., 2020; Liu et al., 2023; Pitis et al., 2023; Zhao et al., 2023; Heineman et al., 2024; Wei et al., 2022; Wang et al., 2023), as a key to enhancing LLMs' performance, can strengthen the model's effects without altering model parameters, achieving seamless integration with downstream tasks.

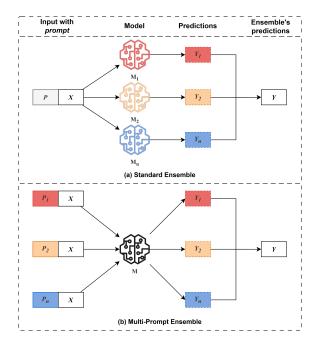


Figure 1: (a) **Standard Ensemble**: Input X with prompt P is fed into models $M_1, M_2, ..., M_n$, yielding predictions $Y_1, Y_2, ..., Y_n$. These are combined to get the final ensemble result Y. (b) **Our Multi-Prompt Ensemble**: Input X constructs prompts $P_1, P_2, ..., P_n$, forming diverse samples batched through one model M to get predictions $Y_1, Y_2, ..., Y_n$. The ensemble result Y is the average of these predictions.

However, in the practical application of LLMs, the output results are closely related to the quality of the Prompt, and a precise and effective Prompt is crucial for improving the model's response quality. How to use Prompts more efficiently to fully leverage the potential of LLMs has become a hot issue of common concern in academia and industry.

Ensemble decoding (Lakshminarayanan et al., 2017; Ganaie et al., 2022; Zhou et al., 2002) is a widely employed technique for enhancing the quality of model-generated outputs. Typically, as shown in Figure 1(a), standard ensemble decoding refers to the process of combining the outputs of multiple distinct models on the same input. Specif-

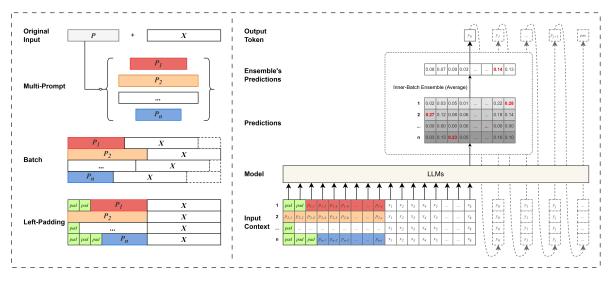


Figure 2: The overall process of Our Multi-Prompt Ensemble Decoding.

ically, during the prediction of each word, ensemble decoding generates a comprehensive prediction by averaging the probability distributions provided by multiple models. This approach leverages the diversity among models, aiming to reduce uncertainty and improve overall predictive performance. In theory, we could apply ensemble decoding to LLMs. However, LLMs already demand considerable memory resources, and the implementation of ensemble decoding with multiple LLMs presents a significant challenge in terms of memory usage. Moreover, even if these models could be deployed, optimizing the performance of the ensemble decoding becomes a complex issue.

In this paper, we introduce a particularly simple yet effective method: Multi-Prompt Ensemble Decoding (M-Ped). This approach constructs ndistinct prompts for a single query, generating ndiverse input samples that are batched together and submitted to LLMs for inference. During the inference process, we average the prediction probabilities within the batch for each word prediction. To ensure batched inference is feasible, we specifically propose the use of left-padding technology to address the issue of varying prompt lengths within a batch. Compared to traditional ensemble methods, our approach shifts the focus of diversity from using different models to using different prompts. We have validated the effectiveness of this method across various tasks and multiple models, including extensive experiments on multiple test sets for machine translation, code generation, and text simplification tasks. The results demonstrate improvements in BLEU scores for machine translation(Papineni et al., 2002; Vaswani et al., 2017; Sennrich et al., 2016; Wei et al., 2023; Gu et al., 2018), pass@k scores for code generation(Chen et al., 2021; Jiang et al., 2024; Dehaerne et al., 2022), and LENS scores for text simplification tasks(Nakamachi et al., 2020; Maddela et al., 2023).

Our main contributions are summarized as follows:

- We propose a particularly simple yet effective method, Multi-Prompt Ensemble Decoding (M-Ped), to enhance the quality of LLMs' generation outcomes.
- We introduce two strategies, Inner-Batch Ensemble and Left-padding, to implement M-Ped, ensuring that the inference performance with multiple prompts is consistent with that of a single prompt.
- We validate the effectiveness of the M-Ped method across various tasks and multiple models.

2 Approach

In this paper, we propose an approach named multiprompt ensemble decoding, aimed at enhancing the generation performance of large language models. The overall process is depicted in Figure 2. For a given distinct input $X = \{x_1, x_2, ..., x_k\}$ with a prompt P, we first generate a list of prompts $\{P_1, P_2, ..., P_n\}$. Then, we submit these n prompts and the input X to LLMs in batch for decoding to obtain probability distributions. We average the n

Algorithm 1 Multi-Prompt Ensemble Decoding
1: procedure INNER_BATCH_ENSEMBLE(pre_logits, mped_num)
2: $total_size \leftarrow pre_logits.size(0)$
3: $part_size \leftarrow total_size // mped_num$
4: $post_logits \leftarrow []$ \triangleright Initialize an empty list to store post_logits
5: for $i \leftarrow 0$ to $mped_num - 1$ do
$6: \qquad start_idx \leftarrow i \times part_size$
7: $end_idx \leftarrow (i+1) \times part_size$
8: $part_logit \leftarrow pre_logits[start_idx : end_idx, :]$
9: $post_logits.append(part_logit.repeat(mped_num, 1))$
10: end for
11: return $\sum post_logits / mped_num$
12: end procedure

probability distributions generated at the *j*-th position prediction within the batch to get the ensemble probability, and ultimately determine the output Y's y_j . To ensure batched inference is possible, we employ a Left-Padding strategy to ensure the lengths of the n inputs are consistent.

2.1 Inner-Batch Ensemble

Most LLMs adopt a Decoder-only architecture and utilize an autoregressive decoding strategy, generating output tokens one by one. Given the source sentence $X = \{x_1, x_2, ..., x_k\}$, LLMs factor the distribution over possible output sentence $Y = \{y_1, y_2, ..., y_j\}$ into a chain of conditional probabilities, satisfying the following formula:

$$\mathbb{P}(Y|X) = \prod_{i=1}^{j} \mathbb{P}(y_i|y_{0:i-1}, X) \tag{1}$$

For the Standard Ensemble, during the prediction of y_j , we average the probability distributions provided by n models. We define these n models as $\{\theta_1, \theta_2, ..., \theta_n\}$, and the formula is as follows:

$$\mathbb{P}(y_j|y_{0:j-1}, X) = \frac{1}{n} \sum_{i=0}^n \mathbb{P}(y_j|y_{0:j-1}, X, P; \theta_i)$$
(2)

which P is a distinct prompt. This method leverages the diversity among models, aiming to reduce uncertainty and improve overall predictive performance.

For our method, we shift the focus of diversity from n models to n prompts, and the formula is as

follows:

$$\mathbb{P}(y_j|y_{0:j-1}, X) = \frac{1}{n} \sum_{i=0}^n \mathbb{P}(y_j|y_{0:j-1}, X, P_i; \theta)$$
(3)

which $\{P_1, P_2, ..., P_n\}$ is a list of prompts having the same meaning with P. As shown in right side of Figure 2, inputs constructed by these n prompts and X are submitted to LLMs in batches for decoding. We average the predicted probability distributions within the batch at each step of prediction, a process we term **Inner-Batch Ensemble**. Here, we use the most straightforward uniform average method. Of course, in the future, strategies like weighted average could also be considered. This approach mitigates biases potentially introduced by any single prompt and enhances the model's robustness against varying inputs. For details of the implementation, please refer to Algorithm 1.

2.2 Left-Padding

In the decoding process of LLMs, the inconsistency in prompt lengths poses challenges for batch processing. To address this issue, we employ Left-Padding technology to preprocess the input prompts, ensuring uniformity in length to accommodate the model's batch processing requirements. In practice, we pad shorter prompts with a specific token *pad* until they match the length of the longest prompt. This padding token is a special token with no semantic meaning, used solely for padding. This padding does not interfere with the model's understanding and processing, as the model is trained to recognize and ignore these special padding characters.

Padding is a common method for handling sequences of varying lengths in batch processing,

d-BLEU	en→de	en→fr	en→zh	en→ja	de→en	fr→en	zh→en	ja→en
p_1	27.40	37.59	17.37	9.35	32.89	41.38	24.39	6.72
p_2	27.05	37.14	17.23	9.61	32.74	41.60	24.39	6.75
Ours	27.88	38.16	18.88	11.44	33.11	42.25	24.85	8.37

Table 1: Results for Machine Translation Task.

but it is typically used during the training phase, often employing Right-Padding. We, however, apply padding during the inference phase and use Left-Padding, which will not affect the model's prediction of the next token. If we used Right-Padding, for shorter prompts, it would sever the direct connection between input and output, causing decoding anomalies. See the left side of Figure 2. By doing so, we can standardize prompts of varying lengths, allowing them to be processed by the model in one go, making full use of parallel computing resources.

3 Experiments

3.1 Application to Machine Translation Task

In the field of machine translation, we have taken on the challenging task of document-level translation and have significantly enhanced the performance of models on the IWSLT 2017 test sets by implementing multi-prompt decoding strategies.

Datasets We validate our experiments using the test sets¹ from the IWSLT 2017 translation task. This dataset includes parallel documents sourced from TED talks. Our experiments are conducted on eight language pairs: English (En) \leftrightarrow Chinese (Zh), German (De), French (Fr), and Japanese (Ja). There are 10 to 12 parallel documents with approximately 1,500 sentences for each language pair.

Model The model we employed is Llama-3.1-8B-Instruct², a large language model particularly suited for instructed learning tasks. Compared to previous Llama versions, Llama-3.1-8B-Instruct has enhanced capabilities in multilingual translation. Given the strong translation capabilities that LLMs already possess, we directly utilize LLMs for document-level translation.

Evaluate Metrics We employ *d*-BLEU (document-level BLEU) as our evaluation metric(Papineni et al., 2002). While there are other

metrics in the field of machine translation, such as BertScore (Zhang et al., 2020) and COMET (Rei et al., 2020), these are typically used for sentence-level translation evaluation. Utilizing them for document-level translation requires sentence-level alignment between the original and translated texts. Hence, we opt for d-BLEU here, which does not rely on sentence alignment.

Prompts Design We employed two fixed prompts. One of them is p_1 : "*Translate the following paragraph from {source language} to {target language}, ensuring that no part of the sentence is omitted.*" The other is p_2 : "You're a very professional translator. Please help me translate the following paragraph from {source language} to {target language}."

Results The experimental results demonstrate that our approach, by employing multi-prompt decoding strategies, achieved significant improvements over the original method on the d-BLEU metric. For detailed results, please refer to Table 1. Our experimental results show that in the English to Chinese and to Japanese directions, compared to the best results with a single prompt, our method can approximately increase by 1.5 points on the d-BLEU scale; there is also an improvement of about 0.5 points in other directions. We speculate that our use of LLMs, Llama-3.1-8B-Instruct, which was trained on a vast amount of English data, results in more stable translations into English, thus limiting the improvement of our method. However, in other language directions, the improvement is more pronounced.

3.2 Application to Code Generation Task

In the code generation task, our technical solution has achieved a significant improvement in pass@k pass rates on the standard test set HumanEval³ compared to the original methods.

Dataset HumanEval is a benchmark test suite designed to evaluate the performance of code generation models, comprising 164 meticulously crafted

¹https://huggingface.co/datasets/IWSLT/iwslt2017

²https://huggingface.co/meta-llama/Llama-3.1-8B-Instruct

³https://github.com/openai/human-eval

Python programming problems. These problems span a variety of programming tasks, from basic string manipulation to complex algorithm design. Each problem includes a function header, docstrings, a function body, and several unit tests. The structure of the dataset includes a task identifier (task_id), model input (prompt, containing function headers and docstrings), a canonical solution (canonical_solution), a function for testing the correctness of generated code (test), and an entry point for testing (entry_point).

Model We conduct experimental evaluations using CodeLlama-7B-Python-hf⁴. CodeLlama-13B-Python-hf is a member of the Code Llama series of models, which is a large-scale code language model series based on Llama 2. It can adapt to a variety of code synthesis and understanding tasks, such as code auto-completion, code refactoring, and code explanation. In Section 4.2, we also perform further experiments comparing models of different size like 13B.

Evaluate Metrics Pass@k (Chen et al., 2021) is a metric used to evaluate the performance of code generation models, specifically measuring the model's ability to correctly solve problems when generating code. During the evaluation process, the model generates multiple k code samples for each unit test problem. If any of these samples pass the unit test, then the problem is considered solved. The pass@k score represents the total proportion of problems solved, which helps to quantify the model's success rate in generating correct code.

Prompts Design Since the dataset provides a prompt for each problem, we define this original prompt as p1. For another prompt, we have constructed a very simple prefix based on p_1 : """This is a good code., which we define as p_2 . This construction ensures that the newly created p_2 does not alter the meaning of the original prompt p_1 . For detailed examples, please refer to Appendix A.2.

pass@k	k=1	k=5	k=10
p_1	32.11%	58.13%	67.17%
p_2	30.74%	58.03%	67.26%
Ours	33.12%	59.07%	68.11%

⁴https://huggingface.co/codellama/CodeLlama-7b-Python-hf

Results The experimental outcomes demonstrate that our technical solution markedly enhances the pass rate across various settings of k. As shown is Table 2, regardless of whether k is set to 1, 5, or 10, our solution consistently boosts the pass@k pass rate by 1% point. This improvement not only underscores the effectiveness of our technical solution in code generation tasks but also highlights its robustness across different evaluation metrics, ensuring the delivery of higher quality code generation outcomes.

3.3 Application to Text Simplification Task

In the text simplification task, our technical solution has demonstrated superior performance on the challenging test set SimpEval_2022. Compared to the original methods, our solution has achieved significant improvements in the LENS metric.

Dataset SimpEval_2022 is a challenging text simplification benchmark consisting of over 1,000 human ratings on 360 simplifications. This dataset is designed to evaluate the latest text simplification models, particularly those based on large pre-trained language models. The sentences in SimpEval_2022 are selected from Wikipedia revisions published after October 22, 2022, and include more complex sentences to reduce the risk of "data contamination" and serve as a more challenging test bed for large language models.

Model The model we used is Llama-3.1-8B-Instruct⁵, a large language model particularly suited for instructed learning tasks. In this study, we applied this model to text simplification tasks and combined it with multi-prompt decoding strategies to enhance text simplification quality. The powerful computational capabilities of the Llama-3.1-8B-Instruct model enable it to handle complex language conversion tasks and perform exception-ally well in text simplification.

Evaluate Metrics LENS (Maddela et al., 2023) is a state-of-the-art metric designed to assess the performance of text simplification tasks. LENS supports two evaluation conditions: with reference (w/ ref) and without reference (w/o ref). Under the with reference condition, LENS uses the original text as a benchmark for evaluation; whereas, under the without reference condition, LENS evaluates

⁵https://huggingface.co/meta-llama/Llama-3.1-8B-Instruct

the quality of simplified text independently, without relying on any original text information. This flexibility allows LENS to accommodate various assessment needs and environments.

Prompts Design Following Heineman et al. (2024), the prompts are designed as follows: p_1 is "Please simplify the following sentence so that it is easy to understand by people with disabilities or those who are unfamiliar with English. Try to use shorter words, fewer clauses, and a simpler structure." p_2 is "Create a simpler version of the sentence below so that it can be better understood by non-English speakers or individuals with disabilities."

LENS	w/ ref	w/o ref
p_1	75.08	81.54
p_2	74.76	81.63
Ours	77.18	82.08

Table 3: Results for Text Simplification Task.

Results The experimental results demonstrate that our technical solution can achieve significant improvements in the LENS metric under various evaluation conditions. As shown in Table 3, whether under with-reference or without-reference evaluation conditions, our solution can steadily enhance the quality of text simplification. Notably, under with-reference evaluation conditions, our method outperforms the best results obtained using only p_1 or p_2 by nearly 1.5 points. This result proves the effectiveness and applicability of our technical solution in text simplification tasks, providing higher quality text simplification results under diverse evaluation standards.

4 Study

4.1 Effectiveness Analysis under Various Decoding Strategies

In this section, we conducted an in-depth analysis of the effects of multi-prompt ensemble decoding methods under various decoding strategies, including Top-p (Finlayson et al., 2024), Top-k (Xie et al., 2020), and Beam Search. Among them, Top-p is the decoding method we used for various tasks in Section 3. We expanded this experiment based on our previous work in machine translation and code generation tasks.

For machine translation tasks, we conducted experiments in the English to German $(en \rightarrow de)$ and

d-BLEU	Тор- <i>p</i>	Top- k	Beam		
		En→De			
p_1	27.40	26.92	27.64		
p_2	27.05	27.22	27.81		
Ours	27.88	27.52	27.81		
	En→Zh				
p_1	17.37	17.56	18.34		
p_2	17.23	16.79	18.42		
Ours	18.88	18.87	18.51		

Table 4: Study under Various Decoding Strategies forMachine Translation Task

English to Chinese (en \rightarrow zh) directions, as shown in Table 4. We found that with Top-k and Top-p decoding methods, our approach showed improvements compared to single prompt. With Beam Search decoding, our method's results are close to the best results of p_1 or p_2 , and higher than the average of these two.

pass@k	Top-p	Top-k
p_1	67.17%	66.94%
p_2	67.26%	67.11%
Ours	68.11%	67.85%*

Table 5: Study under Various Decoding Strategies for Code Generation Task where pass@k=10.

For code generation tasks, due to the characteristics of the task evaluation, we could only adopt sampling search decoding strategies (Top-p or Top-k). As shown in Table 5, regardless of whether based on Top-k or Top-p, our method consistently improved pass@k. This conclusion is consistent with Section 3.2.

4.2 Study across Varying LLM Sizes

In this section, we investigate the effectiveness of our method across different sizes of LLMs. Our main experiments in Section 3 were conducted on models of size 7-8B. Building on our previous code generation tasks, we extended our experiments to a 13B model, using CodeLlama-13B-Python-hf⁶. We ensured that all experimental settings remained consistent with Section 3.2, except for the model itself.

As shown in Table 6, larger models demonstrate superior code generation capabilities, with significant improvements in the pass@k metric for k=1,

⁶https://huggingface.co/codellama/CodeLlama-13b-Python-hf

pass@k	k=1	k =5	k=10
p_1	39.6%	67.53%	78.02%
p_2	39.48%	67.6%	77.88%
Ours	41.52%	69.54%	79.80%

Table 6: Results for Code Generation Task usingCodeLlama-13B-Python-hf.

5 and 10. Our method also shows consistent improvements on the 13B model, achieving similar enhancements as on the 7B model. Moreover, on the 13B model, the improvement is more substantial, with pass@10 increasing by nearly 2 points; whereas the pass@10 on the 7B model (see Table 2) only improved by about 1 point. The experimental results confirm the effectiveness of our method across various sizes of LLMs.

4.3 Study on the Relationship between Prompt Count n and Output Quality

In this section, we investigate the relationship between the number of prompts and the quality of results. Building on our previous experiments on code generation and text simplification tasks, we conducted extended tests with varying numbers of prompts. The settings for the extended prompts are detailed in Appendix C.2.

\overline{n}	1	2	3	4
p_1	67.17%	-	-	-
Ours		68.11%	68.15%	67.85%

Table 7: Pass@10 rate under different Prompt Count n for Code Generation Task.

\overline{n}	1	2	3	4
p_1	75.08	-	-	-
Ours		77.18	77.08	76.88

Table 8: LENS w/ ref under different Prompt Count n for Text Simplification Task.

As shown in Tables 7 and 8, the experimental results indicate that increasing the number of prompts can enhance the quality of generated output for both code generation and text simplification tasks. However, we observed that when the number of prompts increased from 2 to 3, the improvement in result quality began to plateau. This trend suggests that 2-3 prompts are essentially sufficient to achieve optimal results, and beyond this range, additional prompts have a limited effect on enhancing result quality. Therefore, in our previous baseline experiments in Section 3, we opted for two prompts as the standard configuration.

4.4 Exploration of Multilingual Prompts Effects

In this section, we explore the effectiveness of our method under Multilingual Prompts. Building on our previous experiments in machine translation tasks, we extended this experiment to the Chinese to English (zh→en) and English to Chinese (en \rightarrow zh) directions. We utilized the Qwen2.5-7B-Instruct⁷ model, which provides better support for instructions in both Chinese and English. For one of the prompts, p_1 , we maintained consistency with Section 3.1, setting it as "Translate the following paragraph from source language to target language, ensuring that no part of the sentence is omitted." For the other prompt, p_2 , we set it as the Chinese specification "将下面这一段从{源 语种}翻译成{目标语种},确保没有句子被漏 掉。"

d-BLEU	En→Zh	Zh→En
p_1	21.6	23.89
p_2	20.83	24.07
Ours	23.45	24.53

Table 9: Study on Multilingual Prompts using Qwen2.5-7B-Instruct for Machine Translation Task.

As shown in Table 9, under the Multilingual Prompts setup, our method shows improvements compared to using a single prompt.

4.5 Effect of Combination with MBR

Minimum Bayes Risk(MBR), which generates multiple candidate results during inference and selects the final outcome using specific metrics, is widely used in NLP generation tasks. We validate the effectiveness of combining our multi-prompt ensemble decoding strategy with MBR in text simplification tasks. We sampled and generated 50 candidate results for both simple prompts p_1 and p_2 , then used MBR to select the optimal outcome. For our multi-prompt ensemble decoding, we also sampled and generated 50 candidate results and chose the best one using MBR.

As shown in Table 10, the MBR strategy is a universal approach that significantly improves results under various conditions. When combined

⁷https://huggingface.co/Qwen/Qwen2.5-7B-Instruct

LENS	Original	MBR
p_1	75.08	77.04
p_2	74.76	76.87
Ours	77.18	77.72

Table 10: LENS w/ reference results compared between Original and MBR for Text Simplification Task.

with our multi-prompt ensemble decoding strategy, it still manages to enhance the results by more than 0.5 points.

5 Related Work

The following are some significant works (Hokamp et al., 2020; Cheng et al., 2024; Heineman et al., 2024; Pitis et al., 2023) about prompts related to this study:

Heineman et al. (2024) proposed a multi-prompt decoding approach that improves Minimum Bayes Risk (MBR) decoding by decoding multiple candidate generations from a prompt library during inference. This method uses a trained value metric to select the final output, demonstrating that multi-prompt can improve MBR performance in a range of conditional generation tasks by estimating a more diverse and higher-quality candidate space. The core of this paper lies in the MBR strategy, which generates multiple candidate results during inference and selects the final outcome using specific metrics. They construct a sufficiently large and diverse set of candidates through multiprompting, which can be seen as an ensemble in the result space. However our method is an ensemble during the inference process. .

(Pitis et al., 2023) introduced a method named Boosted Prompt Ensembles to enhance the reasoning performance of large language models without additional training. It constructs a set of few-shot prompts that work together as an ensemble, iteratively adding prompts that target difficult examples where the current ensemble's performance is uncertain, thereby improving overall accuracy on a variety of tasks. The core of this paper lies in the selection of prompts. They proposed two algorithms: Train-time Boosting and Test-time Boosting, and conducted experiments solely on the GSM8k and AQuA datasets. In contrast, our research explores a more general ensemble method during the decoding process; we do not select specific prompts but assume that we already have a batch of prompts with equivalent performance.

6 Conclusions

This study set out to address the challenge of enhancing the performance of LLMs in NLP tasks through the introduction of a multi-prompt ensemble decoding approach. Our method, termed Inner-Batch Ensemble, leverages the diversity of multiple prompts to aggregate their outcomes, thereby improving the generation quality of LLMs. The implementation of a Left-Padding strategy ensured efficient batch inference, allowing for uniform input lengths across various prompts. Our extensive experiments across a range of NLP tasks-spanning machine translation, code generation, and text simplification-demonstrated the effectiveness of our Inner-Batch Ensemble method. The results were particularly compelling, with significant improvements observed in BLEU scores, pass@k rates, and LENS metrics when compared to standard methods. The consistent enhancements across different tasks and metrics underscore the robustness and versatility of our approach.

7 Future Work

It is known that LLMs tend to forget information when dealing with lengthy contexts, possibly due to the overwhelming length of the context. In our multi-prompt ensemble decoding strategy, although the prompts vary in form, their semantic content is identical. We are considering whether integrating prompts carrying different information could enhance decoding, allowing for the segmentation of extensive contexts into shorter segments distributed across various prompts. This approach might help the model retain all information more effectively and improve the integrity of integrated reasoning. We believe this is a highly promising area for further research.

Additionally, as LLMs are increasingly moving towards smaller model sizes, enhancing the performance of these smaller models to match the quality of their larger counterparts presents a challenge. We propose the possibility of strengthening the diversity of prompts during the training of smaller LLMs and leveraging the decoding strategy presented in this paper to boost their final performance. **This strategy could shift traditional deep reasoning to broader reasoning, enhancing the model's performance and generalization capabilities by increasing the breadth of inference rather than depth.**

8 Limitations

This study acknowledges several limitations. Firstly, our method is closely tied to the quality of the prompts used. A poorly constructed prompt may render our approach ineffective, as highquality prompts are essential for guiding LLMs to produce accurate outputs. Secondly, due to constraints in time and computational resources, the effectiveness of our method across a broader range of tasks requires further validation. Additionally, we did not experiment with the state-of-the-art GPT-4 series interfaces, as they are proprietary and do not support embedding or modification of their decoding strategies, limiting our ability to test and refine our method on cutting-edge models.

References

- Jinze Bai, Shuai Bai, Yunfei Chu, Zeyu Cui, Kai Dang, Xiaodong Deng, Yang Fan, Wenbin Ge, Yu Han, Fei Huang, Binyuan Hui, Luo Ji, Mei Li, Junyang Lin, Runji Lin, Dayiheng Liu, Gao Liu, Chengqiang Lu, Keming Lu, Jianxin Ma, Rui Men, Xingzhang Ren, Xuancheng Ren, Chuanqi Tan, Sinan Tan, Jianhong Tu, Peng Wang, Shijie Wang, Wei Wang, Shengguang Wu, Benfeng Xu, Jin Xu, An Yang, Hao Yang, Jian Yang, Shusheng Yang, Yang Yao, Bowen Yu, Hongyi Yuan, Zheng Yuan, Jianwei Zhang, Xingxuan Zhang, Yichang Zhang, Zhenru Zhang, Chang Zhou, Jingren Zhou, Xiaohuan Zhou, and Tianhang Zhu. 2023. Qwen technical report. *CoRR*, abs/2309.16609.
- Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Pondé de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, Alex Ray, Raul Puri, Gretchen Krueger, Michael Petrov, Heidy Khlaaf, Girish Sastry, Pamela Mishkin, Brooke Chan, Scott Gray, Nick Ryder, Mikhail Pavlov, Alethea Power, Lukasz Kaiser, Mohammad Bavarian, Clemens Winter, Philippe Tillet, Felipe Petroski Such, Dave Cummings, Matthias Plappert, Fotios Chantzis, Elizabeth Barnes, Ariel Herbert-Voss, William Hebgen Guss, Alex Nichol, Alex Paino, Nikolas Tezak, Jie Tang, Igor Babuschkin, Suchir Balaji, Shantanu Jain, William Saunders, Christopher Hesse, Andrew N. Carr, Jan Leike, Joshua Achiam, Vedant Misra, Evan Morikawa, Alec Radford, Matthew Knight, Miles Brundage, Mira Murati, Katie Mayer, Peter Welinder, Bob McGrew, Dario Amodei, Sam McCandlish, Ilya Sutskever, and Wojciech Zaremba. 2021. Evaluating large language models trained on code. CoRR, abs/2107.03374.
- Zifeng Cheng, Zhaoling Chen, Zhiwei Jiang, Yafeng Yin, Shiping Ge, Yuliang Liu, and Qing Gu. 2024. Multi-prompting decoder helps better language understanding. *CoRR*, abs/2406.06279.

- Enrique Dehaerne, Bappaditya Dey, Sandip Halder, Stefan De Gendt, and Wannes Meert. 2022. Code generation using machine learning: A systematic review. *IEEE Access*, 10:82434–82455.
- Matthew Finlayson, John Hewitt, Alexander Koller, Swabha Swayamdipta, and Ashish Sabharwal. 2024. Closing the curious case of neural text degeneration. In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May* 7-11, 2024. OpenReview.net.
- M. A. Ganaie, Minghui Hu, Ashwani Kumar Malik, Muhammad Tanveer, and Ponnuthurai N. Suganthan. 2022. Ensemble deep learning: A review. *Eng. Appl. Artif. Intell.*, 115:105151.
- Jiatao Gu, James Bradbury, Caiming Xiong, Victor O. K. Li, and Richard Socher. 2018. Non-autoregressive neural machine translation. In 6th International Conference on Learning Representations, ICLR 2018, Vancouver, BC, Canada, April 30 - May 3, 2018, Conference Track Proceedings. OpenReview.net.
- David Heineman, Yao Dou, and Wei Xu. 2024. Improving minimum bayes risk decoding with multi-prompt. In Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing, EMNLP 2024, Miami, FL, USA, November 12-16, 2024, pages 22525–22545. Association for Computational Linguistics.
- Chris Hokamp, Demian Gholipour Ghalandari, Nghia The Pham, and John Glover. 2020. Dyne: Dynamic ensemble decoding for multi-document summarization. *CoRR*, abs/2006.08748.
- Juyong Jiang, Fan Wang, Jiasi Shen, Sungju Kim, and Sunghun Kim. 2024. A survey on large language models for code generation. *CoRR*, abs/2406.00515.
- Zhengbao Jiang, Frank F. Xu, Jun Araki, and Graham Neubig. 2020. How can we know what language models know. *Trans. Assoc. Comput. Linguistics*, 8:423–438.
- Balaji Lakshminarayanan, Alexander Pritzel, and Charles Blundell. 2017. Simple and scalable predictive uncertainty estimation using deep ensembles. In Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA, pages 6402–6413.
- Pengfei Liu, Weizhe Yuan, Jinlan Fu, Zhengbao Jiang, Hiroaki Hayashi, and Graham Neubig. 2023. Pretrain, prompt, and predict: A systematic survey of prompting methods in natural language processing. *ACM Comput. Surv.*, 55(9):195:1–195:35.
- Mounica Maddela, Yao Dou, David Heineman, and Wei Xu. 2023. LENS: A learnable evaluation metric for text simplification. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2023, Toronto, Canada, July 9-14, 2023*, pages 16383–16408. Association for Computational Linguistics.

- Akifumi Nakamachi, Tomoyuki Kajiwara, and Yuki Arase. 2020. Text simplification with reinforcement learning using supervised rewards on grammaticality, meaning preservation, and simplicity. In Proceedings of the 1st Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics and the 10th International Joint Conference on Natural Language Processing: Student Research Workshop, AACL/IJCNLP 2021, Suzhou, China, December 4-7, 2020, pages 153–159. Association for Computational Linguistics.
- OpenAI. 2023. GPT-4 technical report. CoRR, abs/2303.08774.
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. Bleu: a method for automatic evaluation of machine translation. In Proceedings of the 40th Annual Meeting of the Association for Computational Linguistics, July 6-12, 2002, Philadelphia, PA, USA, pages 311–318. ACL.
- Silviu Pitis, Michael R. Zhang, Andrew Wang, and Jimmy Ba. 2023. Boosted prompt ensembles for large language models. *CoRR*, abs/2304.05970.
- Ricardo Rei, Craig Stewart, Ana C. Farinha, and Alon Lavie. 2020. COMET: A neural framework for MT evaluation. In Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing, EMNLP 2020, Online, November 16-20, 2020, pages 2685–2702. Association for Computational Linguistics.
- Rico Sennrich, Barry Haddow, and Alexandra Birch. 2016. Improving neural machine translation models with monolingual data. *Preprint*, arXiv:1511.06709.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurélien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. 2023a. Llama: Open and efficient foundation language models. *CoRR*, abs/2302.13971.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton-Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan,

Melanie Kambadur, Sharan Narang, Aurélien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. 2023b. Llama 2: Open foundation and fine-tuned chat models. *CoRR*, abs/2307.09288.

- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA, pages 5998–6008.
- Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc V. Le, Ed H. Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. 2023. Self-consistency improves chain of thought reasoning in language models. In *The Eleventh International Conference* on Learning Representations, ICLR 2023, Kigali, Rwanda, May 1-5, 2023. OpenReview.net.
- Daimeng Wei, Zhanglin Wu, Hengchao Shang, Zongyao Li, Minghan Wang, Jiaxin Guo, Xiaoyu Chen, Zhengzhe Yu, and Hao Yang. 2023. Text style transfer back-translation. *Preprint*, arXiv:2306.01318.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed H. Chi, Quoc V. Le, and Denny Zhou. 2022. Chain-of-thought prompting elicits reasoning in large language models. In Advances in Neural Information Processing Systems 35: Annual Conference on Neural Information Processing Systems 2022, NeurIPS 2022, New Orleans, LA, USA, November 28 - December 9, 2022.
- Yujia Xie, Hanjun Dai, Minshuo Chen, Bo Dai, Tuo Zhao, Hongyuan Zha, Wei Wei, and Tomas Pfister. 2020. Differentiable top-k with optimal transport. In Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual.
- An Yang, Baosong Yang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Zhou, Chengpeng Li, Chengyuan Li, Dayiheng Liu, Fei Huang, Guanting Dong, Haoran Wei, Huan Lin, Jialong Tang, Jialin Wang, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Ma, Jianxin Yang, Jin Xu, Jingren Zhou, Jinze Bai, Jinzheng He, Junyang Lin, Kai Dang, Keming Lu, Keqin Chen, Kexin Yang, Mei Li, Mingfeng Xue, Na Ni, Pei Zhang, Peng Wang, Ru Peng, Rui Men, Ruize Gao, Runji Lin, Shijie Wang, Shuai Bai, Sinan Tan, Tianhang Zhu, Tianhao Li, Tianyu Liu, Wenbin Ge, Xiaodong Deng, Xiaohuan Zhou, Xingzhang Ren, Xinyu Zhang, Xipin Wei, Xuancheng Ren, Xuejing Liu, Yang Fan, Yang Yao, Yichang Zhang, Yu Wan, Yunfei Chu, Yuqiong Liu, Zeyu Cui, Zhenru Zhang, Zhifang Guo, and Zhihao Fan. 2024. Qwen2 technical report. CoRR, abs/2407.10671.
- Tianyi Zhang, Varsha Kishore, Felix Wu, Kilian Q. Weinberger, and Yoav Artzi. 2020. Bertscore: Evaluating text generation with BERT. In 8th International Conference on Learning Representations, ICLR 2020,

Addis Ababa, Ethiopia, April 26-30, 2020. OpenReview.net.

- Jiangjiang Zhao, Zhuoran Wang, and Fangchun Yang. 2023. Genetic prompt search via exploiting language model probabilities. In *Proceedings of the Thirty-Second International Joint Conference on Artificial Intelligence, IJCAI 2023, 19th-25th August 2023, Macao, SAR, China*, pages 5296–5305. ijcai.org.
- Zhi-Hua Zhou, Jianxin Wu, and Wei Tang. 2002. Ensembling neural networks: Many could be better than all. *Artif. Intell.*, 137(1-2):239–263.

A Prompts Design

A.1 Prompts for Machine Translation Task

The designed prompts for Machine Translation Task used in Section 3.1 are as following:

System Prompt:

 $- - - - p_1$

You are a great translation assistant!

User Prompt:

Translate the following paragraph from {*source language*} to {*target language*}, ensuring that no part of the sentence is omitted.

 p_2

{source language}: {source text}

System Prompt:

You are a helpful assistant!

User Prompt:

You're a very professional translator. Please help me translate the following paragraph from {*source language*} to {*target language*}.

{source language}: {source text}

Table 11: Designed Prompts for Machine Translation Task.

A.2 Prompts for Code Generation Task

For Code Generation Task, since the dataset provides a prompt for each problem, we define this original prompt as p_1 . For prompt p_2 , we construct a simple prefix based on p_1 . Examples of this prompts used in Section 3.2 are as following:

	m.
	p_1
def specialFilter(r	nums):
"""Write a fun	ction that takes an array of numbers as input and returns the number of elements in
	greater than 10 and both first and last digits of a number are odd (1, 3, 5, 7, 9).
For example:	
•	15, -73, 14, -15] => 1
· ·-	
specialFilter([:	$33, -2, -3, 45, 21, 109]) \Longrightarrow 2$
	p_2
""" This is a goo	
def specialFilter(r	
	ction that takes an array of numbers as input and returns the number of elements in
the array that are	greater than 10 and both first and last digits of a number are odd (1, 3, 5, 7, 9).
For example:	
specialFilter([]	15, -73, 14, -15] => 1
· ·-	33, -2, -3, 45, 21, 109 => 2
"""	
	Table 12: Prompts of ID 146 for Code Generation Task
	p_1
from typing impo	rt List, Tuple
1.6	
•	numbers: List[int]) -> List[int]:
	ven list of integers, generate a list of rolling maximum element found until given
-	
moment in the sec	
moment in the sec	quence.
moment in the sec rolling_max	quence. .([1, 2, 3, 2, 3, 4, 2])
moment in the sec	quence. .([1, 2, 3, 2, 3, 4, 2])
moment in the sec rolling_max [1, 2, 3, 3, 3, 4	quence. ([1, 2, 3, 2, 3, 4, 2]) p_2
moment in the sec rolling_max [1, 2, 3, 3, 3, 4	quence. ([1, 2, 3, 2, 3, 4, 2]) p_2
moment in the sec rolling_max [1, 2, 3, 3, 3, 4	quence. ([1, 2, 3, 2, 3, 4, 2]) ([4, 4]) p_2 p_2 p_2
moment in the sec rolling_max [1, 2, 3, 3, 3, 4 """ This is a goo	quence. ([1, 2, 3, 2, 3, 4, 2]) ([4, 4]) p_2 p_2 p_2
moment in the sec rolling_max [1, 2, 3, 3, 3, 4 """ This is a goo from typing impo	quence. ([1, 2, 3, 2, 3, 4, 2]) [4, 4] p_2 p_3 p_2 p_3 p_2 p_3 p_2 p_3 p_4 p_3 p_3 p_4 p_3 p_4 p_3 p_4 p_4 p_4 p_4 p_4 p_5 p_4 p_5 p_4 p_5 p_4 p_5 p_4 p_5 p_5 p_4 p_5
moment in the sec rolling_max [1, 2, 3, 3, 3, 4 """ This is a goo from typing impo def rolling_max(r	quence. ([1, 2, 3, 2, 3, 4, 2]) ([1, 2, 3, 2, 3, 4]) ([1, 2, 3, 2]) ([1, 2, 3, 2]) ([1, 2, 3, 2]) ([1, 2, 3]) ([1, 3,
moment in the sec rolling_max [1, 2, 3, 3, 3, 4 """ This is a goo from typing impo def rolling_max(r """ From a gi	quence. ([1, 2, 3, 2, 3, 4, 2]) ([1, 2, 3, 2, 3, 4]) ([1, 2, 3, 2]) ([1, 2, 3, 2]) ([1, 2, 3]) ([1, 3, 3]) ([1,
moment in the sec rolling_max [1, 2, 3, 3, 3, 4 """ This is a goo from typing impo def rolling_max(r """ From a gi moment in the sec	quence. ([1, 2, 3, 2, 3, 4, 2]) ([1, 2, 3, 2, 3, 4]) ([1, 2, 3, 2]) ([1, 2, 3, 2]) ([1, 2, 3]) ([1, 3, 3]) ([1,
moment in the sec rolling_max [1, 2, 3, 3, 3, 4 """ This is a goo from typing impo def rolling_max(r """ From a gi moment in the sec rolling_max	quence. ([1, 2, 3, 2, 3, 4, 2]) ([1, 2, 3, 2, 3, 4, 2]) p_2 p_3 p_4 p_2 p_3 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4
moment in the sec rolling_max [1, 2, 3, 3, 3, 4 """ This is a goo from typing impo def rolling_max(r """ From a gi moment in the sec	quence. ([1, 2, 3, 2, 3, 4, 2]) ([1, 2, 3, 2, 3, 4, 2]) p_2 p_3 p_4 p_2 p_3 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4 p_4

Table 13: Prompts of ID 9 for Code Generation Task

A.3 Prompts for Text Simplification Task

The designed prompts for Text Simplification used in Section 3.3 are as following:

User Prompt:

Please simplify the following sentence so that it is easy to understand by people with disabilities or those who are unfamiliar with English. Try to use shorter words, fewer clauses, and a simpler structure. Original: {*input text*}

 p_1

 p_2

User Prompt:

Create a simpler version of the sentence below so that it can be better understood by non-English speakers or individuals with disabilities. Original: {*input text*}

Table 14: Designed Prompts for Text Simplification Task

B Detailed Main Experimental Results

B.1 Detailed Results for Machine Translation Task

The specific outcomes for various seed settings in the Machine Translation Task, as discussed in Section 3.1, are presented below in Table 15:

d-BLEU	en→de	en→fr	en→zh	en→ja	de→en	fr→en	zh→en	ja→en
	p_1							
0	27.18	38.57	22.53	13.36	34.74	42.27	21.95	9.21
1	27.82	37.6	16.43	7.23	34.87	42.22	25.84	7.26
2	27.4	35.94	16.58	5.52	31.78	39.12	24.3	5.58
3	28.2	37.6	15.53	12.08	30.99	41.81	25.06	5.58
4	26.54	37.88	16.93	11.7	32.02	41.96	24.31	4.69
5	27.2	36.83	15.61	7.87	32.22	41.88	21.9	9.31
6	27.1	38.43	15.79	6.85	31.19	41.17	25.17	6.95
7	28	37.79	22.44	8.47	34.92	42.36	24.82	5.21
8	26.69	37.61	15.56	14.02	32.45	39.5	26.24	6.88
9	27.86	37.33	16.3	6.39	33.7	41.49	24.35	6.51
ĀVG	27.40	37.59	17.37	9.35	32.89	41.38	24.39	6.72
				<i>p</i>	2			
0	26.99	35.85	15.14	14.03	35.21	41.88	24.94	6.76
1	26.04	37.68	16.74	12.29	33.84	42.63	24.63	6.76
2	26.57	38.5	16.09	6.19	31.73	42.61	26.39	5.1
3	26.15	37.12	16.47	6.46	34.89	42.42	21.68	5.2
4	27.08	37.61	21.57	14.14	31.29	39.37	22.02	6.87
5	26.36	37.01	14.85	7.73	30.28	41.8	24.49	9.45
6	26.96	36.59	16.65	12.3	31.61	41.87	24.75	5.13
7	27.9	35.82	21.43	6.37	31.74	42.06	25.17	5.24
8	27.61	37.24	17.38	8.82	34.81	42.3	25.28	6.76
9	28.79	37.97	16	7.81	31.97	39.01	24.5	10.25
ĀVG	27.05	37.14	17.23	9.61	32.74	41.60	24.39	6.75
				Οι				
0	28.58	37.79	18.86	9.01	32.01	43.21	26.06	7.93
1	27.66	38.84	16.23	14.94	34.74	42.8	26.13	7.74
2	28.59	39.04	23.06	11.06	34.79	42.86	25.18	10.79
3	28.29	39.15	18.75	12.71	35.15	39.87	26.09	6.82
4	27.55	37.94	17.82	14.66	33.4	42.83	25.61	7.35
5	28.82	36.84	17.02	8.87	32.61	42.71	24.66	7.95
6	26.66	37.96	22.83	12.74	31.86	42.74	21.98	7.98
7	26.59	39.16	19.08	9.56	32.18	42.75	23.81	10.9
8	27.97	37.19	18.9	9.89	32.61	39.69	22.92	8.08
9	28.07	37.72	16.29	10.91	31.73	43.06	26.04	8.11
ĀVG	27.88	38.16	18.38	11.44	33.11	42.25	24.85	8.37

Table 15: Detailed results for Machine Translation Task.

B.2 Detailed Results for Code Generation Task

The specific outcomes for various seed settings in the Code Generation Task, as discussed in Section 3.2, are presented below in Table 16:

B.3 Detailed Results for Text Simplification Task

The specific outcomes for various seed settings in the Text Simplification Task, as discussed in Section 3.3, are presented below in Table 17:

pass@k	k=1	k=5	k=10	LENS	w/ref	w/o ref
		p_1				p_1
0	30.41%	56.78%	67.67%	0	75.32	80.76
1	31.94%	58.73%	66.68%	1	75.93	82.04
2	32.32%	58.03%	67.92%	2	75.65	82.58
3	39.24%	59.19%	66.39%	3	74.47	81.02
4	30.44%	59.17%	67.42%	4	75.71	82.2
5	39.2%	58.97%	66.32%	5	74.43	81.4
6	28.02%	57.13%	67.72%	6	75.37	82.36
7	30.71%	57.81%	67.53%	7	75.36	80.26
8	28.42%	57.63%	67.76%	8	74.59	82.5
9	30.37%	57.88%	66.33%	9	73.98	80.27
AVG	32.11%	58.13%	67.17%	ĀVG	75.08	81.54
		p_2				p_2
0	30.11%	58.64%	67.34%	0	74.54	81.79
1	32.12%	58.73%	67.13%	1	75.81	80.62
2	32.31%	57.62%	67.88%	2	72.83	82.44
3	33.39%	58.97%	67.41%	3	74.48	81.61
4	28.05%	56.39%	67%	4	73.31	82.36
5	33.1%	57.9%	66.92%	5	75.68	80.91
6	30.1%	58.58%	67.71%	6	74.92	81.65
7	27.95%	58.47%	66.69%	7	75.35	81.23
8	30.35%	58.67%	67.16%	8	74.63	81.7
9	29.96%	56.3%	67.35%	9	76.05	81.99
ĀVG	30.74%	58.03%	67.26%	ĀVG	74.76	81.63
		Ours				Ours
0	32.66%	58.9%	67.2%	0	76.71	82.21
1	37.1%	58.86%	69.12%	1	76.03	81.88
2	37.06%	57.89%	67.68%	2	77.26	81.68
3	32.97%	60.05%	67.76%	3	77.22	81.98
4	31.8%	58.9%	67.27%	4	77.38	82.36
5	33.03%	59.21%	68.5%	5	78.69	82.61
6	32.16%	59.19%	68.05%	6	78.02	82.12
7	33.26%	57.93%	69.27%	7	76.17	81.63
8	30.59%	59.37%	67.62%	8	77.96	82.64
9	30.57%	60.41%	68.62%	9	76.32	81.69
ĀVG	33.12%	59.07%	68.11%	ĀVG	77.18	82.08

Table 16: Detailed Results for Code Generation Task.

Table 17: Results for Text Simplification Task.

C Appendix for Study

C.1 Detailed Results for Study under Various Decoding Strategies

The specific outcomes for various seed settings in the Machine Translation Task under Top-k decoding strategy, as discussed in Section 4.1, are presented below in Table 18:

$\begin{array}{c c c c c c c c c c c c c c c c c c c $	d-BLEU	en→de	en→zh
$\begin{array}{cccccccccccccccccccccccccccccccccccc$		p_1	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	0		21.43
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	1	27.92	15.99
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	2	26.15	15.62
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	3	26.99	20.85
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	4	26.03	16.34
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	5	27.73	14.90
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		28.04	16.12
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		26.80	15.73
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	8	26.71	22.51
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	9	26.90	16.15
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	ĀVG	26.92	17.56
$\begin{array}{cccccccccccccccccccccccccccccccccccc$		p_2	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$			
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$			
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	8		15.51
Ours028.6018.79128.2418.57225.5417.61327.4919.43425.9216.40526.7519.76628.6617.57727.9317.10828.5822.24927.4621.20	9		
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	AVG		16.70
$\begin{array}{cccccccccccccccccccccccccccccccccccc$			
526.7519.76628.6617.57727.9317.10828.5822.24927.4621.20			
628.6617.57727.9317.10828.5822.24927.4621.20			
727.9317.10828.5822.24927.4621.20			
8 28.58 22.24 9 27.46 21.20			
9 27.46 21.20			
	8		
AVG 27.52 18.87	9		
	AVG	27.52	18.87

The specific outcomes for various seed settings in the Code Generation Task under Top-k decoding strategy, as discussed in Section 4.1, are presented below in Table 19:

pass-k	<i>k</i> =10
p_1	
0	66.99%
1	66.31%
2	67.57%
3	66.25%
4	67.25%
5	65.83%
6	67.66%
7	67.84%
8	67.71%
9	65.99%
ĀVG	66.94%
p_2	
0	66.91%
1	66.75%
2	67.5%
3	67.34%
4	66.83%
5	66.62%
6	67.82%
7	66.43%
8	67.21%
9	67.7%
ĀVG	67.11%
Ours	
0	67.44%
1	67.3%
2	67.32%
3	67.16%
4	67.75%
5	69.05%
6	68.57%
7	67.85%
8	67.6%
9	68.46%
ĀVG	67.85%

Table 19: Detailed results for Code Generation Task under Top-k decoding strategy.

Table 18: Detailed results for Machine Translation Task under Top-k decoding strategy.

C.2 Additional Prompts for Study on Prompt Count n

Additional Prompts for Study on Prompt Count n used in Section 4.3 are as following in Table 20 and Table 21:

 p_3

This is a piece of code written by an expert that is very ingenious. def specialFilter(nums): """Write a function that takes an array of numbers as input and returns the number of elements in the array that are greater than 10 and both first and last digits of a number are odd (1, 3, 5, 7, 9). For example: specialFilter([15, -73, 14, -15]) => 1 specialFilter([33, -2, -3, 45, 21, 109]) => 2 """ Author: a coder expert def specialFilter(nums): """Write a function that takes an array of numbers as input and returns the number of elements in

"""Write a function that takes an array of numbers as input and returns the number of elements in the array that are greater than 10 and both first and last digits of a number are odd (1, 3, 5, 7, 9).

For example: specialFilter([15, -73, 14, -15]) => 1 specialFilter([33, -2, -3, 45, 21, 109]) => 2

Table 20: Additional Prompts of ID 146 for Code Generation Task

User Prompt:

_____*p*_3_____

Rewrite this sentence in a simple and easy to understand way. Make sure to retain the meaning and ideas of the original sentence while using shorter words and sentences. Original: {*input text*}

_____*p*____

User Prompt: Express this sentence in simpler terms, keeping its meaning and ideas intact, and use shorter words and sentences. Original: {*input text*}

Table 21: Additional Prompts for Text Simplification Task