DEWU ZHENG, Sun Yat-sen University, China YANLIN WANG, Sun Yat-sen University, China ENSHENG SHI, Xi'an Jiaotong University, China HONGYU ZHANG, Chongqing University, China ZIBIN ZHENG, Sun Yat-sen University, China

Recently, large language models have demonstrated exceptional performance in code generation. An increasing number of AI-driven programming assistants powered by these models have been integrated into various realworld software development environments, significantly boosting developer productivity. However, existing code generation benchmarks primarily focus on general-purpose scenarios, leaving the code generation performance of LLMs for specific application domains largely unknown. In this paper, we introduce a new benchmark, MultiCodeBench, to fill this gap. MultiCodeBench comprises 2,400 programming tasks, covering 12 popular software development domains and 15 programming languages. Specifically, we perform in-depth research to identify these 12 application domains. Given that each domain may involve multiple technical frameworks, and that different frameworks present distinct challenges in the coding process, we categorize the commonly used frameworks and platforms within each domain. We then sample programming problems from GitHub repositories related to these subdomains. To ensure the quality of the tasks and mitigate data leakage issues, we invite annotators with relevant domain experience to rewrite the docstrings for each task in MultiCodeBench. Additionally, we build a static analysis-based dependency parsing tool to extract the dependencies in the ground truth for each task, enabling deeper performance analysis. Through extensive experiments on MultiCodeBench with eleven representative mainstream LLMs, we reveal the code generation performance of the LLMs across different application domains, providing practical insights for developers in downstream fields when selecting LLMs. Furthermore, we analyze the reasons behind the models' failures in completing software application development tasks, offering guidance for model developers to enhance domain-specific code generation capabilities. Our replication package, including the benchmark and the evaluation results, is available at https://github.com/DeepSoftwareAnalytics/MultiCodeBench.

ACM Reference Format:

Dewu Zheng, Yanlin Wang, Ensheng Shi, Hongyu Zhang, and Zibin Zheng. 2024. How Well Do LLMs Generate Code for Different Application Domains? Benchmark and Evaluation. 1, 1 (December 2024), 22 pages. https://doi.org/10.1145/nnnnnnnnnnn

1 INTRODUCTION

Large language models (LLMs) have demonstrated remarkable capabilities in code generation tasks and are being rapidly applied in real-world development scenarios [20, 21, 30, 33, 51, 60, 64, 77, 78]. Developers only need to describe their intent in natural language (NL), then LLMs can efficiently generate accurate code [17, 37, 57, 62, 63]. Furthermore, to further enhance the performances of

Authors' addresses: Dewu Zheng, Sun Yat-sen University, China; Yanlin Wang, Sun Yat-sen University, China, wangylin36@ mail.sysu.edu.cn; Ensheng Shi, Xi'an Jiaotong University, China, s1530129650@stu.xjtu.edu.cn; Hongyu Zhang, Chongqing University, China, hongyujohn@gmail.com; Zibin Zheng, Sun Yat-sen University, China, zhzibin@mail.sysu.edu.cn.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

https://doi.org/10.1145/nnnnnnnnnnnn

^{© 2024} Association for Computing Machinery.

XXXX-XXXX/2024/12-ART \$15.00

LLMs in code-related domains, researchers have developed specialized code LLMs [1, 10, 45, 47, 56, 65], including the CodeLLaMa series [53], the DeepSeekCoder series [80], and the Starcoder series [39, 44], among others. With the rapid increase in the number of LLMs, researchers proposed numerous benchmarks to evaluate their performance in code generation [5, 9, 13, 22, 29, 66, 73]. HumanEval [13], AiXBench [29], MultiPL-E [9], and MBPP [5] effectively assess the fundamental programming abilities of these LLMs. ClassEval [18, 22, 38, 43, 58, 69, 72] evaluates the LLMs' ability to generate class-level code snippets, while benchmarks like RepoEval [72], CoderEval [69], CrossCodeEval [18], and EvoCodeBench [38] reflect their capability in generating functions with complex dependencies within real-world projects. These benchmarks provide valuable insights into LLMs' code generation performance, offering significant guidance for both research and practical applications of LLMs.

However, most existing code generation benchmarks primarily focus on assessing the generalpurpose code generation capabilities of LLMs, leaving their performance in specific software application domains largely unexplored [27, 42, 59, 70, 71]. Different application domains may involve distinct programming languages, specific requirements, numerous third-party libraries, and diverse development platforms [16, 54], all of which impose unique demands on LLMs when performing code generation tasks in different domains. For instance, system development typically uses C/C++ [3, 55] and requires LLMs to have sufficient knowledge of memory management and resource scheduling when generating system-related code. However, web development often involves programming languages such as HTML, JavaScript, and TypeScript, and demands that the LLMs possess a deep understanding of user interface design, interaction design, and underlying communication, along with the ability to apply this knowledge flexibly when generating webrelated code [7, 19]. As LLMs are increasingly deployed in various real-world downstream software development tasks [20], it becomes both important and urgent to reveal their capabilities in code generation for specific application domains. Revealing LLMs' domain-specific code generation capabilities can provide valuable and practical guidance for both LLM users and developers in the training and application of LLMs.

MultiCodeBench. In this paper, we introduce MultiCodeBench, a code generation benchmark that encompasses 12 software application domains and 15 programming languages, aimed at evaluating the code generation performance of LLMs in specific domains. Table 1 presents a comparison between existing popular benchmarks and MultiCodeBench. Compared to earlier benchmarks [5, 13, 36, 59], MultiCodeBench allows for the assessment of the code generation abilities of LLMs across 12 specific applications domains. To construct MultiCodeBench, we first conduct a survey of the most-discussed application domains since January 1, 2020, which include popular areas such as blockchain development, web development, desktop application development, game development, and so on.

Next, we sample programming problems from high-quality real-world projects related to these domains and perform extensive manual annotation. The resulting MultiCodeBench comprises 2,400 task instances, with 200 carefully prepared code generation tasks for each domain. These tasks are designed to assess the code generation performance of current mainstream LLMs across different domains.

Experimental Evaluation. Based on MultiCodeBench, we explore the code generation capabilities of eleven mainstream LLMs across 12 specific software application domains. Our study includes both open-source LLMs such as the CodeLLaMa series (CodeLLaMa-7B, CodeLLaMa-13B, CodeLLaMa-34B) [53], DeepSeekCoder series (DeepSeekCoder-6B, DeepSeekCoder-33B) [80], StarCoder [39] and StarCoder2 series (StarCoder2-3B, StarCoder2-7B, StarCoder2-15B) [44]) and closed-source LLMs (GPT-4 and GPT-3.5). The empirical results yield the following findings: ① We find that LLMs exhibit varying levels of performance across different domains. For example, LLMs

Benchmark	Num	Tokens	LOC	Language	Domain
HumanEval	164	57.57	57 9.0 Python		Code Exercise
MBPP	974	48.6	6.7	Python	Code Exercise
APPS	5,000	140.6	16.5	Python	Competitions
DS-1000	1,000	43.3	3.7	Python	Data Science
NumpyEval	101	29.9	1.1	Python	Public Library
TorchDataEval	50	50.7	1.3	Python	Private Library
BioCoder (public set)	460	201	26.2	Python, Java	Bioinformatics
CoderEval	460	92.84	14.9	Python, Java	General Domain
					Block chain, Cloud
				Python, JavaScript,	service, Data analysis,
				TypeScript, Solidity, Go,	Deep learning, Desktop
MultiCodeBench	2400	194.2	16.4	CSharp, CPP, C, Java,	application, Distributed
				Rust, Scala, PHP, Lua,	system, Enterprise
				Kotlin, Swift	application, Game, IoT,
					Mobile, Robotics, Web

Table 1. Comparison between existing popular benchmarks and MultiCodeBench. Num and LOC indicate the number of task instances included and average number of lines in the original ground truth.

generally perform well in blockchain development and mobile application development but show weaker performance in domains such as web development and enterprise application development. (2) We observe that a high score on general-purpose benchmarks like HumanEval [13] does not necessarily imply strong performance across all application domains. For instance, DeepSeekCoder-33B outperforms GPT-4 in several domains, even though the latter scores higher on general-purpose benchmarks. (3) We identify several common factors that cause LLMs to fail to generate domain-specific code. These include lack of relevant domain knowledge, absence of repository context, and challenges in handling third-party libraries (especially regarding application programming interface (API), its corresponding parameters and input/output types). These findings provide useful insights for LLM developers to enhance the model performance in specific domains. (4) We evaluate different types of context information for improving LLMs' domain-specific code generation capabilities. The results offer practical guidance for users seeking to enhance the effectiveness of LLMs in specific development scenarios.

In summary, our work makes the following major contributions:

- (1) We introduce MultiCodeBench, a new code generation benchmark that spans 12 specific application domains and 15 programming languages.
- (2) Through extensive experiments, we reveal the code generation performance of mainstream LLMs in these specific application domains, providing constructive recommendations and practical insights to LLM users.
- (3) Through extensive error analysis, we summarize the reasons behind the studied LLMs' suboptimal performances in code generation tasks for specific domains, offering directions for further improving LLMs' capabilities.

2 BACKGROUND

2.1 Large Language Models for Code

With the remarkable success of LLMs in natural language processing tasks [6, 11, 12, 28, 34, 35, 68, 74], LLMs for Code have rapidly emerged [2, 14, 25, 40, 49, 76], including the CodeLLaMa, StarCoder, and DeepSeekCoder series. Typically, these code LLMs are trained on vast amounts of

open-source code and applied to various code-related downstream tasks such as code generation, code completion, code repair, and code summarization [8, 48]. These LLMs can understand code syntax, semantics, and common programming patterns [23, 61], thereby enhancing development efficiency and assisting developers in tackling complex programming challenges. Based on these code LLMs, AI-powered programming assistants such as GitHub Copilot [20] and Cursor ¹ have been developed. GitHub Copilot has been activated by over one million developers, adopted by more than 20,000 organizations, and has generated more than three billion accepted lines of code. While integrated development environments (IDEs) powered by these advanced code LLMs are being used in specific domains to accelerate the software application development process [41, 50], the actual code generation performance of current LLMs in these developers may unknowingly choose an LLM that is not well-suited to their specific domain, resulting in consistently poor code generation and lower development productivity. Therefore, it is crucial to assess the performance of mainstream code LLMs in downstream software application development tasks, helping developers select the most suitable LLM for their respective domains.

2.2 Code Generation Benchmarks

To evaluate the code generation capabilities of LLMs, researchers have introduced numerous benchmarks tailored to code generation tasks [4, 5, 9, 13, 15, 22, 29, 75]. HumanEval [13] includes 164 manually constructed programming problems, requiring LLMs to generate Python function based on NL descriptions. It simulates real-world programming tasks, assessing LLMs' ability to understand NL descriptions and generate executable code. MBPP [5] contains 974 Python programming problems, covering a range of common tasks such as list processing, string manipulation, and mathematical computations.

Although these benchmarks effectively reveal the general-purpose code generation capabilities of current LLMs, they overlook the fact that these LLMs will ultimately be applied to a wide range of downstream domains, and performance in general-purpose code generation tasks does not necessarily translate to performance in domain-specific development scenarios. Most existing code generation benchmarks primarily assess LLMs' ability to generate general-purpose functions without targeting specific domains, which limits their practicality for developers working in specialized software application domains.

Fortunately, recent efforts have started to shift the focus of code generation benchmarks toward downstream domains [26, 36, 79, 81]. BioCoder [59] specifically assesses LLMs' ability to generate code for bioinformatics tasks. BigCodeBench [81] offers tasks involving multiple function calls, covering 139 libraries and 1,140 tasks across seven fundamental programming domains. DomainEval [79] evaluates LLMs' code generation capabilities across multiple domains (e.g., computing, systems, and cryptography). However, despite the advancements made by BigCodeBench and DomainEval in addressing the need for domain-specific code generation benchmarks, the domains emphasized in these benchmarks still largely revolve around foundational programming domains. As a result, developers in downstream development domains may struggle to directly determine the LLMs' code generation performance in their respective domains based on these benchmarks.

Moreover, some studies evaluate LLMs' ability to generate functions that utilize third-party libraries in specific domains. Lin et al. [26] evaluate mainstream LLMs' abilities to generate functions that invoke domain-specific third-party libraries in game development and web development.

¹https://www.cursor.com/

[,] Vol. 1, No. 1, Article . Publication date: December 2024.

However, we think that merely assessing LLMs' capability to generate function calls to domainspecific libraries is insufficient to fully capture its code generation capabilities within a particular domain. When generating code in a specific domain, LLMs should not only be familiar with domainspecific libraries but also handle complex project dependencies, possess domain-specific knowledge, and be proficient in the platforms, tools, and logic commonly used in that domain. Therefore, evaluating code generation performance in a specific domain can not be limited to examining how well an LLM uses a few specialized libraries. Moreover, Lin et al. [26] only covers two development domains (web development and game development) and two programming languages (Go and C++), which is insufficient to reflect the code generation performance of LLMs in a wide range of software application development domains.

In this paper, to comprehensively assess LLMs' code generation performance in specific application domains, we first summarize the commonly used platforms and frameworks within each domain, as shown in Table 2. For the mobile application development domain, we divide it into two subcategories: IOS application and Android application development. We then conduct a survey of the most popular frameworks in each subcategory, identify high-quality code repositories using these frameworks, and sample programming problems from them. By thoroughly classifying and ensuring that MultiCodeBench covers a broader range of popular development domains, we aim to provide a comprehensive evaluation of the current mainstream LLMs' code generation performance in various application domains. Additionally, MultiCodeBench covers 15 programming languages, including Python, JavaScript, Solidity, and so on. Our goal is to evaluate the code generation capabilities of LLMs across various domains, covering as many software application development scenarios as possible.

Domain	Subdomain	Programming Languages			
Block chain	Bitcoin, EOS, Ethereum	JavaScript, TypeScript, CSharp, CPP, Python, C, Java, Solidity, Go			
Web	Django, Vue, Next, Angular, Node, jQuery, React	TypeScript, JavaScript, Python			
Mobile	IOS, Android	JavaScript, TypeScript, CSharp, C, Java, Swift, Kotlin			
Data analysis	dask, statsmodels, matplotlib, numpy, scikit-learn, pandas, seaborn	Python			
ІоТ	Arduino, google iot core, iot, aws iot core	JavaScript, CPP, C, Python, Java, Go			
Robotics	gazebo, ROS	C, Python, CPP			
Distributed system	Netflix oos, kafka, ZooKeeper, hdfs	CSharp, CPP, Python, Java, Scala			
Deep learning	Pytorch, Tensorflow	Python			
Game	Godot Engine, cocos2d-x, Unity3D, phaser, libgdx, Unreal Engine	JavaScript, Lua, CSharp, CPP, Java, Kotlin			
Cloud service	Azure, GCP, AWS	JavaScript, TypeScript, CSharp, Python, Go			
Enterprise application	CMS, CRM, ERP, HRMS, SCM	JavaScript, TypeScript, Lua, Python, Java, Go, PHP			
Desktop application	GTK, Qt, WinForm, Electron, WPF	JavaScript, TypeScript, CSharp, CPP, Rust			

Table 2. The application domains covered by MultiCodeBench.

	Multi	odeBench	Task Instance	Overview
Instance_id	63a08283666f		Owner/Repo	AUTOMATIC1111/stable-diffusion-webu
Domain	Deep Learning		Subdomain	Pytorch
Programming la	anguage Python		File path	<pre>builtin/LDSR/sd_hijack_ddpm_v1.py</pre>
Function declar	ation def forward(self	, x, c, ∗ar	gs, ∗∗kwargs)	
t = log if	<pre>ging.info(f'Random timest self.model.conditioning_k assert c is not None if self.cond_stage_traina c = self.get_learned_c if self.shorten_cond_sche tc = self.cond_ids[t].</pre>	m_timesteps ep t genera ey is not N ble: onditioning dule: # TOD to(self.dev art=c, t=to	ded with shap None: 0(c) 00: drop this vice) c, noise=torch	
for a mod and time selects t condition processes model's c requireme returns t	tion performs a forward p lel, incorporating conditi step information.\\nIt ra ime steps, applices learne ing if applicable, and the inputs according to conditioning ints.\\nFinally, it comput the loss for the given inp tioning.\\n	oning ndomly d the es and	Dependency Import stat import torc import pyto Standard Li logging,inf Third-party torch.randi	h rch_lightning as pl brary API o API
from torch.o from einops from context (80 def shared_s	.nn as nn as np ch_lightning as pl ptim.lr_scheduler import I import rearrange, repeat lib import contextmanages fo lines omitted) tep(self, batch, **kwargs lf.get_input(batch, self. stage_key lf(x, c)	: irst_\	<pre>self.get_le def get_lea if self(9 return c self.q_samp def q_sampl(3 l self.p_loss def p_losse</pre>	<pre>d API with code arned_conditioning rned_conditioning(self, c): cond_stage_forward is None: lines omitted) le e(self, x_start, t, noise=None): lines omitted)</pre>

Fig. 1. An example of a task instance in MultiCodeBench.

3 MULTICODEBENCH

In this section, we present a detailed introduction to MULTICODEBENCH, a new multi-domain, multilanguage code generation benchmark. The section is organized as follows: Benchmark Overview, Benchmark Construction Pipeline, and Benchmark Characteristics.

3.1 Benchmark Overview

MultiCodeBench consists of 2,400 task instances, covering 12 popular application domains and 15 programming languages. Each domain includes 200 carefully constructed programming tasks. Figure 1 provides an example of a task instance in MultiCodeBench. Each task has a unique identifier, represented by the *instance_id*. The *Domain* field indicates the software application development domain to which the task belongs, while the *Subdomain* field represents the specific subdomain of development within that domain. The *Owner/Repo* field specifies the GitHub project from which the task instance is sampled, and the *Function declaration* is included as part of the prompt provided to the LLM, containing information about the input and output of the target function, which helps guide the LLM in generating the correct code. The *Local file context* refers to the code snippet located above the target function in the local file, where the local file refers to the file containing the target function. Together with the function declaration, this simulates a real development

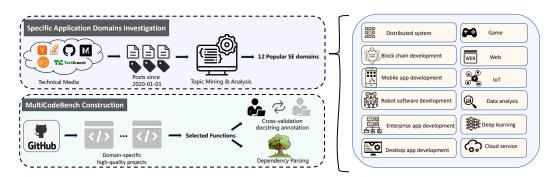


Fig. 2. MultiCodeBench construction pipeline.

scenario by providing the LLM with necessary context for code generation in IDEs. Furthermore, we develop an automated dependency parsing tool to extract the dependency-related information to assist LLMs in generating domain-specific functions. First, we extract all *Import statements* from the local file, helping LLMs understand the dependencies between this file and other parts of the project. Besides, we gather all APIs called within the target function and categorize them into three groups: *Standard library API, Repo-defined API with code*, and *Third-party API*. For repo-defined APIs, we also extract the corresponding function implementation code to further assist the LLM in understanding the project context. These three types of information directly indicate the APIs that the target function needs to call, which can significantly help LLMs generate the target function.

3.2 Benchmark Construction Pipeline

As shown in Figure 2, the construction process of MultiCodeBench consists of two main stages: the investigation of specific software application domains and the construction of the MultiCodeBench benchmark dataset.

3.2.1 Investigation of Specific Application Domains. Due to the vast number of software application domains, it is challenging to cover them all. Therefore, we focus on specific domains that are frequently discussed online as the subjects for MultiCodeBench. We conduct an investigation by analyzing domains with high exposure and frequent discussions since January 1, 2020, on relevant technical websites. Specifically, we collect all posts from active technology news sites (Ars Technica,² TechCrunch,³ Hacker News⁴), developer communities (Dev,⁵ Stack Overflow⁶), and blogs (GitHub Blog,⁷ Medium⁸) from January 1, 2020 onward. After aggregating all the content, we apply the Latent Dirichlet Allocation (LDA) [32] algorithm to identify the underlying topics of the collected posts. LDA is a topic modeling algorithm that can be used to extract the keywords that represent the underlying topics in NL texts. Stack Overflow, on the other hand, has a well-established tag management mechanism where each post is associated with several tags. These tags serve as keywords that effectively reflect the post's topic. Therefore, for Stack Overflow, we only collect and aggregate the tags from all corresponding posts. Finally, we rank the keywords based on their frequency of occurrence and analyze the domains corresponding to the top 200

²https://arstechnica.com/information-technology/

³https://techcrunch.com/category/artificial-intelligence/

⁴https://news.ycombinator.com/

⁵https://dev.to/

⁶https://stackoverflow.com/

⁷https://github.blog/

⁸https://medium.com/

keywords. This process allows us to identify 12 application domains that are currently of high interest, such as blockchain, data analysis, deep learning, and others. All the specific domains studied in MultiCodeBench are presented in Table 1.

Moreover, we investigate the common technical frameworks and development platforms for each studied domain to more comprehensively evaluate the domain-specific code generation performance of LLMs. As software systems grow in scale and complexity, a single application domain is often divided into several specialized subdomains. For instance, web development can be split into front-end and back-end development and there are also different technical frameworks in front-end development. Different subdomains within the same domain may rely on different technology stacks, tools, or development platforms, posing distinct challenges to developers. Therefore, to comprehensively reflect the code generation capabilities of LLMs in a specific application domain, we first conduct an investigation into the common subdomains within the 12 identified specific domains. We research the typical technology frameworks and development platforms used in each subdomain. Table 2 shows detailed taxonomy on MultiCodeBench. By starting with this detailed categorization, MultiCodeBench is designed to offer a thorough evaluation of current LLMs' code generation performance across various application domains. This approach also enables deeper analysis of the LLMs' strengths and weaknesses, providing practical recommendations and guidance to both users and developers of these LLMs.

3.2.2 Construction of the MultiCodeBench Benchmark. The construction of the MultiCodeBench benchmark involves four main steps, namely, selecting high-quality open-source repositories for specific domains, sampling programming problems from the these repositories, manually annotating docstrings through cross-validation, and dependency analysis.

Domain-specific high-quality projects selection. Based on the taxonomy in Table 2, we start by searching for real open-source projects on GitHub that are built upon specific technology frameworks or development platforms corresponding to each subdomain. We rank these projects based on their star count, selecting a set of high-quality projects for each domain. The advantage of sampling problems from these high-quality projects is that they generally adhere to good maintenance practices and coding standards, making the selected problems more representative of real-world scenarios.

Sampling programming problems from the selected repositories. We do not randomly select functions from the selected projects as programming problems. Instead, we conduct careful manual reviews to ensure that the chosen programming problems are highly domain-specific rather than general-purpose functions. For example, in web development projects, general algorithms and data structure implementations are not considered. Instead, we select functions that are closely related to business logic, including but not limited to core application functionality and functions that invoke domain-specific APIs. Ultimately, we carefully select 2,400 programming problems for MultiCodeBench, with 200 for each domain.

Manually annotating docstrings through cross-validation. Since the quality of docstrings in the selected projects can vary and using existing docstrings directly may lead to data leakage issues, we manually rewrite the docstrings for every programming problem in MultiCodeBench. We invite professional software developers to rewrite the requirement descriptions for each instance in MultiCodeBench. Specifically, we invite 24 developers, two per domain, each with over five years of experience in their respective domains. Then we conduct a cross-validation annotation precess: one annotator is responsible for writing the requirement description for each task instance, while another annotator conducts a manual review to determine whether the rewritten docstring matches the corresponding ground truth. In cases of disagreement, both annotators should reach a final resolution through discussion. This ensures that the docstrings in MultiCodeBench accurately

reflect the programming requirements and prevent data leakage by ensuring that LLMs do not directly associate the problems with previously seen training data.

Dependency analysis. To further assess LLMs' performance in domain-specific code generation, we develop an automated static analysis tool to extract dependencies for the ground truth. This includes the import statements in the local file, as well as standard library APIs, repository-defined APIs, and third-party library APIs used in the ground truth. Since LLMs may not be familiar with repository-defined APIs, we also include the corresponding implementation code for each repository-defined API to help the LLMs better understand the dependencies relevant to the target function.

3.3 Benchmark Characteristics

Multi-domain multi-language benchmark. MultiCodeBench spans 12 specific application domains, aiming at shifting the focus of LLM evaluation in code generation toward real-world application scenarios. Our benchmark includes 2,400 programming tasks, with 200 carefully constructed tasks for each domain. To comprehensively evaluate the code generation capability of LLMs within specific domains, we first explore the subdomains within each specific application domain, aiming to cover as many development branches as possible. Furthermore, MultiCodeBench also supports 15 different programming languages, allowing for the assessment of LLMs' performance across various programming tasks. Previous benchmarks that focus on general-purpose tasks only provide pass rates, limiting their ability to offer deeper insights for future research. In contrast, MultiCodeBench not only offers practical advice for LLM users, helping them choose the most suitable LLM in their respective domains, but also enables LLM developers to identify specific weaknesses, thereby facilitating targeted performance improvements. We advocate for a shift in LLMs' evaluation towards real-world scenarios, providing more direct feedback to researchers and practitioners.

Human annotation. We enlist experienced developers in each domain to rewrite the docstrings for every task instance in MultiCodeBench, and ensure the quality of the manual annotations through cross-validation. During the benchmark construction process, we observe that the quality of docstrings in real-world projects varies significantly, with many failing to clearly and accurately convey the target function's purpose. Therefore, we deem it necessary to rewrite a high-quality docstring for each programming task. To ensure the quality of the docstring annotations, we require annotators to have relevant industry experience in the corresponding domain. Additionally, human annotation process helps mitigate the risk of data leakage by providing fresh annotations, offering a more accurate reflection of the LLMs' code generation abilities in specific domains.

Rich dependency information. Each task in MultiCodeBench is accompanied by rich relevant dependency information, which facilitates deeper analysis of LLMs' performance. We extract various dependencies related to the target function, including import statements from the local file and API dependencies of the target function. The APIs that the target function relies on are categorized into three types: standard library APIs, project-defined APIs, and third-party library APIs. This categorization allows for more detailed analysis of LLMs, such as investigating the reasons behind LLMs' failures, assessing the LLMs' familiarity with these three types of APIs, and evaluating how well the LLMs handles domain-specific third-party libraries. This deeper insight aids in understanding the LLMs' strengths and weaknesses in handling complex, real-world tasks.

4 EXPERIMENTAL SETUP

4.1 Research Questions

Our experiments are designed to answer the following research questions (RQs):

Туре	Model	Pass@1 on HumanEval				
	GPT-4	83.5 (1)				
Closed-source	GPT-3.5	76.8 (2)				
	CodeLLaMa-7B	39.6 (8)				
	CodeLLaMa-13B	42.7 (7)				
	CodeLLaMa-34B	52.4 (3)				
0	DeepSeekCoder-6.7B	45.1 (5)				
Open-source	DeepSeekCoder-33B	50.6 (4)				
	StarCoder	34.8 (9)				
	StarCoder2-3B	31.1 (11)				
	StarCoder2-7B	34.8 (9)				
	StarCoder2-15B	45.1 (5)				

Table 3. Performance comparison of LLMs on HumanEval.

<pre>def net_to_prefix(net: Union[ipaddress.IPv4Network,ipaddress.IPv6Network]) -> list[bo0]: """ The function converts an IPv4 or IPv6 network into a prefix represented as a list of bits.\nIt first calculates the number of bits and the network range from the network address.\nFor IPv4 networks, it remaps them to the IPv4-mapped IPv6 range by adjusting the number of bits and the network range.\nIt then strips unused bottom bits and returns the prefix as a list of boolean values representing each bit in the network range.""</pre>	<pre>/// <summary> /// the function filterByLimit filters an array based on a specified limit, sorting key, and direction.\nIt sets default values for the key as "timestamp" and fromStart as false.\nDepending on the fromStart flag and the array's order, it slices the array accordingly:\n- If fromStart is true and the limit exceeds the array length, it adjusts the limit to the array length.\n- It slices the array from the start or end based on the ascending order and fromStart flag. /// </summary> public virtual object filterByLimit(object array, object limit = null, object key = null, object fromStart = null) {</pre>	Python C
<pre>/* * The function sc_adb_disconnect(struct sc_intr *intr, const char *ip_port, unsigned flags) initiates an ADB disconnect command for the specified IP and port using sc_adb_execute. It then checks if the process executed successfully with process_check_success_intr and returns the result as a boolean.\n</pre>	<pre>[[This function, playAudioWhenRotate, plays an audio clip based on the currently selected hero in the ChooseRoleScene.\nIt retrieves the hero by tag, gets the hero's race type, and then plays a specific audio clip depending on whether the hero is a Knight, Archer, or Mage.]] function ChooseRoleScene:playAudioWhenRotate()</pre>	Lua

Fig. 3. Prompt examples.

- **RQ1: How well do current mainstream LLMs perform in code generation for specific domains?** We assess the domain-specific code generation performance of eleven mainstream LLMs on MultiCodeBench. For each task in MultiCodeBench, we provide the LLMs with a docstring and a function declaration to generate the target code. Figure 3 presents examples of prompts used in the experiments. To better showcase LLMs' code generation performance, we combine the docstring and function declaration in accordance with the characteristics of the task's corresponding programming language.
- RQ2: What are the reasons that LLMs fail to correctly generate domain-specific code? We conduct an error analysis on the tasks that the LLMs fail to complete accurately, and summarize the causes of failure.
- RQ3: Can different types of context information improve the LLMs' code generation performance in specific domains? We explore whether providing additional dependency information related to the target function (such as import statements, local file context, standard library APIs, third-party library APIs, project-defined APIs with corresponding implementation code) could help improve LLMs' performance in domain-specific code generation.

Table 4. Performance of LLMs on Various Domains. Abbreviations: **BC**: Blockchain, **CS**: Cloud Service, **DA**: Data Analysis, **DL**: Deep Learning, **DApp**: Desktop Application, **DSys**: Distributed System, **EApp**: Enterprise Application, **Game**: Game Development, **IoT**: Internet of Things, **Mob**: Mobile Application, **Rob**: Robotics, **Web**: Web Development.

LLMs	BC	CS	DA	DL	DApp	DSys	EApp	Game	IoT	Mob	Rob	Web
GPT-4	46.83	39.10	39.02	36.47	43.15	40.58	36.40	41.13	39.46	46.33	42.26	34.45
GPT-3.5	32.19	32.46	29.02	29.72	23.49	20.74	19.26	19.02	22.42	27.09	25.07	17.27
CodeLLaMa-7B	43.24	39.28	33.34	33.34	40.52	38.47	35.76	35.50	38.20	42.78	40.32	34.58
CodeLLaMa-13B	47.91	41.47	36.04	35.69	42.80	40.11	37.05	35.66	40.64	44.39	42.84	35.33
CodeLLaMa-34B	48.90	42.57	37.80	38.25	43.31	42.14	37.80	35.38	41.09	46.07	43.56	36.80
DeepSeekCoder-6.7B	49.04	41.60	36.03	35.66	43.79	40.51	37.22	34.13	40.69	42.03	44.13	34.93
DeepSeekCoder-33B	52.75	44.32	39.65	39.89	46.29	42.27	39.64	39.71	43.45	44.33	48.54	38.88
StarCoder-15.5B	40.17	39.02	34.10	37.19	37.37	35.32	32.84	35.91	37.17	30.45	35.97	30.41
StarCoder2-3B	40.21	37.60	31.97	33.92	35.16	32.38	30.87	34.01	35.31	31.91	36.74	29.09
StarCoder2-7B	41.20	39.57	34.10	35.22	38.03	33.49	33.32	36.43	37.10	34.70	37.81	30.60
StarCoder2-15B	41.67	41.92	37.06	37.67	39.33	36.71	34.87	36.00	39.79	34.53	40.82	33.83

4.2 Model Selection and Settings

We select the mainstream LLMs commonly used in recent code-related studies, including both opensource and closed-source LLMs. For open-source LLMs, we choose the StarCoder series (including StarCoder, StarCoder2-3B, StarCoder2-7B, and StarCoder2-15B), the CodeLLaMa series (including CodeLLaMa-7B, CodeLLaMa-13B, and CodeLLaMa-34B), and the DeepSeekCoder series (including DeepSeekCoder-6.7B and DeepSeekCoder-33B). For closed-source LLMs, we select the widely-used GPT-4 (GPT-4-0125-preview) and GPT-3.5 (GPT-3.5-turbo-turbo-0125). Table 3 provides detailed information about the studied LLMs, including type, model, and performance on HumanEval, with performance data on HumanEval derived from EvoEval [66]. The values in brackets in the "Pass@1 on HumanEval" column represent the performance ranking of each LLM relative to all the studied LLMs. For all studied LLMs, we set the temperature to 0.4 and top-p to 0.95. Note that, to mitigate issues stemming from the randomness of model generation, the experimental results presented in this paper are obtained by conducting three repeated experiments and averaging the results. The experiments are conducted on a server running Ubuntu 18.04.6 LTS with 128 Intel(R) Xeon(R) Platinum 8336C @ 2.30GHz CPUs and 8 NVIDIA A800 80GB PCIe GPUs.

4.3 Evaluation Metric

We use the CodeBLEU [52] metric to evaluate the code generation performance of the studied LLMs on MultiCodeBench, rather than the commonly used pass@k metric in recent code generation works [38, 69]. This choice is motivated by the complexity of the tasks in MultiCodeBench, which spans 12 application domains, 15 programming languages. Projects in each development domain tend to be highly complex, with intricate dependencies and specific platform requirements, often relying on numerous third-party libraries. Deploying, debugging, and running these projects could demand vast time and effort. Furthermore, the tests within these projects may not fully cover all functionalities of the target functions. Additionally, with 2,400 task instances, execution-based evaluation would result in prohibitively long evaluation times, making MultiCodeBench less practical for future use. Given these factors, using execution-based metrics on MultiCodeBench would be excessively burdensome. Thus, we adopt the CodeBLEU metric, which is commonly used for code generation tasks [24, 26].

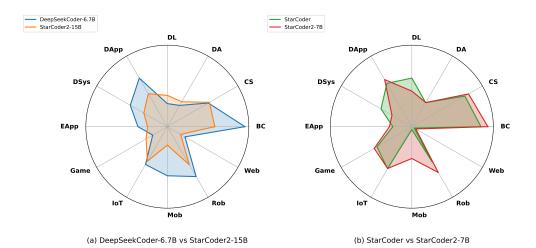


Fig. 4. Comparison of code generation performance in different domains for LLMs with similar performance on HumanEval. Abbreviations: **BC**: Blockchain, **CS**: Cloud Service, **DA**: Data Analysis, **DL**: Deep Learning, **DApp**: Desktop Application, **DSys**: Distributed System, **EApp**: Enterprise Application, **Game**: Game Development, **IoT**: Internet of Things, **Mob**: Mobile Application, **Rob**: Robotics, **Web**: Web Development.

5 EVALUATION RESULTS

5.1 RQ1: How Well Do Current Mainstream LLMs Perform in code Generation for Specific Domains?

5.1.1 Overall Performance. Table 4 presents the code generation performance of eleven mainstream LLMs on MultiCodeBench. Experimental results show that, overall, all studied LLMs perform poorly on MultiCodeBench. The most surprising result is that, closed-source LLMs such as GPT-4 and GPT-3.5 exhibit relatively suboptimal performance in domain-specific application development tasks , with performance even falling below that of the open-source DeepSeekCoder-33B. DeepSeekCoder-33B demonstrates superior code generation performance across most domains, while CodeLLaMa-34B only surpasses DeepSeekCoder-33B in the domain of mobile application development. However, as shown in Table 3, DeepSeekCoder-33B only rank 4th in the HumanEval Pass@1 metric among the eleven studied LLMs, suggesting that general-purpose benchmarks may not accurately reflect the LLMs' true capabilities in downstream software engineering tasks.

Moreover, as illustrated in Figure 4 (a) and (b), LLMs with similar performance on HumanEval can exhibit varying levels of performance in different application domains. For example, as presented in Table 3, DeepSeekCoder-6.7B and StarCoder2-15B perform similarly in terms of code generation capability on HumanEval, yet their performance diverges significantly in downstream software engineering code generation tasks. DeepSeekCoder-6.7B excels in desktop application development, blockchain development, and mobile application development, while StarCoder2-15B outperforms DeepSeekCoder-6.7B in game development and deep learning. Therefore, we think researchers should shift their focus from general-purpose benchmarks to more specific downstream domains, which will provide deeper insights into LLM performance and offer more practical, actionable guidance for users of these LLMs. Similarly, as depicted in Figure 4 (b), StarCoder and StarCoder2-7B also show considerable code generation performance on HumanEval. However, the domains in which these two LLMs excel are also different. Instead of simply reporting a single pass@k

score [13], MultiCodeBench allows detailed analysis analyze for LLMs' code generation capabilities across different software application development domain to identify specific domain where LLMs struggle or excel.

Additionally, from the results in Table 4, we observe that larger parameter scale of LLMs does not necessarily correlate with better code generation performance. For example, the 15.5B Star-Coder performs significantly worse than the 7B CodeLLaMa model in several domains, including blockchain development, cloud services, desktop application development, enterprise application development, IoT, mobile application development, robotics, and web development.

5.1.2 Performance Comparison Among Subdomains. Table 5 presents a detailed analysis of the studied LLMs' code generation performance across different development subdomains within the 12 specific domains. In general, all LLMs exhibit varying performance across different subdomains. For example, in the data analysis (DA) domain, all LLMs demonstrate poor performance in code generation based on the statistical library statsmodels, significantly lower than their performance in other subdomains of the same domain. Besides, in the blockchain development domain, DeepSeekCoder-33B demonstrates a stronger proficiency in developing Ethereum-based blockchain projects compared to those based on the original Bitcoin chain, with a performance increase of 21.8%. Furthermore, we observe that an LLM may exhibit suboptimal overall performance in a particular domain, yet demonstrate better code generation capabilities in a specific subdomain within that domain. For example, in web development, CodeLLaMa-13B achieves a performance level comparable to that of DeepSeekCoder-33B on React-based programming tasks, despite its smaller parameter size and overall weaker performance in web development tasks. These results highlight the importance of evaluating LLMs' code generation capabilities in specific subdomains, as performance can vary considerably between subdomains within the same domain. Such findings offer practical insights and guidance for downstream developers in selecting AI programming assistants best suited to their specialized development needs.

RQ1 Summary: Mainstream LLMs often perform poorly in domain-specific code generation tasks. Strong performance on HumanEval does not guarantee success in these tasks, and LLMs with similar performance on HumanEval can perform significantly different in domain-specific code generation. Furthermore, larger parameter scales do not necessarily lead to better code generation performance in specific domains.

5.2 RQ2: What are the Reasons that LLMs Fail to Correctly Generate Domain-specific Code?

Given that GPT-3.5 unexpectedly demonstrates poor domain-specific code generation performance, we conduct an error analysis of its generation results in Table 4 by reviewing each function generated by the model and compare it with the ground truth to identify why the model fails to produce the correct functions. After a thorough manual error analysis process, we identify five key reasons that contribute to the LLM's inability to generate the domain-specific function correctly.

- Reason 1: The LLM does not sufficiently understand the requirements in the docstring.
- Reason 2: The LLM lacks the repository context.
- Reason 3: The LLM is unfamiliar with third-party libraries and APIs related to specific domain.
- Reason 4: The LLM does not fully understand domain-specific algorithms, processing flows, or methods.
- Reason 5: The LLM has insufficient capabilities in some programming or language features.

Subdomain		CodeLLaMa		DeepSe		StarCoder	StarCoder2			
Subuomalli	7B	13B	34B	6.7B	33B	StarCouer	3B	7B	1.5B	
				Blockcha						
Bitcoin	40.62	44.41	45.09	45.61	48.14	39.97	39.07	39.19	41.31	
Ethereum	45.87	52.42	53.82	54.08	58.66	40.01	41.75	43.37	40.62	
EOS	46.20	46.80	48.47	45.57	51.78	42.14	39.97	42.67	48.18	
				Cloud Ser	vice					
AWS	36.14	39.41	41.73	40.27	43.25	36.70	36.80	38.35	40.98	
GCP	42.49	42.47	43.14	43.02	45.57	42.06	38.24	41.58	43.47	
azure	40.50	43.11	42.84	42.05	44.32	39.20	38.13	39.52	41.78	
				Data Ana	ysis					
scikit-learn	33.24	35.44	36.73	36.39	40.01	34.63	32.85	34.34	36.92	
statsmodels	16.52	22.67	24.50	25.83	32.06	29.79	23.29	20.54	34.12	
pandas	34.66	37.24	38.06	36.12	40.81	35.46	33.70	35.86	38.86	
seaborn	37.39	38.36	38.76	37.68	38.83	33.52	34.24	33.59	34.56	
numpy	31.50	35.27	37.79	34.97	37.50	33.07	28.64	34.77	37.64	
matplotlib	33.91	35.44	36.77	33.77	36.67	29.72	30.47	30.13	33.69	
dask	38.13	43.18	49.83	42.74	50.88	40.53	38.03	36.75	40.44	
				Deep Lear						
Pytorch	31.40	34.05	35.90	34.51	38.71	34.45	31.43	33.09	35.15	
tensorflow	39.21	40.68	45.08	39.12	43.44	45.27	41.32	41.71	45.27	
				Desktop App						
Electron	36.21	37.85	39.18	39.68	41.01	32.79	31.53	33.16	34.72	
Qt	45.96	48.16	49.01	48.49	52.23	40.90	42.04	44.50	45.65	
WinForm	38.09	42.03	40.37	42.79	43.67	35.78	29.96	35.64	34.98	
WPF	43.68	43.89	45.08	46.02	49.82	40.14	33.27	39.31	41.16	
GTK	41.72	44.75	45.59	44.20	49.13	42.08	39.02	39.58	43.14	
OIK	41.72	11.75		Distributed S		42.00	57.02	37.30	45.14	
ZaaVaanar	37.93	41.06	42.16	41.59	41.97	35.56	31.97	33.03	36.74	
ZooKeeper hdfs	37.93	38.94	42.10 39.89	39.35	40.53	34.16	32.46		35.49	
kafka	39.09		43.85	39.33	40.33		31.28	33.10		
		39.84 39.05	43.83 41.47	43.26	42.81	33.84		31.94 39.64	36.08 40.48	
Netflix_oos	38.69	39.05				40.36	36.84	39.04	40.48	
EDD	20.05	00.40		nterprise Ap		01 70	00.52	01.50	00.01	
ERP	32.95	33.49	34.66	35.07	36.75	31.79	29.53	31.52	33.31	
CRM	37.57	39.45	40.22	40.19	41.95	31.15	31.15	33.76	34.07	
CMS	32.17	36.59	34.80	35.51	38.51	32.48	28.97	31.58	33.21	
SCM	41.00	42.36	43.24	40.87	43.41	36.65	33.67	37.06	39.64	
HRMS	31.91	30.64	31.79	29.20	35.72	31.86	30.07	30.99	32.52	
				Game Develo						
Unity3D	36.58	38.40	40.56	38.68	42.24	34.37	28.82	34.85	31.19	
Unreal_Engine	34.13	29.90	26.80	24.89	35.24	42.36	40.38	40.84	42.46	
Godot_Engine	38.90	36.64	42.97	36.43	41.14	33.89	34.52	36.16	40.02	
cocos2d-x	38.72	39.75	40.65	42.63	44.43	36.02	38.56	38.74	38.31	
libgdx	31.92	34.87	32.80	32.62	36.60	29.08	26.44	28.53	28.34	
phaser	34.11	39.60	38.01	36.58	41.89	29.25	32.50	33.48	35.63	
				Internet of 7	Things					
Arduino	37.96	40.03	40.25	39.72	41.22	35.85	34.56	36.11	39.22	
google_iot_core	35.27	35.66	38.48	36.42	37.68	33.15	28.69	30.27	33.53	
aws_iot_core	30.81	31.23	35.73	35.47	35.76	28.45	33.64	32.60	35.20	
iot	38.96	42.05	42.11	42.15	45.97	38.80	36.95	38.97	41.26	
			j	Mobile Appl	ication					
IOS	43.77	45.02	47.33	41.35	44.19	27.63	33.18	36.47	32.89	
android	41.76	43.77	44.80	42.74	44.49	33.24	30.67	32.91	36.17	
				Robotio						
ROS	40.96	44.21	44.67	45.42	50.09	36.22	37.00	38.78	41.74	
gazebo	39.13	40.20	41.43	41.70	45.54	35.49	36.25	35.91	39.08	
0	57.10	10.20		Web Develo		55117	50.25	55.71	57.50	
React	33.31	34.37	34.55	33.50	36.99	29.12	26.34	29.19	31.03	
Angular	36.99	37.32	40.22	37.13	42.19	31.75	32.77	33.98	36.96	
Vue	36.99 40.75				42.19 41.44					
		38.52	40.10	38.27		31.51	30.16	31.84	39.47	
Next	32.63	36.07	39.29	38.77	40.31	30.82	30.32	31.60	32.17	
Node	30.05	32.62	35.38	29.33	40.34	29.41	24.14	21.84	32.58	
Django jQuery	33.95	33.66	36.22	32.36	38.61	33.88	30.53	32.68	34.06	
	30.05	29.21	30.85	31.42	29.96	26.73	28.93	27.33	29.84	

Table 5. CodeBLEU scores for various domains across different LLMs.

We also statistically analyze the occurrence frequency of these reasons to more intuitively demonstrate the impact of different factors on the LLMs' domain-specific code generation performance. The frequencies of occurrence for the five reasons are as follows:

, Vol. 1, No. 1, Article . Publication date: December 2024.

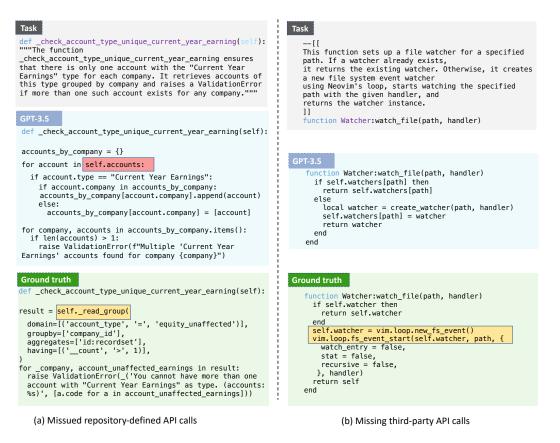


Fig. 5. Case studies

- Reason 1: Frequency of occurrence = 0.50
- Reason 2: Frequency of occurrence = 0.97
- Reason 3: Frequency of occurrence = 0.77
- Reason 4: Frequency of occurrence = 0.66
- Reason 5: Frequency of occurrence = 0.01

The statistical results presented above indicate that LLMs struggle to generate the correct function primarily due to a lack of repository context and insufficient understanding of domain-specific characteristics, which includes difficulties in effectively utilizing third-party libraries specific to the domain and unfamiliarity with unique algorithms and processes/methods within the domain.

Firstly, the most significant reason behind the LLMs' inability to generate target code correctly is a lack of repository context. Real-world projects are often intricate and have complex dependencies, developers must understand the inter-dependencies between programs to better write code. This also applies to LLMs, as many functions defined in the project may not have been encountered during their training, leading to a lack of awareness of these dependency functions. Consequently, LLMs may perform poorly in real project development due to a lack of understanding of the relevant project context. Figure 5 (a) presents a case where GPT-3.5 misuses an API due to a lack of repository context. The implementation of the ground truth requires querying a database defined within the project, which has corresponding database access interfaces " self.read_group". However, since the

LLM is unaware of these defined interfaces, it fails to complete the code generation task correctly and resorts to accessing an undefined "self.accounts" interface.

It is well known that different development domains may have various third-party libraries, that accelerate software development by providing APIs. However, due to the large number of these libraries and the multiple parameter constraints associated with different APIs, even if the LLM has encountered data related to these APIs during training, it can still struggle to use them flexibly [26, 79]. Figure 5 (b) presents a case in which the LLM fails to call third-party APIs. The implementation of the ground truth requires calling two APIs provided by a third-party library to create a new file system event watcher and utilize it to monitor file system events at a specific path. However, GPT-3.5 fails to invoke these APIs, resulting in failure.

Additionally, unfamiliarity with domain-specific algorithms and processing methods is another significant reason for the LLMs' failures. We believe that to achieve proficiency in domain-specific algorithms and processes, LLMs should be trained on a large amount of domain-specific data, which allows them to effectively learn and derive domain-specific processing workflows from the data. In real development, it is unrealistic to expect programmers to provide detailed explanations of foundational knowledge in their development domain every time they use the LLM to generate code, as this would waste a significant amount of their time and effort.

RQ2 Summary: We identify five common reasons behind the LLMs' failure in domain-specific code generation tasks. Key reasons include LLMs' limited project understanding, unfamiliarity with domain-specific third-party APIs, and lack of knowledge of unique algorithms and processing methods, all of which hinder LLM performance in real development scenarios.

5.3 RQ3: Can Different Types of Context Information Improve the LLM's Code Generation Performance in Specific Domains?

Table 6 shows the code generation performance of LLMs enhanced by various contexts. We consider the combination of docstring and function declaration as a basic prompt, which provides only a description of the target function along with a simple introduction to the input and output types of parameters. This is far from sufficient for the challenging task of domain-specific code generation. According to the error analysis results in the Section 5.2, LLMs fails in specific domain code generation tasks primarily due to a lack of project background knowledge and a lack of domainrelated knowledge. Therefore, in this experiment, we attempt to integrate more information into the basic prompt to explore whether the LLM can enhance its code generation performance with the assistance of additional context. Our aim is to provide empirical recommendations for developers to better utilize LLMs in real-world development scenarios. The additional information we provide for the LLMs is as follows:

- (1) Import statements. We provide the import statements from the file containing the ground truth as auxiliary information to explore whether this information can effectively help the LLMs improve code generation performance. CodeGen4Libs [42] has found that generating import statements first can significantly enhance the LLM's ability to call APIs, as import statements help the LLMs understand the potential dependencies of the target function.
- (2) **Local file context.** Local file context refers to all code snippets in the file containing the ground truth that precede the ground truth itself. Experiments in ComplexCodeEval [24] have shown that local file context can effectively improve the LLMs' code generation performance.
- (3) **Dependency context.** Dependency context includes the project-specific APIs called by the ground truth and their corresponding function code. This information helps the LLM clarify the

Table 6. Performance of LLMs on Various Domains with Multiple Contexts. Abbreviations: **BC**: Blockchain, **CS**: Cloud Service, **DA**: Data Analysis, **DL**: Deep Learning, **DApp**: Desktop Application, **DSys**: Distributed System, **EApp**: Enterprise Application, **Game**: Game Development, **IoT**: Internet of Things, **Mob**: Mobile Application, **Rob**: Robotics, **Web**: Web Development.

LLMs	BC	CS	DA	DL	DApp	DSys	EApp	Game	IoT	Mob	Rob	Web
				Imp	ort Statem	ent Conte	ext					
CodeLLaMa-7B	4.40	1.28	0.72	2.16	0.97	2.27	3.42	3.07	0.85	0.75	1.55	3.33
CodeLLaMa-13B	3.06	1.38	0.56	2.02	0.05	3.69	2.75	4.10	0.85	1.19	1.81	3.82
CodeLLaMa-34B	3.41	1.26	-0.57	1.62	1.34	3.52	3.24	6.32	1.20	1.94	3.09	5.13
DeepSeekCoder-6.7B	2.39	1.41	0.08	1.91	0.35	3.40	3.53	6.84	0.54	0.38	0.84	4.27
DeepSeekCoder-33B	2.99	2.15	0.21	2.37	1.55	4.35	4.21	6.34	0.56	1.89	1.55	4.18
StarCoder	5.97	1.31	0.64	2.59	0.28	2.83	2.16	0.26	1.10	7.40	3.21	0.31
StarCoder2-3B	1.85	-0.09	0.87	0.68	1.16	2.54	2.35	2.11	0.18	2.64	0.31	-6.15
StarCoder2-7B	3.36	-0.87	1.13	0.38	-0.80	2.84	1.19	1.46	0.50	2.12	1.05	-4.05
Local File Context												
CodeLLaMa-7B	-2.13	-1.99	-1.93	-2.50	0.27	-0.99	1.40	5.83	-5.98	0.45	-3.53	5.42
CodeLLaMa-13B	-3.48	-2.29	-1.32	-4.03	-0.31	-0.99	2.35	7.74	-5.88	0.92	-5.19	7.43
CodeLLaMa-34B	-4.69	-2.57	-1.03	-4.20	-0.11	-1.37	2.09	7.72	-5.77	1.19	-4.31	10.35
DeepSeekCoder-6.7B	8.29	6.76	3.85	4.78	10.17	8.73	8.14	15.77	12.78	5.83	5.70	8.67
DeepSeekCoder-33B	7.68	8.65	5.24	9.00	10.48	11.52	8.79	14.39	13.82	7.05	7.88	11.72
StarCoder	9.43	8.39	4.29	6.50	8.07	10.26	7.67	7.23	9.90	11.59	7.70	7.64
StarCoder2-3B	8.45	7.26	5.12	4.46	7.05	10.52	7.42	8.15	12.25	7.82	6.31	4.40
StarCoder2-7B	3.91	5.46	4.01	4.82	7.34	9.57	6.25	7.02	11.19	5.38	3.85	4.81
StarCoder2-15B	9.26	6.40	4.32	5.66	7.32	10.69	8.22	5.33	12.80	10.41	2.41	4.79
					API Co	ntext						
CodeLLaMa-7B	5.90	2.45	1.20	3.54	5.95	1.75	2.89	7.23	3.58	0.05	4.42	3.84
CodeLLaMa-13B	5.45	3.21	1.27	3.34	7.49	2.96	3.15	6.83	4.55	1.16	5.36	4.70
CodeLLaMa-34B	4.89	2.47	0.71	2.64	6.68	1.71	2.36	8.59	4.04	0.44	5.70	3.96
DeepSeekCoder-6.7B	5.66	1.69	1.95	2.02	5.57	2.13	2.74	9.27	2.84	-0.78	3.94	4.65
DeepSeekCoder-33B	4.94	2.27	1.67	4.48	6.94	3.16	3.53	8.55	3.81	0.35	5.11	4.38
StarCoder	5.96	2.40	1.58	2.67	3.50	1.52	2.79	4.50	2.91	6.64	4.25	4.29
StarCoder2-3B	4.06	-0.11	1.96	0.45	5.17	0.06	2.15	5.06	2.16	2.16	3.87	3.08
StarCoder2-7B	3.01	0.10	0.22	0.06	3.57	0.51	0.50	3.97	3.00	0.69	3.75	2.87
StarCoder2-15B	7.55	0.96	2.21	2.43	5.75	2.99	3.08	7.53	3.37	5.96	4.44	3.95
					ependency	y Context						
CodeLLaMa-7B	6.34	4.12	5.22	3.52	7.98	6.75	6.02	7.32	5.31	11.76	2.01	6.56
CodeLLaMa-13B	4.81	3.60	4.08	4.59	8.31	7.13	6.72	4.22	3.74	11.22	2.01	7.14
CodeLLaMa-34B	4.29	2.59	2.41	2.98	7.56	7.73	6.35	4.89	3.67	10.81	2.17	6.94
DeepSeekCoder-6.7B	4.01	3.48	3.96	3.29	7.11	7.01	7.28	3.49	2.91	10.33	-0.78	7.57
DeepSeekCoder-33B	4.39	3.37	4.58	4.37	7.29	7.57	7.39	1.93	3.01	10.65	0.12	6.61
StarCoder	7.13	4.80	3.13	3.35	5.68	6.60	6.37	1.21	1.73	10.37	1.65	5.57
StarCoder2-3B	1.96	2.70	5.67	2.34	5.71	5.75	6.11	2.31	2.04	10.03	-1.08	3.34
StarCoder2-7B	4.18	2.35	5.74	2.99	5.28	5.44	5.93	2.85	2.60	6.16	-1.04	3.91
StarCoder2-15B	6.11	2.58	5.58	3.67	3.92	6.54	6.75	0.57	1.48	10.50	-0.59	4.80
					+ Depende							
CodeLLaMa-7B	9.82	4.87	5.73	5.33	12.12	7.80	8.99	9.96	6.15	13.06	6.14	7.68
CodeLLaMa-13B	6.77	5.15	5.64	5.45	13.49	9.43	8.99	10.69	6.63	11.58	6.38	8.37
CodeLLaMa-34B	7.48	5.53	5.48	5.28	12.80	8.58	8.70	11.83	6.82	11.63	7.23	8.73
DeepSeekCoder-6.7B	6.86	5.05	6.67	6.97	11.73	7.74	9.14	11.95	5.14	10.87	4.41	7.87
DeepSeekCoder-33B	6.47	5.69	5.33	7.11	12.37	9.09	10.27	11.86	6.13	11.39	4.70	7.74
StarCoder	7.10	5.18	6.43	6.16	5.75	6.56	6.89	4.06	2.68	7.50	3.22	4.74
StarCoder2-3B	5.23	3.78	7.10	4.34	8.36	5.71	8.53	7.94	3.62	8.63	2.73	3.72
StarCoder2-7B	4.09	2.06	6.63	2.20	6.54	3.80	5.14	5.14	4.25	5.01	2.38	3.67

dependencies between the ground truth and other functions in the project, enabling analysis of the target function's requirements.

- (4) **APIs.** APIs include all the APIs called by the ground truth, encompassing standard library APIs, third-party library APIs, and project-specific APIs.
- (5) **API + Dependency context.** Since the API only includes function names for project-specific APIs, which may limit the LLM's understanding of the target function's dependencies, we combine both API and Dependency context and provide them to the LLM simultaneously.

Table 6 presents a comparison of domain-specific code generation performance between the LLMs using the basic prompt and the LLMs using the basic prompt with additional information. The values in Table 6 are computed by subtracting the performance of the LLMs using the basic prompt from that of the LLMs using the basic prompt with additional information. Positive values indicate the extent to which the performance of LLMs improves when given additional information, while negative values indicate the extent to which performance decreases under the same conditions.

Experimental results indicate that LLMs' performance has significant overall improvement with the additional repository context and domain-specific API information, especially when provided with the API information required for the target function and project dependency context. In cases where the local file context is given, we observe a decline in the code generation performance of the CodeLLaMa series LLMs in some domains. We think this may be due to the relatively long length of the local file context, while the CodeLLaMa series LLMs may not have been adequately trained to handle long context. As a result, the extended context could distract the LLMs' attention, leading to a slight decrease in performance. Additionally, LLMs show significantly better performance when provided with the API information required for the target function and project dependency information. By providing this information, LLMs can better understand the requirements of the target function, as well as the dependencies between the target function, the project, and third-party libraries, which allows them to generate the target code more effectively. These experimental results can provide guidance to developers when using LLMs, suggesting that they could explicitly clarify the dependencies of the target function to the LLM, which may improve the LLMs' performance in real project development.

RQ3 Summary: Rich repository context and domain-specific knowledge can assist LLMs in analyzing project dependencies and requirements, enhancing their code generation performance in specific domains. However, excessively long contexts can distract LLMs, which may lead to a decline in code generation performance.

6 THREATS TO VALIDITY

We have identified the following threats to the validity of our study.

Covered domains. MultiCodeBench encompasses 12 specific application domains. However, due to the vast number of domains, it is indeed challenging to cover all of them at once, which may somewhat limit the applicability of MultiCodeBench. Additionally, our research on specific domains from active websites may have overlooked some equally prominent domains. Therefore, we will continue to expand MultiCodeBench in future work to promote it across more domains.

Evaluated LLMs. Due to limitations in computational resources, we are unable to evaluate all code-related LLMs, such as WizardCoder [45], PolyCoder [67], and the CodeGen series [49]. Nonetheless, we have made every effort to cover both open-source and closed-source LLMs to enhance the representativeness of the experimental results.

Evaluation metric. We chose CodeBLEU as the evaluation metric for all experiments. Although this metric reflects the accuracy of LLMs' generated results from various aspects, it does not fully capture whether the generated code can run correctly or pass the corresponding test cases.

7 CONCLUSION

In this paper, we emphasize the need to assess LLMs in specific domains. We introduce Multi-CodeBench, a code generation benchmark covering 12 specific software application domains and 15 programming languages. We conduct a comprehensive experimental evaluation to explore the code generation performance of current mainstream LLMs. Additionally, we perform an in-depth analysis of the reasons for LLMs' failures in code generation tasks and identify factors contributing to their

suboptimal performance. We also investigate how to improve LLMs' code generation capabilities in specific application domains. The experimental results provide many practical insights, which we believe can assist developers in selecting more suitable code LLMs and help model developers further enhance these LLMs' coding abilities.

8 DATA AVAILABILITY

To facilitate the replication study, we have released our benchmark and the experimental data at our project homepage: https://github.com/DeepSoftwareAnalytics/MultiCodeBench.

REFERENCES

- [1] ACHIAM, J., ADLER, S., AGARWAL, S., AHMAD, L., AKKAYA, I., ALEMAN, F. L., ALMEIDA, D., ALTENSCHMIDT, J., ALTMAN, S., ANADKAT, S., ET AL. Gpt-4 technical report. arXiv preprint arXiv:2303.08774 (2023).
- [2] AHMAD, W. U., CHAKRABORTY, S., RAY, B., AND CHANG, K.-W. Unified pre-training for program understanding and generation. arXiv preprint arXiv:2103.06333 (2021).
- [3] ALNAELI, S. M., SARNOWSKI, M., AMAN, M. S., YELAMARTHI, K., ABDELGAWAD, A., AND JIANG, H. On the evolution of mobile computing software systems and c/c++ vulnerable code: Empirical investigation. In 2016 IEEE 7th Annual Ubiquitous Computing, Electronics & Mobile Communication Conference (UEMCON) (2016), IEEE, pp. 1–7.
- [4] ATHIWARATKUN, B., GOUDA, S. K., WANG, Z., LI, X., TIAN, Y., TAN, M., AHMAD, W. U., WANG, S., SUN, Q., SHANG, M., ET AL. Multi-lingual evaluation of code generation models. arXiv preprint arXiv:2210.14868 (2022).
- [5] AUSTIN, J., ODENA, A., NYE, M., BOSMA, M., MICHALEWSKI, H., DOHAN, D., JIANG, E., CAI, C., TERRY, M., LE, Q., ET AL. Program synthesis with large language models. arXiv preprint arXiv:2108.07732 (2021).
- [6] BAI, J., BAI, S., CHU, Y., CUI, Z., DANG, K., DENG, X., FAN, Y., GE, W., HAN, Y., HUANG, F., HUI, B., JI, L., LI, M., LIN, J., LIN, R., LIU, D., LIU, G., LU, C., LU, K., MA, J., MEN, R., REN, X., REN, X., TAN, C., TAN, S., TU, J., WANG, P., WANG, S., WANG, W., WU, S., XU, B., XU, J., YANG, A., YANG, H., YANG, J., YANG, S., YAO, Y., YU, B., YUAN, H., YUAN, Z., ZHANG, J., ZHANG, X., ZHANG, Y., ZHANG, Z., ZHOU, C., ZHOU, J., ZHOU, X., AND ZHU, T. Qwen technical report, 2023.
- [7] BOGNER, J., AND MERKEL, M. To type or not to type? a systematic comparison of the software quality of javascript and typescript applications on github. In *Proceedings of the 19th International Conference on Mining Software Repositories* (2022), pp. 658–669.
- [8] CASSANO, F., GOUWAR, J., LUCCHETTI, F., SCHLESINGER, C., FREEMAN, A., ANDERSON, C. J., FELDMAN, M. Q., GREENBERG, M., JANGDA, A., AND GUHA, A. Knowledge transfer from high-resource to low-resource programming languages for code llms. *Proceedings of the ACM on Programming Languages 8*, OOPSLA2 (2024), 677–708.
- [9] CASSANO, F., GOUWAR, J., NGUYEN, D., NGUYEN, S., PHIPPS-COSTIN, L., PINCKNEY, D., YEE, M.-H., ZI, Y., ANDERSON, C. J., FELDMAN, M. Q., ET AL. Multipl-e: a scalable and polyglot approach to benchmarking neural code generation. IEEE Transactions on Software Engineering 49, 7 (2023), 3675–3691.
- [10] CHEN, B., ZHANG, F., NGUYEN, A., ZAN, D., LIN, Z., LOU, J.-G., AND CHEN, W. Codet: Code generation with generated tests. arXiv preprint arXiv:2207.10397 (2022).
- [11] CHEN, J., CHEN, C., HU, J., GRUNDY, J., WANG, Y., CHEN, T., AND ZHENG, Z. Identifying smart contract security issues in code snippets from stack overflow. In *Proceedings of the 33rd ACM SIGSOFT International Symposium on Software Testing and Analysis* (2024), pp. 1198–1210.
- [12] CHEN, J., ZHONG, Q., WANG, Y., NING, K., LIU, Y., XU, Z., ZHAO, Z., CHEN, T., AND ZHENG, Z. Rmcbench: Benchmarking large language models' resistance to malicious code. In *Proceedings of the 39th IEEE/ACM International Conference on Automated Software Engineering* (2024), pp. 995–1006.
- [13] CHEN, M., TWOREK, J., JUN, H., YUAN, Q., PINTO, H. P. D. O., KAPLAN, J., EDWARDS, H., BURDA, Y., JOSEPH, N., BROCKMAN, G., ET AL. Evaluating large language models trained on code. arXiv preprint arXiv:2107.03374 (2021).
- [14] CHOWDHERY, A., NARANG, S., DEVLIN, J., BOSMA, M., MISHRA, G., ROBERTS, A., BARHAM, P., CHUNG, H. W., SUTTON, C., GEHRMANN, S., ET AL. Palm: Scaling language modeling with pathways. *Journal of Machine Learning Research 24*, 240 (2023), 1–113.
- [15] COBBE, K., KOSARAJU, V., BAVARIAN, M., CHEN, M., JUN, H., KAISER, L., PLAPPERT, M., TWOREK, J., HILTON, J., NAKANO, R., ET AL. Training verifiers to solve math word problems. arXiv preprint arXiv:2110.14168 (2021).
- [16] CROFT, R., XIE, Y., ZAHEDI, M., BABAR, M. A., AND TREUDE, C. An empirical study of developers' discussions about security challenges of different programming languages. *Empirical Software Engineering* 27 (2022), 1–52.
- [17] DEHAERNE, E., DEY, B., HALDER, S., DE GENDT, S., AND MEERT, W. Code generation using machine learning: A systematic review. *Ieee Access 10* (2022), 82434–82455.
- [18] DING, Y., WANG, Z., AHMAD, W., DING, H., TAN, M., JAIN, N., RAMANATHAN, M. K., NALLAPATI, R., BHATIA, P., ROTH, D., ET AL. Crosscodeeval: A diverse and multilingual benchmark for cross-file code completion. Advances in Neural

Information Processing Systems 36 (2024).

- [19] DINH, D., AND WANG, Z. Modern front-end web development: how libraries and frameworks transform everything.
- [20] DOHMKE, T., IANSITI, M., AND RICHARDS, G. Sea change in software development: Economic and productivity analysis of the ai-powered developer lifecycle. arXiv preprint arXiv:2306.15033 (2023).
- [21] DONG, Y., JIANG, X., JIN, Z., AND LI, G. Self-collaboration code generation via chatgpt. ACM Transactions on Software Engineering and Methodology 33, 7 (2024), 1–38.
- [22] DU, X., LIU, M., WANG, K., WANG, H., LIU, J., CHEN, Y., FENG, J., SHA, C., PENG, X., AND LOU, Y. Classeval: A manuallycrafted benchmark for evaluating llms on class-level code generation. arXiv preprint arXiv:2308.01861 (2023).
- [23] FAN, L., LIU, J., LIU, Z., LO, D., XIA, X., AND LI, S. Exploring the capabilities of llms for code change related tasks. arXiv preprint arXiv:2407.02824 (2024).
- [24] FENG, J., LIU, J., GAO, C., CHONG, C. Y., WANG, C., GAO, S., AND XIA, X. Complexcodeeval: A benchmark for evaluating large code models on more complex code. ASE '24, Association for Computing Machinery, p. 1895–1906.
- [25] FRIED, D., AGHAJANYAN, A., LIN, J., WANG, S., WALLACE, E., SHI, F., ZHONG, R., YIH, W.-T., ZETTLEMOYER, L., AND LEWIS, M. Incoder: A generative model for code infilling and synthesis. arXiv preprint arXiv:2204.05999 (2022).
- [26] GU, X., CHEN, M., LIN, Y., HU, Y., ZHANG, H., WAN, C., WEI, Z., XU, Y., AND WANG, J. On the effectiveness of large language models in domain-specific code generation. ACM Transactions on Software Engineering and Methodology (2024).
- [27] GU, X., CHEN, M., LIN, Y., HU, Y., ZHANG, H., WAN, C., WEI, Z., XU, Y., AND WANG, J. On the effectiveness of large language models in domain-specific code generation. ACM Transactions on Software Engineering and Methodology (2024).
- [28] GUO, L., WANG, Y., SHI, E., ZHONG, W., ZHANG, H., CHEN, J., ZHANG, R., MA, Y., AND ZHENG, Z. When to stop? towards efficient code generation in llms with excess token prevention. In *Proceedings of the 33rd ACM SIGSOFT International Symposium on Software Testing and Analysis* (2024), pp. 1073–1085.
- [29] HAO, Y., LI, G., LIU, Y., MIAO, X., ZONG, H., JIANG, S., LIU, Y., AND WEI, H. Aixbench: A code generation benchmark dataset. arXiv preprint arXiv:2206.13179 (2022).
- [30] HONG, S., ZHUGE, M., CHEN, J., ZHENG, X., CHENG, Y., WANG, J., ZHANG, C., WANG, Z., YAU, S. K. S., LIN, Z., ZHOU, L., RAN, C., XIAO, L., WU, C., AND SCHMIDHUBER, J. MetaGPT: Meta programming for multi-agent collaborative framework. In *The Twelfth International Conference on Learning Representations* (2024).
- [31] IYER, S., KONSTAS, I., CHEUNG, A., AND ZETTLEMOYER, L. Mapping language to code in programmatic context, 2018.
- [32] JELODAR, H., WANG, Y., YUAN, C., FENG, X., JIANG, X., LI, Y., AND ZHAO, L. Latent dirichlet allocation (lda) and topic modeling: models, applications, a survey. *Multimedia tools and applications* 78 (2019), 15169–15211.
- [33] JIANG, S., WANG, Y., AND WANG, Y. Selfevolve: A code evolution framework via large language models. arXiv preprint arXiv:2306.02907 (2023).
- [34] KERNYCKY, A., COLEMAN, D., SPENCE, C., AND DAS, U. Evaluating the performance of llms on technical language processing tasks. In International Conference on Human-Computer Interaction (2024), Springer, pp. 75–85.
- [35] KOLASANI, S. Optimizing natural language processing, large language models (llms) for efficient customer service, and hyper-personalization to enable sustainable growth and revenue. *Transactions on Latest Trends in Artificial Intelligence* 4, 4 (2023).
- [36] LAI, Y., LI, C., WANG, Y., ZHANG, T., ZHONG, R., ZETTLEMOYER, L., TAU YIH, S. W., FRIED, D., WANG, S., AND YU, T. Ds-1000: A natural and reliable benchmark for data science code generation, 2022.
- [37] LE, H., WANG, Y., GOTMARE, A. D., SAVARESE, S., AND HOI, S. C. H. Coderl: Mastering code generation through pretrained models and deep reinforcement learning. Advances in Neural Information Processing Systems 35 (2022), 21314–21328.
- [38] LI, J., LI, G., ZHANG, X., DONG, Y., AND JIN, Z. Evocodebench: An evolving code generation benchmark aligned with real-world code repositories. arXiv preprint arXiv:2404.00599 (2024).
- [39] LI, R., ALLAL, L. B., ZI, Y., MUENNIGHOFF, N., KOCETKOV, D., MOU, C., MARONE, M., AKIKI, C., LI, J., CHIM, J., ET AL. Starcoder: may the source be with you! arXiv preprint arXiv:2305.06161 (2023).
- [40] LI, Y., CHOI, D., CHUNG, J., KUSHMAN, N., SCHRITTWIESER, J., LEBLOND, R., ECCLES, T., KEELING, J., GIMENO, F., DAL LAGO, A., ET AL. Competition-level code generation with alphacode. *Science* 378, 6624 (2022), 1092–1097.
- [41] LI, Y., PENG, Y., HUO, Y., AND LYU, M. R. Enhancing llm-based coding tools through native integration of ide-derived static context. In Proceedings of the 1st International Workshop on Large Language Models for Code (2024), pp. 70–74.
- [42] LIU, M., YANG, T., LOU, Y., DU, X., WANG, Y., AND PENG, X. Codegen4libs: A two-stage approach for library-oriented code generation. In 2023 38th IEEE/ACM International Conference on Automated Software Engineering (ASE) (2023), IEEE, pp. 434–445.
- [43] LIU, T., XU, C., AND MCAULEY, J. Repobench: Benchmarking repository-level code auto-completion systems. In The Twelfth International Conference on Learning Representations (2024).
- [44] LOZHKOV, A., LI, R., ALLAL, L. B., CASSANO, F., LAMY-POIRIER, J., TAZI, N., TANG, A., PYKHTAR, D., LIU, J., WEI, Y., ET AL. Starcoder 2 and the stack v2: The next generation. arXiv preprint arXiv:2402.19173 (2024).

- [45] LUO, Z., XU, C., ZHAO, P., SUN, Q., GENG, X., HU, W., TAO, C., MA, J., LIN, Q., AND JIANG, D. Wizardcoder: Empowering code large language models with evol-instruct. arXiv preprint arXiv:2306.08568 (2023).
- [46] MAIER, D., WALDHERR, A., MILTNER, P., WIEDEMANN, G., NIEKLER, A., KEINERT, A., PFETSCH, B., HEYER, G., REBER, U., HÄUSSLER, T., ET AL. Applying lda topic modeling in communication research: Toward a valid and reliable methodology. In Computational methods for communication science. Routledge, 2021, pp. 13–38.
- [47] MUENNIGHOFF, N., LIU, Q., ZEBAZE, A., ZHENG, Q., HUI, B., ZHUO, T. Y., SINGH, S., TANG, X., VON WERRA, L., AND LONGPRE, S. Octopack: Instruction tuning code large language models. arXiv preprint arXiv:2308.07124 (2023).
- [48] NEJJAR, M., ZACHARIAS, L., STIEHLE, F., AND WEBER, I. Llms for science: Usage for code generation and data analysis. *Journal of Software: Evolution and Process* (2023), e2723.
- [49] NIJKAMP, E., PANG, B., HAYASHI, H., TU, L., WANG, H., ZHOU, Y., SAVARESE, S., AND XIONG, C. Codegen: An open large language model for code with multi-turn program synthesis. arXiv preprint arXiv:2203.13474 (2022).
- [50] PANG, X., LI, Z., CHEN, J., CHENG, Y., XU, Y., AND QI, Y. Ai2apps: A visual ide for building llm-based ai agent applications. arXiv preprint arXiv:2404.04902 (2024).
- [51] QIAN, C., CONG, X., LIU, W., YANG, C., CHEN, W., SU, Y., DANG, Y., LI, J., XU, J., LI, D., LIU, Z., AND SUN, M. Communicative agents for software development, 2023.
- [52] REN, S., GUO, D., LU, S., ZHOU, L., LIU, S., TANG, D., SUNDARESAN, N., ZHOU, M., BLANCO, A., AND MA, S. Codebleu: a method for automatic evaluation of code synthesis, 2020.
- [53] ROZIERE, B., GEHRING, J., GLOECKLE, F., SOOTLA, S., GAT, I., TAN, X. E., ADI, Y., LIU, J., SAUVESTRE, R., REMEZ, T., ET AL. Code llama: Open foundation models for code. arXiv preprint arXiv:2308.12950 (2023).
- [54] RYDER, B. G., SOFFA, M. L., AND BURNETT, M. The impact of software engineering research on modern programming languages. ACM Transactions on Software Engineering and Methodology (TOSEM) 14, 4 (2005), 431–477.
- [55] SAMEK, M. Practical UML statecharts in C/C++: event-driven programming for embedded systems. CRC Press, 2008.
- [56] SHEN, B., ZHANG, J., CHEN, T., ZAN, D., GENG, B., FU, A., ZENG, M., YU, A., JI, J., ZHAO, J., ET AL. Pangu-coder2: Boosting large language models for code with ranking feedback. arXiv preprint arXiv:2307.14936 (2023).
- [57] SHIN, J., AND NAM, J. A survey of automatic code generation from natural language. Journal of Information Processing Systems 17, 3 (2021), 537–555.
- [58] SHRIVASTAVA, D., LAROCHELLE, H., AND TARLOW, D. Repository-level prompt generation for large language models of code. In *International Conference on Machine Learning* (2023), PMLR, pp. 31693–31715.
- [59] TANG, X., QIAN, B., GAO, R., CHEN, J., CHEN, X., AND GERSTEIN, M. B. Biocoder: a benchmark for bioinformatics code generation with large language models. *Bioinformatics 40*, Supplement_1 (2024), i266–i276.
- [60] TAO, W., ZHOU, Y., WANG, Y., ZHANG, W., ZHANG, H., AND CHENG, Y. Magis: Llm-based multi-agent framework for github issue resolution. arXiv preprint arXiv:2403.17927 (2024).
- [61] UGARE, S., SURESH, T., KANG, H., MISAILOVIC, S., AND SINGH, G. Improving llm code generation with grammar augmentation. *arXiv preprint arXiv:2403.01632* (2024).
- [62] WANG, Y., HUANG, Y., GUO, D., ZHANG, H., AND ZHENG, Z. Sparsecoder: Identifier-aware sparse transformer for file-level code summarization. arXiv preprint arXiv:2401.14727 (2024).
- [63] WANG, Y., JIANG, T., LIU, M., CHEN, J., AND ZHENG, Z. Beyond functional correctness: Investigating coding style inconsistencies in large language models. arXiv preprint arXiv:2407.00456 (2024).
- [64] WANG, Y., WANG, Y., GUO, D., CHEN, J., ZHANG, R., MA, Y., AND ZHENG, Z. Rlcoder: Reinforcement learning for repository-level code completion. arXiv preprint arXiv:2407.19487 (2024).
- [65] WEI, Y., WANG, Z., LIU, J., DING, Y., AND ZHANG, L. Magicoder: Empowering code generation with oss-instruct. In Forty-first International Conference on Machine Learning (2024).
- [66] XIA, C. S., DENG, Y., AND ZHANG, L. Top leaderboard ranking = top coding proficiency, always? evoeval: Evolving coding benchmarks via llm, 2024.
- [67] XU, F. F., ALON, U., NEUBIG, G., AND HELLENDOORN, V. J. A systematic evaluation of large language models of code, 2022.
- [68] YANG, J., JIN, H., TANG, R., HAN, X., FENG, Q., JIANG, H., ZHONG, S., YIN, B., AND HU, X. Harnessing the power of llms in practice: A survey on chatgpt and beyond. ACM Transactions on Knowledge Discovery from Data 18, 6 (2024), 1–32.
- [69] YU, H., SHEN, B., RAN, D., ZHANG, J., ZHANG, Q., MA, Y., LIANG, G., LI, Y., WANG, Q., AND XIE, T. Codereval: A benchmark of pragmatic code generation with generative pre-trained models. In *Proceedings of the 46th IEEE/ACM International Conference on Software Engineering* (2024), pp. 1–12.
- [70] ZAN, D., CHEN, B., GONG, Y., CAO, J., ZHANG, F., WU, B., GUAN, B., YIN, Y., AND WANG, Y. Private-library-oriented code generation with large language models. arXiv preprint arXiv:2307.15370 (2023).
- [71] ZAN, D., CHEN, B., YANG, D., LIN, Z., KIM, M., GUAN, B., WANG, Y., CHEN, W., AND LOU, J.-G. Cert: continual pre-training on sketches for library-oriented code generation. arXiv preprint arXiv:2206.06888 (2022).
- [72] ZHANG, F., CHEN, B., ZHANG, Y., KEUNG, J., LIU, J., ZAN, D., MAO, Y., LOU, J.-G., AND CHEN, W. Repocoder: Repository-level code completion through iterative retrieval and generation. arXiv preprint arXiv:2303.12570 (2023).

- [73] ZHANG, S., ZHAO, H., LIU, X., ZHENG, Q., QI, Z., GU, X., ZHANG, X., DONG, Y., AND TANG, J. Naturalcodebench: Examining coding performance mismatch on humaneval and natural user prompts. arXiv preprint arXiv:2405.04520 (2024).
- [74] ZHANG, Z., WANG, Y., WANG, C., CHEN, J., AND ZHENG, Z. Llm hallucinations in practical code generation: Phenomena, mechanism, and mitigation. arXiv preprint arXiv:2409.20550 (2024).
- [75] ZHENG, D., WANG, Y., SHI, E., ZHANG, R., MA, Y., ZHANG, H., AND ZHENG, Z. Towards more realistic evaluation of llm-based code generation: an experimental study and beyond. arXiv preprint arXiv:2406.06918 (2024).
- [76] ZHENG, Q., XIA, X., ZOU, X., DONG, Y., WANG, S., XUE, Y., SHEN, L., WANG, Z., WANG, A., LI, Y., ET AL. Codegeex: A pre-trained model for code generation with multilingual benchmarking on humaneval-x. In Proceedings of the 29th ACM SIGKDD Conference on Knowledge Discovery and Data Mining (2023), pp. 5673–5684.
- [77] ZHENG, Z., NING, K., CHEN, J., WANG, Y., CHEN, W., GUO, L., AND WANG, W. Towards an understanding of large language models in software engineering tasks. arXiv preprint arXiv:2308.11396 (2023).
- [78] ZHENG, Z., NING, K., WANG, Y., ZHANG, J., ZHENG, D., YE, M., AND CHEN, J. A survey of large language models for code: Evolution, benchmarking, and future trends. arXiv preprint arXiv:2311.10372 (2023).
- [79] ZHU, Q., CAO, J., LU, Y., LIN, H., HAN, X., SUN, L., AND CHEUNG, S.-C. Domaineval: An auto-constructed benchmark for multi-domain code generation, 2024.
- [80] ZHU, Q., GUO, D., SHAO, Z., YANG, D., WANG, P., XU, R., WU, Y., LI, Y., GAO, H., MA, S., ET AL. Deepseek-coder-v2: Breaking the barrier of closed-source models in code intelligence. arXiv preprint arXiv:2406.11931 (2024).
- [81] ZHUO, T. Y., VU, M. C., CHIM, J., HU, H., YU, W., WIDYASARI, R., YUSUF, I. N. B., ZHAN, H., HE, J., PAUL, I., BRUNNER, S., GONG, C., HOANG, T., ZEBAZE, A. R., HONG, X., LI, W.-D., KADDOUR, J., XU, M., ZHANG, Z., YADAV, P., JAIN, N., GU, A., CHENG, Z., LIU, J., LIU, Q., WANG, Z., LO, D., HUI, B., MUENNIGHOFF, N., FRIED, D., DU, X., DE VRIES, H., AND WERRA, L. V. Bigcodebench: Benchmarking code generation with diverse function calls and complex instructions, 2024.