

How Propense Are Large Language Models at Producing Code Smells? A Benchmarking Study

Alejandro Velasco¹, Daniel Rodriguez-Cardenas¹, David N. Palacio¹, Luftar Rahman Alif², Denys Poshyvanyk¹

¹Department of Computer Science, William & Mary

²Department of Computer Science and Engineering, University of Dhaka

{svelascodimate, dhrodriguezcar, danaderpalacio}@wm.edu, bsse1120@iit.du.ac.bd, dposhyvanyk@wm.edu

Abstract—Large Language Models (LLMs) have shown significant potential in automating software engineering tasks, particularly in code generation. However, current evaluation benchmarks, which primarily focus on accuracy, fall short in assessing the quality of the code generated by these models, specifically their tendency to produce code smells. To address this limitation, we introduce *CodeSmellEval*, a benchmark designed to evaluate the propensity of LLMs for generating code smells. Our benchmark includes a novel metric: *Propensity Smelly Score (PSC)*, and a curated dataset of method-level code smells: *CodeSmellData*. To demonstrate the use of *CodeSmellEval*, we conducted a case study with two state-of-the-art LLMs, CodeLlama and Mistral. The results reveal that both models tend to generate code smells, such as *simplifiable-condition* and *consider-merging-isinstance*. These findings highlight the effectiveness of our benchmark in evaluating LLMs, providing valuable insights into their reliability and their propensity to introduce code smells in code generation tasks.

Index Terms—LLMs, Smells, Benchmark, Interpretability.

I. INTRODUCTION

Large Language Models (LLMs) have been increasingly adopted to automate multiple tasks in software engineering (SE), including code completion [1]–[3], code summarization [4], program repair [5], clone detection [6], and test case generation [7]. The applications of LLMs in SE have evolved from classification tasks (e.g., defect detection, requirements triage, vulnerability severity) to generative tasks, such as sequence synthesis, where a prompt/context is given to instruct the LLMs to generate text (e.g., code summarization) and/or code (e.g., code generation) [8]. Ensuring the quality of the predictions made by those models is essential, regardless of the type of task. Generative tasks, in particular, require rigorous evaluation due to the complexity of structured information within the source code. Among the evaluation criteria, we have focused specifically on *code smells*.

Code smells are defined as symptoms of poor design and implementation choices in SE. Previous studies have shown the negative impact of code smells on the comprehensibility and maintainability of code [9], [10]. Research has increasingly focused on studying the use of LLMs for detecting and refactoring code smells [9], [11]–[18], and these models have demonstrated some success when their output is validated against the ground-truth. However, traditional metrics such as BLEU [19], CodeBLEU [20], ROUGE [21], and METEOR [22] fall short at assessing the LLMs’ tendency

for introducing code smells while generating code. This limitation is particularly relevant for developers using commercial LLMs (e.g., ChatGPT, Copilot, and Claude ¹), which might generate code with smells like *invalid-names*, *too-many-arguments*, or *unnecessary-lambda*. Although LLMs are becoming more integrated into SE, and code smell detection has been extensively studied, there is still little known as to how likely LLMs are at generating smells.

Despite an apparent success of using LLMs for automating software tasks, developers still face two key challenges: 1) they need more information to assess which LLM is more reliable, and 2) they cannot evaluate model performance beyond accuracy, as traditional metrics often overestimate code quality. This leads to important questions: *What is the propensity of an LLM to generate code smells?* and *Which types of code smells are most propense to be generated?*

To address these concerns, we propose a new benchmark, *CodeSmellEval*, designed to estimate the propensity of an LLM at generating code smells. *CodeSmellEval* draws inspiration from *Syntax Decomposition* [23], [24] and introduces a model-agnostic evaluation metric called the *Propensity Smelly Score (PSC)*. *PSC* analyzes the logits from the final layer of an LLM, providing insights into the model’s propensity of generating code smells. Additionally, our benchmark includes a new dataset, *CodeSmellData*, comprising 142k unique method-level code smells of 13 different types, mined from GitHub.

To demonstrate the utility of our benchmark, we devised an exploratory case study using *CodeSmellEval* in two LLMs (i.e., CodeLlama and Mistral). We assessed the distribution of *PSC* values for each type of code smells across both models. Our analysis revealed that both models are propense to generate the same types of code smells, with a few exceptions. For example, *consider-merging-isinstance* (R1701), *chained-comparison* (R1716), and *broad-exception-caught* (W0718) were among the top, whereas *disallowed-name* (C0104), *too-many-arguments* (R0913), and *non-ascii-name* (C2401) were below the *PSC* propensity threshold. We hope that our findings will shed light on the propensity of current LLMs to introduce code smells, enabling a more systematic and rigorous evaluation of code quality beyond canonical accuracy.

To summarize, our key contributions are as the following: 1) a new metric for evaluating the propensity of LLMs to produce

¹<https://chatgpt.com>, <https://copilot.microsoft.com>, <https://claude.ai>

code smells during code generation (*PSC*), 2) a new dataset *CodeSmellData* of Python methods with *Pylint* code smells, 3) an exploratory case study that evaluates the propensity of two current popular open-source *LLMs* in producing code smells, and 4) and a set of notebooks and source code packages with instructions to replicate the experiments and use our benchmark [25].

II. BENCHMARK

In this section, we present our benchmark, *CodeSmellEval*, which consists of three key components: (1) *PSC*, a metric designed to estimate the propensity of an *LLM* to introduce code smells, (2) our evaluation dataset, *CodeSmellData*, comprising 142k curated instances of method-level code smells mined from GitHub, and (3) a *protocol*, which outlines the methodology for using our benchmark.

A. Propensity Smelly Score (*PSC*)

PSC is an evaluation metric that works by extracting the non-normalized log-probabilities (logits) Z for each token prediction from the last hidden layer of a decoder-based transformer (e.g., GPT). To estimate the probabilities of expected tokens in a sequence w , we apply the softmax function (σ) to each logit z_i . For a token $w_i = t$, where t belongs to the vocabulary V , we compute the probability $P(w_i = t|w_{<i}) \approx \sigma(z_i)_t = e^{z_{i,t}} / \sum_{j=1}^{|V|} e^{z_{i,j}}$. In this equation, $z_{i,t}$ represents the logit for the expected token t at position i , and the denominator normalizes the probabilities by summing the exponentiated logits for all vocabulary tokens. Since decoder-based models are auto-regressive, the preceding context influences the computation of $\sigma(z_i)_t$.

Meaningful Structures \mathbb{M} . Using an alignment function (δ), tokens $w_i \in w$ are grouped into a meaningful structure $\mu \in \mathbb{M}$ (Eq. 1). Then, an aggregation function (θ) (Eq. 2) computes a central tendency statistic (e.g., median, mean, mode) of their probabilities, resulting in an overall probability estimate for predicting μ (i.e., propensity score). Once $P(w_i|w_{<i})$ is computed, the probability of each token’s predicted value is treated independently to calculate the overall estimate of μ . Eq. 2 outlines how to compute the *PSC* for a meaningful concept μ . Indexes that points out to smelly code are defined as $0 \leq i \leq k \leq j \leq |w|$.

$$\delta_\mu(w) : w \rightarrow (i, j), \mu \in \mathbb{M} \quad (1)$$

$$\theta_\mu(w, i, j) = \mathbb{E}_{k=i}^j [P(w_k|w_{0\dots k-1})] \quad (2)$$

Code Smells. The definition of the set of meaningful structures \mathbb{M} used in function δ (Eq. 1) depends on the problem context. For example, token probabilities can be aggregated using syntax-based decomposition, based on elements defined by the grammar of a programming language (e.g., identifiers, conditionals, statements). In this paper, we propose defining the set of concepts \mathbb{M} using types of method-level code smells. Table I illustrates the full taxonomy of code smells in \mathbb{M} included in *CodeSmellData*.

TABLE I: Method-level code smells instances included in *CodeSmellData*.

Type	ID	Code Smell $\mu \in \mathbb{M}$	Count
Convention	C0103	<i>invalid-name</i>	125815
	C0121	<i>singleton-comparison</i>	1089
	C3001	<i>unnecessary-lambda-assignment</i>	666
	C2401	<i>non-ascii-name</i>	583
Refactor	C0104	<i>disallowed-name</i>	174
	R0913	<i>too-many-arguments</i>	4738
	R1702	<i>too-many-nested-blocks</i>	1273
	R0916	<i>too-many-boolean-expressions</i>	289
	R1701	<i>consider-merging-isinstance</i>	132
Warning	R1716	<i>chained-comparison</i>	128
	W0718	<i>broad-exception-caught</i>	4384
	W0719	<i>broad-exception-raised</i>	3150
	W0108	<i>unnecessary-lambda</i>	396

*For detailed descriptions of each code smell, refer to the *Pylint* documentation [27].

Global Estimates. Finally, we compute the average of Eq. 2 for a given code smell type (μ) across all code snippets s in the dataset (*CodeSmellData*) to estimate the overall *PSC* of code smells generated by an *LLM*. We define a *propensity threshold* $\lambda = 0.5$ to determine whether the *LLM* is *propense* to generate the code smell, with $PSC \geq \lambda = 0.5$ indicating a higher propensity. We use this estimate to answer **RQ**₁. The selected propensity threshold was selected considering the findings of Karpaty et al. [26]. In addition, Fig. 2 depicts an example of computing *PSC* for a Python snippet containing the code smells: *invalid-name* with a *PSC* of 0.6 above the propensity threshold and *comparison-of-constants* with a *PSC* of 0.206.

B. CodeSmellData

To mitigate the risk of data leakage during the evaluation of code smells in generation tasks, we created a new dataset of code smells: *CodeSmellData* using Galeras [28]. We mined popular open-source Python repositories from GitHub, extracting a total of 232,715 methods. The selection criteria included repositories published between January 2022 and December 2024, with a minimum of 3,500 stars, ensuring that only well-maintained and highly rated repositories were considered. We then applied *Pylint* [27] analysis to these methods, detecting 79,574 with at least one code smell.

Dataset Curation. From this filtered set of methods, we identified 156,151 instances of code smells across 30 distinct types. Using random sampling, the two authors manually validated instances from each code smell type to confirm true positives (TP) and false positives (FP) with an 80% confidence level and 15% margin error. We found that five code smells—*inconsistent-return-statements*, *too-many-branches*, *too-many-return-statements*, *too-many-statements*, and *unbalanced-tuple-unpacking*—had near to zero precision. For *unbalanced-tuple-unpacking*, the number of FPs exceeded the number of TPs, while for the other cases, *Pylint* failed to identify the exact location on the other code smell types of the smell within the method due to parsing errors. Additionally, 12 code smells were excluded because they had fewer than 100 instances, making them not representative (we observed that

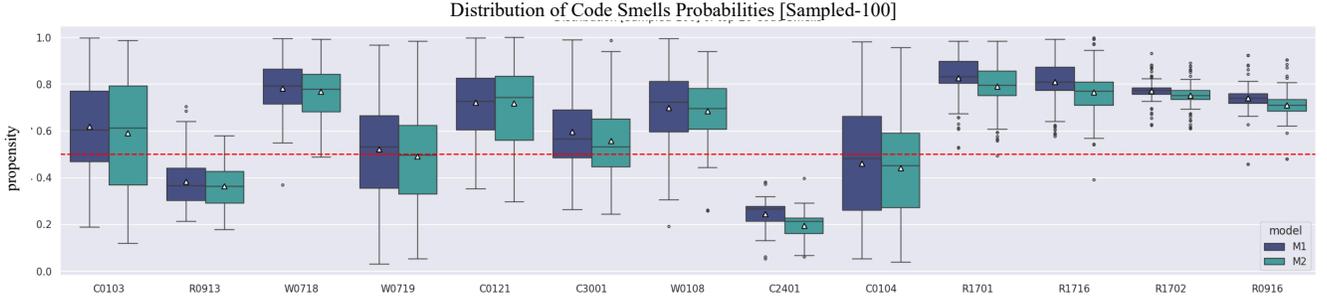


Fig. 1: Bootstrapped propensity of smells (100 instances per sample). The red line at 0.5 indicates the error threshold.

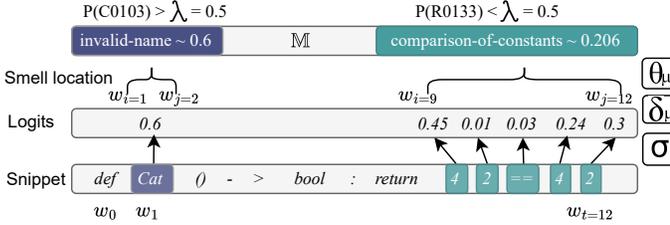


Fig. 2: Example of PSC computation for `invalid-name` (C0103) and `comparison-of-constants` (R0133), with the former surpassing the propensity threshold $\lambda = 0.5$.

all PSC distributions tend to resemble a Gaussian distribution with at least 100 instances). Finally, we ensured that all code smell instances in *CodeSmellData* originated from unique Python methods, avoiding any repetition of source code among code smell types. The resulting dataset consists of 142,817 code smell instances from 13 confirmed types, categorized into Refactoring, Warnings, and Conventions, as shown in Table I.

Code Smell Location. In our case study, we used the information provided by *Pylint* (i.e., starting and ending row and column) to locate the exact portion of each code snippet containing a code smell, which allowed us to implement the alignment function δ as introduced in Eq. 1.

C. Protocol

PSC evaluates the propensity of *LLMs* to generate specific types of code structures by analyzing next-token predictions. Our benchmark computes the probability for each expected token in the sequences from *CodeSmellData*. The steps are as follows: (1) encode each sequence using the *LLM*'s tokenizer, (2) compute the logits for each token using the *LLM*'s forward method, (3) apply the softmax function (σ) to calculate the probability of each expected value, (4) group tokens corresponding to a given code smell using the alignment function (δ), and (5) compute the PSC for each code smell using a central tendency statistic (Eq. 2). The resulting PSC estimates the propensity of each smell to be generated by an *LLM*.

III. CASE STUDY

To demonstrate the practical application of our benchmark, we conducted a case study evaluating the propensity of two *LLMs* to generate the code smells in *CodeSmellData*. We formulated the following main research question:

TABLE II: Top-5 highest and Top-3 lowest (gray bkg.) smells ranked by PSC (in [avg \pm std]).

Code Smell	M1 PSC	M2 PSC	ME - 95%
R1701	0.80 \pm 0.08	0.80 \pm 0.10	5%
R1716	0.80 \pm 0.10	0.77 \pm 0.10	5%
W0718	0.80 \pm 0.12	0.77 \pm 0.10	10%
R1702	0.77 \pm 0.05	0.75 \pm 0.06	10%
R0916	0.73 \pm 0.06	0.71 \pm 0.06	8%
C0104	0.46 \pm 0.25	0.44 \pm 0.23	7%
R0913	0.40 \pm 0.13	0.36 \pm 0.10	10%
C2401	0.24 \pm 0.07	0.20 \pm 0.06	9%

*ME - Margin Error for sample size of 100.

RQ₁ [Propensity of Code Smells] What types of code smells are more prone to be generated by M1 and M2?

Selected *LLMs*. Although PSC is model-agnostic, we selected two popular decoder-based transformers as they are well-suited for generative tasks. The first model, CodeLlama-7b-Instruct-hf (M1) [29], has a vocabulary size of 32,016 tokens. The second model, Mistral-7B-v0.3 (M2) [30], has a vocabulary size of 37,768 tokens. Both models have 7 billion parameters, 32 hidden layers, and 32 attention heads. The models were loaded on an Ubuntu 20.04 system with an AMD EPYC 7532 32-Core CPU, an NVIDIA A100 GPU with 40GB VRAM, and 1TB of RAM.

Evaluation Methodology. To address **RQ₁**, we computed PSC global estimates (refer to Sec. II-A) for both models (i.e., M1 and M2) using the collected snippets for all identified code smells. Due to memory constraints, we limited the evaluation to datapoints in *CodeSmellData* with a maximum size of 400 tokens. We further sampled 100 datapoints from each of the 13 code smells with at least 100 instances in the dataset to ensure fair statistical treatment. Also, note that all the selected datapoints came from distinct Python methods. We then followed the protocol steps (refer to Sec. II-C) to compute the global estimates of PSC for each code smell.

A. Results & Discussion

Fig. 1 presents the probability scores computed for each code smell using M1 and M2. Remarkably, 10 out of 13 code smells have a probability higher than the propensity threshold of 0.5, indicating that both models are prone to generating these smells. As shown in Table II, the top five smells with the highest PSC in both models are *consider-merging-isinstance* (R1701), *chained-comparison* (R1716), *broad-exception-caught* (W0718), *too-many-nested-*

blocks (R1702) and *too-many-boolean-expressions* (R0916). Conversely, *disallowed-name* (C0104), *too-many-arguments* (R0913) and *non-ascii-name* (C2401) are below the propensity threshold for both models.

Upon examining the computed distributions of *PSC* for both the highest and lowest scoring code smells in each model, as shown in Fig. 3, we observe a significant difference. The *PSC* score for *consider-merging-isinstance* (R1701) is nearly double that of *disallowed-name* (C2401). We attribute this disparity to the fact that tokens associated with disallowed names have very low probabilities, as they are highly specific and closely tied to the context of the source code.

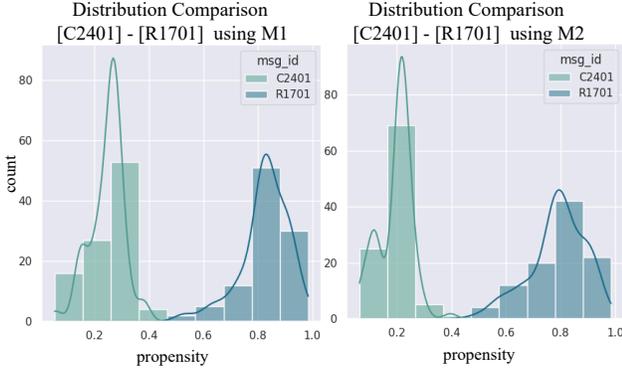


Fig. 3: Comparison of edge propensity distributions between (*consider-merging-isinstance* - R1701) and (*disallowed-name* - C2401) for both M1 and M2.

RQ1 [Propensity of Code Smells]: Both CodeLlama-7b-Instruct-hf [29] and Mistral-7B-v0.3 [30] are prone to generate code-smells Convention, Refactor, and Warnings. With few exceptions: *disallowed-name* (C0104), *too-many-arguments* (R0913), and *non-ascii-name* (C2401).

We believe that both *LLMs* are prone to generate the detected code smells, as they are trained on publicly available code, which often contains quality issues [29]. This assumption is supported by our dataset creation process, since we extracted code smells from mined code snippets in public repositories. However, a separate study is necessary to confirm this hypothesis, as this paper primarily focuses on demonstrating the use of *CodeSmellEval*. An in-depth evaluation of the underlying reasons *why* code smells appear in generated code is beyond the scope of this paper.

IV. RELATED WORK

Considerable research has been devoted to collecting code smell data, detecting, and repairing. Code smell often indicates deeper issues in the codebase, affecting code quality and performance [9]–[13], [31]–[33]. Our related work is focused on research on code smell datasets and papers that have reported benchmarks on generating code smells.

Nasrabadi et al. [34] introduced an SLR with the most updated code smells datasets. Most datasets are training or testing code smell detection on *LLMs* [12], [33], [35]. Datasets

can be created manually [36]–[38] or automatically [39], [40] via refactorings, however, the validations are time-consuming so most automatically generated datasets are not validated [34]. Our dataset *CodeSmellData* is automatically mined and manually curated to confirm the code smell type and location.

Existing benchmarks focus on detecting code smells using different techniques (*e.g.*, SVM [35], few-shot learning [12], chain-of-thoughts [11]). CodeLMSec [12] evaluates code generation models’ vulnerability to generating insecure prompts, while LCG [2], iSmell [18], and PromptSmell [41] examine *LLM*-based approaches. Unlike these, our benchmark uses logits to assess an *LLM*’s propensity for generating smelly code, rather than merely classifying or detecting it. By aligning meaningful tokens to highlight smelly segments, our approach offers a novel, interpretable metric [28], [42], suitable for black-box code generation models.

V. FUTURE PLANS

Based on the results of our case study, we demonstrated the computation of *PSC* for 13 method-level code smells. Our next step is to conduct a systematic empirical evaluation that includes additional types of smells and a broader range of *LLMs*. This effort will involve mining more instances of underrepresented code smells in *CodeSmellData*. Specifically, we will analyze sampling error when computing *PSC* for each code smell to mitigate the risk of sampling bias and ensure the representativeness of all smell types in *CodeSmellData*. Furthermore, since our analysis has so far focused solely on method-level granularity, we plan to expand *CodeSmellData* to include higher-level smells, such as *god-class* and *feature-envy*. In future versions of *CodeSmellData*, we will use other static analysis tools alongside *Pylint* to reduce dependency on a single tool for identifying code smell locations, which is crucial for implementing the alignment function (Eq. 1) in *CodeSmellEval*.

Our proposed benchmark identifies the types of code smells that *LLMs* are prone to generate. Future research should focus on explaining this phenomenon by uncovering the reasons behind *LLMs*’ propensity to introduce specific types of code smells. For instance, by identifying the most relevant features in the input that influence the prediction of specific types of code smells. This research direction is essential for enhancing the trustworthiness [23] of *LLMs* and also developing defense techniques to mitigate such behavior. We believe interpretability techniques such as LIME [43] or SHAP [44] will help us to reach this goal.

VI. ACKNOWLEDGMENTS

This research has been supported in part by the NSF CCF-2311469, CNS-2132281, CCF-2007246, and CCF-1955853. We also acknowledge support from Cisco Systems. Any opinions, findings, and conclusions expressed herein are the authors’ and do not necessarily reflect those of the sponsors.

REFERENCES

- [1] M. Ciniselli, N. Cooper *et al.*, “An empirical study on the usage of transformer models for code completion,” *IEEE TSE*’22, vol. 48, no. 12, pp. 4818–4837, 2022.
- [2] F. Lin, D. J. Kim *et al.*, “When LLM-based Code Generation Meets the Software Development Process,” Mar. 2024, arXiv:2403.15852.
- [3] M. White, C. Vendome *et al.*, “Toward deep learning software repositories,” in *IEEE/ACM MSR*’15, 2015, pp. 334–345.
- [4] T. Ahmed and P. Devanbu, “Few-shot training llms for project-specific code-summarization,” in *Proceedings of the 37th IEEE/ACM International Conference on Automated Software Engineering*, ser. ASE ’22. ACM, 2023.
- [5] M. Jin, S. Shahriar *et al.*, “Inferfix: End-to-end program repair with llms,” in *Proceedings of the 31st ACM Joint European Software Engineering Conference and Symposium on the Foundations of Software Engineering*, ser. ESEC/FSE 2023. ACM, 2023, p. 1646–1656.
- [6] M. White, M. Tufano *et al.*, “Deep learning code fragments for code clone detection,” in *Proceedings of the 31st IEEE/ACM International Conference on Automated Software Engineering*, ser. ASE ’16. ACM, 2016, p. 87–98.
- [7] C. Watson, M. Tufano *et al.*, “On learning meaningful assert statements for unit test cases,” in *Proceedings of the ACM/IEEE 42nd International Conference on Software Engineering*, ser. ICSE ’20. ACM, 2020, p. 1398–1409.
- [8] C. Watson, N. Cooper *et al.*, “A systematic literature review on the use of deep learning in software engineering research,” *ACM TOSEM*, vol. 31, no. 2, Mar. 2022.
- [9] M. Tufano, F. Palomba *et al.*, “When and Why Your Code Starts to Smell Bad (and Whether the Smells Go Away),” *IEEE Transactions on Software Engineering*, vol. 43, no. 11, pp. 1063–1088, Nov. 2017.
- [10] F. Palomba, G. Bavota *et al.*, “On the diffuseness and the impact on maintainability of code smells: a large scale empirical investigation,” *Empirical Software Engineering*, vol. 23, no. 3, pp. 1188–1221, Jun. 2018.
- [11] S. Kaniewski, D. Holstein *et al.*, “Vulnerability Handling of AI-Generated Code – Existing Solutions and Open Challenges,” Aug. 2024, arXiv:2408.08549.
- [12] H. Hajipour, K. Hassler *et al.*, “CodeLMsSec benchmark: Systematically evaluating and finding security vulnerabilities in black-box code language models,” in *2024 IEEE Conference on Secure and Trustworthy Machine Learning (SaTML)*. IEEE, pp. 684–709.
- [13] M. L. Siddiq, J. C. S. Santos *et al.*, “SALLM: Security Assessment of Generated Code,” Sep. 2024, arXiv:2311.00889.
- [14] Y. Yang, X. Zhou *et al.*, “DLAP: A Deep Learning Augmented Large Language Model Prompting Framework for Software Vulnerability Detection,” May 2024, arXiv:2405.01202.
- [15] K. Lucas, R. Gheyi *et al.*, “Evaluating Large Language Models in Detecting Test Smells,” Jul. 2024, arXiv:2407.19261.
- [16] D. Mahalakshmi, P. Kasinathan *et al.*, “Code smell detection using hybrid machine learning algorithms,” in *2023 5th International Conference on Inventive Research in Computing Applications (ICIRCA)*, 2023, pp. 633–638.
- [17] Y. Li and X. Zhang, “Multi-Label Code Smell Detection with Hybrid Model based on Deep Learning,” in *Proceedings of the 33rd International Conference on Software Engineering and Knowledge Engineering*, Jul. 2022, pp. 42–47.
- [18] Di Wu, Fangwen Mu *et al.*, “iSMELL: Assembling LLMs with Expert Toolsets for Code Smell Detection and Refactoring,” in *Proceedings of the 40th IEEE/ACM International Conference on Automated Software Engineering*, ser. ASE ’24, Sacramento, California, United States, Oct. 2024.
- [19] K. Papineni, S. Roukos *et al.*, “BLEU: a method for automatic evaluation of machine translation,” in *Proceedings of the 40th Annual Meeting on Association for Computational Linguistics*, ser. ACL ’02. USA: Association for Computational Linguistics, Jul. 2002, pp. 311–318.
- [20] S. Ren, D. Guo *et al.*, “CodeBLEU: a Method for Automatic Evaluation of Code Synthesis,” Sep. 2020, arXiv:2009.10297.
- [21] C.-Y. Lin, “ROUGE: A Package for Automatic Evaluation of Summaries,” in *Text Summarization Branches Out*. Barcelona, Spain: Association for Computational Linguistics, Jul. 2004, pp. 74–81.
- [22] A. Lavie and A. Agarwal, “Meteor: an automatic metric for mt evaluation with high levels of correlation with human judgments,” in *Proceedings of the Second Workshop on Statistical Machine Translation*, ser. StatMT ’07. Association for Computational Linguistics, 2007, p. 228–231.
- [23] D. N. Palacio, D. Rodriguez-Cardenas *et al.*, “Towards More Trustworthy and Interpretable LLMs for Code through Syntax-Grounded Explanations,” Jul. 2024, arXiv:2407.08983.
- [24] A. Velasco, D. N. Palacio *et al.*, “Which syntactic capabilities are statistically learned by masked language models for code?” in *Proceedings of the 2024 ACM/IEEE 44th International Conference on Software Engineering: New Ideas and Emerging Results*, ser. ICSE-NIER’24. ACM, 2024, p. 72–76.
- [25] WM-SEMERU, “Codesmells,” <https://github.com/WM-SEMERU/CodeSmells>, 2024, accessed: 2024-12-25.
- [26] A. Karpathy, J. Johnson *et al.*, “Visualizing and Understanding Recurrent Networks,” Nov. 2015, arXiv:1506.02078.
- [27] PyCQA, “Pylint,” Python Code Quality Authority (PyCQA), 2003.
- [28] D. Rodriguez-Cardenas, D. N. Palacio *et al.*, “Benchmarking causal study to interpret large language models for source code,” in *ICSME*’23, 2023, pp. 329–334.
- [29] B. Rozière, J. Gehring *et al.*, “Code Llama: Open Foundation Models for Code,” Jan. 2024, arXiv:2308.12950 [cs].
- [30] A. Q. Jiang, A. Sablayrolles *et al.*, “Mistral 7B,” Oct. 2023, arXiv:2310.06825 [cs].
- [31] D. Mahalakshmi, P. Kasinathan *et al.*, “Code smell detection using hybrid machine learning algorithms,” in *2023 5th International Conference on Inventive Research in Computing Applications (ICIRCA)*. IEEE, pp. 633–638.
- [32] M. Sikсна, I. Berzina *et al.*, “Machine learning powered code smell detection as a business improvement tool,” in *2023 IEEE 64th International Scientific Conference on Information Technology and Management Science of Riga Technical University (ITMS)*. IEEE, pp. 1–6.
- [33] A. Mohsin, H. Janicke *et al.*, “Can We Trust Large Language Models Generated Code? A Framework for In-Context Learning, Security Patterns, and Code Evaluations Across Diverse LLMs,” Jun. 2024, arXiv:2406.12513.
- [34] M. Zakeri-Nasrabadi, S. Parsa *et al.*, “A Systematic Literature Review on the Code Smells Datasets and Validation Mechanisms,” *ACM Computing Surveys*, vol. 55, no. 13s, pp. 1–48, Dec. 2023.
- [35] B. Nguyen Thanh, M. Nguyen N. H. *et al.*, “ml-Codesmell: A code smell prediction dataset for machine learning approaches,” in *The 11th International Symposium on Information and Communication Technology*. ACM, Dec. 2022, pp. 368–374.
- [36] L. Madeyski and T. Lewowski, “Mlcq: Industry-relevant code smell data set,” *Proceedings of the 24th International Conference on Evaluation and Assessment in Software Engineering*, 2020.
- [37] M. Hozano, N. Antunes *et al.*, “Evaluating the accuracy of machine learning algorithms on detecting code smells for different developers,” in *International Conference on Enterprise Information Systems*, 2017.
- [38] H. Nandani, M. Saad *et al.*, “DACOS—a manually annotated dataset of code smells,” in *2023 IEEE/ACM 20th International Conference on Mining Software Repositories (MSR)*. IEEE, pp. 446–450.
- [39] V. Lenarduzzi, N. Saarimäki *et al.*, “The Technical Debt Dataset,” in *Proceedings of the Fifteenth International Conference on Predictive Models and Data Analytics in Software Engineering*. ACM, Sep. 2019, pp. 2–11.
- [40] Y. Wang, S. Hu *et al.*, “Using code evolution information to improve the quality of labels in code smell datasets,” in *2018 IEEE 42nd Annual Computer Software and Applications Conference (COMPSAC)*, vol. 01, 2018, pp. 48–53.
- [41] H. Liu, Y. Zhang *et al.*, “Prompt Learning for Multi-Label Code Smell Detection: A Promising Approach,” Feb. 2024, arXiv:2402.10398.
- [42] D. Nader Palacio, A. Velasco *et al.*, “Toward a theory of causation for interpreting neural code models,” *IEEE Transactions on Software Engineering*, vol. 50, no. 5, pp. 1215–1243, 2024.
- [43] M. T. Ribeiro, S. Singh *et al.*, “‘‘why should i trust you?’’: Explaining the predictions of any classifier,” in *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, ser. KDD ’16. ACM, 2016, p. 1135–1144.
- [44] S. M. Lundberg and S.-I. Lee, “A unified approach to interpreting model predictions,” in *Proceedings of the 31st International Conference on Neural Information Processing Systems*, ser. NIPS’17. Curran Associates Inc., 2017, p. 4768–4777.