

Boosting Private Domain Understanding of Efficient MLLMs: A Tuning-free, Adaptive, Universal Prompt Optimization Framework

Jiang Liu¹, Bolin Li², Haoyuan Li², Tianwei Lin¹, Wenqiao Zhang¹, Tao Zhong², Zhelun Yu², Jinghao Wei²,
Hao Cheng², Hao Jiang², Zheqi Lv¹, Juncheng Li¹, Siliang Tang¹, Yueting Zhuang¹

¹Zhejiang University

²Alibaba Group

{jiang.liu, lintw, wenqiaozhang, zheqilv, junchengli, siliang, yzhuang}@zju.edu.cn;

{libolin.lbl, lihaoyuan.lhy, zt395565, yuzhelun.yzl, weijinghao.wjh, chenghao.x, aoshu.jh}@taobao.com

Abstract

Efficient multimodal large language models (EMLLMs), in contrast to multimodal large language models (MLLMs), reduce model size and computational costs and are often deployed on resource-constrained devices. However, due to data privacy concerns, existing open-source EMLLMs rarely have access to private domain-specific data during the pre-training process, making them difficult to directly apply in device-specific domains, such as certain business scenarios. To address this weakness, this paper focuses on the efficient adaptation of EMLLMs to private domains, specifically in two areas: 1) how to reduce data requirements, and 2) how to avoid parameter fine-tuning. Specifically, we propose a **tuning-free, adaptive, universal Prompt Optimization Framework**, abbreviated as **IDEALPrompt** which consists of two stages: 1) Predefined Prompt, based on the reinforcement searching strategy, generate a prompt optimization strategy tree to acquire optimization priors; 2) Prompt Reflection initializes the prompt based on optimization priors, followed by self-reflection to further search and refine the prompt. By doing so, IDEALPrompt elegantly generates the “ideal prompts” for processing private domain-specific data. Note that our method requires no parameter fine-tuning and only a small amount of data to quickly adapt to the data distribution of private data. Extensive experiments across multiple tasks demonstrate that our proposed IDEALPrompt significantly improves both efficiency and performance compared to baselines.

1 Introduction

In recent years, multimodal large language models (MLLMs) have achieved significant advancements, particularly in cross-modal information understanding and integration (Huang et al., 2023; Gong et al., 2023; Ye et al., 2023). Efficient multimodal large language models (EMLLMs) significantly reduce model size and computational costs compared to

MLLMs, making them ideal for deployment on resource-constrained devices for enhanced processing efficiency (Jin et al., 2024). However, the scenarios encountered by different devices, including various private business contexts, can vary significantly. Moreover, ethical considerations and the necessity to protect trade secrets prevent the use of device data for pre-training by open-source, general-purpose EMLLMs. Consequently, a discrepancy between the distribution of pre-training data and device-specific data emerges, leading to reduced performance or even failure when EMLLMs process this unique and highly private domain data.

A viable solution involves utilizing EMLLMs, e.g., InternVL2-2B (Chen et al., 2023b, 2024) and Qwen2-VL-2B (Wang et al., 2024), to perform either full-parameter (Chung et al., 2024; Zhang et al., 2024b) or efficient fine-tuning (Hu et al., 2021; Lin et al., 2024a) on private device data for domain-specific adaptation (Chang et al., 2019; Zhang et al., 2022, 2024c; Li et al., 2023). However, this approach incurs large training costs, necessitates large-memory GPUs, and entails long training times. The elevated training costs significantly increase the application threshold, thereby restricting the availability and generalizability of such methods on private domain data. Therefore, our goal is to minimize the adaptation cost for EMLLMs when deployed on devices utilizing private domain-specific data.

In response to the aforementioned challenges, we propose a **tuning-free, adaptive, universal Prompt optimization framework**, referred to as **IDEALPrompt**. Our bootstrapping philosophy aims to strengthen EMLLMs’ capability in private domain tasks by progressively and adaptively optimizing the prompt. IDEALPrompt consists of two progressive optimization steps: **i) Reinforcement Warm-up Strategy (RWS)**, which employs a reinforcement learning tree search strategy for the general prompt optimization, encouraging combi-

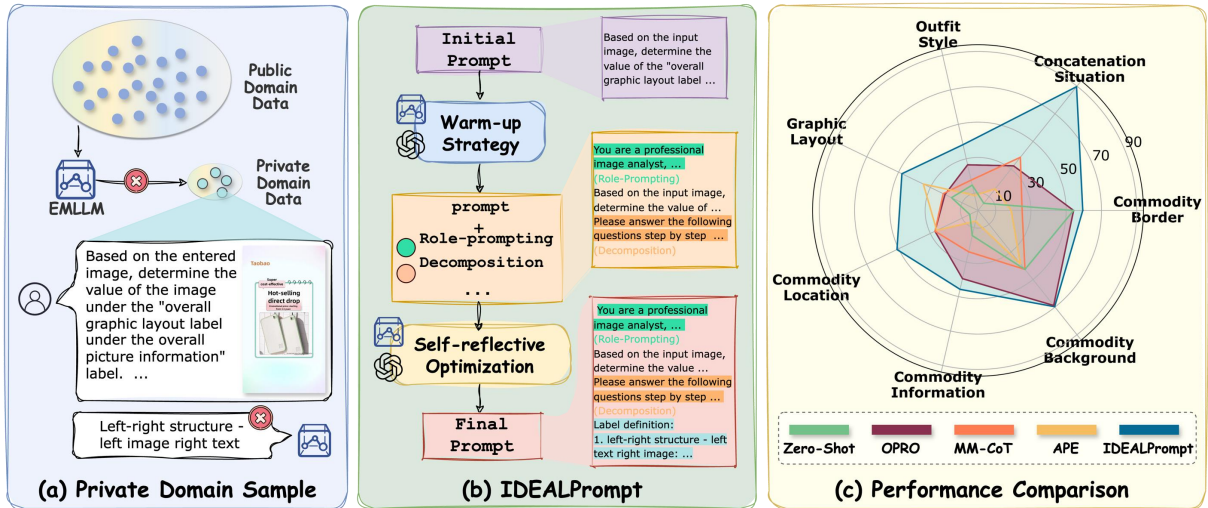


Figure 1: (a) shows the gap between public domain data and private domain data. (b) describes the simplified version of our IDEALPrompt. (c) illustrates that compared to baseline methods, our method achieves superior performance on Taobao-PDA benchmark.

nations of diverse prompt strategies that are most effective given the context of the current task. This step enables the framework to gather prior knowledge that can be adapted across tasks and models, significantly reducing iteration cycles while maintaining performance. It effectively functions as a “Pre-Training” phase for task-specific prompt engineering, similar to the pre-training in the MLLMs’ training paradigm, thereby encouraging the framework’s adaptability to varied task requirements. **ii) Empirical Self-reflective Optimization (ESO)**, further refines the prompts by selecting critical bad cases from the error distribution of inference results and incorporating self-reflection. By focusing on these critical bad cases, IDEALPrompt learns to optimize prompts by identifying and correcting ambiguous task descriptions and labels. This step allows the framework to continuously improve its understanding of prompt definitions in private domain tasks, functioning as a “Supervised Fine-Tuning” phase for prompt refining, similar to the supervised fine-tuning in the MLLMs’ training paradigm, thereby boosting the framework’s performance.

To evaluate our method in private domain adaptation thoroughly, we introduce the Taobao Private Domain Adaptation (Taobao-PDA), a new Chinese benchmark comprising multiple complex multimodal tasks, which is able to evaluate the private domain understanding capability of EMLLMs. The results of the experiment demonstrate that IDEALPrompt exhibits strong generalization and adaptability across multiple tasks, achieving robust performance in content understanding while

minimizing computational costs. Our contributions are as follows:

- To the best of our knowledge, this is the first study that focuses on the efficient adaptation of on-device EMLLMs to private data distributions that differ significantly from the pre-trained data distribution.
- We meticulously devise a pre-made prompt dataset for multimodal business scenarios, called Taobao-PDA, which serves as fundamental data support for promoting private domain understanding.
- We propose IDEALPrompt, a tuning-free, adaptive, universal prompt optimization framework, which leverages a two-stage design to facilitate EMLLMs’ content understanding of private domain data.
- Extensive and comprehensive experiments are conducted and followed by detailed analysis, which demonstrates the superiority of our method compared to the baselines. **Notably, our method even outperforms the fine-tuning method on proposed Taobao-PDA.**

2 Related Work

Prompt Optimization. Prompt optimization can enhance the performance of MLLMs without parameter fine-tuning, and several methods have been proposed to address the challenges of automated prompt optimization. Recent works focus on discrete optimization methods, such as GRIPS (Prasad et al., 2022) and APO (Pryzant et al., 2023), which utilize edit-based operations to generate various

candidate prompts for subsequent optimization. Other approaches leverage advanced algorithms for prompt optimization, including EvoPrompt (Guo et al., 2023), PromptBreeder (Fernando et al., 2023), AELP (Hsieh et al., 2023), and PhaseEvo (Cui et al., 2024), which leverage evolutionary algorithms to produce different prompts; RLPROMPT (Deng et al., 2022) and PRewrite (Kong et al., 2024) apply reinforcement learning techniques; PromptAgent (Wang et al., 2023) and Agent-Pro (Zhang et al., 2024a) utilize agent-based methods. APE (Zhou et al., 2022) generates candidate prompts using MLLMs, followed by a resampling of those prompts. OPRO (Yang et al., 2023a) leverage MLLMs as prompt optimizers, iteratively generating superior prompts by considering previously generated solutions with their values. Additionally, some research reformulates prompt optimization as a continuous optimization problem, as seen in InstructZero (Chen et al., 2023a), INSTINCT (Lin et al., 2024c), and ZOPO (Hu et al., 2024). APOHF (Lin et al., 2024b) prompt optimization based on human preference feedback rather than specific numerical scores. IPC (Levi et al., 2024) aims to optimize prompt engineering for MLLMs by utilizing synthetic case samples.

Multimodal Chain-of-Thought Prompting. Recent works indicate that multimodal Chain-of-Thought reasoning significantly enhances the understanding capabilities of MLLMs. MM-CoT (Zhang et al., 2023) develops a two-stage framework where the model first learns to produce rationales using ground-truth annotations and then employs all available information to generate the final answer. DDCoT (Zheng et al., 2023) integrates multimodality into reasoning by initially separating the responsibilities of MLLMs into reasoning and recognition, then incorporating the visual recognition capabilities of visual models into the combined reasoning process. The work of Yang et al. (2023b) introduces Question-Driven Visual Exploration (QVix), which leverages MLLMs to generate input-exploratory questions, guiding MLLMs to explore visual content more comprehensively and uncover subtle or peripheral details. CCoT (Mitra et al., 2024) first generates a scene graph using the MLLMs and then uses that scene graph in the prompt to produce a response. These multimodal Chain-of-Thought methods rely on guiding MLLMs through multiple steps reasoning to enhance performance.

3 Methodology

This section describes the details of IDEALPrompt (Figure 2). We will present each module and its optimization procedure.

3.1 Problem Formulation and Notations

Data. The input query of the on-device private data is represented by \mathcal{X} (e.g., image for vision-language models). High-value critical bad cases sampled by IDEALPrompt from \mathcal{X} is represented by $\mathcal{X}^{\text{sub}} \subseteq \mathcal{X}$. Correspondingly, we use \mathcal{Y} , and \mathcal{Y}^{sub} to represent their ground truths. For a sample, x and y represent a sample in \mathcal{X} and \mathcal{Y} respectively. Given a multimodal understanding task- t that is characterized by private domain data distribution \mathcal{D}_t . Prompt set is represented by \mathcal{V} , and a prompt in the \mathcal{V} is represented by v .

Model. The EMLLM adapted to \mathcal{D}_t is represented by \mathcal{G}_E , with parameters Θ . The general MLLM that assists the adaptation process of \mathcal{G}_E is represented by \mathcal{G}_M . $f_E(\cdot)$, $f_M(\cdot)$ represents the forward propagation process of \mathcal{G}_E , \mathcal{G}_M respectively, for example, $f_E(v, x; \Theta)$ is the process of the prediction made by \mathcal{G}_E based on the prompt v and the input query x with parameters Θ .

Formula. Our proposed IDEALPrompt avoids parameter fine-tuning; therefore, the comparison of formulas between parameter fine-tuning and IDEALPrompt is as follows:

Parameter Fine-tuning: Optimize the parameters Θ based on the training data \mathcal{X} .

$$\max_{\Theta} \mathbb{E}_{(v, \mathcal{X}, \mathcal{Y}) \sim \mathcal{D}_t} h(f_E(v, \mathcal{X}; \Theta), \mathcal{Y}) \quad (1)$$

IDEALPrompt: Find the optimal v and \mathcal{X}^{sub} , without parameter fine-tuning and without optimize on the whole dataset.

$$\max_{v \in \mathcal{V}, \mathcal{X}^{\text{sub}} \subseteq \mathcal{X}} \mathbb{E}_{(v, \mathcal{X}^{\text{sub}}, \mathcal{Y}^{\text{sub}}) \sim \mathcal{D}_t} h(f_E(v, \mathcal{X}^{\text{sub}}; \Theta), \mathcal{Y}^{\text{sub}}), \quad (2)$$

where $h(\cdot)$ is score function applied to measure the alignment between the EMLLM’s output $f_E(v, x; \Theta)$ and the ground truth y .

3.2 IDEALPrompt

We propose **IDEALPrompt**, a tuning-free, adaptive, prompt optimization framework for EMLLMs, which consists of two progressive optimization stages. Specifically, at the outset, several prompt optimization strategies are designed using human priors, referred to as the *Strategy Pool* \mathcal{S} , which

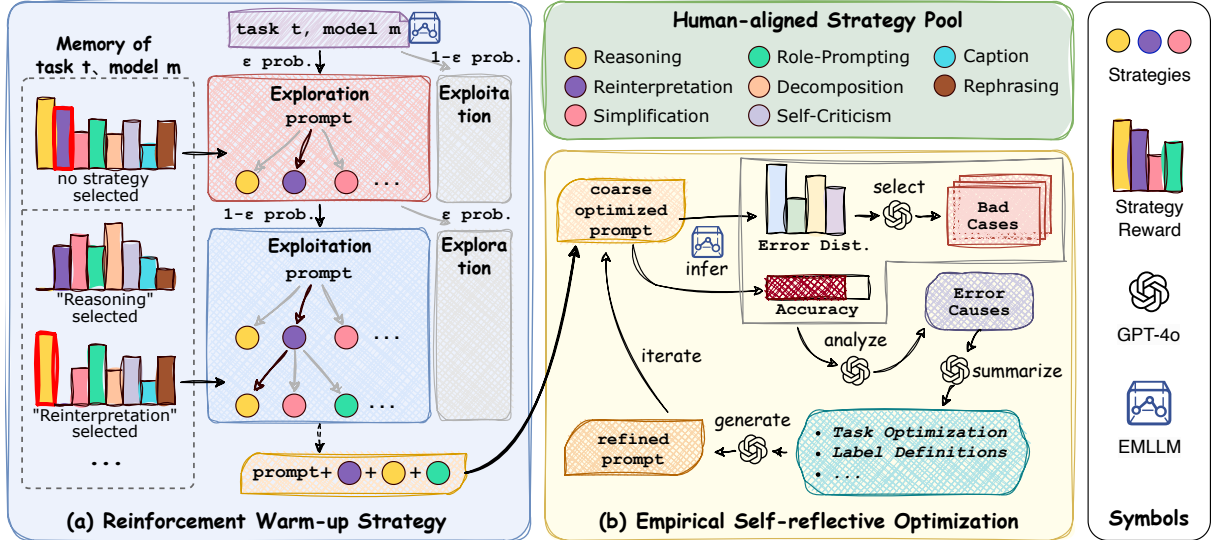


Figure 2: The architecture of IDEALPrompt. It includes Strategy Pool, Reinforcement Warm-up Strategy and Empirical Self-reflective Optimization, avoiding parameter fine-tuning and requiring only a small amount of data for efficient adaptation on the device.

directly guides the prompts’ optimization direction. Building on this, in the first stage, *Reinforcement Warm-up Strategy (RWS)*, a strategy tree search based on reinforcement learning is conducted to acquire prior knowledge of optimization strategies. In the second stage, *Empirical Self-reflective Optimization (ESO)*, the error distribution derived from the validation inference results is analyzed to identify critical bad cases, and self-reflection is subsequently applied to refine the prompts.

During the optimization process, a highly capable general MLLM is utilized as the prompt optimizer, while EMLLMs are employed as the prompt inference model.

3.2.1 Human-aligned Strategy Pool

While some works have used MLLMs for text gradient-based prompt optimization, we instead leverage human-designed prompt optimization strategies constructed a priori that effectively optimize prompts.

The work of (Schulhoff et al., 2024) indicates a wide range of prompt optimization strategies. We carefully select several representative strategies that are beneficial for the private domain, as identified by human experts, to form our *Strategy Pool* $\mathcal{S} = \{s_1, s_2, \dots, s_k\}$, where s_k denotes each individual strategy. Specifically, we identify the following optimization strategies: *Reasoning*, *Reinterpretation*, *Simplification*, *Role-Prompting*, *Decomposition*, *Self-Criticism*, *Caption* and *Rephrasing*. The details of the strategies are provided in Appendix A.2.1.

Note that the strategies in strategy pool can be freely modified, removed or expanded to flexibly adapt various task requirements. In this work, we showcase the aforementioned strategies adapting to private domain data as our strategy pool.

3.2.2 Reinforcement Warm-up Strategy

Based on these human-aligned strategies within the strategy pool, Reinforcement Warm-up Strategy (RWS) conducts a reinforcement learning exploration-exploitation strategy tree search across tasks and models to optimize prompts, as illustrated in Figure 2 (a).

Specifically, the strategy nodes $s_k \in \mathcal{S}$ constitute the action space of reinforcement learning, while the evaluation results of private domain task- t on EMLLM- \mathcal{G}_E are considered action rewards. The reward distribution of actions is maintained in the memory module \mathcal{M} . Note that we maintain a distinct distribution for each task type within each EMLLM, i.e., $\mathcal{M} = \{\mathcal{M}_{t_0, \mathcal{G}_{E_0}}, \dots, \mathcal{M}_{t_n, \mathcal{G}_{E_m}}\}$.

In the initial state of RWS, the framework has not encountered any private domain tasks nor performed any strategy search on any EMLLMs, i.e., the memory module \mathcal{M} is empty. When the EMLLM- \mathcal{G}_{E_0} encounters the first private domain task- t_0 , the framework performs a complete strategy tree search based on the human-aligned strategies within the strategy pool, simultaneously updating the action-reward distribution $\mathcal{M}_{t_0, \mathcal{G}_{E_0}}$:

$$\mathcal{M}_{t_0, \mathcal{G}_{E_0}} = \psi(\mathcal{S}, t_0, \mathcal{G}_{E_0}), \quad (3)$$

where ψ denotes the tree search operation.

For a new private domain task- t_n on a new EMLLM- \mathcal{G}_{E_m} , the framework utilizes prior information stored in the memory module \mathcal{M} and applies an ε -greedy strategy to balance exploration and exploitation. Specifically, the general MLLM \mathcal{G}_M first selects the distribution with the highest task-model similarity to task- t_n and EMLLM- \mathcal{G}_{E_m} from the existing memory module \mathcal{M} as a reference:

$$\mathcal{M}_{\text{ref}} = \arg \max_{\mathcal{M}_{t, \mathcal{G}_E} \in \mathcal{M}} \rho((t, \mathcal{G}_E), (t_n, \mathcal{G}_{E_m})), \quad (4)$$

where ρ denotes the task-model similarity.

The distribution is then smoothed and homogenized based on task-model similarity to reduce bias:

$$\mathcal{M}_{t_n, \mathcal{G}_{E_m}} = \sigma(\mathcal{M}_{\text{ref}}, \rho((t, \mathcal{G}_E), (t_n, \mathcal{G}_{E_m}))), \quad (5)$$

where σ denotes the smooth operation.

This distribution is used as the action-reward distribution $\mathcal{M}_{t_n, \mathcal{G}_{E_m}}$ for the private domain task- t_n and EMLLM- \mathcal{G}_{E_m} . An ε -greedy search is then performed based on this distribution, offering a $1-\varepsilon$ probability of selecting one of top-k historically effective strategies for exploitation, while with a ε probability, the framework randomly searches other strategies for exploration:

$$\mathcal{S}^* = \begin{cases} \kappa(\mathcal{M}_{t_n, \mathcal{G}_{E_m}}) & \text{prob. } 1 - \varepsilon, \\ \xi(\mathcal{S} \setminus \kappa(\mathcal{M}_{t_n, \mathcal{G}_{E_m}})) & \text{prob. } \varepsilon, \end{cases} \quad (6)$$

where κ denotes the selection one of top-k operation, ξ denotes the random selection operation. \mathcal{S}^* represents the selected strategies.

RWS fully utilizes prior knowledge of prompt engineering strategies. Compared to other search methods, it is more transparent and explicit, enhancing the interpretability of the prompt optimization process. We expect RWS to exhibit a degree of transferability across different private domain tasks and models, similar to pre-training in the MLLMs' training paradigm. This stage allows for the acquisition of a more generalizable combination of prompt strategies for private domain-specific tasks, showcasing significant advantages in multimodal, multi-task understanding in real-world business scenarios.

3.2.3 Empirical Self-reflective Optimization

After the RWS, we obtained the coarse optimized prompts as well as optimized priors for various

private domain tasks and EMLLMs. Building on this foundation, Empirical Self-reflective Optimization (ESO) further refines the prompts by selecting critical bad cases from the error distribution of evaluation results and leveraging EMLLMs' self-reflection to better adapt to private domain data.

Specifically, the process of ESO is as follows: First, the coarse optimized prompts obtained from RWS are used as the initial prompts for ESO.

$$v'_0 = v_0 + \mathcal{S}^* \quad (7)$$

Building upon this foundation, ESO begins iterative optimization with the EMLLM first performing evaluation on the validation set. During the optimization process, historical evaluation results of the validation set are considered, including previous prompts, accuracy rates, and error distributions. Optimization by the general MLLM \mathcal{G}_M is carried out based on two key aspects:

- i) Global Error Distribution Learning: the general MLLM \mathcal{G}_M analyzes error evaluation results to identify and assess patterns in error distribution of private domain, uncovering task descriptions and labels that are commonly misunderstood or not well comprehended by EMLLMs. This macro-level analysis provides insights into the EMLLM's weaknesses within specific tasks, guiding further optimization.
- ii) Local Case-based Learning: the general MLLM \mathcal{G}_M selects critical bad cases according to error distribution based on the principles of typicality and diversity to identify confusing or distinctive private domain bad cases. These cases are analyzed alongside ground truth labels to diagnose errors, refining private domain tasks and label definitions as needed.

The optimization process can be formalized as follows:

$$\begin{aligned} \mathcal{R}(v'_0) &= \mathbb{E}_{([v'_0, \mathcal{X}^{\text{sub}}], \mathcal{Y}^{\text{sub}}) \sim \mathcal{D}_t} h(f_E(v'_0, \mathcal{X}^{\text{sub}}; \Theta), \mathcal{Y}^{\text{sub}}) \\ v_{i+1} &= v_i + \nabla_{v_i} \mathcal{R}(v_i) \text{ for } i = 0, 1, \dots \end{aligned} \quad (8)$$

This process iterates until it reaches the specified number of iterations.

$$\mathcal{T}(v_i) = \text{True if } \max_iterations \leq i \quad (9)$$

Thus, ESO can utilize the priors obtained from RWS to develop fine-tuned prompts for unknown private domain tasks with minimal search steps, similar to supervised fine-tuning in the MLLMs' training paradigm.

Method	w/o Parameter Tuning	Image		Commodity			Outfit	Average	
		Graphic Layout	Commodity Location	Commodity Information	Commodity Background	Commodity Border	Concatenation Situation		Outfit Style
Fine-Tuning		38.5	26.0	69.8	61.5	58.3	88.5	47.1	55.7
MM-CoT	✓	21.9	27.1	24.0	42.7	25.0	38.5	17.6	28.4
Zero-Shot	✓	16.7	5.2	14.6	42.7	54.2	5.2	14.7	22.5
APE	✓	34.4	26.0	6.3	38.5	18.8	15.6	8.8	21.2
OPRO	✓	20.8	27.1	39.6	68.8	54.2	32.3	26.5	38.5
IDEALPrompt	✓	47.9	51.0	45.8	69.7	59.4	89.6	38.2	57.4

Table 1: Performance comparison of IDEALPrompt and other baseline methods on the Taobao-PDA benchmark. All methods leverage the efficient MLLM, InternVL2-2B, for inference. We color each row as the **best** and **second best**.

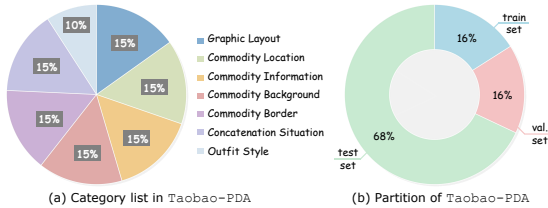


Figure 3: Data characteristics of Taobao-PDA

4 Experiment

4.1 Experimental Setting

Datasets and Tasks. As our primary objective is to address tasks focused on multimodal content understanding of the private domain, we collect external data from Taobao’s private domain involved multimodal content understanding and propose a benchmark, namely Taobao Private Domain Adaptation (Taobao-PDA) benchmark, encompassing 7 multimodal content understanding tasks across 3 categories, where the ground truth are labeled by GPT-4o and further refined by human annotation. The detailed tasks are as follows:

- Image: Graphic Layout, Commodity Location.
- Commodity: Commodity Information, Commodity Background, Commodity Border, Concatenation Situation.
- Outfit: Outfit Style.

Each task can be viewed as a visual question answering task in a distinct private domain of understanding. Figure 3 shows the detailed characteristics of Taobao-PDA, with additional details provided in Appendix A.1¹.

Baselines. We compare IDEALPrompt with several prompt engineering baseline methods: (1) MM-CoT (Zhang et al., 2023), which generates rationales before generating the final answer; (2) APE (Zhou et al., 2022), which generates instruc-

¹Note that Taobao-PDA’s original language is Chinese, which is translated to English for presentation in this paper.

Method	Stages		Average Performance
	Stage 1	Stage 2	
Zero-Shot			22.5
w/o Self-reflection	✓		43.5
w/o Warm-up Strategy		✓	41.1
IDEALPrompt	✓	✓	56.3

Table 2: Ablation results of involving different stages.

tions using powerful models; (3) OPRO (Yang et al., 2023a), which leverages historical prompts, scores, and error examples to guide models generate prompts with higher scores. In addition, we compare our method with (4) Zero-Shot inference and (5) Fine-Tuning method learning on the train set of Taobao-PDA. These methods enhance understanding performance in different ways. For instance, Fine-Tuning involves parameter tuning, MM-CoT employs multi-step inference, while other prompt optimization methods (*i.e.*, APE and OPRO) generally utilize single-step inference without parameter tuning but prompt optimization.

Implementation Details. In the experiments, we leverage GPT-4o as the general MLLM for prompt optimization and InternVL2-2B as the EMLLM for inference. We use a simple 0-1 loss as the score function $h(\cdot)$, *i.e.*, $h(f_E(v, x; \Theta), y) = 1$ if $f_E(v, x; \Theta) = y$, otherwise $h(f_E(v, x; \Theta), y) = 0$. We set the general MLLM’s sampling temperature to 1 and EMLLM’s sampling temperature to 0 during the whole optimization process. Details of RWS and ESO are provided in Appendix A.2 and Appendix A.3 respectively.

4.2 Main Results

We evaluate the performance of IDEALPrompt on the Taobao-PDA benchmark compared to the baseline methods, as shown in Table 1. Our observations are summarized as follows: (i) IDEALPrompt achieve the highest average performance

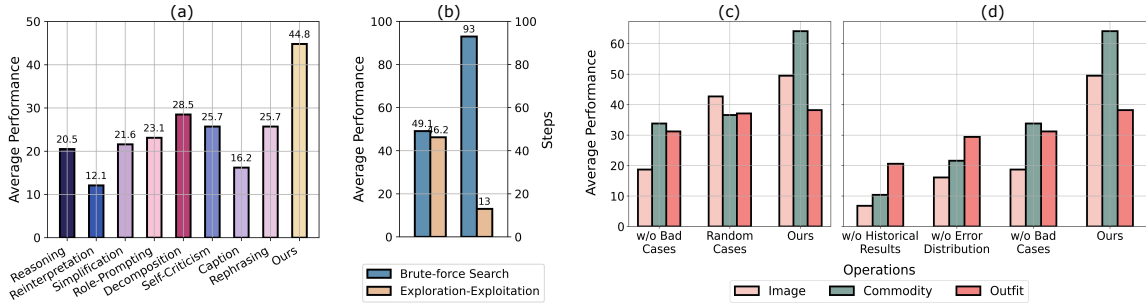


Figure 4: (a) Performance comparison between the single strategy and the exploration-exploitation strategy. (b) Performance and search steps comparison between the brute-force search and the exploration-exploitation strategy tree search. (c) and (d) Performance comparison among the absence of various components in Empirical Self-reflective Optimization.

Method	Model	Average Performance	Inference Time	GPU Memory Usage
Zero-Shot	InternVL2-8B	52.2	$\sim 1.2\times$	$\sim 16\text{GB}$
IDEALPrompt	InternVL2-2B	56.3	$\sim 1\times$	$\sim 4\text{GB}$

Table 3: Comparison of average performance, inference time, and GPU memory usage between Zero-Shot on InternVL2-8B and IDEALPrompt on InternVL2-2B.

of **57.3** among all baseline methods. This result significantly surpasses that of other methods, showcasing IDEALPrompt’s superior performance across various tasks. Whether dealing with Image, Commodity or Outfit categories, IDEALPrompt demonstrates consistent and remarkable effectiveness. (ii) IDEALPrompt excel in several key tasks, achieving the best performance across 5 out of 7 tasks, *i.e.*, “Graphic Layout” (**47.9**), “Commodity Location” (**51.0**), “Commodity Background” (**69.7**), “Commodity Border” (**59.4**) and “Merging Situation” (**89.6**). Particularly compared with the fine-tuning method, IDEALPrompt performs worse on only two tasks, yet slightly outperforms it in terms of overall average performance. Considering the higher costs and deployment of the fine-tuning method, this outcome is deemed acceptable. (iii) Our method consistently achieves improvements across various tasks. In contrast, other prompt optimization methods often experience either a lack of performance enhancement or even a decline. This may be attributed to the model’s inability to accurately infer a reasonable optimization direction, thereby limiting their optimization capabilities².

4.3 Ablation Study

To investigate the effectiveness of the two-stage framework, we conduct an ablation study compar-

²We conduct human evaluation on Taobao-PDA and additional experiments on public domain benchmark as well; see Appendix A.4 for details.

ing the complete two-stage framework with versions that omit one of the stages. Table 2 shows that both stages of IDEALPrompt are effective, and combining both stages outperforms using each stage individually.

4.4 In-Depth Analysis

Analysis of the Strategy Optimization in RWS.

We first compare the prompt optimized with a single strategy against the resulting coarse optimized prompt on the training set, as illustrated in Figure 4-(a). The ensemble strategy tree, derived through exploration-exploitation search, achieves a performance of 46.2, outperforming other individual strategies. Furthermore, we compare the exhaustive search of the strategy tree with the exploration-exploitation-based search, as illustrated in Figure 4-(b). For new tasks, exhaustive search through the strategy tree requires over 90 search steps, whereas our method needs only about 10 steps, achieving performance comparable to that of the exhaustive search.

Effectiveness of Each Component in ESO.

We conduct a performance comparison to evaluate the impact of the absence of various components within ESO. Specifically, we considered the following components during the generation of new prompts: (i) without selection of bad cases; (ii) random selection of samples as bad cases; (iii) without using error distribution; and (iv) without using historical inference results. Figure 4-(c) sequentially shows the performance improvement derived from the analysis of selected bad cases, while Figure 4-(d) sequentially shows the performance improvement derived from analyzing conclusions based on historical evaluation results.

Additional Baseline Comparison.

We conduct the comparison of the average performance, inference time, and GPU memory usage between

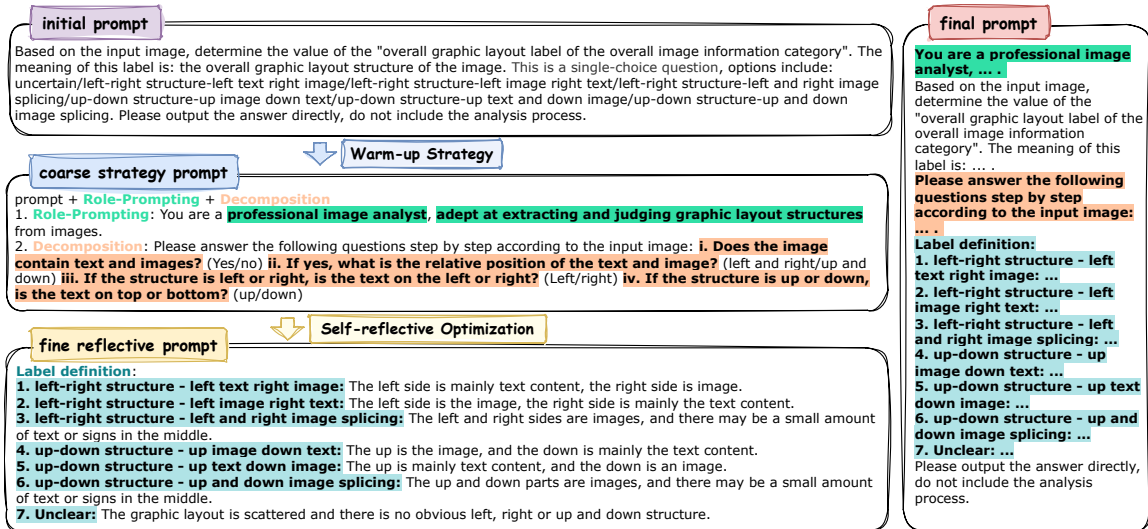


Figure 5: A case of prompt optimization using the IDEALPrompt.

Method	Average Performance	Iteration Steps	Method	Graphic Layout	Commodity Location	Commodity Information	Commodity Background	Commodity Border	Concatenation Situation	Outfit Style	Average
OPRO	38.5	50 ± 3	Zero-Shot	33.3	52.1	56.3	38.5	67.7	76.0	41.2	52.2
IDEALPrompt	56.3	15 ± 3	IDEALPrompt	71.9	57.3	61.5	42.7	69.8	84.4	76.5	66.3

Table 4: Comparison between Table 5: Performance comparison between Zero-Shot and IDEALPrompt on OPRO and IDEALPrompt. InternVL2-8B.

Type	EMLLM	Method	Performance			Steps
			Image	Commodity	Average	
Tasks	InternVL2-2B	w/o adapt	49.0	49.7	49.5	93
		w adapt	49.5	66.1	60.6	13
Models	Qwen2-VL-2B	w/o adapt	16.1	62.8	47.2	93
		w adapt	17.7	58.6	45.0	13

Table 6: Comparison of performance and steps between adapt from tasks/model and without adapt.

Zero-Shot on InternVL2-8B and IDEALPrompt on InternVL2-2B, as shown in Table 3. IDEALPrompt on InternVL2-2B achieved higher average performance than Zero-Shot on InternVL2-8B while maintaining lower inference time and GPU memory usage. In addition, we conduct the comparison of performance and average iteration steps between OPRO and IDEALPrompt on InternVL2-2B, as shown in Table 4. IDEALPrompt achieved higher average performance than OPRO while maintaining lower iteration steps. Table 5 shows the performance comparison between Zero-Shot and IDEALPrompt on InternVL2-8B, which demonstrates the general effectiveness of our method across different models.

Adaptability. Notably, our method demonstrates adaptability across both tasks and models, table 6 presents the adaptability of our method in task and model dimensions. Regardless of adapting to tasks or models, IDEALPrompt achieved competitive results with fewer iteration steps.

4.5 Case Study

Figure 5 shows a case of prompt optimization using the IDEALPrompt framework. The initial prompt requests the EMLLM to determine the value of the "overall graphic layout label of the overall image information category" based on the input image. After RWS, the optimal strategy combination, "Role-Prompting + Decomposition", is identified. Subsequently, RWS refines the label by providing a detailed definition, ultimately producing the final optimized prompt.

5 Conclusion

In this paper, we propose IDEALPrompt, a tuning-free, adaptive, universal prompt optimization framework consisting of two stages, which focuses on boosting EMLLMs' content understanding of private domain data. Specifically, IDEALPrompt incorporates human experts' prior optimization strategies along with a reinforcement learning-based strategy tree search and utilizes the model's self-reflection to refine prompts. In addition, we propose Taobao-PDA benchmark to study the private domain adaptation of IDEALPrompt. Experimental results demonstrate that IDEALPrompt outperforms existing prompt optimization approaches while significantly improving optimization efficiency.

Limitations

Our limitations and potential risks are as follows:

- **Large Consumption of API Calls.** Our method involves extensive searching and still requires a large number of API calls (although this is much less than existing methods), which is a common issue in automatic prompt optimization.
- **Burden of human-aligned strategy definition.** Strategies defined by human experts are intended to provide models with human-derived optimization priors. This is because humans can usually intuitively perceive better descriptions, but optimizing them directly is difficult. However, this increases the burden of manual definitions, thereby automatic construction of external strategies will be a key area for our future research.

Ethics Statement

In the process of collecting Taobao-PDA, we obtained TaoBao’s permission and carried out desensitization processing. In addition, racial discrimination and gender discrimination were eliminated. Especially for the data of the `outfit` category involving people, we only consider some clothes with distinct characteristics, regardless of gender or race.

References

- Woong-Gi Chang, Tackgeun You, Seonguk Seo, Suha Kwak, and Bohyung Han. 2019. Domain-specific batch normalization for unsupervised domain adaptation. In *Proceedings of the IEEE/CVF conference on Computer Vision and Pattern Recognition*, pages 7354–7362.
- Lichang Chen, Jiu Hai Chen, Tom Goldstein, Heng Huang, and Tianyi Zhou. 2023a. Instructzero: Efficient instruction optimization for black-box large language models. *arXiv preprint arXiv:2306.03082*.
- Zhe Chen, Weiyun Wang, Hao Tian, Shenglong Ye, Zhangwei Gao, Erfei Cui, Wenwen Tong, Kongzhi Hu, Jiapeng Luo, Zheng Ma, et al. 2024. How far are we to gpt-4v? closing the gap to commercial multimodal models with open-source suites. *arXiv preprint arXiv:2404.16821*.
- Zhe Chen, Jiannan Wu, Wenhui Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, Bin Li, Ping Luo, Tong Lu, Yu Qiao, and Jifeng Dai. 2023b. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. *arXiv preprint arXiv:2312.14238*.
- Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Yunxuan Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, et al. 2024. Scaling instruction-finetuned language models. *Journal of Machine Learning Research*, 25(70):1–53.
- Wendi Cui, Jiaxin Zhang, Zhuohang Li, Hao Sun, Damien Lopez, Kamalika Das, Bradley Malin, and Sricharan Kumar. 2024. Phaseevo: Towards unified in-context prompt optimization for large language models. *arXiv preprint arXiv:2402.11347*.
- Mingkai Deng, Jianyu Wang, Cheng-Ping Hsieh, Yihan Wang, Han Guo, Tianmin Shu, Meng Song, Eric P Xing, and Zhiting Hu. 2022. Rlprompt: Optimizing discrete text prompts with reinforcement learning. *arXiv preprint arXiv:2205.12548*.
- Chrisantha Fernando, Dylan Banarse, Henryk Michalewski, Simon Osindero, and Tim Rocktäschel. 2023. Promptbreeder: Self-referential self-improvement via prompt evolution. *arXiv preprint arXiv:2309.16797*.
- Tao Gong, Chengqi Lyu, Shilong Zhang, Yudong Wang, Miao Zheng, Qian Zhao, Kuikun Liu, Wenwei Zhang, Ping Luo, and Kai Chen. 2023. Multimodal-gpt: A vision and language model for dialogue with humans. *arXiv preprint arXiv:2305.04790*.
- Qingyan Guo, Rui Wang, Junliang Guo, Bei Li, Kaitao Song, Xu Tan, Guoqing Liu, Jiang Bian, and Yujie Yang. 2023. Connecting large language models with evolutionary algorithms yields powerful prompt optimizers. *arXiv preprint arXiv:2309.08532*.
- Cho-Jui Hsieh, Si Si, Felix X Yu, and Inderjit S Dhillon. 2023. Automatic engineering of long prompts. *arXiv preprint arXiv:2311.10117*.
- Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2021. Lora: Low-rank adaptation of large language models. *arXiv preprint arXiv:2106.09685*.
- Wenyang Hu, Yao Shu, Zongmin Yu, Zhaoxuan Wu, Xiangqiang Lin, Zhongxiang Dai, See-Kiong Ng, and Bryan Kian Hsiang Low. 2024. Localized zeroth-order prompt optimization. *arXiv preprint arXiv:2403.02993*.
- Shaohan Huang, Li Dong, Wenhui Wang, Yaru Hao, Saksham Singhal, Shuming Ma, Tengchao Lv, Lei Cui, Owais Khan Mohammed, Qiang Liu, et al. 2023. Language is not all you need: Aligning perception with language models. *arXiv preprint arXiv:2302.14045*.
- Yizhang Jin, Jian Li, Yexin Liu, Tianjun Gu, Kai Wu, Zhengkai Jiang, Muyang He, Bo Zhao, Xin Tan, Zhenye Gan, Yabiao Wang, Chengjie Wang, and Lizhuang Ma. 2024. Efficient multimodal large language models: A survey. *Preprint, arXiv:2405.10739*.

- Weize Kong, Spurthi Amba Hombaiah, Mingyang Zhang, Qiaozhu Mei, and Michael Bendersky. 2024. Prewrite: Prompt rewriting with reinforcement learning. *arXiv preprint arXiv:2401.08189*.
- Elad Levi, Eli Brosh, and Matan Friedmann. 2024. Intent-based prompt calibration: Enhancing prompt optimization with synthetic boundary cases. *arXiv preprint arXiv:2402.03099*.
- Haoyuan Li, Hao Jiang, Tao Jin, Mengyan Li, Yan Chen, Zhijie Lin, Yang Zhao, and Zhou Zhao. 2023. Date: Domain adaptive product seeker for e-commerce. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 19315–19324.
- Tianwei Lin, Jiang Liu, Wenqiao Zhang, Zhaocheng Li, Yang Dai, Haoyuan Li, Zhelun Yu, Wanggui He, Juncheng Li, Hao Jiang, et al. 2024a. Teamlora: Boosting low-rank adaptation with expert collaboration and competition. *arXiv preprint arXiv:2408.09856*.
- Xiaoqiang Lin, Zhongxiang Dai, Arun Verma, See-Kiong Ng, Patrick Jaillet, and Bryan Kian Hsiang Low. 2024b. Prompt optimization with human feedback. *arXiv preprint arXiv:2405.17346*.
- Xiaoqiang Lin, Zhaoxuan Wu, Zhongxiang Dai, Wenyang Hu, Yao Shu, See-Kiong Ng, Patrick Jaillet, and Bryan Kian Hsiang Low. 2024c. [Use your INSTINCT: INSTRUCTION optimization for LLMs using neural bandits coupled with transformers](#). In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 30317–30345. PMLR.
- Chancharik Mitra, Brandon Huang, Trevor Darrell, and Roei Herzig. 2024. Compositional chain-of-thought prompting for large multimodal models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14420–14431.
- Archiki Prasad, Peter Hase, Xiang Zhou, and Mohit Bansal. 2022. Grips: Gradient-free, edit-based instruction search for prompting large language models. *arXiv preprint arXiv:2203.07281*.
- Reid Pryzant, Dan Iter, Jerry Li, Yin Tat Lee, Chenguang Zhu, and Michael Zeng. 2023. Automatic prompt optimization with "gradient descent" and beam search. *arXiv preprint arXiv:2305.03495*.
- Sander Schulhoff, Michael Ilie, Nishant Balepur, Konstantine Kahadze, Amanda Liu, Chenglei Si, Yin-heng Li, Aayush Gupta, HyoJung Han, Sevien Schulhoff, et al. 2024. The prompt report: A systematic survey of prompting techniques. *arXiv preprint arXiv:2406.06608*.
- Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Yang Fan, Kai Dang, Mengfei Du, Xuancheng Ren, Rui Men, Dayiheng Liu, Chang Zhou, Jingren Zhou, and Junyang Lin. 2024. Qwen2-vl: Enhancing vision-language model's perception of the world at any resolution. *arXiv preprint arXiv:2409.12191*.
- Xinyuan Wang, Chenxi Li, Zhen Wang, Fan Bai, Haotian Luo, Jiayou Zhang, Nebojsa Jojic, Eric P Xing, and Zhiting Hu. 2023. Promptagent: Strategic planning with language models enables expert-level prompt optimization. *arXiv preprint arXiv:2310.16427*.
- Chengrun Yang, Xuezhi Wang, Yifeng Lu, Hanxiao Liu, Quoc V. Le, Denny Zhou, and Xinyun Chen. 2023a. [Large language models as optimizers](#). *ArXiv*, abs/2309.03409.
- Kaiwen Yang, Tao Shen, Xinmei Tian, Xiubo Geng, Chongyang Tao, Dacheng Tao, and Tianyi Zhou. 2023b. Good questions help zero-shot image reasoning. *arXiv preprint arXiv:2312.01598*.
- Qinghao Ye, Haiyang Xu, Guohai Xu, Jiabo Ye, Ming Yan, Yiyang Zhou, Junyang Wang, Anwen Hu, Pengcheng Shi, Yaya Shi, et al. 2023. [mplug-owl: Modularization empowers large language models with multimodality](#). *arXiv preprint arXiv:2304.14178*.
- Wenqi Zhang, Ke Tang, Hai Wu, Mengna Wang, Yongliang Shen, Guiyang Hou, Zeqi Tan, Peng Li, Yueting Zhuang, and Weiming Lu. 2024a. Agentpro: Learning to evolve via policy-level reflection and optimization. *arXiv preprint arXiv:2402.17574*.
- Wenqiao Zhang, Tianwei Lin, Jiang Liu, Fangxun Shu, Haoyuan Li, Lei Zhang, He Wanggui, Hao Zhou, Zheqi Lv, Hao Jiang, et al. 2024b. [Hyperllava: Dynamic visual and language expert tuning for multimodal large language models](#). *arXiv preprint arXiv:2403.13447*.
- Wenqiao Zhang, Zheqi Lv, Hao Zhou, Jia-Wei Liu, Juncheng Li, Mengze Li, Yunfei Li, Dongping Zhang, Yueting Zhuang, and Siliang Tang. 2024c. Revisiting the domain shift and sample uncertainty in multi-source active domain transfer. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16751–16761.
- Wenqiao Zhang, Lei Zhu, James Hallinan, Shengyu Zhang, Andrew Makmur, Qingpeng Cai, and Beng Chin Ooi. 2022. [Boostmis: Boosting medical image semi-supervised learning with adaptive pseudo labeling and informative active annotation](#). In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 20666–20676.
- Zhuosheng Zhang, Aston Zhang, Mu Li, Hai Zhao, George Karypis, and Alex Smola. 2023. [Multimodal chain-of-thought reasoning in language models](#). *arXiv preprint arXiv:2302.00923*.

Ge Zheng, Bin Yang, Jiajin Tang, Hong-Yu Zhou, and Sibe Yang. 2023. Ddcot: Duty-distinct chain-of-thought prompting for multimodal reasoning in language models. *Advances in Neural Information Processing Systems*, 36:5168–5191.

Yongchao Zhou, Andrei Ioan Muresanu, Ziwen Han, Keiran Paster, Silviu Pitis, Harris Chan, and Jimmy Ba. 2022. Large language models are human-level prompt engineers. *arXiv preprint arXiv:2211.01910*.

A Appendix

A.1 Data Detail

A.1.1 Task Definition

Figure 6 illustrates the detailed definition of tasks.

A.1.2 Initial Prompt

Our zero-shot initial prompts of various tasks are shown in Table 7.

A.2 Strategy Detail

In RWS, part of strategies use the {initial prompt + strategy prompt} as the strategy-based prompt, while other utilize GPT-4 to generate the strategy-based prompt. The top-k value is set to 3. ϵ is set to 0.3, meaning there is a 0.7 probability of exploitation and a 0.3 probability of exploration. Task-model similarity is assessed by GPT-4.

A.2.1 Strategy Definition

Detailed definition of strategies are followed:

- **Reasoning** represents that the prompt requires MLLMs to explicitly articulate their logical process and rationale within the output, enabling a deeper understanding of the question’s essence and ensuring the response’s validity.
- **Reinterpretation** represents that the prompt requires MLLMs to re-read and reinterpret the question before answering, ensuring comprehension is both accurate and contextually appropriate.
- **Simplification** represents that the prompt requires MLLMs to remove irrelevant information, ensuring that the content is concise and directly focused on the question.
- **Role-Prompting** represents that the prompt assigns a specific role to MLLMs, guiding their approach to generating responses and framing the context accordingly.
- **Decomposition** represents that the prompt requires MLLMs to decompose complex questions into simpler sub-instructions, addressing each sub-question individually for clarity and precision.
- **Self-Criticism** represents that the prompt requires MLLMs to critically reflect on their responses, identifying and addressing potential weaknesses or errors.
- **Caption** represents that the prompt requires MLLMs to provide a detailed description or caption of an image before generating an answer, en-

```
{
  "overall image information": {
    "overall graphic layout": {
      "type": "single-choice question",
      "description": "the overall graphic layout structure of the image",
      "option": ["uncertain", "left-right structure-left text right image", "left-right structure-left image right text",
        "left-right structure-left and right image splicing", "up-down structure-up image down text",
        "up-down structure-up text and down image",
        "up-down structure-up and down image splicing"]
    },
    "commodity image location": {
      "type": "single-choice question",
      "description": "the location of the commodity image in the overall image",
      "option": ["no commodity", "uncertain", "full screen", "center of screen", "left and right halves",
        "left half", "right half", "up and down halves", "top half", "bottom half"]
    }
  },
  "commodity": {
    "commodity information": {
      "type": "single-choice question",
      "description": "commodity information",
      "option": ["no commodity", "single commodity single style", "single commodity multiple styles", "multiple commodities"]
    },
    "commodity image background": {
      "type": "single-choice question",
      "description": "the background color of the commodity image",
      "option": ["white", "other"]
    },
    "commodity image border": {
      "type": "single-choice question",
      "description": "the shape of the commodity image's border",
      "option": ["no obvious border", "square border", "other shaped border"]
    },
    "commodity image concatenation situation": {
      "type": "single-choice question",
      "description": "the concatenation situation of the commodity image",
      "option": ["single image without concatenation", "2 images concatenation", "3 images concatenation",
        "4 images concatenation", "5 or more images concatenation"]
    }
  },
  "outfit": {
    "outfit style": {
      "type": "single-choice question",
      "description": "the outfit style of the person in the image",
      "option": ["Anklei", "Girlcore", "Sporty Chic", "Y3K", "Mori", "Dopamine", "Bohemian", "Intellectual"]
    }
  }
}
```

Figure 6: Tasks definition.

Task	Initial Prompt
Graphic Layout	Based on the input image, determine the value of the "overall graphic layout label of the overall image information category". The meaning of this label is: the overall graphic layout structure of the image. This is a single-choice question, options include: uncertain/left-right structure-left text right image/left-right structure-left image right text/left-right structure-left and right image splicing/up-down structure-up image down text/up-down structure-up text and down image/up-down structure-up and down image splicing. Please output the answer directly, do not include the analysis process.
Commodity Location	Based on the input image, determine the value of the "commodity image location label of the overall image information category". The meaning of this label is: the location of the commodity image in the overall image. This is a single-choice question, options include: no commodity/uncertain/full screen/center of screen/left and right halves/left half/right half/up and down halves/top half/bottom half. Please output the answer directly, do not include the analysis process.
Commodity Information	Based on the input image, determine the value of the "commodity information label of the commodity category". The meaning of this label is: commodity information. This is a single-choice question, options include: no commodity/single commodity single style/single commodity multiple styles/multiple commodities. Please output the answer directly, do not include the analysis process.
Commodity Background	Based on the input image, determine the value of the "commodity image background label of the commodity category". The meaning of this label is: the background color of the commodity image. This is a single-choice question, options include: white/other. Please output the answer directly, do not include the analysis process.
Commodity Border	Based on the input image, determine the value of the "commodity image border label of the commodity category". The meaning of this label is: the shape of the commodity image's border. This is a single-choice question, options include: no obvious border/square border/other shaped border. Please output the answer directly, do not include the analysis process.
Concatenation Situation	Based on the input image, determine the value of the "commodity image concatenation situation label of the commodity category". The meaning of this label is: the concatenation situation of the commodity image. This is a single-choice question, options include: single image without concatenation/2 images concatenation/3 images concatenation/4 images concatenation/5 or more images concatenation. Please output the answer directly, do not include the analysis process.
Outfit Style	Based on the input image, determine the value of the "outfit style label of the outfit category". The meaning of this label is: the outfit style of the person in the image. This is a single-choice question, options include: Anklei/Girlcore/Sporty Chic/Y3K/Mori/Dopamine/Bohemian/Intellectual. Please output the answer directly, do not include the analysis process.

Table 7: Initial prompts of tasks.

Strategy	Prompt
Reasoning	{prompt} + Please carefully understand the question before answering and provide your thought and analysis process.
Reinterpretation	{prompt} + Please do not rush to answer; before providing a response, reread and carefully understand my question and requirements.
Simplification	You are now an expert prompt engineer, tasked with optimizing prompts to help smaller models accurately reason through complex problems. Focus on simplifying the expression of the problem and its requirements. My prompt is: {prompt}. Please output your optimized prompt directly without providing the analysis process.
Role-Prompting	You are now an expert prompt engineer, tasked with optimizing prompts to help smaller models accurately reason through complex problems. Focus on incorporating role-playing (e.g., "You are a xxx...") as a method of optimization. My prompt is: {prompt}. Please output the optimized prompt directly without providing the analysis process.
Decomposition	You are now an expert prompt engineer, tasked with optimizing prompts to help smaller models accurately reason through complex problems. Focus on decomposing the problem description into a combination of multiple simple and understandable questions to enhance performance through multi-step reasoning. My prompt is: {prompt}. Please output the optimized prompt directly without providing the analysis process.
Self-Criticism	{prompt} + Please do not rush to answer, before giving the answer, carefully reflect on your answer is correct, confirm the answer is correct before output the answer.
Caption	You are now an expert prompt engineer, tasked with optimizing prompts to help smaller models accurately reason through complex problems. Focus on having the model first provide a detailed description of the image content, and then formulate an answer based on this description. My prompt is: {prompt}. Please output the optimized prompt directly without providing the analysis process.
Rephrasing	{prompt} + Did you understand the task above? Please summarize the tasks you need to do and show how you will execute the detailed plan for the task

Table 8: Prompts of strategies.

You are currently an accomplished prompt engineer. Your task is to analyze potential causes of errors based on the model inference prompt and typical erroneous samples. These causes will be used to optimize the model inference prompt.

The following is the prompt for model inference:

{prompt}

The strategies obtained in Reinforcement Warm-up Strategy are:

{strategies}

The current error distribution of the model is as follows:

{error_distribution}

Here are some representative error samples:

{error_cases}

Please analyze the possible causes of errors from the following perspectives:

1. Clarity of Task Definition:

(1) Typically, models with a 2B parameter size have limited instruction-following capabilities. Is the task description in the prompt overly complex, insufficiently concise, or unclear, leading to the model's inability to comprehend the task

(2) Are the descriptions of options unclear, causing the model to misunderstand the meaning of the options?

(3) Are the boundaries between the options indistinct, causing the model to easily confuse certain options?

2. Model Capability:

(1) Although the task and options are clearly described, the model's capacity may be insufficient to solve the task. It might be necessary to attempt task decomposition or other methods to reduce task complexity.

Based on the error cause analysis, please propose improvement methods for this prompt. Note that in the improvement suggestions regarding options, the names of the options must not be changed. Instead, identify the boundaries between option definitions to help the model clearly understand the specific meaning of each option and prevent confusion.

Please follow this format to structure your output: {"Error Causes": "", "Improvement Methods": ""}

Table 9: Error analysis prompt.

You are currently an accomplished prompt engineer. Your task is to optimize the prompt used for inference based on historical records of prompt optimization, the current inference prompt, error distribution, and error cause analysis, with the aim of enhancing the inference performance of smaller models.

The following are the prompts, accuracy rates, and error distribution information from previous inference rounds: {historical_results}

For the current inference, my prompt is:

{prompt}

The current analysis of error causes and directions for optimization are as follows:

{error_analysis_results}

Please provide the revised prompt directly, omitting the process of analysis.

Table 10: Error summary prompt.

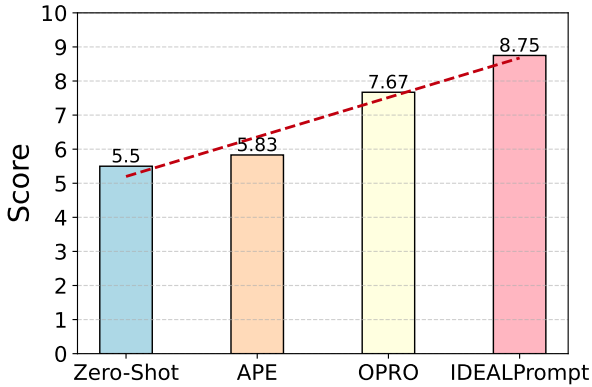


Figure 7: Comparison of human evaluation scores.

Method	causal_judgement	disambiguation_qa
	(train / test / overall)	(train / test / overall)
Zero-Shot	54.1 / 49.3 / 50.3	62.0 / 63.0 / 62.8
OPRO	78.4 / 64.0 / 66.8	78.0 / 75.0 / 75.6
IDEALPrompt	83.8 / 64.7 / 68.4	82.0 / 77.0 / 78.0

Table 11: Accuracies on part of BBH tasks.

hancing contextual understanding and relevance.

- **Rephrasing** represents that the prompt requires MLLMs to thoroughly understand the task, rephrase it based on their comprehension, and outline a detailed plan for its completion.

A.2.2 Strategy Prompt

Our specific prompts to add strategies by general MLLMs are shown in Table 8.

A.3 Self-reflective Detail

The number of critical bad cases is set to 5.

A.3.1 Self-reflective Prompt

Table 9 and Table 10 shows the error analysis prompt and error summary prompt in Empirical Self-reflective Optimization, respectively.

A.4 Additional Experimental Results

Human Evaluation. We further conduct a human evaluation on Taobao-PDA. Specifically, we recruit 6 well-educated people to rank the randomly shuffled prompts optimized by APE, OPRO and IDEALPrompt. The scores range from 1 to 10 (10 means best) and are allowed to be equal for comparable instances. As shown in Figure 7. IDEALPrompt demonstrates best performance in human evaluation as well.

Experiments on Public Domain Benchmark. To evaluate the effectiveness and universality of IDEALPrompt, we conducted experiments on public domain benchmark, comparing with zero-shot and OPRO. BBH is a public domain benchmark which is often used for verifying prompt optimization; therefore, we selected part of BBH tasks for evaluation on InternVL2-2B. Following OPRO, we select 20% of the data for each task as the training set, with the remaining 80% used as test set. Consequently, we present accuracies in the format of "training / test / overall (training + test)," as illustrated in Table 11. The results indicate that IDEALPrompt still achieves better performance on public domain benchmark, demonstrating its effectiveness not only on private domain-specific tasks.