

EEG-Reptile: An Automatized Reptile-Based Meta-Learning Library for BCIs

Daniil A. Berdyshev^{1,3}, Artem M. Grachev², Sergei L. Shishkin¹ and Bogdan L. Kozyrskiy⁴

¹ MEG Center, Moscow State University of Psychology and Education, Moscow, Russia

² Independent researcher, Berlin, Germany

³ Faculty of Computational Mathematics and Cybernetic, Lomonosov Moscow State University, Moscow, Russia

⁴ Independent researcher, Lille, France

E-mail: danberdyshev@gmail.com

December 2024

Abstract.

Meta-learning, i.e., “learning to learn”, is a promising approach to enable efficient BCI classifier training with limited amounts of data. It can effectively use collections of in some way similar classification tasks, with rapid adaptation to new tasks where only minimal data are available. However, applying meta-learning to existing classifiers and BCI tasks requires significant effort. To address this issue, we propose EEG-Reptile, an automated library that leverages meta-learning to improve classification accuracy of neural networks in BCIs and other EEG-based applications. It utilizes the Reptile meta-learning algorithm to adapt neural network classifiers of EEG data to the inter-subject domain, allowing for more efficient fine-tuning for a new subject on a small amount of data. The proposed library incorporates an automated hyperparameter tuning module, a data management pipeline, and an implementation of the Reptile meta-learning algorithm. EEG-Reptile automation level allows using it without deep understanding of meta-learning. We demonstrate the effectiveness of EEG-Reptile on two benchmark datasets (BCI IV 2a, Lee2019 MI) and three neural network architectures (EEGNet, FBCNet, EEG-Inception). Our library achieved improvement in both zero-shot and few-shot learning scenarios compared to traditional transfer learning approaches.

Keywords: BCI, meta-learning, Reptile, neural networks

1. Introduction

Brain-Computer Interfaces (BCIs) enable direct communication between the brain and external devices by translating neural activity into commands, bypassing neuromuscular pathways (Wolpaw et al. 2002). By allowing control of prosthetic limbs, exoskeletons, or computer interfaces through neural signals, BCIs can restore movement and autonomy,

improving rehabilitation and quality of life. In particular, electroencephalography (EEG) based noninvasive BCIs employing motor imagery (MI) are increasingly used in neurorehabilitation, particularly for post-stroke patients, where they may facilitate motor function recovery via neuroplasticity (Daly and Wolpaw 2008; Murphy and Corbett 2009; Frolov et al. 2017; Cervera et al. 2018; Mane, Chouhan, et al. 2020; Mane, Z. Wu, et al. 2022). Users of the MI BCIs imagine specific movements without actual muscle activity, generating neural patterns that can be decoded into control commands.

The effectiveness of an EEG based BCI greatly depends on performance of its core computational part, a classifier, which translates patterns of the recorded signals into commands. A BCI classifier needs to be trained on its user’s individual data or at least fine-tuned to it, due to great intersubject variability of the neural data. This variability stems primarily from individual differences in brain anatomy and function. Even higher variability is observed among post-stroke patients, as stroke-induced damage alters neural signals in different ways. Moreover, different electrode positioning, recovering or pathological processes, slow fluctuations of a patient’s physiological state and sources of artifacts often make necessary classifier re-calibration even on daily basis. However, the amount of training data which can be obtained from a single user, especially in a single session, is limited. For a range of practical reasons, especially in patients with significant disability, it is highly desirable to make procedures of training data collection as short as possible or even exclude them completely.

To address these issues, various transfer-learning techniques are being applied to EEG-based BCIs (Azab et al. 2018, Huang et al. 2022, X. Duan et al. 2023, M. Li and Xu 2024). The core idea of transfer learning is to find common features between various user sessions and to perform classification based on these features (D. Wu et al. 2022). However, achieving this requires a large and relatively homogeneous dataset to effectively extract these shared features (Azab et al. 2018). In addition, the extraction of these features often requires the modification of the original classifier, which prevents the building of more automated solutions (Cai and Hong 2024).

In contrast, meta-learning focuses on learning how to learn by leveraging a collection of smaller, sometimes disparate tasks. This approach enables rapid adaptation to entirely new tasks from minimal data. More broadly, meta-learning (Schmidhuber 1987, Thrun and Pratt 1998), also referred to as “learning to learn,” involves training models on a range of tasks or datasets so that they can quickly adapt to novel tasks with minimal additional data.

Consequently, we find a meta-learning approach more suitable for BCI problems. The available pre-training data often comes from numerous distinct BCI users, each with only a small amount of data, and can thus be treated as separate tasks. Instead of searching for common features across all these users, which may not exist at all, it is more promising to train the classifier to quickly adapt to each new user.

Being more specific, meta-learning approach provides an initialization scheme for neural network parameters, that allows to adapt to new BCI users using very small

amount of data. This initialization scheme is constructed using data from other users. This approach can:

- *Enhance Adaptability*: Enable models to generalize across different users and sessions by capturing common patterns in EEG data.
- *Reduce Calibration Time*: Minimize the per-user data required for effective model tuning.
- *Improve Performance in Variable Conditions*: Handle variability due to physiological differences or neural alterations.

However, some patients exhibit neural patterns that significantly deviate from the average due to unique physiological or pathological conditions. Even with high-quality EEG data, their brain activity may not align with common patterns learned during meta-training. Including such outlier data in the meta-learning pool can degrade the model’s generalization ability. Therefore, it is crucial to detect and handle these atypical patients separately, ensuring that the model is trained using representative data while developing methods to adapt to individual differences during personalization.

Despite previous efforts (X. Wu and Chan 2022, T. Duan et al. 2020) to apply meta-learning algorithms for BCIs, the focus on reducing the size of training datasets has been limited. Specifically, Reptile (Nichol et al. 2018) and Model-Agnostic Meta-Learning (MAML) (Finn et al. 2017) have not been explored in scenarios where minimal EEG data is used for fine-tuning or zero-shot learning. Notably, previous studies on MAML (T. Duan et al. 2020) involved moderate reductions in dataset size, while other approach lost model agnostic nature (Tremmel et al. 2022, Han et al. 2024). We propose that the application of general-purpose meta-learning algorithms will enable us to achieve comparable or superior classification performance using significantly reduced training data, even under zero-shot learning conditions.

In this study with our proposed meta-learning library EEG-Reptile[‡], we focus on the Motor Imagery (MI) paradigm to illustrate the advantages of our approach. MI is widely used in real-world BCIs, enabling control of external devices by imagining movements. This is crucial for post-stroke rehabilitation, where MI can activate neural pathways associated with movement, promoting neuroplasticity and aiding recovery. However, MI tasks present significant challenges due to high inter-subject variability and limited per-user data. By focusing on MI data, we aim to demonstrate how meta-learning can effectively handle variability and data scarcity, leading to more adaptable and efficient EEG-based BCIs for rehabilitation purposes. Our main contributions are:

- We propose a method to filter subjects for model pre-training, ensuring a coherent pre-training subset and enhancing subsequent meta-learning performance.
- We introduce an advanced meta-learning procedure for EEGNet, a widely used neural network for EEG classification, enabling it to operate effectively in few-shot and even zero-shot training regimes.

[‡] EEG-Reptile GitHub: <https://github.com/gasiki/EEG-Reptile>

- We propose an approach for tuning meta-learning hyperparameters on the fly.
- We develop a highly automated meta-learning library that incorporates several neural network architectures and EEG datasets.

2. Methods

In our study, we present an approach for meta-learning based on the Reptile algorithm for BCI applications. In this section, we describe used methods, machine learning models and datasets used for training. In addition, we present data preprocessing and algorithm of the proposed meta-learning method.

2.1. Datasets

The BCI-IV (2a) (Tangermann et al. 2012) and Lee 2019 (MI) (Lee et al. 2019) datasets were used to train ML models and evaluate performance of the proposed library. The datasets were loaded using the MOABB library (Aristimunha et al. 2023). Data preprocessing was performed utilizing the Braindecode toolbox (Schirrneister et al. 2017). Both datasets are recorded using an imaginary movement paradigm. This paradigm is interesting due to the differences in signal between users, which complicates the transfer learning process. It is also possible to use this paradigm to construct BCI systems.

2.1.1. BCI IV (2a) The BCI iv 2a dataset (Tangermann et al. 2012) comprises electroencephalographic (EEG) recordings for 4 motor imagery tasks: right hand, left hand, both feet and tongue. The dataset consists of 22-channel EEG data from 9 subjects, recorded at a sampling rate of 250 Hz. A total of 5184 epochs are included in the dataset, 144 epochs per class for each subject. Prior to analysis, a band-pass filter (4-38 Hz) and exponential moving standardization were applied to each EEG channel. The duration of each data epoch was 4.5 seconds or 1125 measurements.

2.1.2. Lee2019 MI The Lee2019 MI dataset (Lee et al. 2019) represents motor imagery tasks comprising two classes: right hand and left hand. The data consists of 62 EEG channels, recorded at a sampling rate of 1000 Hz. The dataset contains a total of 200 epochs per class to each of 54 subjects included in the dataset.

The dataset was preprocessed to ensure compatibility with neural network architectures designed for EEG analysis. Specifically, it was downsampled to 250 Hz to reduce the dimensionality of the data. Then a band-pass filter (4-38 Hz) was applied, followed by exponential moving standardization. Each epoch has a duration of 2.5 seconds and consists of 625 time points. To minimize the dimensionality of the dataset and reduce computational requirements, we selectively retained only 20 EEG channels that have been previously identified as relevant for motor imagery tasks in the work by

Lee et al. The selected channels were FC5, FC3, FC1, FC2, FC4, FC6, C5, C3, C1, Cz, C2, C4, C6, CP5, CP3, CP1, CPz, CP2, CP4, CP6.

2.2. Models

In this study, we present a meta-learning approach, which can apply meta-learning to any neural network trained with techniques similar to Stochastic Gradient Descent (SGD). To evaluate the efficacy of the proposed approach, we employed three distinct neural networks commonly used for EEG signal classification in MI tasks: EEGNet (Lawhern et al. 2018), EEG-Inception (Motor Imagery) (C. Zhang et al. 2021), and FBCNet (Mane, Chew, et al. 2021). These networks were selected for their ability to effectively address the challenges of EEG-based brain-computer interfaces.

EEGNet is a compact convolutional neural network designed specifically for EEG-based brain-computer interfaces. Inspired by the work of Vernon J. Lawhern et al., our revised architecture consists of two distinct groups of layers: spatial feature extractors and classifiers. These groups are separated to facilitate independent training and application of different learning rates, allowing for more efficient optimization. EEGNet effectively encapsulates well-known EEG feature extraction concepts for brain-computer interfaces, leveraging depthwise and separable convolutions to achieve high performance across various BCI paradigms, including P300 visual-evoked potentials, error-related negativity responses (ERN), movement-related cortical potentials (MRCP), and sensory motor rhythms (SMR).

Two other neural networks used in our study were employed in their original form. EEG-Inception (MI), a convolutional neural network architecture designed for accurate and robust classification of EEG-based motor imagery (MI). This network was sourced from the Braindecode Python library (Schirrneister et al. 2017). FBCNet, a novel Filter-Bank Convolutional Network proposed in R. Mane et al. study, which was obtained from the TorchEEG python library (Z. Zhang et al. 2024).

2.3. Reptile meta-learning algorithm

We utilize the Reptile meta-learning algorithm to ensure robustness across different neural network architectures. This algorithm belongs to the class of Model Agnostic Meta-Learning algorithms (Finn et al. 2017), which are applicable to any networks trained using gradient descent. The Reptile algorithm (Nichol et al. 2018) optimizes the initial weights θ of a neural network $f(\theta)$ over a distribution of tasks $p(\mathcal{T})$. It adjusts the weights to move closer to a point in the weight space that is approximately equidistant from the optimal weights for each task during the current training step. In the context of EEG data, we treat classification problems for individual BCI users as separate tasks. Consequently, during meta-training, Reptile updates the initial weights of the neural network using an averaged difference between the initial weights θ and user-specific weights θ'_i .

Our implementation of Reptile (Alg. 1) introduces notable features:

- multiple learning rate coefficients β_1 & β_2 for distinct groups of layers within the neural network (layers responsible for processing EEG-specific features θ_1 vs. those responsible for final classification θ_2).
- flexibility to utilize any optimizer, such as Adam, to update weights during meta-training.

These features enable customized optimization strategies for different parts of the network, making model weight updates more efficient during meta-training.

Algorithm 1 Reptile algorithm

Require: $p(\mathcal{T})$: distribution over tasks, α , β : meta step size hyperparameters, M : number of meta-learning epochs

Initialize the initial parameter vector θ and cleaned $p'(\mathcal{T})$ using the Algorithm 2

```

1: for  $i = 0$  to  $M$  do
2:   Sample batch of tasks  $\mathcal{T}_i \sim p'(\mathcal{T})$  with length  $N$ 
3:   for all  $\mathcal{T}_i$  do
4:     Sample  $K$  data points  $\{\mathbf{x}^{(k)}, \mathbf{y}^{(k)}\}$  from  $\mathcal{T}_i$ 
5:     Evaluate  $\nabla_{\theta} L_{\mathcal{T}_i}(f_{\theta})$  w.r.t.  $K$  data points
6:      $\theta'_i = \theta - \alpha \nabla_{\theta} L_{\mathcal{T}_i}(f_{\theta})$ 
7:   end for
8:   if double meta weights  $\beta_1$  &  $\beta_2$  then
9:     Update:  $\theta_1 \leftarrow \theta_1 + \frac{\beta_1}{N} \sum_N (\theta'_{1i} - \theta_1)$ 
10:    Update:  $\theta_2 \leftarrow \theta_2 + \frac{\beta_2}{N} \sum_N (\theta'_{2i} - \theta_2)$ 
11:   else
12:     Update:  $\theta \leftarrow \theta + \frac{\beta}{N} \sum_N (\theta'_i - \theta)$ 
13:   end if
14: end for
15: return  $\theta$  or  $\theta_1$  &  $\theta_2$ 

```

In short, the Reptile implementation in our library leverages the agnostic nature of this meta-learning algorithm and introduces adaptability through the use of multiple coefficients and optimizers, enabling effective adaptation across diverse neural network architectures and tasks.

2.4. EEG-Reptile Library

We introduce **EEG-Reptile** library, a collection of modules designed for using meta-learning with neural networks for EEG classification, handling EEG datasets necessary for meta-learning, hyperparameter tuning, and model fine-tuning. The library consists of four primary modules: Data Storage, Hyperparameter Search, Meta-Learning, and Fine-Tuning. A simplified scheme of the proposed library is shown on Figure 1.

The Data Storage module facilitates the storage and retrieval of preprocessed EEG data from multiple subjects, along with their associated metadata. This module provides prepared datasets for other components within the library.

The Hyperparameter Search module leverages the **Optuna** (Akiba et al. 2019) library to perform hyperparameter tuning for both meta-learning and fine-tuning. For meta-learning, this module searches optimal parameters, including:

- Number of epochs for meta-learning.
- Number of epochs within each meta-step.
- Learning rate for training the base model within each meta-step.
- Multiple meta-learning rates (β).
- Number of data points used in each meta-step (N).

For fine-tuning, this module searches optimal parameters, including:

- Learning rate.
- Linear approximation of the dependence between the number of epochs and the available data points.

Linear approximation is necessary because it is impossible to know the size of the fine-tuning set for the target subject in advance and to select a large enough validation set to apply early stopping. In our case, during the selection of hyperparameters on a non-target subject that did not participate in meta-training, we select such linear approximation coefficients a and b so that mean classification quality is maximized for a different size of fine-tuning set.

The Meta-Learning module facilitates meta-learning on multiple subjects in various regimes. This module initializes the model weights θ by computing the average weights θ' of models trained for a few epochs on each subject. The proposed initialization procedure helps exclude “outlier” subjects whose models have significantly different optimal weight values from the mean of $p(\mathcal{T})$. The proportion of “outliers” removed is denoted by γ (Alg. 2). The training regimes vary based on the chosen parameters for the base meta-learning algorithm and the data partitioning strategy. Furthermore, this module supports preparing a network pre-trained on the same datasets using standard Transfer Learning.

The Fine-Tuning module enables additional training of a previously meta-trained model on a specific subject. It also gathers statistics on the fine-tuning process and performs testing to assess the fine-tuning performance.

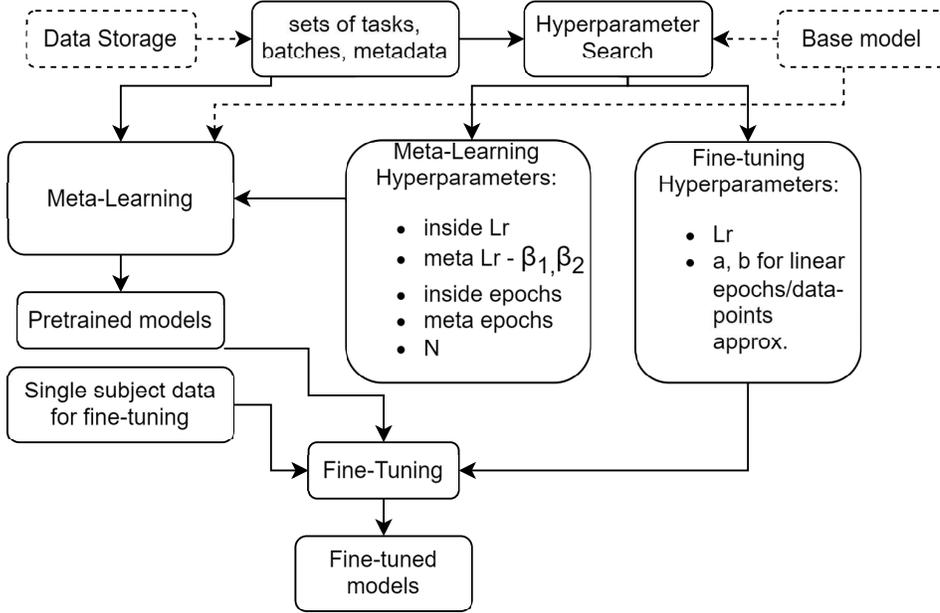


Figure 1: Structure of EEG-Reptile library.

Algorithm 2 Weight Initialization Algorithm

Input: $p(\mathcal{T})$: a distribution over N tasks, γ : outlier removal rate

Output: θ' : final weight vector, $p'(\mathcal{T})$

- 1: Initialize θ randomly
- 2: Initialize $\theta' = \mathbf{0}$ (same shape as θ)
- 3: **for** each task \mathcal{T}_i in $p(\mathcal{T})$ **do**
- 4: Train a model from θ on \mathcal{T}_i to obtain θ_i
- 5: $\theta' \leftarrow \theta' + \frac{1}{N}\theta_i$
- 6: **end for**
- 7: **for** each θ_i **do**
- 8: $d_i = |\text{mean}(\theta' - \theta_i)|$
- 9: **end for**
- 10: $n = \lfloor \gamma N \rfloor$ \triangleright Number of outliers to remove
- 11: Obtain $p'(\mathcal{T})$ by removing n tasks with the largest d_i from $p(\mathcal{T})$
- 12: Reset $\theta' = \mathbf{0}$
- 13: **for** \mathcal{T}_i in $p'(\mathcal{T})$ **do**
- 14: $\theta' \leftarrow \theta' + \frac{1}{(N-n)}\theta_i$
- 15: **end for**
- 16: **return** $\theta', p'(\mathcal{T})$

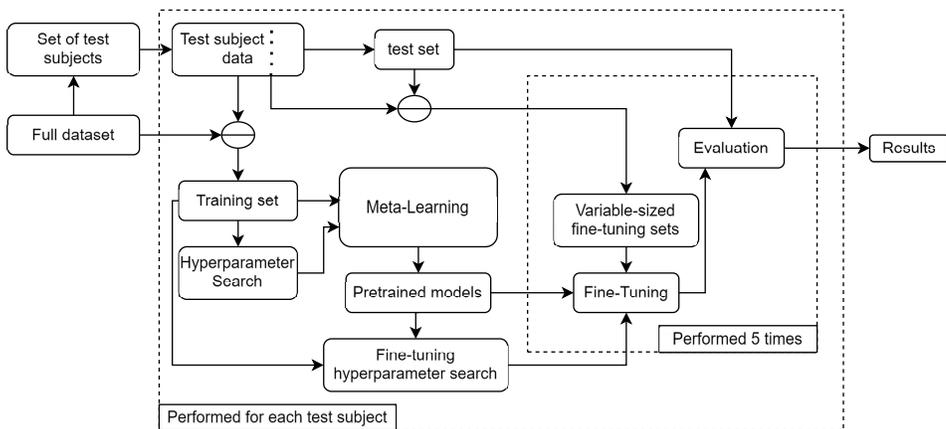


Figure 2: Experiment design.

2.5. Experimental Setup

All experiments were conducted using the **EEG-Reptile** library. Prior to conducting the experiments, we randomly selected five subjects from each dataset and designated them as "test subjects." For each individual experiment, we began by removing data from one test subject in each dataset. We then performed hyperparameter optimization for meta-learning on the remaining subjects' data. After completing the hyperparameter tuning, we carried out meta-training and transfer learning, the latter serving as our baseline approach. Next, we conducted another hyperparameter search to prepare for the fine-tuning stage. Subsequently, we fine-tuned the model on the previously unseen test subject and evaluated its classification accuracy without any additional training (Zero-shot). The full experimental design is illustrated in Figure 2.

The model's performance in each experiment was evaluated using accuracy. This metric was computed with varying amounts of data per class during the fine-tuning stage. Specifically, we measured accuracy as we retrained the model on different numbers of EEG data points (and their corresponding class labels) per class.

Each experiment was repeated five times for each test subject, with different random subsets of training data selected in each repetition. For evaluation, we used a fixed test set composed of the last 20% of each dataset, ensuring equal amounts of data per class. This approach allowed for a fair and consistent performance comparison across all experiments.

3. Results

We conducted a comprehensive evaluation of classification performance on the BCI Competition IV 2a dataset (four classes) and the Lee2019 (MI) dataset (two classes). This evaluation was based on the average performance for five randomly selected test subjects from each dataset. The results are presented in Figure 3.

Our experimental design ensured that each test subject remained entirely unseen

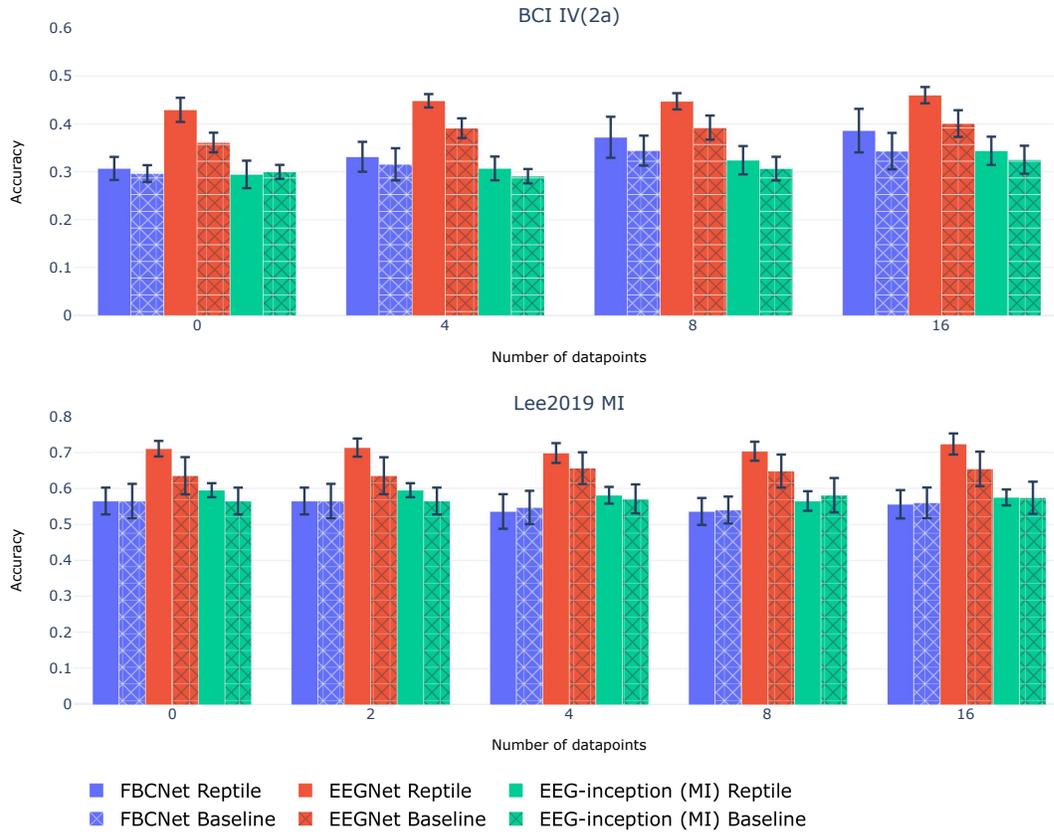


Figure 3: Comparison of group average Accuracy with 95% confidence intervals on BCI IV 2a (four classes) and Lee2019 (MI) (two classes) datasets for baseline algorithms and algorithms with meta-learning fine-tuned on subsets with different sizes and zero-shot.

during the meta-learning and zero-shot testing phases. This approach allowed us to rigorously assess the effectiveness of the machine learning methods without the influence of any fine-tuning steps.

For all experiments, fine-tuning was performed on small data subsets of the target subject, with different subset sizes shown on the x-axis. Each individual subset with specified size was randomly chosen five times. Our results demonstrate that meta-learning and transfer learning-based methods exceed performance of random guessing (random guessing would give accuracy of 25% for 4 class and 50 % for 2 class), even without fine-tuning on a new subject.

Our analysis shows that achieving satisfactory classification quality for EEG data from previously unseen subjects remains challenging in MI classification tasks. This finding highlights the limitations of current state-of-the-art inter-subject transfer learning methods. In particular, we observed that meta-learning approaches still fall short of the standards required for reliable integration into a BCI system, highlighting

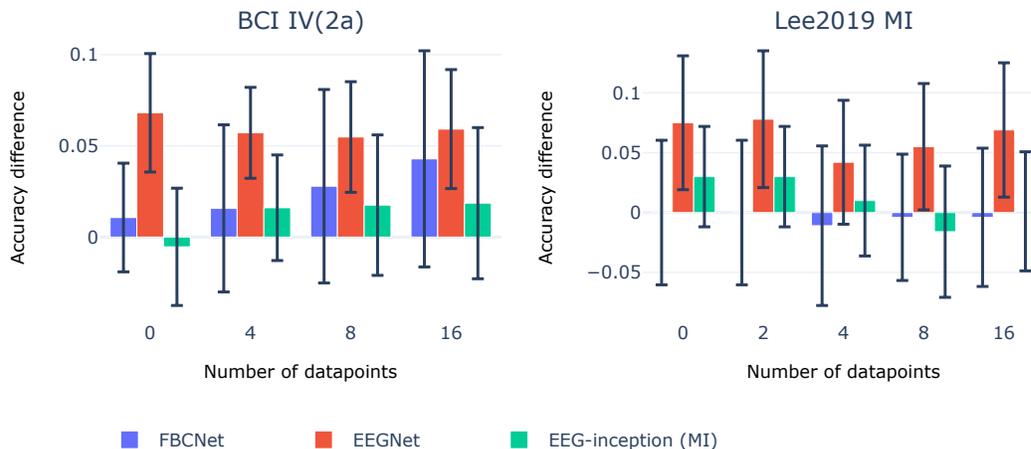


Figure 4: Comparison of group average of difference for Accuracy with 95% confidence intervals on BCI IV 2a (four classes) and Lee2019 (MI) (two classes) datasets between baseline algorithms and algorithms with meta-learning fine-tuned on subsets with different sizes and zero-shot.

the need for further research.

For the BCI IV 2a dataset, we found that meta-learning with the EEGNet model achieved an average classification accuracy of $43\% \pm 7\%$ without fine-tuning (zero-shot). Notably, this result was surpassed by fine-tuning on small data subsets, which reached a peak classification accuracy of $46\% \pm 5\%$ when trained on only 16 data points (4 per class).

For the Lee2019 MI dataset, we observed that the highest zero-shot classification accuracy was also achieved using EEGNet with meta-learning, at $71\% \pm 5\%$. Furthermore, fine-tuning on small data subsets led to a modest improvement in classification performance, reaching $72\% \pm 7\%$, when trained on 16 data points (8 per class).

We present a graphical comparison (Fig. 4) illustrating the differences in average classification accuracy for each model and dataset under both meta-learning and baseline (transfer learning) conditions. For both datasets, EEGNet with meta-learning significantly outperformed the baseline algorithm ($p < 0.05$, Wilcoxon signed-rank test). Moreover, the observed improvement in average classification accuracy was statistically significant at the 95% confidence level.

For both datasets, we also observed that when fine-tuned on small data subsets (16 data points), EEGNet with meta-learning again outperformed the baseline algorithm at a significance level of $p < 0.05$ and a confidence interval of 95%. This suggests that EEGNet with meta-learning is not only effective for zero-shot classification but also robust when fine-tuned on small data subsets.

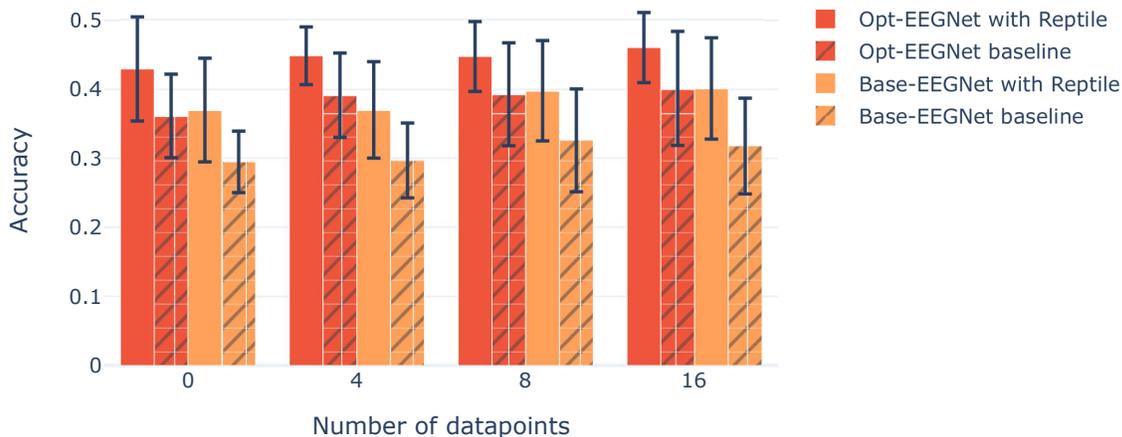


Figure 5: Comparison of group average Accuracy with 95% confidence intervals on BCI IV 2a (four classes) dataset between baseline algorithms and algorithms with meta-learning applied with EEGNet optimization and without, fine-tuned on subsets with different sizes and zero-shot.

For other models, we found that two approaches exhibited positive differences in average classification accuracy between meta-learning and baseline algorithms, but these differences were smaller than the confidence interval of 95%. For the Lee2019 MI dataset, we found that the results for FBCNet and EEG-inception (MI) pre-trained with meta-learning were comparable to those of the baseline algorithm.

Given the significant difference in classification accuracy between the EEGNet architecture and the other models, we evaluated EEGNet with the proposed optimizations (hereafter referred to as Opt-EEGNet) to assess the effectiveness of these modifications. As described previously, the key distinction between the two architectures is that Opt-EEGNet separates convolutional and fully connected layers into distinct groups. This arrangement enables the use of independent learning rates during fine-tuning, the allocation of individual β coefficients for meta-learning, and even the option to freeze weights in one group while fine-tuning the other.

To evaluate the effect of this modification, we performed a similar experiment using the unmodified EEGNet (see Fig. 5). The results show that separating the layers into distinct groups improves classification accuracy, even under a straightforward transfer learning approach. Notably, both EEGNet and Opt-EEGNet benefit from meta-learning, indicating that this optimization strategy can enhance the quality of inter-subject knowledge transfer and meta-learning.

4. Discussion

The results demonstrate that the proposed meta-learning library, EEG-Reptile, can be used to improve classification performance. Furthermore, it allows relatively autonomous operation, making it an attractive solution for various applications.

Experiments without fine-tuning and with fine-tuning on small datasets (zero- and few-shot) both showed higher accuracy using EEG-Reptile, particularly when paired with an optimized network. This improvement holds even for small dataset sizes, suggesting that our library can enhance classification accuracy given a sufficiently large, though not excessive, amount of training data for neural networks. This is consistent with results demonstrated in work (Berdyshev et al. 2023). There, it is shown that such outcomes are achievable using meta-learning. It is possible to achieve similar or higher accuracy improvement by utilizing EEG-Reptile library in such case.

Results for optimized and not optimized EEGNet have demonstrated that such optimization could improve classification accuracy in meta-learning and transfer learning. The separation of layers into distinct groups may provide a beneficial optimization strategy for other neural architectures as well. Further research is necessary to fully explore the potential benefits of this approach and its applicability to different models and tasks.

One of the key features of EEG-Reptile is its ability to filter and select subjects that are too different from the others, enabling automatic exclusion of overly specific subjects from the meta training set. This feature is provided by the weight initialization procedure presented in this work, which is close to the RANSAC method (Fischler and Bolles 1981). As far as the authors know, such a method has not been applied for this purpose in meta-learning approaches within the context of BCI. This capability can lead to improved mean performance in inter-subject transfer learning.

A recent study (Han et al. 2024) demonstrated higher classification accuracy compared to our experiments; however, the key difference is that their models were trained on all available data for each user. Our results, on the other hand, show a significant improvement in classification performance when using a small number of EEG epochs for unseen users. This was achieved through fully automated hyperparameter optimization for meta-learning and fine-tuning. This stands in contrast to previous works (Ahuja and Sethia 2024, X. Wu and Chan 2022, J. Li et al. 2023), where researchers failed to demonstrate improved classification accuracy on small datasets with cross-subject transfer learning. Such small datasets, in turn, represent the primary use case for many practical BCI applications.

One of the main challenges associated with meta-learning is the size of available datasets in the sense of number of users. Collecting more even small sessions may improve the performance of our approach. Another downside of the fully automated meta-optimization could be an extensive search for hyperparameters. In our experiments, it took approximately 24 hours with NVIDIA Tesla P100 GPU.

5. Conclusion

In this article, we introduce EEG-Reptile, a meta-learning library designed to enhance classification accuracy in BCI tasks with EEG data. Application of the Reptile meta-learning algorithm using this library improved classification performance on two benchmark datasets, BCI IV 2a and Lee2019 MI, in both zero-shot and few-shot learning scenarios in comparison with a straightforward transfer learning approach. EEG-Reptile provides a practical solution to improve the classification accuracy of EEG data, in the cases of an insufficient amount of data for the target subject, which is essential for various applications such as brain-computer interfaces and cognitive research.

The proposed library has additional advantages over existing solutions. Firstly, EEG-Reptile allows mostly autonomous operation, making it a valuable tool for researchers and practitioners who may not have extensive expertise in deep learning or meta-learning. Secondly, the proposed weights initialization procedure enables exclusion of “outlier” subjects from the training set of tasks for meta-learning. Lastly, it can be easily used with various neural network architectures, making it a versatile solution for EEG-based applications.

Acknowledgments

This research was funded by the Russian Science Foundation, grant 22-19-00528. Special thanks to E.I. Chetkin for his contribution in improving the readability of this paper.

References

- Ahuja, Chirag and Divyashikha Sethia (2024). “Harnessing Few-Shot Learning for EEG signal classification: a survey of state-of-the-art techniques and future directions”. *Frontiers in Human Neuroscience* 18, 1421922.
- Akiba, Takuya, Shotaro Sano, Toshihiko Yanase, et al. (July 25, 2019). “Optuna: A Next-generation Hyperparameter Optimization Framework”. *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*. KDD '19: The 25th ACM SIGKDD Conference on Knowledge Discovery and Data Mining. Anchorage AK USA: ACM, pp. 2623–2631. URL: <https://dl.acm.org/doi/10.1145/3292500.3330701> (visited on 12/03/2024).
- Aristimunha, Bruno, Igor Carrara, Pierre Guetschel, et al. (2023). *Mother of all BCI Benchmarks*. Version 1.0.0. URL: <https://github.com/NeuroTechX/moabb>.
- Azab, Ahmed M, Jake Toth, Lyudmila S Mihaylova, et al. (2018). “A review on transfer learning approaches in brain–computer interface”. *Signal processing and machine learning for brain-machine interfaces*, 81–98.

- Berdyshev, Daniil A., Artem M. Grachev, Sergei L. Shishkin, et al. (Sept. 28, 2023). “Meta-Optimization of Initial Weights for More Effective Few- and Zero-Shot Learning in BCI Classification”. *2023 IEEE Ural-Siberian Conference on Computational Technologies in Cognitive Science, Genomics and Biomedicine (CSGB)*. 2023 IEEE Ural-Siberian Conference on Computational Technologies in Cognitive Science, Genomics and Biomedicine (CSGB). Novosibirsk, Russian Federation: IEEE, pp. 263–267. URL: <https://ieeexplore.ieee.org/document/10329624/> (visited on 12/07/2024).
- Cai, Miao and Jie Hong (2024). “Joint multi-feature extraction and transfer learning in motor imagery brain computer interface”. *Computer Methods in Biomechanics and Biomedical Engineering* 0(0). PMID: 39286921, 1–12. eprint: <https://doi.org/10.1080/10255842.2024.2404541>. URL: <https://doi.org/10.1080/10255842.2024.2404541>.
- Cervera, María A, Surjo R Soekadar, Junichi Ushiba, et al. (2018). “Brain-computer interfaces for post-stroke motor rehabilitation: a meta-analysis”. *Annals of clinical and translational neurology* 5(5), 651–663.
- Daly, Janis J and Jonathan R Wolpaw (2008). “Brain-computer interfaces in neurological rehabilitation”. *The Lancet Neurology* 7(11), 1032–1043.
- Duan, Tiehang, Mohammad Abuzar Shaikh, Mihir Chauhan, et al. (2020). “Meta Learn on Constrained Transfer Learning for Low Resource Cross Subject EEG Classification”. *IEEE Access* 8, 224791–224802.
- Duan, Xu, Songyun Xie, Yanxia Lv, et al. (Jan. 2023). “A transfer learning-based feedback training motivates the performance of SMR-BCI”. *Journal of Neural Engineering* 20(1), 016026. URL: <https://dx.doi.org/10.1088/1741-2552/acaee7>.
- Finn, Chelsea, Pieter Abbeel, and Sergey Levine (Aug. 6, 2017). “Model-Agnostic Meta-Learning for Fast Adaptation of Deep Networks”. *Proceedings of the 34th International Conference on Machine Learning*. Ed. by Doina Precup and Yee Whye Teh. Vol. 70. Proceedings of Machine Learning Research. PMLR, pp. 1126–1135. URL: <https://proceedings.mlr.press/v70/finn17a.html>.
- Fischler, Martin A. and Robert C. Bolles (June 1981). “Random sample consensus: a paradigm for model fitting with applications to image analysis and automated cartography”. *Communications of the ACM* 24(6), 381–395. URL: <https://dl.acm.org/doi/10.1145/358669.358692> (visited on 12/03/2024).
- Frolov, Alexander A, Olesya Mokienko, Roman Lyukmanov, et al. (2017). “Post-stroke rehabilitation training with a motor-imagery-based brain-computer interface (BCI)-controlled hand exoskeleton: a randomized controlled multicenter trial”. *Frontiers in neuroscience* 11, 400.
- Han, Ji-Wung, Soyeon Bak, Jun-Mo Kim, et al. (Mar. 2024). “META-EEG: Meta-learning-based class-relevant EEG representation learning for zero-calibration brain-computer interfaces”. *Expert Systems with Applications* 238, 121986. URL: <https://linkinghub.elsevier.com/retrieve/pii/S0957417423024880> (visited on 12/07/2024).

- Huang, Xiuyu, Shuang Liang, Yuanpeng Zhang, et al. (2022). “Relation Learning Using Temporal Episodes for Motor Imagery Brain-Computer Interfaces”. *IEEE Transactions on Neural Systems and Rehabilitation Engineering* 31, 530–543.
- Lawhern, Vernon J, Amelia J Solon, Nicholas R Waytowich, et al. (Oct. 1, 2018). “EEGNet: a compact convolutional neural network for EEG-based brain-computer interfaces”. *Journal of Neural Engineering* 15(5), 056013. URL: <https://iopscience.iop.org/article/10.1088/1741-2552/aace8c> (visited on 12/03/2024).
- Lee, Min-Ho, O-Yeon Kwon, Yong-Jeong Kim, et al. (May 1, 2019). “EEG dataset and OpenBMI toolbox for three BCI paradigms: an investigation into BCI illiteracy”. *GigaScience* 8(5), giz002. URL: <https://academic.oup.com/gigascience/article/doi/10.1093/gi> (visited on 12/03/2024).
- Li, Jingcong, Fei Wang, Haiyun Huang, et al. (June 2023). “A novel semi-supervised meta learning method for subject-transfer brain-computer interface”. *Neural Networks* 163, 195–204. URL: <https://linkinghub.elsevier.com/retrieve/pii/S0893608023001740> (visited on 12/07/2024).
- Li, Mingai and Dongqin Xu (2024). “Transfer learning in motor imagery brain computer interface: a review”. *Journal of Shanghai Jiaotong University (Science)* 29(1), 37–59.
- Mane, Ravikiran, Effie Chew, Karen Chua, et al. (2021). *FBCNet: A Multi-view Convolutional Neural Network for Brain-Computer Interface*. arXiv: [2104.01233](https://arxiv.org/abs/2104.01233) [cs.OH]. URL: <https://arxiv.org/abs/2104.01233>.
- Mane, Ravikiran, Tushar Chouhan, and Cuntai Guan (2020). “BCI for stroke rehabilitation: motor and beyond”. *Journal of neural engineering* 17(4), 041001.
- Mane, Ravikiran, Zhenzhou Wu, and David Wang (2022). “Poststroke motor, cognitive and speech rehabilitation with brain-computer interface: a perspective review”. *Stroke and vascular neurology* 7(6).
- Murphy, Timothy H and Dale Corbett (2009). “Plasticity during stroke recovery: from synapse to behaviour”. *Nature reviews neuroscience* 10(12), 861–872.
- Nichol, Alex, Joshua Achiam, and John Schulman (2018). *On First-Order Meta-Learning Algorithms*. arXiv: [1803.02999](https://arxiv.org/abs/1803.02999) [cs.LG]. URL: <https://arxiv.org/abs/1803.02999>.
- Schirrmester, Robin Tibor, Jost Tobias Springenberg, Lukas Dominique Josef Fiederer, et al. (Aug. 2017). “Deep learning with convolutional neural networks for EEG decoding and visualization”. *Human Brain Mapping*. URL: <http://dx.doi.org/10.1002/hbm.23730>.
- Schmidhuber, Jürgen (1987). “Evolutionary principles in self-referential learning, or on learning how to learn: The meta-meta-. hook”. MA thesis. Technical University of Munich, Germany. URL: <https://mediatum.ub.tum.de/813180>.
- Tangemann, Michael, Klaus-Robert Müller, Ad Aertsen, et al. (2012). “Review of the BCI Competition IV”. *Frontiers in Neuroscience* 6.
- Thrun, Sebastian and Lorien Y. Pratt, eds. (1998). *Learning to Learn*. Springer. URL: <https://doi.org/10.1007/978-1-4615-5529-2>.

- Tremmel, Christoph, Jacobo Fernandez-Vargas, Dimitris Stamos, et al. (2022). “A meta-learning BCI for estimating decision confidence”. *Journal of Neural Engineering* 19(4), 046009.
- Wolpaw, Jonathan R, Niels Birbaumer, Dennis J McFarland, et al. (2002). “Brain–computer interfaces for communication and control”. *Clinical neurophysiology* 113(6), 767–791.
- Wu, Dongrui, Xue Jiang, and Ruimin Peng (2022). “Transfer learning for motor imagery based brain–computer interfaces: A tutorial”. *Neural Networks* 153, 235–253. URL: <https://www.sciencedirect.com/science/article/pii/S0893608022002131>.
- Wu, Xiaoli and Rosa H. M. Chan (July 11, 2022). “Does Meta-Learning Improve EEG Motor Imagery Classification?” *2022 44th Annual International Conference of the IEEE Engineering in Medicine & Biology Society (EMBC)*. 2022 44th Annual International Conference of the IEEE Engineering in Medicine & Biology Society (EMBC). Glasgow, Scotland, United Kingdom: IEEE, pp. 4048–4051. URL: <https://ieeexplore.ieee.org/document/9871035/> (visited on 12/07/2024).
- Zhang, Ce, Young-Keun Kim, and Azim Eskandarian (Aug. 1, 2021). “EEG-inception: an accurate and robust end-to-end neural network for EEG-based motor imagery classification”. *Journal of Neural Engineering* 18(4), 046014. URL: <https://iopscience.iop.org/article/10.1088/1741-2552/abed81> (visited on 12/03/2024).
- Zhang, Zhi, Sheng-hua Zhong, and Yan Liu (2024). “TorchEEGEMO: A deep learning toolbox towards EEG-based emotion recognition”. *Expert Systems with Applications*, 123550.