

# Graph Neural Networks for Next-Generation-IoT: Recent Advances and Open Challenges

Nguyen Xuan Tung, Le Tung Giang, Bui Duc Son, Seon Geun-Jeong, Trinh Van Chien, *Member, IEEE*,  
Won Joo Hwang, *Senior Member, IEEE*, Lajos Hanzo, *Life Fellow, IEEE*

**Abstract**—Graph Neural Networks (GNNs) have emerged as a critical tool for optimizing and managing the complexities of the Internet of Things (IoT) in next-generation networks. This survey presents a comprehensive exploration of how GNNs may be harnessed in 6G IoT environments, focusing on key challenges and opportunities through a series of open questions. We commence with an exploration of GNN paradigms and the roles of node, edge, and graph-level tasks in solving wireless networking problems and highlight GNNs' ability to overcome the limitations of traditional optimization methods. This guidance enhances problem-solving efficiency across various next-generation (NG) IoT scenarios. Next, we provide a detailed discussion of the application of GNN in advanced NG enabling technologies, including massive MIMO, reconfigurable intelligent surfaces, satellites, THz, mobile edge computing (MEC), and ultra-reliable low latency communication (URLLC). We then delve into the challenges posed by adversarial attacks, offering insights into defense mechanisms to secure GNN-based NG-IoT networks. Next, we examine how GNNs can be integrated with future technologies like integrated sensing and communication (ISAC), satellite-air-ground-sea integrated networks (SAGSIN), and quantum computing. Our findings highlight the transformative potential of GNNs in improving efficiency, scalability, and security within NG-IoT systems, paving the way for future advances. Finally, we propose a set of design guidelines to facilitate the development of efficient, scalable, and secure GNN models tailored for NG IoT applications.

**Index Terms**—Graph Neural Network, Internet of Things, Next-generation (NG).

Nguyen Xuan Tung, Le Tung Giang, and Seon Geun Jeong are with the Department of Information Convergence Engineering, Pusan National University, Busan 46241, Republic of Korea (e-mail: giang.lt2399144@pusan.ac.kr; tung.nguyenxuan1310@pusan.ac.kr; wjdtjrsms11@pusan.ac.kr).

Bui Duc Son is with the School of Electrical and Electronic Engineering, Hanoi University of Science and Technology, Hanoi 100000, Vietnam. (e-mails: son.bd200524@sis.hust.edu.vn).

Trinh Van Chien is with the School of Information and Communications Technology (SoICT), Hanoi University of Science and Technology (HUST), Vietnam (e-mail: chientv@soict.hust.edu.vn).

Won-Joo Hwang is with the School of Computer Science and Engineering, Center for Artificial Intelligence Research, Pusan National University, Busan 46241, South Korea (e-mail: wjhwang@pusan.ac.kr).

Lajos Hanzo is with the Department of Electronics and Computer Science, University of Southampton, Southampton SO17 1BJ, U.K. (e-mail: lh@ecs.soton.ac.uk)

## GLOSSARY

6G	Sixth Generation
AIoT	Artificial Intelligence of Things
APs	Access Points
CDF	Cumulative Distribution Function
CLOPS	Circuit Layer Operations Per Second
D2D	Device-to-Device
DDPG	Deep Deterministic Policy Gradient
DNN	Deep Neural Networks
DRL	Deep Reinforcement Learning
FL	Federated Learning
GAEs	Graph Autoencoders
GATs	Graph Attention Networks
GCNs	Graph Convolutional Networks
GraphSAGE	Graph Sample And Aggregation
GRLO	Reinforcement Learning-Based Offloading
GRU	Gated Recursive Unit
GWCN	Graph-Weighted Convolution Network
HeGNNs	Heterogeneous Graph Neural Networks
HoGNNs	Homogeneous Graph Neural Networks
HQGNN	Hybrid Quantum Graph Neural Network
IIoT	Industrial Internet of Things
IoT	Internet of Things
IoV	Internet of Vehicles
ISAC	Integrated Sensing And Communication
LEO	Low Earth Orbit
MEC	Mobile Edge Computing
MIMO	Multiple Input Multiple Output
NG	Next Generation
NISQ	Noisy Intermediate-Scale Quantum
QGNNs	Quantum Graph Neural Networks
QML	Quantum Machine Learning
RIS	Reconfigurable Intelligent Surfaces
RL	Reinforcement Learning
SAGSINs	Satellite-Air-Ground-Sea Integrated Networks
SFCs	Service Function Chains
THz	Terahertz
UAVs	Unmanned Aerial Vehicles
URLLC	Ultra-Reliable Low Latency Communications
VQC	Variational Quantum Circuits
WMMSE	Weighted Minimum Mean Squared Error

## I. INTRODUCTION

The Internet of Things (IoT) has revolutionized the way we interact with our environment, supporting a vast network of interconnected devices that communicate and exchange data

seamlessly [1], [2]. As we move towards next-generation networks, the integration of IoT within this advanced framework, termed as NG-IoT, promises unprecedented improvements in connectivity, latency, and data throughput [3]. All the advantages accrue from sophisticated technologies, including massive multiple-input multiple-output (MIMO) schemes, reconfigurable intelligent surfaces (RIS), satellites, terahertz (THz), mobile edge computing (MEC), ultra-reliable low-latency communications (URLLC), and blockchain. Despite their potential, this evolution presents several open challenges, including the need for efficient resource allocation, robust data handling, and effective model-driven approaches. Future technologies such as integrated sensing and communication (ISAC), satellite-air-ground-sea integrated networks (SAGSINs), and quantum computing will further expand the realm of possibilities in NG-IoT networks.

Optimization and data/model-driven approaches have been at the forefront of efforts to enhance 6G-IoT technologies [13]–[18]. While these approaches have yielded notable improvements, these are often attained at the cost of evaded scalability and excessive complexity. For instance, MEC and massive MIMO require sophisticated resource allocation and interference management, which are computationally intensive and, hence, challenging to implement in real-time scenarios. Similarly, the deployment of RIS and THz communications necessitates precise environmental adaptation and robust signal processing techniques, which traditional optimization methods struggle to handle efficiently.

Graph Neural Networks (GNNs) have emerged as a promising technique for circumventing these limitations, offering a novel approach to modeling the complex relationships and dependencies inherent in NG-IoT networks. In contrast to traditional methods, GNNs leverage graph-structured data to capture the intricate connectivity patterns of network elements. This capability allows GNNs to efficiently model the non-Euclidean data structures typical in wireless networks. GNNs can handle varying-sized inputs, making them ideal for NG-IoT networks where the number of devices and connections can change frequently [19], [20]. While traditional models usually struggle in dynamic network environments, GNNs operate on graph structures that are capable of naturally adapting to fluctuations in network topology. Hence, GNNs are capable of integrating new devices or changes in network structure without needing retraining while maintaining consistent performance even as the network evolves. To better understand the evolution of GNNs and their capabilities, Table I provides an overview of the development from early graph theory to the advanced GNN models.

GNNs also feature decentralized implementation, where computations are distributed across multiple nodes in the network rather than being centralized. This decentralization reduces computational complexity and enhances robustness against time-variant network conditions. Each node can perform computations locally and only share the absolutely necessary information with neighboring nodes, hence reducing the overall computational load and making the system more re-

silient to outages in the face of network structure uncertainties. By contrast, traditional deep learning methods often require extensive labeled data and centralized processing, leading to excessive computational costs and reduced flexibility. As a result, GNNs support efficient and scalable processing, making them well-suited for the evolving demands of NG-IoT networks. To illustrate the comparative advantages of GNNs, we present a comparison table (Table II) that contrasts the efficiency of optimization approaches, of traditional deep learning technologies, and of GNNs concerning their key parameters such as scalability, computational complexity, and practical implementation. This comparison highlights the superior performance of GNNs in addressing the challenging requirements of NG-IoT networks.

Existing surveys have significantly contributed to the understanding of GNNs and their application in wireless communications and the IoT. For example, Lee *et al.* [21] discusses the potential of GNNs in wireless communications, focusing on how graphical models are constructed and their application in wireless networks. The paper Ivanov *et al.* [22] provides insights into resource allocation using GNNs for integrated space and terrestrial networks, while the author in Tam *et al.* [23] provides a review of GNN applications in areas such as network management, offloading strategies, routing optimization, virtual network function orchestration, and resource allocation. Additionally, Suarez *et al.* [24] focuses on specific use cases of GNNs in communication networks. The most recent survey was conducted in [25], where Sabarish *et al.* have explored GNN applications in IoT networks, highlighting advances in spectrum awareness, data fusion, and network intrusion detection. While these surveys have made considerable progress, this treatise provides an up-to-date critical appraisal of the relevant follow-up advances.

Although some offer insights into the application of GNNs, they often do not provide sufficient practical guidance on how and when to apply GNN techniques to specific wireless networking tasks. Additionally, wireless networks, due to their open communication nature, are particularly vulnerable to threats like eavesdropping and jamming attacks [26]–[28]. Nevertheless, security concerns, especially adversarial attacks, are often inadequately addressed, leaving a critical gap in understanding the robustness of GNNs in hostile environments. Moreover, prior review papers tend to focus on specific aspects of GNN applications, missing a comprehensive perspective that integrates multiple technologies and their interactions. The future potential and emerging applications of GNNs are frequently overlooked, limiting the scope to existing technologies. By contrast, to fully harness the potential of GNNs in NG-IoT networks, this paper provides an integrated survey addressing the full range of challenges and opportunities that GNNs present for NG technologies. In this paper, we present eight open questions that address key challenges and opportunities for GNNs in NG-IoT networks. These questions cover fundamental GNN paradigms, their diverse applications in NG environments, the challenges of adversarial attacks and corresponding defenses, as well as the integration of GNNs

TABLE I: Overview of Developments from Graph Theory to Graph Neural Networks (GNNs)

Year	Category	Significance	Key Application areas	Reference
1956	Classical Graph Theory	Provided foundational algorithms for pathfinding in graphs	Shortest Path Algorithms (Routing, Logistics)	Dijkstra, E. W. [4]
1977	Centrality Measures	Introduced measures to quantify node importance in graphs	Network Analysis (Node Importance in Social and Communication Networks)	Linton C. Freeman [5]
1996	Spectral Graph Theory	Leveraged eigenvalues and eigenvectors for graph partitioning and embedding	Network Partitioning (Clustering, Community Detection)	Fiedler, M. [6], Cvetkovic, D.M. <i>et al.</i> [7]
2005	Graph Neural Networks	Proposed using neural networks for general graphs, extending deep learning to graph-structured data	Machine Learning (Node Classification, Link Prediction, Graph-Level Regression, Network Communication)	Gori, M. <i>et al.</i> [8]
2014	Random Walks	Enabled learning of node embeddings by random walks, pioneering unsupervised learning on graphs	Extends convolutional neural networks to graph data for feature learning (Natural Language Processing, Recommender Systems)	Perozzi, B. <i>et al.</i> [9]
2017	Graph Convolutions	Applied convolution operations to graph data, revolutionizing graph learning with scalability and efficiency	Extends convolutional neural networks to graph data for feature learning (Social Networks, Citation Networks)	Thomas N. Kipf and Max Welling [10]
2018	Graph Attention Networks	Introduced attention mechanisms to graph learning for more adaptive representation learning	Introduced attention mechanisms for graph learning (Recommender Systems, Social Networks, Computational Biology)	Velickovic, P. <i>et al.</i> [11]
2019	Quantum GNNs	Integrated quantum computing to improve large-scale graph processing and optimization	Integrated quantum computing for large-scale graph processing and optimization (Quantum Computing, Cryptography, Large-Scale Networks)	Liao, Y. <i>et al.</i> [12]

TABLE II: Comparison of Optimization Approaches, Traditional Deep Learning, and GNNs in NG-IoT Networks

Criterion	Optimization Approaches	Traditional Deep Learning	Graph Neural Networks (GNNs)
Scalability	Low scalability, often limited by problem size and complexity.	Limited scalability, the model works on trained network size.	High scalability, able to handle variable network sizes.
Computational complexity	High, especially for large-scale problems.	High, requires large training datasets.	Moderate to low, efficient at handling graph-structured data with fewer training samples.
Practical implementation	Moderate, difficult for large network size.	Moderate requires high memory to save models for different network sizes.	Practical and flexible.
Integration with emerging technologies	Limited requires specific modifications for different technologies.	Moderate can be adapted but with significant effort and computational cost.	High easily integrates.

with emerging technologies such as future integrated networks and quantum computing. Each question is explored in depth, providing an overview of the existing research, challenges, and future directions. This comprehensive approach aims for highlighting the various ways GNNs can support and enhance the development of NG wireless systems. A summary of these open questions is provided in Table III. The main contributions of this paper are summarized as follows:

- We provide an overview of graph neural networks in NG IoT systems, discussing their definitions, paradigms, and key use cases. We explain the roles and benefits of node-, edge-, and graph-level tasks in wireless network problems, offering practical examples to guide their application in various NG-IoT scenarios.
- We compare the performance of different GNN models, including our proposed hybrid quantum GNN harnessed for power allocation in cell-free massive MIMO, demonstrating the efficiency of GNNs and the potential of quantum GNNs for future research.
- We present a comprehensive review of GNN applications, carefully categorized by the core technologies driving NG advances. These include massive MIMO schemes, RIS, Satellite, THz communications, MEC, URLLC, and blockchain.
- To fully harness the advantages of GNNs, we conduct an in-depth examination of adversarial attacks and defense techniques in GNNs, providing essential insights into the security challenges and solutions for deploying GNNs in NG-IoT networks.
- We explore the potential of GNNs in shaping NG-IoT networks, focusing on identifying adversarial attacks and proposing defense techniques. We also examine the use of GNNs in future integrated networks, including ISAC and SAGSINs. Additionally, we discuss the role of quantum

TABLE III: Summary of Open Questions on GNN-Based NG-IoT Networks.

Open Questions	Background	State-of-the-art	Challenges and Future Directions
1) How do GNN paradigms represent and process graph-structured data across different types of graphs?	Graph Neural Networks (GNNs) include several variants, such as GCN, GAT, and GAEs	<ul style="list-style-type: none"> <li>Graph data, GNN Paradigm, and GNN variants [29]–[31]</li> <li>The explainability and scalability of GNNs [32], [33]</li> </ul>	<ul style="list-style-type: none"> <li>Model depth and over-smoothing</li> <li>Scalability of GNN models</li> <li>Security</li> </ul>
2) How do different task levels (node, edge, graph) contribute to solving NG-IoT network problems?	GNN tasks can operate at node, edge, and graph levels, providing different perspectives for solving complex network challenges, such as resource allocation and link prediction in NG	<ul style="list-style-type: none"> <li>Node-level task [34]–[42]</li> <li>Edge-level task [43]–[47]</li> <li>Graph-level task [48]–[51]</li> </ul>	<ul style="list-style-type: none"> <li>Scalability</li> <li>High computational and memory requirements.</li> <li>Divide large graphs into sub-graphs for local learning and then aggregate</li> </ul>
3) How do GNNs enhance communication and computation efficiency in massive MIMO, RIS systems, satellites, THz, MEC, and URLLC systems?	Massive MIMO, RIS Systems, Satellite, THz Communication, MEC, and URLLC are essential for enhancing NG-IoT system performance, coverage, and efficiency	<ul style="list-style-type: none"> <li>Massive MIMO [20], [45], [52]–[57]</li> <li>RIS Systems [57]–[60]</li> <li>Satellite [61], [62], [62]–[66]</li> <li>THz Communication [67]–[69]</li> <li>MEC [70]–[78]</li> <li>URLLC [79]–[82]</li> </ul>	<ul style="list-style-type: none"> <li>Heterogeneity of network's entities</li> <li>Dynamic resource allocation with diverse constraints</li> <li>Scalability</li> </ul>
4) How can GNNs enhance integrity, security, and scalability along with blockchain for IoT systems?	Blockchain is a promising technology for ensuring data integrity and security in IoT systems. GNNs can help enhance blockchain-based IoT systems by improving node classification, enhancing security, and supporting scalable solutions	<ul style="list-style-type: none"> <li>User privacy [83]</li> <li>Application distribution among IoT networks [84]</li> <li>Malicious node detection [85]</li> </ul>	<ul style="list-style-type: none"> <li>Computational and communication burden</li> <li>Ensuring data integrity and security in decentralized environments</li> <li>Lightweight GNN models design</li> <li>Privacy-preserving mechanisms</li> </ul>
5) How do adversarial attacks exploit vulnerabilities in GNN-based NG-IoT networks?	GNN models are vulnerable to adversarial attacks, where small changes to input data can degrade performance. In NG-IoT networks, these attacks threaten data integrity, disrupt services, and pose security risks in various applications.	<ul style="list-style-type: none"> <li>Adversarial Homogeneous Graph Neural Network [86]–[90]</li> <li>Adversarial Heterogeneous Graph Neural Network [91], [92]</li> </ul>	<ul style="list-style-type: none"> <li>Adversarial HoGNN defense</li> <li>Trade-off between deconstructing performance and computational complexity</li> <li>Explore joint attack methods involving multiple algorithms.</li> </ul>
6) What are the most effective defense techniques against adversarial attacks in GNN-based NG-IoT networks?	Defense strategies are crucial to safeguarding GNNs from adversarial threats to ensure robust deployment of GNNs in critical NG-IoT applications, including smart cities, healthcare, and autonomous systems	<ul style="list-style-type: none"> <li>Adversarial Homogeneous GNN defense [93], [94]</li> <li>Adversarial Heterogeneous GNN defense [95], [96]</li> </ul>	<ul style="list-style-type: none"> <li>Adversarial training</li> <li>Defensive distillation: Distill knowledge from a complex model to a simple one</li> <li>Hybrid defense approaches to improve robustness.</li> </ul>
7) How can GNNs enhance the performance and scalability of future integrated sensing and communication and space-air-ground-sea integrated networks?	Future integrated networks like SAGSINs and ISAC are crucial for ensuring seamless connectivity across multiple domains. GNNs can enhance the performance and scalability of these networks by optimizing communication and sensing processes and handling complex cross-domain interactions.	<ul style="list-style-type: none"> <li>Integrated Communications and Sensing [69], [97]</li> <li>Space-air-ground-sea integrated networks [75]</li> </ul>	<ul style="list-style-type: none"> <li>Scalability and heterogeneity in ISAC and SAGSINs</li> <li>Privacy and security issues in integrated communication and sensing</li> <li>Lack of standardized protocols for seamless integration of GNNs</li> </ul>
8) How can GNNs and future computational technologies, like quantum computing, work together to enhance the capabilities of NG-IoT networks?	Quantum computing has the potential to address the computational limitations of GNNs, providing enhanced capabilities for processing complex graph data in NG-IoT networks	<ul style="list-style-type: none"> <li>Quantum computing and quantum circuits [98]–[100]</li> <li>Variational quantum circuit for GNN [101]</li> <li>Hybrid quantum graph neural network [102]</li> </ul>	<ul style="list-style-type: none"> <li>Noisy intermediate-scale quantum (NISQ) devices</li> <li>Standard optimal variational quantum circuits for implementing QGNNs guaranteeing efficient circuit design and scalability</li> <li>Quantum cryptography with GNN</li> </ul>

TABLE IV: Related surveys on the applications of GNN in NG-IoT networks versus our study.

		[103]	[24]	[23]	[22]	[21]	[104]	[19]	[25]	Our research
Categorizing NG-IoT network problems by graph problems		✓		✓	✓	✓			✓	✓
GNN for NG technologies	Massive MIMO	✓			✓	✓				✓
	RIS									✓
	Satellite Communication	✓	✓		✓			✓		✓
	THz								✓	✓
	URLLC			✓						✓
	Edge computing			✓			✓	✓	✓	✓
	Blockchain			✓			✓			✓
Adversarial attack on GNN										✓
GNN with future NG-IoT networks and technologies	Integrated communication and sensing									✓
	Space-air-ground-sea integrated networks				✓					✓
	Quantum GNN									✓

computing in NG systems, highlighting how the combination of quantum and GNN can enhance GNN capabilities and the challenges of implementing them.

- Table IV offers a detailed comparison between our work and other state-of-the-art surveys in the field, emphasizing the unique contributions and advances presented in this paper.

*Paper Organization:* The rest of the paper is organized as follows. In Section II, we provide an overview of GNNs, covering their definitions, paradigms, and the different levels of graph tasks—node, edge, sub-graph, and graph-level tasks. We discuss how these tasks can be applied to address wireless network problems and include a simulation of power allocation in cell-free massive MIMO systems to compare the performance of various GNN models. Section III presents a detailed survey of GNN applications across key NG technologies, including massive MIMO scheme, RIS, satellite communication, THz, MEC, URLLC, and blockchain. Section IV delves into adversarial GNNs, examining potential attack methods and defense strategies in GNN-based NG networks, with a focus on both homogeneous and heterogeneous graph settings. In Section V, we discuss the integration of GNNs with emerging NG technologies, including ISAC, SAGSINs, and quantum graph neural networks. Section VI will provide a set of generic design guidelines. Finally, Section VII concludes the paper. For convenience, we treat each of the eight open questions in the form of an identical structure: 1) Background; 2) State-of-

the-art; 3) Challenges and future directions.

## II. GRAPH NEURAL NETWORK

In this section, we address Open Questions 1 and 2. We commence by defining the fundamental elements of graph structures, distinguishing between types such as directed vs. undirected and homogeneous vs. heterogeneous graphs. We then provide an overview of different GNN models, including Graph Convolutional Networks (GCNs) [10], Graph Attention Networks [11] (GATs), Graph Autoencoders (GAEs) [105], and Graph Spatial-Temporal Networks [106] (GSTNs), and discuss how they are designed to tackle specific challenges within graph-structured data. Following this, we dive into Open Question 2, where we explore the advantages of node, edge, and graph-level tasks in optimizing the wireless network performance. We offer practical examples of how these task levels can be applied to problems like power allocation, user association, and network deployment in NG-IoT networks. Finally, we present simulation results that compare the performance of different GNN architectures, including the introduction of a hybrid quantum GNN model, offering insights into its potential for enhancing wireless communication systems.

*Open Question 1: How Do GNN Paradigms Represent and Process Graph-structured Data Across Different Types of Graphs?*

1) *Background:*

- **Graph Definition:**

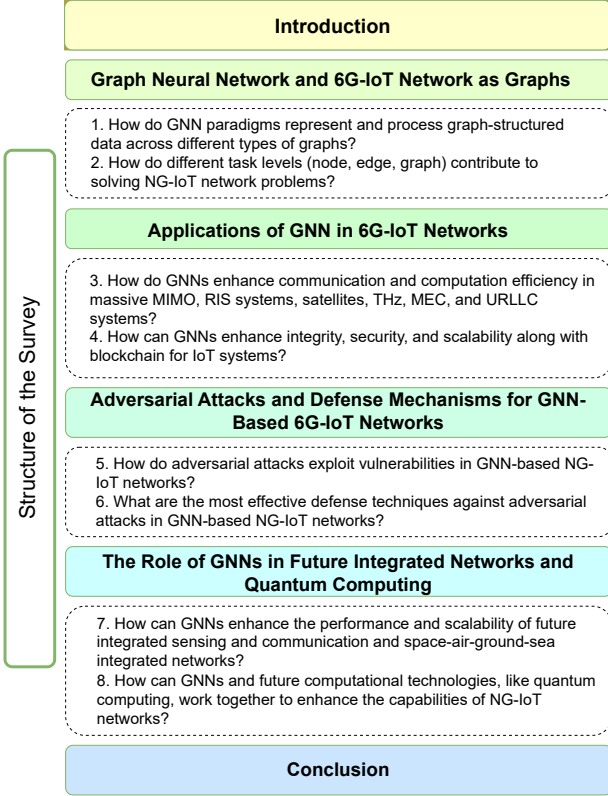


Fig. 1: Structure of this paper.

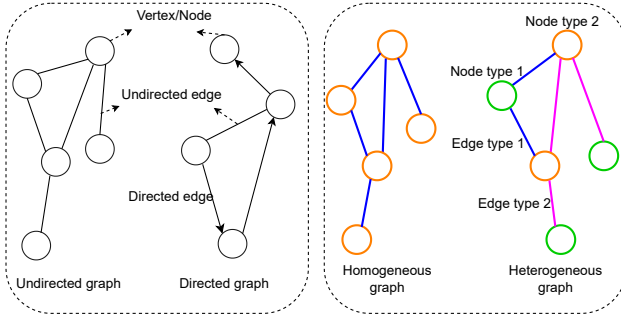


Fig. 2: The left figure separates the family of graphs into undirected and directed types. The right figure classifies the graph into homogeneous and heterogeneous types.

In the context of Graph Neural Networks (GNNs) applied to wireless networks, understanding the fundamental structure of graphs is crucial. A graph is a mathematical representation consisting of a set of vertices (also called nodes) and edges (also called links) that connect pairs of vertices. In general, a graph is represented by a tuple  $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ . The set of  $|\mathcal{V}|$  vertices is denoted by  $\mathcal{V} = \{1, \dots, v, \dots, |\mathcal{V}|\}$ , while the set of edges is defined based on the graph types as follows:

- **Undirected graph:** An undirected graph is repre-

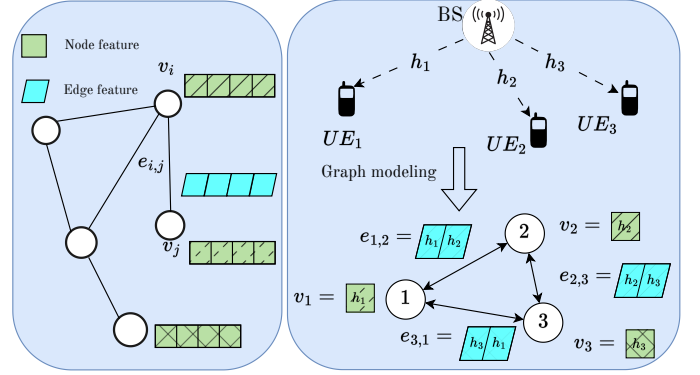


Fig. 3: Cellular network as a graph.

sented by the set of edges  $\mathcal{E} = \{(i, j) | i, j \in \mathcal{V}, i \neq j\}$ . Here, the edge  $(i, j)$  represents an undirected connection between vertices  $i$  and  $j$ .

- **Directed graph:** A directed graph, on the other hand, is represented by  $\mathcal{E} = \{(i, j) | i, j \in \mathcal{V}, i \neq j\}$ , where  $(i, j)$  is the edge directed from vertex  $i$  to vertex  $j$ .

The illustrations of directed and undirected graphs are represented in the left sub-figure of Fig. 2. Graphs can also be categorized into two types based on the nature of their nodes and edges:

- **Homogeneous graph:** These graphs consist of a single type of node and a single type of edge. This simplicity allows for straightforward analysis and processing.
- **Heterogeneous graph:** These graphs include multiple types of nodes and edges, as illustrated in the right sub-figure of Fig. 2. This diversity better represents complex real-world networks, such as wireless communication systems, where different devices and connections exist.

The *adjacency matrix* of the graph is represented as  $\mathbf{A} \in \{0, 1\}^{|\mathcal{V}| \times |\mathcal{V}|}$ , where  $\mathbf{A}_{ij} = 1$  if  $e_{i,j} \in \mathcal{E}$ . For an undirected graph,  $\mathbf{A}$  is symmetric, while for a directed graph, it may not be. The *node feature matrix*  $\mathbf{X}$  is a  $|\mathcal{V}| \times F_n$  matrix, where each row corresponds to a vector of features for a node. Similarly, the *edge feature matrix*  $\mathbf{E}$  is a  $|\mathcal{E}| \times F_e$  matrix, where each row corresponds to features of an edge. By storing information in the nodes and edges, the graph can capture the complexity of real-world networks, as illustrated in the left sub-figure of Fig. 3. For example, a cellular network can be represented as a graph, where the communication link between a base station and a user corresponds to a node. Edges are formed between all pairs of nodes to represent the interference between different communication links. The feature of the  $i$ -th node will be the channel gain between the base station and the  $i$ -th user, denoted as  $v_i = [h_i]$ . Meanwhile,  $e_{ij} = [h_i, h_j]$  represents the features of the edge between nodes  $i$  and  $j$ , including the interference channels between these links.

- **Graph Neural Network Paradigms**

GNN is a specialized neural network designed for processing and analyzing graph data. GNNs are effective at extracting deep-level topological information, unveiling critical and intricate data characteristics, and enabling efficient data processing. The core idea of GNNs is to learn a mapping function to generate node, edge, or graph representations, known as embedding vectors, based on initial graph information.

For example, consider a social network graph where each node represents a user, and each edge represents a connection between users. Initially, each node (user) may only contain basic information like user interests. As the GNN processes the graph, the embedding vector of each node is iteratively updated by combining its own information with information from neighboring nodes, as depicted in the graph convolutional layer block in Fig. 4. This iterative process, called message passing, aggregates information from neighboring nodes and edges to update the representation of each node in the graph. Ultimately, each node and edge obtains an embedding that captures the broader network context. The GNN model then processes these node and edge representations to produce node-level, edge-level, or graph-level features for tasks such as node clustering, link prediction, or graph classification. Fig. 4 illustrates the general pipeline of a GNN model, comprising input data, graph convolutional layers, and a downstream task layer.

GNNs can be broadly classified into different types based on their architecture and function, including Graph Convolutional Networks (GCNs) [10], Graph Attention Networks (GATs) [11], Graph Autoencoders (GAEs) [105], and Graph Spatial-Temporal Networks (GSTNs) [106]. The GCNs use convolution operations directly applied to the graph, updating node representations by aggregating features from neighboring nodes. This method is efficient and scalable, making it eminently suitable for large-scale graph data. Meanwhile, GATs introduce attention mechanisms into GNNs by dynamically assigning weights to the edges during the aggregation process. This approach allows the network to focus on the most relevant parts of the graph structure and enhances the model's ability to capture complex relationships and dependencies. The attention mechanism ensures that crucial nodes and edges have a greater influence on the final node representation, allowing the GNN to effectively capture complex dependencies within the graph. GAEs are designed for unsupervised learning on graphs, using an encoder to generate lower-dimensional representations and a decoder to reconstruct the graph. They excel in tasks like graph reconstruction and anomaly detection [107]. GSTNs extend GNNs to process time-evolving data by integrating spatial and temporal information, making them suitable for tasks like traffic prediction [108], [109] and dynamic network analysis [110].

In addition, the integration of GNNs with Reinforcement

Learning (RL) has opened new avenues for solving complex decision-making problems that involve graph-structured data [111], [112]. For instance, in this hybrid approach, GNNs encode the graph structure and extract features, which are then fed into RL algorithms to make sequential decisions. This combination is particularly effective in graph-representable scenarios, for example, in network routing [113], robotics [114], [115], and multi-agent systems [116].

2) *State-of-the-art:*

The development of GNNs has resulted in numerous advances across domains such as social networks, wireless networks [117], biology [118], and recommendation systems [119]. Early contributions, such as [29], explored the robustness of GNNs in processing graph data independently of node permutations, ensuring that GNNs can operate efficiently across a wide variety of graph structures. A comprehensive taxonomy of GNNs was provided by Zhou *et al.* [30], where the authors categorized GNN models into paradigms like GCNs, GATs, and GAEs. Further building on this, Wu *et al.* [31] focused their attention on the application of GNNs in recommendation systems, demonstrating how GNNs enhance recommendation accuracy by leveraging user-item interaction graphs.

The explainability of GNNs has become a crucial area of research, Yuan *et al.* [32] emphasized the importance of making GNNs interpretable, especially in sensitive areas like healthcare and finance. They introduced explainability methods such as GNNExplainer and PGExplainer, which help identify key subgraphs and node features, hence improving the transparency of GNN models. Moreover, Keyulu *et al.* [120] examined the limitations of shallow GNNs and proposed deeper architectures for capturing more complex graph structures and node dependencies, contributing to the scalability of GNNs in large datasets. Similarly, Wu *et al.* [33] augmented the understanding of GNNs, especially for dynamic and spatio-temporal graphs, focusing on traffic prediction and network analysis.

Despite these advances, challenges such as scaling GNNs to larger datasets, improving interpretability, and enhancing their application in real-time systems remain. Future research is expected to focus on overcoming these obstacles for enabling GNNs to efficiently handle larger datasets and operate in more complex, real-time scenarios.

3) *Challenges and future directions:*

- **Model Depth and Oversmoothing:** A major challenge in GNNs is the oversmoothing issue, where deeper layers render node representations to become indistinguishable. As highlighted by Keyulu *et al.* [120] and Xu *et al.* [121], adding too many layers may result in all nodes having similar embeddings, hence reducing the model's ability to differentiate between them. Solutions like residual connections and multi-scale GNNs are needed to retain expressiveness in deeper models. A possible solution is to incorporate multi-scale attention mechanisms that

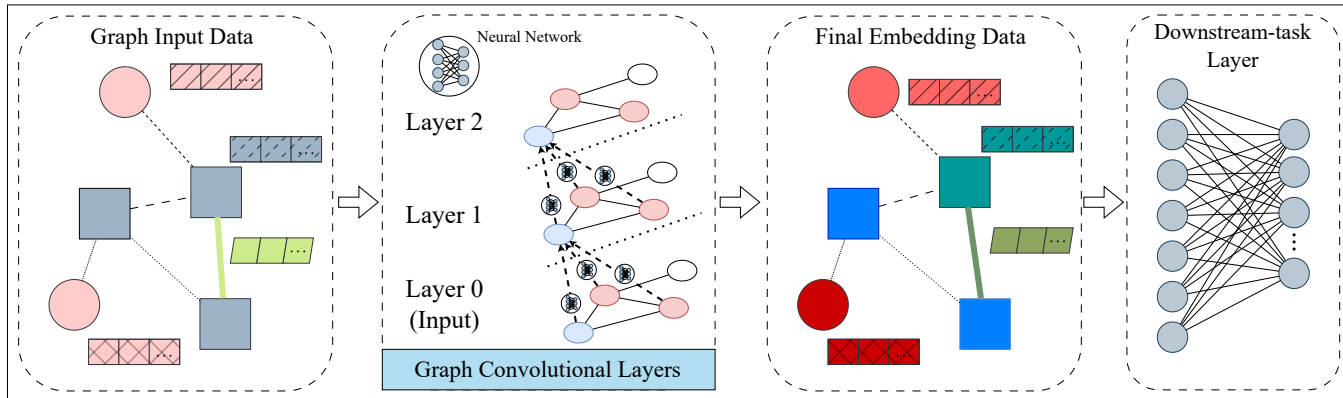


Fig. 4: A general pipeline for solving wireless network problems by using GNNs.

could allow GNNs to learn both local and global features effectively.

- **Scalability:** GNNs struggle with scalability, particularly when applied to large graphs. The computational cost escalates for larger networks. Zhou *et al.* [30] emphasized the need for techniques like graph sampling, mini-batch training, and graph sparsification to make GNNs more efficient for large-scale applications. To address this, research into advanced graph partitioning algorithms, combined with edge and node-compression techniques, can further reduce the computational burden of large networks.
- **Security:** Ensuring the robustness of GNNs, particularly in adversarial environments, remains an open problem, where small perturbations to the graph structure or node features can lead to incorrect predictions. Recent research has focused on developing adversarial training methods and robust GNN architectures that can guard against topology attacks. However, the existing defenses are still limited, and further advances are necessary in this area to construct more secure and reliable GNN models [122]. Strengthening GNN security requires more robust adversarial training to defend against both structure- and feature-based attacks. Future work should explore quantum-safe encryption for secure GNN communication, especially in critical fields like cybersecurity. Additionally, explainable AI methods can enhance transparency and improve the detection of adversarial threats.

*Open Question 2: How Do Different Task Levels (Node, Edge, and Graph) Contribute to Solving NG-IoT Network Problems?*

#### 1) Background:

The NG-IoT network problems can be modeled by three distinct task levels as in Fig. 5, including node-, edge-, and graph-levels. Each level represents different aspects of the network and it is associated with specific types of tasks. For example, as illustrated in Fig. 6, an IoT network having multiple access points and serving several devices can be modeled at the node level to focus on tasks like power allocation for individual devices. Edge-level tasks, on the other

hand, concentrate on relationships between pairs of nodes, such as user association or channel assignment. Graph-level tasks consider the entire network, addressing challenges like network slicing. Understanding how to formulate wireless problems at the node, edge, or graph level is key to effective problem-solving.

- **Node level:** Node-level tasks are particularly advantageous in scenarios where the primary focus is on optimizing and configuring individual nodes and their features within a wireless network. These tasks involve associating each variable with a node entity in the graph, making them well-suited for problems that require attention to the configuration and performance of specific network components, such as user equipment, access points, and base stations [38], [123], [124]. Common node-level tasks include node classification, node clustering, and node regression, where each node's unique characteristics play a vital role in the network's overall functionality.
- **Edge level:** Formulating wireless network problems as edge-level tasks within GNNs allows models to focus on capturing the interactions within connected nodes, which is essential for wireless communication that relies on device-to-device connections. Particularly in wireless networks, the quality of communication links is affected by factors such as distance, interference, and environmental conditions. By representing these links as edges in a graph, GNNs can capture the intricate relationships and dependencies among these variables, enabling more accurate predictions of link quality and improved resource management strategies. This approach is well-suited for tasks like link prediction, interference management, and resource scheduling, where the performance of individual links is the primary concern.
- **Graph level:** Graph-level tasks involve obtaining a global representation of the entire graph, which can capture comprehensive information that node-level and edge-level tasks might miss. This global perspective is vital for tasks that demand a holistic understanding of the network's structure and behavior. By summarizing the representations of all nodes and edges, graph-level



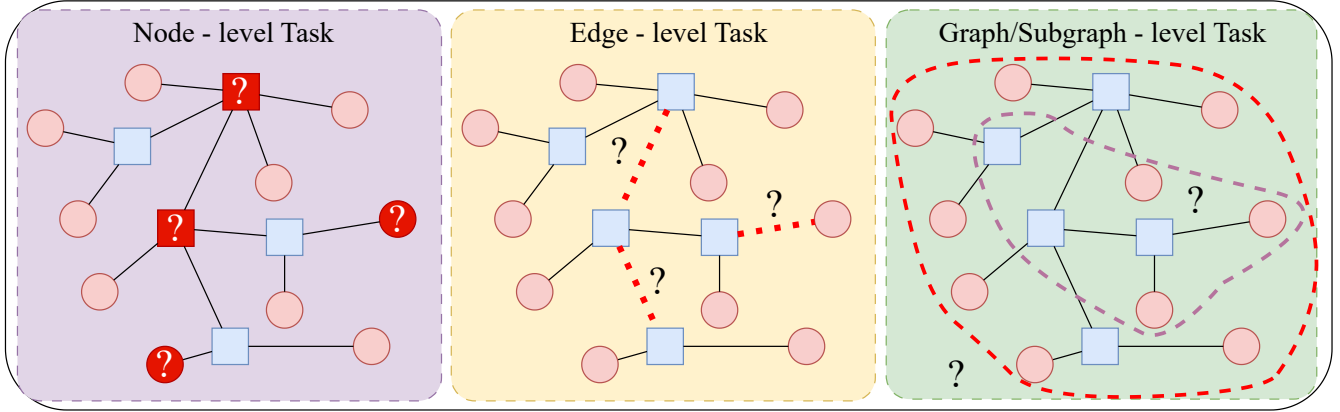


Fig. 5: Node-, edge-, and graph-level tasks.

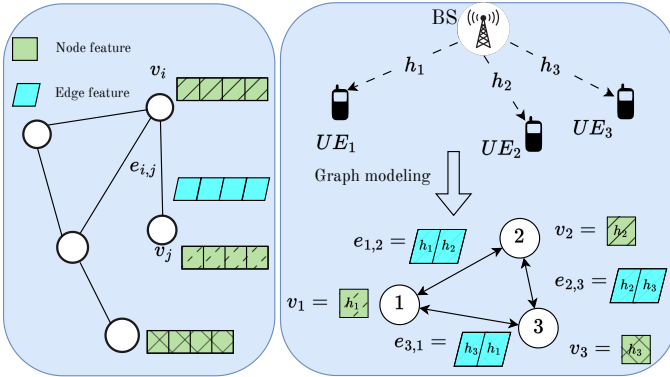


Fig. 6: Representation of different levels of graph perspective: (a) The original IoT network, (b) Node-level representation, (c) Edge-level representation, and (d) Graph-level representation

embedding vectors enable the model to leverage global hidden features beyond the scope of node-level and edge-level approaches.

## 2) State-of-the-art:

Table V provides a summary of existing applications of GNNs on various IoT network scenarios with three types of tasks in the graph, highlighting their effectiveness in solving different types of wireless network challenges.

- Node level:** Node-level GNN applications are widely used in wireless networks. One of the most well-known applications of node-level tasks is power allocation, a critical aspect of network optimization [34], [35], [39]. For instance, in [20], the uplink power allocation of a cell-free massive MIMO IoT System can be formulated as a node-level task of an undirected graph, where users and access points (APs) are represented as nodes. This approach allows the model to generalize effectively across different network configurations, ensuring scalability. However, in downlink power allocation, the problem becomes more complex because each AP must allocate power vectors that are dependent on the number of served users, making the task more sensitive to changes in network size.

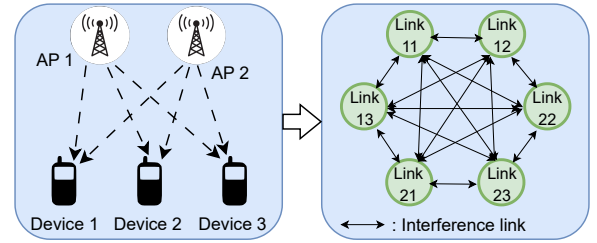


Fig. 7: An example of a wireless network graph, where each communication link is considered as a node.

To overcome this challenge, Shen *et al.* [125] proposes an approach, where each communication link is represented as a node. The illustration of communications links as nodes is shown in Fig. 7. This representation shifts the focus from the APs to the links, allowing the system to maintain scalability even as the network size varies. This method ensures that the power allocation process remains efficient and adaptable in dynamic network environments, where the number of connected devices may fluctuate. Furthermore, by representing each communication link as a node, the node-level tasks lend themselves to solving link scheduling problems, such as AP-IoT device association or frequency assignment problems. In this way, decisions regarding transceiver pair scheduling can be made independently based on the node's features. This method enables efficient link scheduling, as demonstrated in studies like [36], [37].

Moreover, node-level tasks are particularly effective in predicting user behavior by analyzing the node attributes that capture specific user activity and communication patterns. Since each user's behavior can be anticipated independently of others, focusing on node-level representations facilitates accurate forecasting of traffic patterns based on local information. This approach is pursued in [40], where a cellular traffic network is modeled as an undirected graph, with mobile traffic data embedded as node attributes. By focusing on these node-level details, the GNN can accurately predict traffic fluctuations and

TABLE V: Existing application of GNNs on various wireless networks categorized by types of tasks

Task Level	Reference	Network Architecture	Considered Problem	Graph Data
Node-level	D. Abode <i>et al.</i> [34] (2023)	Industrial Wireless Subnetworks (IWS)	Power control	Undirected + Homogeneous
	B. Li <i>et al.</i> [35] (2024)	Cellfree-massive MIMO	Power control	Directed + Heterogeneous
	M. Lee <i>et al.</i> [36] (2021)	D2D	Link scheduling	Directed + Homogeneous
	T. Chen <i>et al.</i> [37] (2022)	D2D	Link scheduling	Directed + Homogeneous
	Z. Wang <i>et al.</i> [38] (2023)	RIS	Power allocation + RIS phase-shift	Undirected + Heterogeneous
	S. Lyu <i>et al.</i> [39] (2024)	RIS	Beamforming + RIS phase-shift	Undirected + Homogeneous
	N. Zhao <i>et al.</i> [40] (2022)	Cellular Network	Network traffic prediction	Undirected + Homogeneous
	J. Xiao <i>et al.</i> [41] (2023)	Security Network	Anomaly detection	Undirected + Homogeneous
	T. Huoh <i>et al.</i> [42] (2023)	Encrypted Network	Network traffic classification	Directed + Homogeneous
Edge-level	X. Liu <i>et al.</i> [43] (2022)	Massive URLLC	User association	Undirected + Heterogeneous (Bipartite graph)
	Z. Sun <i>et al.</i> [44] (2023)	Multi-access Edge Computing (MEC)	Computation offloading	Directed + Heterogeneous
	Y. Peng <i>et al.</i> [45] (2024)	D2D/ MIMO	Power allocation	Undirected + Heterogeneous
	Y. Wang <i>et al.</i> [46] (2023)	Downlink cellular network	Power allocation	Undirected + Heterogeneous
	S. Liu <i>et al.</i> [47] (2023)	MISO	Precoding design	Undirected + Heterogeneous
Sub-Graph/ Graph-level	Y. Yang <i>et al.</i> [48] (2023)	Wireless Communication	Network deployment	Undirected + Homogeneous
	Z. Wu <i>et al.</i> [49] (2022)	Indoor Localization System	Indoor localization	Undirected + Homogeneous
	G. Wang <i>et al.</i> [50] (2023)	MEC	Task offloading	Undirected + Homogeneous
	A. Asheralieva <i>et al.</i> [51] (2023)	MEC	Malicious edge server detection	Directed + Homogeneous

user behavior, leading to more responsive and efficient network management.

Node-level tasks are also beneficial in classification problems within wireless networks. In [41], a GNN was applied to a binary classification problem to detect anomalies and insider threats. In this context, nodes represent activity log positions, while edges represent the contextual relationships between activities. This node-centric approach allowed the GNN to identify abnormal patterns effectively. Similarly, Huoh *et al.* [42] addressed encrypted network traffic classification by mapping each packet to a node and using packet relationships and meta-features as graph inputs. The authors represented the classification problem by both a node-level task as well as an edge-level task and revealed that the classification accuracy was higher when using node-level tasks than edge-level tasks. This indicates the effectiveness of node-level representations in certain wireless network applications, where capturing and leveraging node-specific information is crucial for achieving superior performance.

- **Edge level:** Edge-level GNNs have proven effective in addressing various wireless network challenges, especially in optimizing user association, which is crucial for enhancing system performance in wireless networks [126]. Liu *et al.* [43] utilized the edge-GNN concept to predict the user-BS association. Similarly, in [44], the edge-level concept was used to represent the task

offloading problem between wireless devices and mobile edge computing. In terms of resource allocation, the edge-level task formulation enhances interference management by directly modeling interactions between interfering links. In dense wireless networks, where devices compete for resources, this approach allows GNNs to predict and mitigate interference more accurately. By focusing on the edges, GNNs can optimize scheduling and power control, hence reducing interference and improving network performance. This is achieved by dynamically adjusting the transmission power in overlapping cellular networks to boost the overall throughput and user experience [45], [46]. Peng *et al.* [45] revealed that edge-GNN could perform just as well as the node-GNNs in power allocation, with the added benefit of reduced training time.

Another advantage of edge-level tasks in GNNs is their superior scalability in large and dynamic wireless networks. By focusing on the edges, GNNs can efficiently manage changes in network topology, including the addition or removal of links, without being constrained by the number of nodes. By contrast, node-level tasks may struggle to attain scalability, particularly in scenarios like downlink power allocation. Here, the output dimension at an AP node is typically fixed based on the number of users, limiting flexibility as the network grows. By associating the power allocation variable with the edge, as demonstrated in [46], [47], edge-level GNNs can

more effectively adapt to varying network sizes, ensuring scalability.

- **Graph level:** Graph-level tasks have proven to be highly effective in optimizing large-scale wireless networks by providing a holistic understanding of the entire network structure. For instance, a novel GNN-based approach is proposed by Yang *et al.* [48] optimizing the deployment of network nodes to enhance the overall network throughput, treating the entire network as a unified entity. The authors model the network throughput as the maximum flow of the network and employ a GNN for learning the relationship between node deployment and network flow. Their simulations demonstrate that addressing wireless policies at a graph level significantly outperforms simpler node-level regression tasks, underscoring the importance of a global understanding of the network. Another example is found in [49], where a GNN-based federated learning framework is proposed for indoor fingerprint localization. The problem is modeled at two levels: the client level and the server level. For clients, each received signal strength sample is treated as a graph, and a GNN is utilized for predicting locations through a graph-level regression task.

Edge computing substantially benefits from graph-level tasks due to the need for a holistic view of the interconnected network, especially in task offloading. Wang *et al.* [50] minimized the average offloading delay by using a Branch & Bound (B&B) algorithm, representing the process as an enumeration tree of edges and nodes. Briefly, the GNN processes the input state and action pair to derive the MEC system’s reward through the final graph-level embedding, which is then used for optimizing the offloading strategy via the B&B method. Similarly, Asheralieva *et al.* [51] model MEC networks relying on multiple edge servers as a directed multigraph, where the GNN produces a graph-level embedding used for managing security and efficiency. This approach illustrates how graph-level tasks can effectively handle complex problems that require considering the entire network, leading to accurate and robust solutions.

- **Simulations:**

*Model architecture:* We consider the uplink power allocation for a cell-free massive MIMO system. The goal is to maximize the minimum user rate across the system, ensuring efficient energy usage while maintaining high data rates. The max-min fairness criterion harnessed for power allocation is formulated as in [127]. This is particularly challenging, because the users experience varying levels of interference and channel conditions. Efficient power control is crucial for enhancing the system performance attained and for ensuring fairness among users. The global solution may indeed be obtained, but it is computationally expensive, especially for large-scale networks experiencing dynamic user and channel conditions. This makes real-time optimization challenging. Using GNN provides an efficient design alternative.

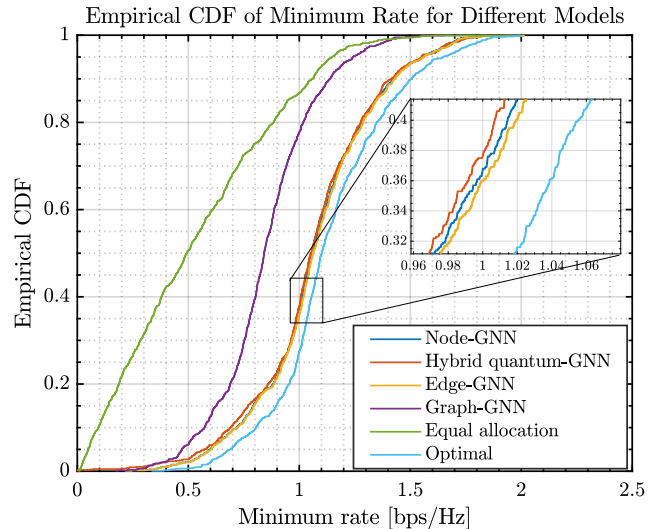


Fig. 8: An example of a wireless network graph where each communication link is a node.

As suggested by Peng *et al.* [45], the cell-free massive MIMO system can be represented as a heterogeneous graph. Therein, the associated max-min fairness problem can be formulated either as an edge-level task or a node-level task and then solved using the edge and node convolution-based methods, respectively. To evaluate the effectiveness of different GNN architectures for this task, we harnessed both models from [45] and proposed new ones. Below is a summary of the models considered:

- **Node-GNN:** Focuses on updating node features, representing users and access points, to allocate power based on node-level characteristics.
- **Hybrid Quantum GNN (Our proposal):** The HQGNN uses the GNN to preprocess and generate node embeddings, which are then handled by the deep quantum neural network (DQN) using quantum circuits for power allocation.
- **Edge-GNN:** Updates edge features, representing the connections between users and access points to capture the relationships between them.
- **Graph-GNN:** Utilizes global graph pooling to aggregate features across the entire graph, paving the way for a holistic approach to power allocation.

*Simulations and results:* In this simulation, we consider a cell-free massive MIMO system supporting 6 users with the aid of 30 access points. Only large-scale fading coefficients are used as inputs of the GNNs. We model the system as a bipartite graph associated with two types of nodes, including cellular users and access points. Fig. 8 presents the performance of various GNN architectures, illustrated using the cumulative distribution function (CDF) derived from 10,000 realizations of a cell-free massive MIMO system.

The results show that edge-GNN and node-GNN constitute a pair of models capable of approximating the optimal solution. Briefly, these two models achieve a min-

imum rate above 1bps/Hz in about 65% of the instances. The hybrid quantum GNN, which integrates quantum circuits into the Node-GNN architecture, also performs competitively. Quantitatively, this model tends to achieve 1bps/Hz in about 64% of the instances. On average, the Edge-GNN, Node-GNN, and HQGNN models provide data throughputs of 1.0783, 1.0733, and 1.0640 bps/Hz, respectively. By contrast, the optimal solution achieves an average throughput of 1.129 bps/Hz, slightly outperforming all GNN models, but at the cost of significantly higher computational complexity, particularly as the network size escalates. The graph-GNN performs worst of all GNN models, with less than 40% of cases reaching a minimum rate of 1.0 bps/Hz. This poor performance is attributed to its global aggregation of information, which fails to capture the crucial local node and edge interactions necessary for optimizing power allocation in the network. Overall, the results underscore the superiority of node-level GNN models, particularly of those utilizing attention mechanisms for solving the power control problem of cell-free massive MIMO systems. Furthermore, the hybrid quantum GNN offers an intriguing avenue for integrating quantum computing into GNN architectures.

### 3) Challenges and future directions

Again, a significant challenge in modeling GNNs for wireless networks is ensuring scalability, particularly when dealing with networks that have inherent constraints, such as limited node resources or dynamic topology changes. As the graph size grows, the computational cost and memory usage increase, making it challenging to maintain the target performance in real-time. To address this challenge, a promising future direction is to partition the large graph into multiple subgraphs, allowing GNNs to learn locally within each subgraph. The information learned from each subgraph may then be aggregated, ensuring that the model is able to process graphs of varying sizes without losing generalization capabilities. This approach can mitigate scalability issues and maintain performance across different network scales.

## III. APPLICATIONS OF GNN FOR NG TECHNOLOGIES IN IOT NETWORKS

In this section, we address Open Questions 3 and 4, focusing on how GNNs enhance key NG technologies. Open Question 3 covers resource management and communication efficiency in massive MIMO, RIS, Satellite, MEC, THz, and URLLC systems, with GNNs optimizing user association, beamforming, and signal propagation. By contrast, open Question 4 investigates how GNNs enhance integrity and security in blockchain.

*Open Question 3: How Do GNNs Enhance Communication and Computation Efficiency in Massive MIMO, RIS, Satellite, THz, MEC, and URLLC Systems?*

### 1) Background:

Massive MIMO, RIS, satellite, THz, mobile edge computing, and URLLC systems are key NG technologies aimed at enhancing system performance, including energy, spectrum,

and computational efficiency, as well as coverage. These technologies and their applications are comprehensively illustrated in Fig. 9, which highlights their roles in NG IoT networks. For instance, massive MIMO systems improve spectral efficiency by employing a large number of antennas, which allows for improved spatial multiplexing and user throughput [129]–[132]. RIS creates programmable propagation environments capable of dynamically adjusting the phase, amplitude, and polarization of radio waves. This enhances coverage by reducing interference without relying on power amplifiers or complex signal processing [133]–[137]. Satellite networks have become crucial in supporting non-terrestrial networks by extending coverage to remote areas, hence providing global connectivity [138]–[140]. THz communication leverages the unlicensed spectrum ranging from 0.1 to 10 THz for opening up new frequency bands. The abundance of free spectrum in this band circumvents spectrum scarcity, hence offering the high throughput needed for advanced applications like virtual reality and ultra-high-definition video [141]–[144], albeit at a high path-loss and limited coverage. Mobile Edge Computing (MEC) brings data processing capabilities closer to end users by carrying out computation at the network edge instead of centrally, thus reducing latency and improving response times for time-sensitive applications. Harnessing MEC is essential in scenarios where quick decision-making and real-time analytics are needed, such as smart cities, autonomous vehicles, and industrial IoT environments [70]–[72], [145]. It helps offload computational tasks from centralized cloud servers, optimizing resource utilization and enhancing the overall network efficiency. Meanwhile, URLLC (Ultra-Reliable Low-Latency Communication) ensures low-latency, high-reliability communication for mission-critical applications like autonomous driving, robotics, and healthcare. It is crucial in near real-time scenarios, such as industrial automation and remote medical procedures, using bespoke resource allocation for meeting stringent performance requirements [146], [147]. Despite these advantages, the above sophisticated technologies face common challenges in managing high-dimensional spatial data and optimizing spectrum usage. GNNs are becoming popular in addressing these challenges by learning spatial dependencies, optimizing resource management, and maintaining efficient, low-latency communication in dynamic environments.

### 2) State-of-the-art:

- **Massive MIMO:** GNNs have been increasingly harnessed for addressing challenges in wireless networks using massive MIMO schemes, particularly in resource allocation problems [20], [52], [53]. Shen *et al.* [20] formulated tangible guidelines for designing GNNs to solve power allocation problems by maximizing the sum rate of the uplink in a cell-free massive MIMO network. They treated this heterogeneous network associated with two types of nodes corresponding to APs and users. Similarly, Li *et al.* [52] explored the use of heterogeneous GNNs in a multicarrier-division duplex cell-free mMIMO system, proposing a sophisticated technique for differentiating be-

TABLE VI: Related studies in the use of GNN on different NG technologies for IoT networks

NG key technologies	Reference	IoT applications	Problems	Task Level	GNN model
Massive MIMO	[20] (2023)	Uplink cell-free massive MIMO	Power control for max-min rate	Node	MPGNN
	[52] (2023)	Multicarrier-division duplex cell-free mMIMO	Power control for maximizing average rate	Node	GAT
	[54] (2022)	Downlink cell-free massive MIMO	Power control for max-min rate	Node	HetGNN
	[45] (2024)	Downlink MIMO	Power control for max sum rate	Edge, node	HetGNN
	[55] (2023)	Cell-free massive MIMO	AP selection	Node	MPGNN
	[56] (2024)	Integrated satellite-terrestrial cell-free massive mimo IoT systems	Power control for max-min rate	Node	HetGNN
RIS	[57] (2023)	Massive MIMO	Power control	Node	GNN
	[58] (2023)	RIS aided communication	Channel estimation	Sub-graph	GNN
	[59] (2022)	RIS support multiuser downlink	RIS phase shift and power allocation for long-term error minimization	Node	HetGNN
	[60] (2022)	RIS support Fed procedure	RIS phase shift and satellite's beamforming optimization	Node	GAT
Satellite	[57] (2023)	RIS-enhanced downlink LEO satellite IoT networks	Power control	Node	Unfolding GNN
	[61] (2023)	LEO satellite networks	Satellite routing and network traffic optimization	Node	RL + MPNN
	[62] (2023)	Mega-constellations Satellite Networks Model	Satellite routing	Node	GCN + GRU
	[63] (2024)	LEO satellite networks	The SFC orchestration	Node	RL + GAT
	[64] (2023)	LEO satellite constellation	Topology optimization	Node	RL + GNN
	[65] (2023)	space-air-ground integrated network with MEC	The network slicing allocation	Node	DL + MPGNN
THz	[66] (2021)	UAV-assisted hybrid satellite-terrestrial network	Trajectory design and link selection	Node	GAT
	[62] (2023)	RIS-assisted satellite IoT communications	Channel estimation	Node	GAT
	[67] (2023)	Digital Twin (DT) network with the THz band	Weighted mean rate maximization problem	Node	MPGNN
MEC	[68] (2024)	RIS-aided multiuser mimo THz system	Sub-band allocation, the phase shift, and the precoding to maximize the system sum rate	Node	HetGNN with self-attention
	[69] (2023)	Integrated communication and sensing for vehicle communication	Operation mode selection	Node	GNN
	[70] (2021)	MEC support IoT networks	Task off-loading	Edge	RL + GNN
	[71] (2023)	MEC support D2D communication	Task off-loading	Graph	RL + GAT
	[72] (2022)	MEC based UAV	Task off-loading	Node	RL + GNN
	[73] (2023)	MEC support IoV	Task off-loading	Node	Graph weighted convolution network
	[74] (2023)	MEC support IoV	Task off-loading	Node	STGNN + GRU + Transformer
	[75] (2022)	MEC support marine-based IoT	Trajectory prediction at Edge computing	Node	STMGCN + Self-attention
URLLC	[76] (2024)	MEC support healthcare applications	Classification at Edge computing	Node	GCN
	[77] (2023)	MEC support smart home	Intrusion detection	Edge	GraphSAGE
	[78] (2023)	MEC support industrial IoT	Anomaly detection	Node	SPGNN
	[79] (2023)	Cellular network	QoS violation probability minimization	Node	GNN
Blockchain	[80] (2024)	OFDMA wireless network for URLLC services	Maximizing number of successful transmissions	Node	GraphSAGE
	[81] (2021)	A factory automation scenario	Packet loss probability minimization	Node	GNN
	[82] (2024)	massive URLLC (mURLLC) network	Decoding error probability minimization	Node	GNN
Blockchain	[128] (2023)	A secure smart blockchain IoT network	User privacy and data processing time	Node	GNN
	[84] (2020)	IoT smart blockchain	Application distribution among IoT networks	Node	GraphSAGE
	[85] (2020)	IoT smart blockchain for healthcare applications	Malicious node detection	Node	GNN

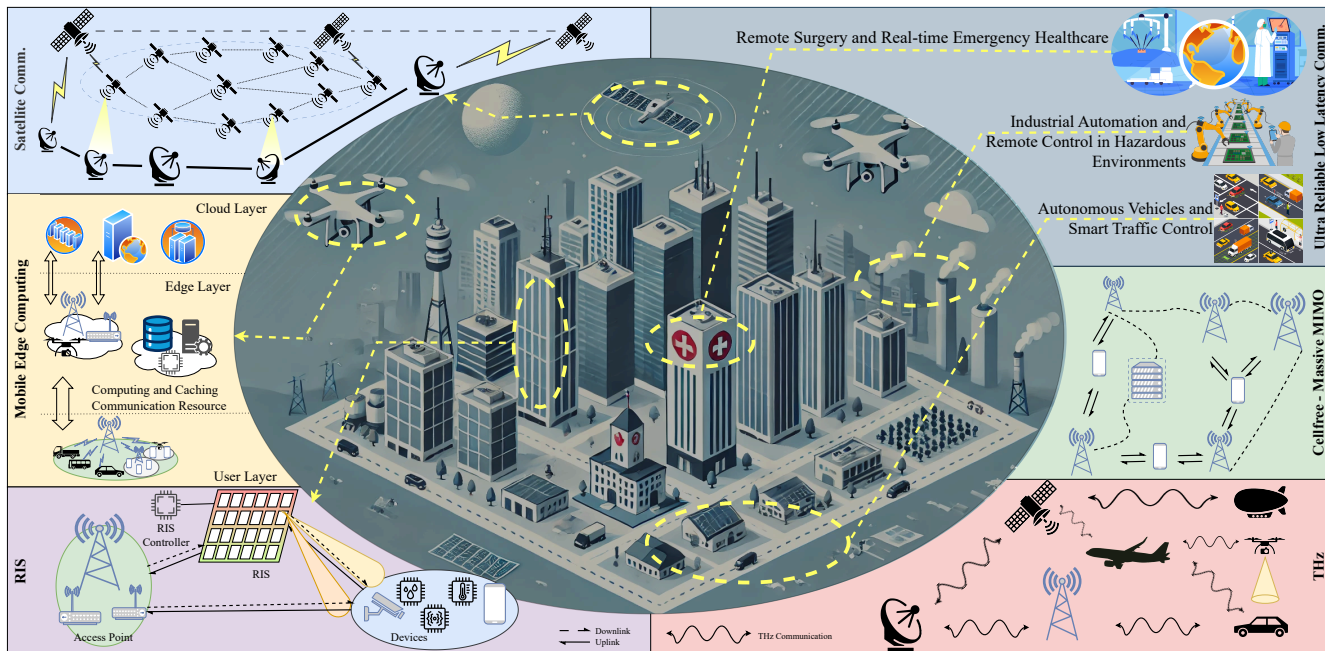


Fig. 9: Next generation IoT networks.

tween communication and interference links. An attention mechanism was applied for extracting critical information from both the APs and users. In another study, Salaun *et al.* [54] tackled the max-min power control problem of a cell-free massive MIMO network by constructing a heterogeneous graph. In contrast to the approach in [20], [52], the represented graph constructed by Salaun *et al.* composed of  $(M \times K)$  nodes, where  $M$  and  $K$  represent the number of APs and users, respectively. An edge is formed between two nodes if these nodes share the same AP or user, and the graph has two types of edges. Note that for the downlink power control problem, the node embedding approach of Shen *et al.* [20] will fix the output dimension based on the number of APs and users during the training phase. Hence, scalability cannot be guaranteed, while the solution conceived by Salaun *et al.* [54] succeeded in guaranteeing the scalability of the network. Another method that was put forward by Peng *et al.* in [45] also guaranteed the scalability of the downlink in a MIMO system. Briefly, the MIMO system is represented by a heterogeneous graph associated with two types of nodes: APs and users. The edge-GNN concept was proposed for learning the graph capable of generating edge embedding, which is used to infer the power allocation of an AP for a user. In [55], Ranasinghe *et al.* addressed the AP selection problem by utilizing a pair of different graph representations: a homogeneous graph consisting only of APs and a heterogeneous graph that includes both APs and users. They employed graph sample and aggregation (GraphSAGE) [148] for learning the wireless graph, capable of generating node embeddings that were then used for calculating confidence scores for classifying the links between APs and users. In

a related study, Chien *et al.* [56] explored a system, where multiple IoT users are simultaneously served by both a satellite and access points. The focus was on optimizing the sum of the ergodic uplink throughput with the aid of the most appropriate power allocation across all IoT users. The authors harnessed a heterogeneous GNN for tackling the optimization problem formulated. Notably, Schynol *et al.* [57] introduced an innovative technique for optimizing the total data rate of a massive MIMO system. They constructed a GNN architecture inspired by the algorithmic unfolding of the weighted minimum mean squared error (WMMSE) method, providing a powerful tool for enhancing the performance of a massive MIMO system.

- **Reconfigurable Intelligent Surfaces:** GNN-based RIS-assisted IoT systems have been characterized in [58], [59], [149]. Singh *et al.* [58] combined GNNs with a transformer model, which uses self-attention mechanisms for capturing long-range dependencies in data, in support of channel estimation. Specifically, the GNN layers within the transformer are used for generating embedded vectors representing the groups of RIS elements, which are assumed to have the same channel. These are then processed by the transformer's attention mechanism for accurately predicting the unknown channels. This method significantly reduces the pilot overhead while maintaining high estimation accuracy. As a further advance, Zhang *et al.* [59] proposed a joint optimization procedure for user scheduling, RIS configuration, and base station beamforming to maximize the weighted sum rate in the downlink enhanced by RISs. They utilized a pair of GNNs for user scheduling and RIS configuration, with the final beamforming harnessing the WMMSE algorithm. Wang

*et al.* [149] studied the benefits of federated learning (FL) for distributed IoT networks. The RIS was employed for enhancing the FL process by minimizing long-term errors, hence improving accuracy. A heterogeneous GNN was proposed for learning the network's graph structure, enabling the optimization of RIS phases, client power allocation, and denoising factors at the server. Cao *et al.* [60] investigated the RIS-aided downlink of Low Earth orbit (LEO) satellite IoT networks. They proposed an attention graph neural network for learning the network topology and received pilots, optimizing the RIS phase shifts and satellite beamforming, thereby improving the overall network performance.

- **Satellite Communication:** GNNs are also capable of addressing challenges in satellite-based IoT networks, efficiently handling their dynamic topology and resource constraints [61]–[63]. Huang *et al.* [61] studied a suite of multipath routing optimization problems under both bandwidth and flow constraints. The topology of the LEO satellite and ground stations is represented by a spatio-temporal graph. The study proposed a GNN-based multiPath traffic engineering algorithm relying on edge embeddings for distributing traffic across the candidate paths identified by a custom algorithm. Chen *et al.* [62] also considered the routing issues of the LEO system supporting IoT users. As the number of elements in the network increases, the memory requirement becomes a challenge. Therefore, the authors proposed combining a GCN and a gated recursive unit (GRU) [150] for reducing the memory requirement while still predicting the topology of the LEO system. He *et al.* [63] investigated the service function chain orchestration problem of LEO networks with the objective of maximizing the user service acceptance rate. They proposed a GAT-based hierarchical RL technique for solving the problem, in which the GAT model served as a feature extraction module. Similarly, Wang *et al.* [64] utilized a GNN as an extraction module within a reinforcement learning model to optimize routing in LEO satellite networks.

Integrated networks combining satellites with aerial or ground systems have also garnered significant attention. Asheralieva *et al.* [65] investigated the space-air-ground integrated networking (SAGIN) concept concerning network slicing aided MEC systems designed for IoT and mobile applications. The SAGIN system, which includes aerial, LEO satellite, and terrestrial networks, aims for providing seamless service for IoT devices. However, the rapidly fluctuating dynamic topology can lead to instability and unreliable nodes. To address this, Asheralieva *et al.* proposed a deep learning model based on MPGNN for acquiring node embeddings that the DL model will use for solving the associated slicing problem.

In [151], the hybrid satellite-terrestrial networks have been studied by Chen *et al.* with the support of unmanned aerial vehicles (UAVs) as relay stations. The objective was to maximize the number of IoT devices

served along the UAV's trajectory and activating user scheduling. The GAT model was employed for extracting node embeddings, which were used for predicting user scheduling for IoT devices. This scheduling information was then fed into a Q-learning model to determine the UAV's optimal trajectory. To further enhance the satellite transmission performance, RISs may also be considered as a potential solution [60], [66]. For instance, Tekbyk *et al.* [66] utilized a GAT network to learn the relationship between the pilot signal and the phase shift of RIS, which was then exploited for channel estimation. Leveraging the GAT network allows the system to estimate all channel coefficients simultaneously and this procedure can be generalized to diverse network configurations.

- **THz Communication:** Recent studies have applied GNNs for optimizing wireless systems operating in the THz band, focusing on addressing unique challenges, such as their high path loss and dynamic channel conditions. For instance, GNNs have been utilized for enhancing resource allocation to optimize the performance of wireless systems utilizing the THz band [67]–[69]. Zhang *et al.* [67] proposed integrating Digital Twin (DT) technology with the THz band. The associated weighted mean rate maximization problem subject to power allocation and user association is formulated as a graph optimization problem that is then solved using a distributed message propagation algorithm. Briefly,  $K$  message passing layers are utilized to infer the node embedding. The power allocation,  $P_i$ , and the user association,  $\mu_i$ , of the  $i$ -th user are inferred from the node embedding,  $x_i^K$ , at the last layer  $K$ , where we have  $P_i = \text{MLP}(x_i^K)$  and  $\mu_i = \sigma\left(\frac{x_i^K}{\gamma}\right)$ , respectively. Here,  $\sigma$  is the sigmoid function, and  $\gamma$  is a hyperparameter.

For mitigating the path loss and improving the propagation distance, Mehrabian *et al.* [68] suggested using a RIS system. They simultaneously optimized the THz sub-band allocation, the phase shift, and the transmit precoder for maximizing the system's sum rate. The authors proposed a heterogeneous graph-transformer network based on the self-attention mechanism for learning the input features of the RIS, the BS, and all users, resulting in embedding vectors before applying deep neural network (DNN) to predict the specific output for each node. Moreover, to guarantee the minimum required data rate, the authors applied a penalty term when the achievable rate fell below the minimum required rate  $r_i^{\min}$ .

Li *et al.* [69] harnessed the THz band for vehicular networks. In particular, a set of provider vehicles offer services to several communication and sensing vehicles using the THz band. An integrated sensing and communication problem was considered and the data rates of all communicating vehicles were optimized, while meeting the specifications of the associated sensing task. The system was represented by a heterogeneous network having three types of nodes, including provider,

communication, and sensing vehicles. A GNN model was proposed for learning the represented graph to yield embedding vectors for all provider nodes and then to use them for calculating the probability of operating in the sensing and the communication mode or being dormant.

- **MEC:** GNNs have been widely adopted for solving various problems in MEC-aided IoT networks, [70]–[72], [145]. To elaborate, Sun *et al.* [70] proposed a graph reinforcement learning-based offloading (GRLO) framework to solve the task offloading problem in a collaborative Artificial Intelligence of Things (AIoT) system consisting of wireless devices equipped with intelligent sensors and MEC servers. They constructed a GNN as an actor network, which learns the policy relying on the relationship between nodes. Wang *et al.* [71] invoked fog computing for task offloading in MEC systems supporting device-to-device (D2D) communication. A real-time GNN inference framework, termed as Foggraph, was proposed for maximizing the servers' performance. In particular, the authors designed an attention mechanism for GNNs to calculate a reward for the proposed inverse reinforcement learning relying on GNNs. Similarly, Li *et al.* [72] employed a UAV as a mobile-edge server. Their study investigated the joint optimization of UAV trajectory and task allocation using a GNN within an actor-critic structure in order to train real-time actions. In contrast to previous treatises, where a GNN was used as an actor-network in reinforcement learning, Li *et al.* [72] utilized the GNN as a pre-trained network to harness the associated network feature correlations.

The application of GNNs in MEC-based IoT scenarios extends to specific use cases such as transportation. In [73], [74], the authors studied the task offloading problem in the Internet of Vehicles (IoV) utilizing edge servers. Both [73] and [74] utilized a graph-weighted convolution network (GWCN) for predicting the traffic flow based on the connectivity and distance relations between road segments. This information was then used for optimizing the edge resources within each region using a deep deterministic policy gradient (DDPG) approach. Similarly, Zhou *et al.* [74] introduced a computation offloading method incorporating demand prediction and reinforcement learning, using an STGNN for accurate predictions. In maritime IoT applications, Liu *et al.* [75] proposed a so-called Spatio-Temporal Multigraph Convolutional Network (STMGCN) for vessel trajectory prediction. This approach uses three distinct graphs based on social force, time to closest approach, and the size of surrounding vessels, demonstrating robust performance in predicting future vessel positions.

Apart from transportation, GNNs have also been applied in other areas, such as healthcare [76] and smart home systems [77]. Fei *et al.* [76] introduced the so-called MedGCN system, which utilizes IoT edge computing for real-time analysis of patient data. A novel graph convolutional network is harnessed by the MedGCN

system for predicting and diagnosing occlusive vascular diseases. The authors also considered patient privacy; therefore, this framework has a high potential. Sun *et al.* [77] proposed an edge gateway, which is an important intermediary between edge computing and IoT devices for intrusion detection in smart home applications. Briefly, the graph-type network traffic is fed into the proposed RF-GraphSAGE model in order to predict attack types along the edge between devices. Tang *et al.* [78] considered various Cloud-Edge Industrial Internet of Things (IIoT) scenarios, where anomalies happen more often when users generate service function chains (SFCs). They proposed a distributed knowledge distillation framework for time-series anomaly detection. In their teacher model, the authors proposed to utilize spatial graph convolution for capturing spatial topology information in their SFC anomaly detection schemes.

- **URLLC:** By involving the computational efficiency of GNNs, researchers have explored their potential in accelerating the computational process to meet the stringent latency requirements of URLLC applications. For example, in [79], Liu *et al.* minimized the packet loss probability by harnessing a mechanism that transmits multiple copies of a packet without waiting for acknowledgment from the receiver, thereby enhancing reliability. To determine the optimal number of slots reserved for each packet and the number of repetitions, a pair of cascaded random-edge GNN networks (REGNN) was constructed. The first REGNN will learn the traffic state, the network state, and the channel state information in support of determining the number of slots for each packet. The second REGNN utilizes the results from the first REGNN and the network state to predict the most appropriate number of repetitions.

In [80], Jiaqi *et al.* aimed for maximizing the success probability of URLLC data transmissions by formulating the resource allocation problem as a Markov decision process. They used a reinforcement learning framework along with a GraphSAGE encoder to extract networking information and feed it into the actor-critic network for decision-making. In [81], Liu *et al.* proposed a user association solution employing edge-wise gated GNNs (EG-GNN) for modeling the network as a bipartite graph of the BS and IoT devices. The BS nodes included estimated collision and delay violation probabilities, while the UE nodes had packet loss probabilities. The EG-GNN predicted the most appropriate gate values for the device-BS connections, with the devices selecting the particular gate promising the most beneficial association. As a further advance, Gu *et al.* [82] studied a massive URLLC (mURLLC) relying on multiple transmit antennas, and aiming for minimizing the decoding error probability of the worst link in their beamforming design. The mURLLC network considered was represented by a fully connected graph, where each communication link corresponds to a node in the graph, and the interference



link is represented by an edge. The authors proposed a distributed GNN for a mURLLC system, allowing each node to determine its policy based solely on the channel state information gathered from the previous frame. Accordingly, the system can reduce both the signaling overhead and the computational delay by updating graph embeddings based on the correlation of CSI between two consecutive frames, rather than harnessing multiple updates within the same frame, as in previous GNN models.

### 3) Challenges and future directions

One of the key challenges is the heterogeneity of both the IoT networks and of the additional infrastructure, such as the associated MEC and satellites. This further complicates prediction and optimization, because each entity requires specific resource allocation strategies. Secondly, NG-IoT networks tend to rely on dynamic resource allocation. The complexity increases in the face of multiple constraints, such as power, bandwidth, and interference, which makes the problem harder to represent as a standard graph problem. Each technology requires careful consideration of the unique characteristics of the network, such as the spatial correlation experienced by massive MIMO, the dynamic channel conditions of THz, or the strict latency and reliability requirements of URLLC communication. These constraints must be incorporated into the GNN models for ensuring accurate and efficient resource allocation across different entities, which requires novel methods for graph representation and message passing.

Additionally, the scalability of GNNs becomes critical, since all these technologies involve a large number of network entities, such as numerous antennas in massive MIMO schemes, reflecting elements in RISs, or other devices in satellite and THz communication systems. Managing these vast networks in the presence of complex interdependencies challenges GNN models, which must balance the computational efficiency vs. the need to capture detailed spatial and temporal correlations. Future research should focus on developing scalable GNN architectures capable of handling larger graphs and integrating techniques like graph partitioning, hierarchical GNNs, and distributed learning for ensuring that GNN-based models succeed in handling the complex constraints of these massive networks effectively.

*Open Question 4: How Can GNNs Enhance Integrity, Security, and Scalability Along with Blockchain for IoT Systems?*

#### 1) Background:

The blockchain concept has emerged as a powerful solution for addressing security and privacy challenges in IoT systems, thanks to its decentralization, traceability, trustworthiness, and immutability [152]. These features make blockchain an ideal candidate for enhancing security in IoT networks, which are increasingly vulnerable to attacks and privacy breaches. As shown in Fig. 10, the blockchain provides a flexible framework for secure IoT applications, allowing users to control connection permissions for IoT devices, base stations, and satellites, enabling trusted data exchange. However, leveraging

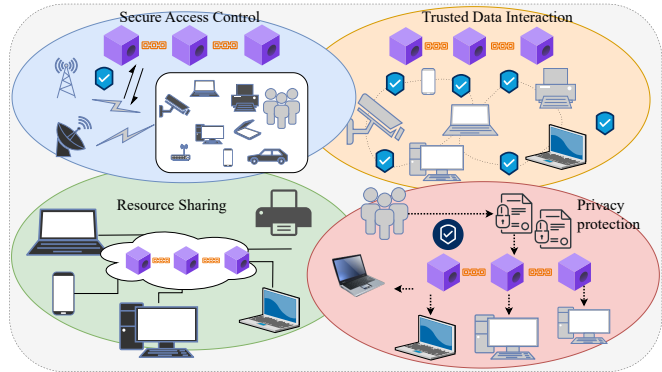


Fig. 10: Blockchain for NG-IoT networks.

blockchain in IoT environments also presents several challenges, including their scalability and limited computational resources.

#### 2) State-of-the-art:

GNNs have been explored as a solution to address these challenges in blockchain-based IoT systems [84], [85], [128]. In [128], Cai *et al.* introduced a technique termed as GTx-Chain, which is a secure IoT smart blockchain framework based on GNNs. To elaborate a little further, after collecting data, the blockchain data structure is exploited for eliminating unnecessary data. At the blockchain nodes, a GNN model is utilized to learn as well as maintain the information on the blockchain and the information stored in the so-called InterPlanetary File System. For the graph represented, each block is treated as an object, and the connection between blocks represents the edge. Both the computational resources and the data harnessed for training the GNN are allocated based on the nodes' workload. Kim *et al.* [84] focused their attention on transaction exchanges between blockchain network nodes in IoT environments. A GNN was designed for node classification, determining whether nodes should spread, skip, or specific activate transactions, thus facilitating efficient distributed applications across blockchain networks.

As a further development, Ziyu *et al.* [85] designed a decentralized blockchain-aided system for maintaining data privacy in health applications. Their solution, termed as Guard-Health, combines blockchain and smart contracts for achieving secure data storage and sharing. As shown in the lower-right quadrant of Fig. 10, blockchain allows users to encrypt their data and grant access only to authorized institutions with their permission. The authors represented the network by an undirected graph having  $N$  nodes, including patient nodes, institute nodes, and cloud service providers, where the nodes and edges connected them. The nodes have different features trust assessment mechanism. The GNN model was proposed for malicious node detection in order to reduce transactions with nodes, which are eventually removed from the network. These studies highlight the potential of GNNs in addressing the unique challenges of integrating blockchains into IoT systems for improving their security, scalability, and efficiency across a range of applications.

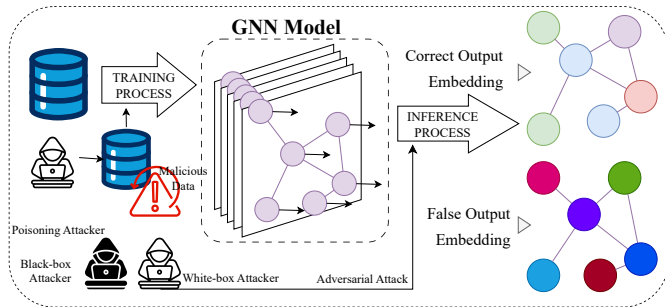


Fig. 11: Adversarial attack applied into GNNs.

### 3) Challenges and future directions:

Despite these advances, numerous challenges remain in applying GNNs to the blockchain-aided IoT. The large scale and extreme heterogeneity of IoT networks require more scalable and computationally efficient GNN architectures. The integration of hybrid storage mechanisms, as highlighted in [128], points toward reducing on-chain storage load, but significant computational and communication burdens still persist. Again, improving the privacy and security of GNN-based blockchain solutions is a key concern, particularly in environments having constrained resources, where computational capabilities are limited. Future research should focus on developing lightweight GNN models capable of handling large-scale blockchain data, while incorporating robust privacy-preserving techniques, such as zero-knowledge proofs [153], to ensure trust and data integrity in decentralized IoT networks.

## IV. ADVERSARIAL ATTACKS AND DEFENSE MECHANISMS CONCEIVED FOR GNN-BASED NG-IoT NETWORKS

In this section, we address a pair of critical questions: Open Question 5 focuses on the nature of adversarial attacks targeting GNN-based systems, while Open Question 6 explores defense techniques designed for safeguarding these systems. We commence by examining how adversarial attacks exploit vulnerabilities in GNN models within NG-IoT networks, targeting both homogeneous GNNs (HoGNNs) and heterogeneous GNNs (HeGNNs). These attacks can severely impact the performance and security of systems in applications such as smart cities, autonomous transportation, and healthcare. Next, Open Question 6 explores defense mechanisms that have been developed for countering these attacks, enhancing both the robustness and reliability of GNN-based systems. Finally, we review the latest strategies of adversarial defense and provide insights into future research directions for securing GNNs in the complex dynamic environments of NG-IoT networks.

*Open Question 5: How Do Adversarial Attacks Exploit Vulnerabilities in GNN-Based NG-IoT Networks?*

### 1) Background:

Graph neural networks have become pivotal in enhancing the performance of NG-IoT networks across various domains, including smart cities, healthcare, autonomous transportation, and communication systems relying on massive MIMO schemes, RIS, and URLLC. Despite having numerous benefits, GNNs are vulnerable to adversarial attacks, when

malicious actors introduce subtle perturbations into the data to manipulate the model's output. Fig. 11 outlines the process of adversarial attacks on GNNs, showcasing three main types: poisoning attacks, where malicious data is injected during training, and white-box and black-box attacks, which target the inference phase. It also highlights how these attacks can lead to incorrect embeddings and outputs, compromising the system's integrity. These attacks may erode the system's performance, compromise data integrity, and pose significant security risks, especially in critical applications like autonomous driving and industrial automation. The ability to defend GNN-based systems from such attacks is essential for ensuring secure and robust operations in complex and dynamic NG-IoT environments.

### 2) State-of-the-art:

- **Adversarial homogeneous graph neural network:** Ma *et al.* [86] proposed a novel setup for black-box attacks on GNNs representing one of the most practical approaches available at that time. By exploring the structural inductive biases of GNNs, which can be leveraged for adversarial black-box attacks, they introduced a practical greedy method for adversarial attacks targeting node classification tasks. In another study, Sharma *et al.* [87] proposed the so-called TANDIS algorithm in the context of the evasion attack-based targeted black box scenario. As shown in Fig. 11, these attacks target the training or inference process, leading to incorrect outputs and degraded performance. The figure highlights how attackers, including poisoning and inference-based (white-box and black-box), exploit vulnerabilities in the GNN pipeline. In the realm of HoGNNs, some authors have mitigated adversarial attacks [88], [89], [90], but their solutions often suffered from limitations in three key areas:

1. They focused on specific tasks.
2. The adversaries had knowledge about the GNN models.
3. Their methods rely heavily on node or edge labels.

The experiments showed that the TANDIS algorithm of [87] outperformed other evasion attack-based black-box algorithms, despite running approximately 1000 times faster and achieving up to 50% higher effectiveness in terms of Drop-in-Accuracy (DA%), which quantifies the percentage reduction in model accuracy before and after an attack. Despite being model-agnostic and task-independent, this algorithm highlights the vulnerability of HoGNNs [87] when faced with adversarial attacks, proving their susceptibility.

- **Adversarial heterogeneous graph neural network:** Sun *et al.* [91] introduced a hierarchical-learning-based method that enables adversaries to execute data poisoning attacks without relying on reinforcement learning techniques. They examined a novel graph node injection attack, which adversely impacts the accuracy of heterogeneous GNNs, even though it does not alter the link structure of the original graph. Additionally, their framework was tested on several real-world graph datasets, including

Cora [154], Citeseer [155], and Pubmed [154], and it was shown to gravely degrade the model accuracy. Additionally, H. Zhao *et al.* introduced the so-called HGAttack concept of [92], which operated under the gray-box scenario, where attackers have limited knowledge of the targeted models. Suffice to note that Sun *et al.* [91] conducted experiments under white-box scenarios, when attackers have full knowledge of the targeted models. The results acquired by HGAttack [92] showed that the proposed attack method was effective in gray-box evasion attacks in the context of the ACM, IMDB, and DBLP datasets. Therefore, H. Zhao *et al.* [92] showed the potential opportunities for applying adversarial attacks to mislead the heterogeneous GNN models in the real world black-box scenarios, when attackers only know the input and output of the targeted models.

### 3) Challenges and future directions:

Let us now discuss the family of adversarial attacks designed for damaging key GNN technologies. Firstly, we classify adversarial attacks into three levels: white, grey, and black. Briefly, in a white box scenario, the adversary has complete knowledge of the victim model, hence facilitating grave destruction even upon using straightforward algorithms like fast gradient descent or projected gradient descent. However, most real-world adversarial attacks occur in grey- or black-box scenarios, where the adversary's knowledge is limited or nonexistent. Nevertheless, even in these cases, there are potent techniques of attacking the model; a possible approach is to generate various white boxes to find the most suitable model similar to the targeted model. Notably, the adversary may be able to infer the model input and output, subject to the practical trade-offs between destruction performance and the computational complexity. For example, to generate adversarial perturbations for attacking model-based federated learning, the adversary may harness centralized or distributed attacks. Each family of attack has its advantages and disadvantages as regard to the potential resources required. Additionally, multiple attack algorithms may be combined. Overall, we must carefully guard against adversarial attacks.

*Open Question 6: What Are the Most Effective Defense Techniques Against Adversarial Attacks in GNN-Based NG-IoT Networks?*

#### 1) Background:

As GNNs become increasingly integral to NG-IoT networks, their vulnerability to adversarial attacks poses a significant threat to system reliability and security. Defending against such attacks is vital for ensuring the integrity and robustness of GNN-based systems, particularly in dynamic and distributed NG environments. Both homogeneous GNNs and heterogeneous GNNs are susceptible to these threats, necessitating a range of defense techniques tailored to their specific vulnerabilities. Fig. 12 demonstrates how these defenses protect the inference process, maintaining the accuracy and reliability of the system. Adversarial defenses focus on enhancing data during the training process through pre-training

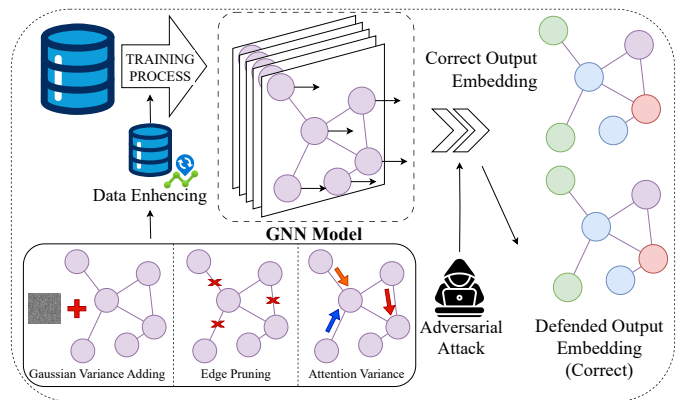


Fig. 12: Adversarial defense for GNN.

techniques. These approaches aim to mitigate the impact of adversarial attacks, ensuring the GNN model produces correct and secure embeddings despite malicious attempts.

#### 2) State-of-the-art:

- **Adversarial HoGNN defense:** To enhance the robustness of GCNs against adversarial attacks, Zhu *et al.* [93] proposed a novel model, where the hidden representations of nodes are modeled by Gaussian distributions. Their approach allows the model to mitigate the impact of adversarial structure alterations by incorporating these changes into the variances of the Gaussian distributions. Additionally, they introduced a variance-based attention mechanism for mitigating the impact of adversarial attacks within GCNs. This involves assigning particular weights to specific node neighborhoods based on their variances during the associated convolution operations. Their experimental results demonstrated that the proposed method was capable of significantly improving the robustness of GCNs, leading to enhanced node classification accuracy, as demonstrated with the aid of three benchmark datasets: Cora [154], Citeseer [155], and Pubmed [154].

As a further development, Zhang *et al.* [94] developed GNNGuard, a general defense algorithm for securing discrete graph structures. GNNGuard can be readily integrated into any GNN model. The primary objective of GNNGuard was to minimize the adverse effects of adversarial attacks by inferring the relationship between the node features and the graph structure. GNNGuard facilitates the robust propagation of the neural message by using revised edges, which was achieved by learning the most appropriate weights for linking the node, whereas pruning edges between irrelevant nodes. Experimental results derived for five types of GNNs showed that GNNGuard outperforms other existing defense strategies, including GNN-Jaccard [156], RobustGCN [93], and GNN-SVD [157], with an average improvement of 15.3% in the accuracy over the Cora [154], Citeseer [155], ogbn-arxiv [158], and DP datasets [159].

- **Adversarial HeGNN defense:** Zhang *et al.* in [95]

identified a pair of key issues contributing to the vulnerabilities of heterogeneous GNNs (HeGNNs): perturbation enlargement effect and soft attention mechanism. Their experiments, conducted across three specific types of HeGNNs, revealed that perturbation enlargement is less significant in meta-path aggregated graph neural networks and graph transformer networks than in heterogeneous graph attention networks. To improve the robustness of HeGNNs, Zhang *et al.* [95] proposed the concept of Robust Heterogeneous GNNs (RoHe), which may be used for purifying the node-level aggregation framework by harnessing an attention purifier against topology adversarial attacks. Another notable contribution is by Sang *et al.* [96], who introduced a model called AHGNNRec designed for robust recommendation systems based on HeGNNs. The authors applied adversarial training for optimizing hierarchical HeGNN layers by generating perturbed nodes from clean nodes in order to explore the weaknesses of their system. The experimental results based on YouTube and Yelp datasets illustrated the power of AHGNNRec.

### 3) Challenges and future directions:

While existing defense techniques offer promising solutions, there is still substantial room for improving their efficiency and robustness in NG-IoT networks. Adversarial training is a widely used method, which strengthens the models by exposing them to adversarial perturbations. Additionally, defensive distillation constitutes another potent method where knowledge is distilled from a complex model to a simpler one with the objective of enhancing the performance. Briefly, this approach seeks for creating a more robust classifier that is better prepared to guard against adversarial attacks by relying on precise gradient information. Nonetheless, this method's effectiveness may be compromised by attacks that do not depend on gradients or use gradient approximation techniques. A combination of defense methods can also be used for providing stronger protection against adversarial attacks, but this can make the model more complex and increase its carbon footprint.

## V. THE ROLE OF GNNs IN FUTURE INTEGRATED NETWORKS AND QUANTUM COMPUTING

In this section, we address a pair of critical questions related to the future of GNN applications in NG-IoT networks. Open Question 7 focuses on how GNNs enhance the performance and scalability of future integrated networks, such as SAGSINs and ISAC. Figure 13 illustrates an ISAC network and a SAGSIN, showcasing their integration within next-generation IoT networks supported by GNNs. These emerging technologies present unique opportunities for IoT networks, but also pose significant challenges for GNN-based solutions. Open Question 8 explores how GNNs can be combined with future computational technologies, including quantum computing, in order to support various NG applications. Quantum computing is maybe expected to revolutionize the computational landscape for NG systems by accelerating tasks such as encryption,

signal processing, and resource optimization. By integrating GNNs with quantum technologies, NG networks may realize more efficient and scalable solutions, further enhancing capabilities across different network layers and applications.

*Open Question 7: How Can GNNs Enhance the Performance and Scalability of Future Integrated Sensing and Communication and Space-Air-Ground-Sea Integrated Networks?*

### 1) Background:

- Integrated sensing and communications:** In the realm of NG networks, the concept of ISAC network emerges as a transformative technology, seamlessly integrating sensing capabilities with communication functionalities [160]. Leveraging the extensive coverage of the operational network infrastructures, ISAC becomes capable of providing sensing capabilities across the entire communications network at a modest additional cost, effectively using the network as a sensor array. As illustrated in the left sub-figure of Fig. 13, ISAC integrates vehicular networks, event monitoring, and smart device communication into a unified framework, ensuring efficient data collection and processing. Sensing is also capable of significantly enhancing communications by providing improved accuracy in localization, imaging, and environment reconstruction, leading to accurate beamforming and CSI tracking, thus improving the overall communication performance. ISAC exhibits several key characteristics, including dynamic resource allocation, heterogeneous data processing, and real-time adaptability, which are crucial for NG IoT applications. However, these demanding requirements also impose grave challenges and necessitate careful optimization and network design.
- Space-air-ground-sea integrated networks:** Space-Air-Ground-Sea Integrated Networks have emerged as an intriguing solution in NG-IoT research and development, extending connectivity to all corners of the Earth. This includes challenging environments such as mountainous regions, oceans, underwater areas, and space. SAGSINs achieve this by integrating satellite, aerial, terrestrial, and marine communication networks [2], [161]. The need for a comprehensive global coverage and the growing demands of NG-IoT applications drive the transition from SAGINs to SAGSINs. While a SAGIN covers the vast majority of terrestrial and aerial needs, incorporating sea-based communication networks into SAGSINs addresses the unique requirements of maritime and underwater environments. The right sub-figure of Fig. 13 illustrates how SAGSIN integrates satellite, aerial, terrestrial, and marine networks into a layered architecture. Each layer plays a specific role: satellites provide global connectivity, aerial networks enhance communication coverage and flexibility, terrestrial networks handle dense urban demands, and sea networks enable maritime and underwater communication. This extension ensures robust and reliable connectivity for maritime operations, deep-sea exploration, and remote IoT applications, thus creating

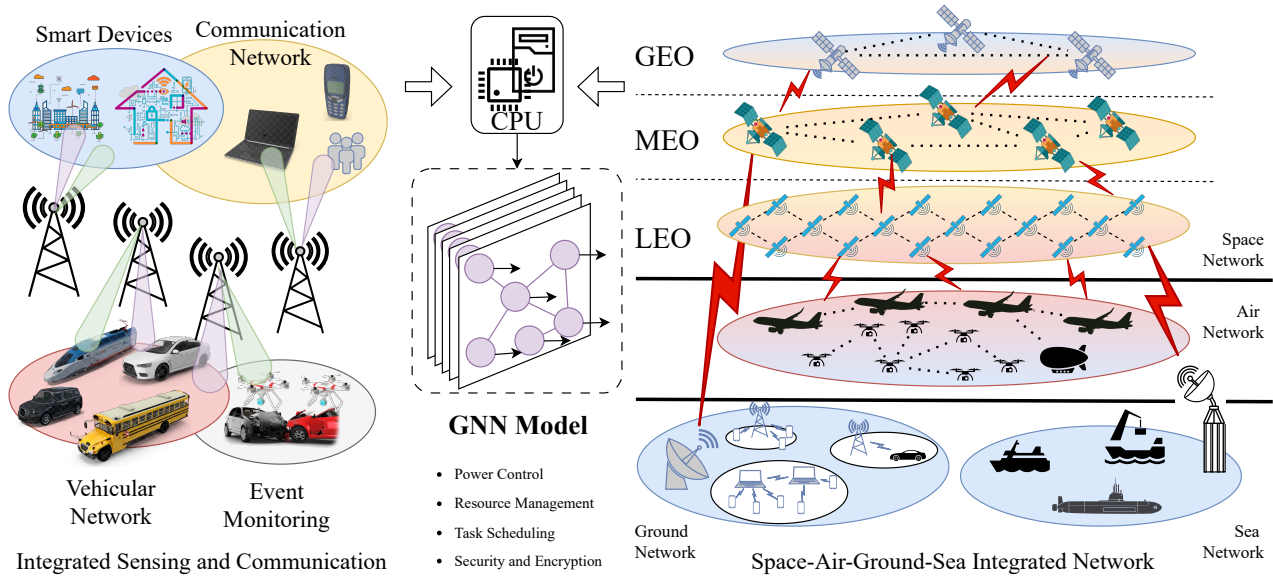


Fig. 13: Integrated Sensing and Communication (ISAC) and Space-Air-Ground-Sea Integrated Network (SAGSIN) in NG frameworks.

a truly global communication infrastructure.

## 2) State-of-the-art:

- Integrated communications and sensing:** In the context of ISAC, GNN is a strong candidate as a benefit of its capabilities in terms of modeling complex relationships and dependencies. GNNs can offer insights into network dynamics and resource allocation. In [97], Lee *et al.* proposed a framework for joint radar and communication in an intelligent vehicle based system, enabling high-performance radar detection, while balancing performance without extensive knowledge or specialized hardware. To solve the joint radar and communications problem, the authors designed a multi-agent deep reinforcement learning (DRL) algorithm combined with GNNs for learning inter-agent coordination. They demonstrated superior results compared to traditional algorithms dispensing with learning. Similarly, Li *et al.* [69] utilized GNNs to extract graph information from integrated sensing and communication in vehicle networks for deciding between the sensing and communication modes of the vehicles.
- Space-air-ground-sea integrated networks:** To fully harness the benefits of SAGSINs, leveraging GNNs has become an attractive proposition for researchers. A notable example is presented in [75], where Liu *et al.* considered a maritime IoT system that collects vessel trajectories using a satellite-terrestrial based automatic identification system. These trajectories were processed using the proposed framework for traffic management. The authors represented vessel trajectories through three distinct graphs: the social force graph, the time-to-closest-point-of-approach graph, and the vessel-size graph. Their solution learned these graphs for the sake of extract-

ing vessel features, which were then fed into a self-attentive temporal convolutional layer for vessel trajectory prediction. Beyond solving network management problems, GNNs can facilitate cross-domain integration of SAGSINs by modeling their interactions and optimizing their cooperation, resulting in seamless data transmission and interoperability across the entire network.

## 3) Challenges and future directions:

- Integrated sensing and communications:** The employment of the use of GNNs for ISAC in IoT networks is still in its infancy. ISAC presents a myriad of challenges, including scalability concerns, heterogeneous data processing, privacy and security issues associated with sensitive IoT data, and the need for robustness against adversarial attacks in dynamic network environments. Overcoming these challenges is paramount for unlocking the full potential of GNNs in ISAC-aided NG-IoT networks, enabling seamless integration of sensing and communication to facilitate transformative advances in IoT applications.
- Space-air-ground-sea integrated networks:** Despite the promising potential of GNNs in SAGSINs, numerous challenges remain. Firstly, guaranteeing the scalability of GNNs in SAGSINs is a grave challenge, given the dynamic nature of the network. Secondly, security vulnerabilities in SAGSINs pose significant challenges, especially in low Earth orbit satellite communication systems. Potential attacks may compromise the integrity and reliability of the network. Harnessing robust security measures for these satellite systems is critical for preventing disruptions and safeguarding data transmission [162]. Finally, conceiving a standardized protocol for integrating GNNs into SAGSINs is essential for ensuring

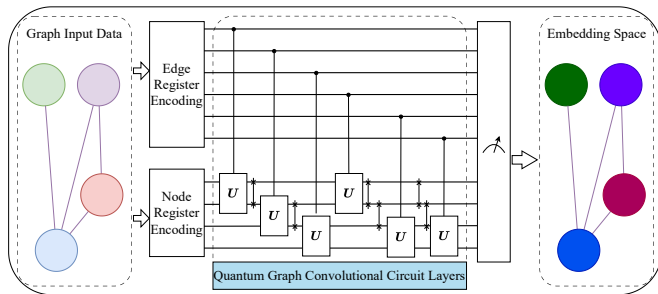


Fig. 14: Quantum GNN relying on a quantum graph convolutional layer circuit, where  $U$  is a unitary operator.

that different systems and technologies can work together seamlessly.

*Open Question 8: How Can GNNs and Future Computational Technologies, Like Quantum Computing, Work Together to Enhance the Capabilities of NG-IoT Networks?*

### 1) Background:

Quantum computing exploits the principles of quantum mechanics to solve complex problems at a potentially lower number of cost-function evaluations than classical computers. In contrast to classical bits, which represent information as either 0 or 1, qubits can exist in a superposition of both states simultaneously. This capability of processing multiple possibilities simultaneously gives quantum computing a distinct edge over classical computers for certain problems. While classical computing requires performing a new calculation each time a variable changes, yielding a single result, quantum computing is capable of exploring the entire solution space in parallel. The advanced computational capability of quantum computing makes it a promising solution for wireless communication applications, where classical optimization methods struggle with scalability.

Recent research has increasingly focused on combining the strengths of quantum computing with advanced classical machine learning algorithms, giving rise to the interdisciplinary field of quantum machine learning (QML) [98], [99], [163], [164]. An area of particular interest is the integration of quantum computing with GNNs [100]. Although GNNs excel at processing graph-structured data, they face scalability and computational challenges for large-scale graphs, leading to high training and inference costs [165], [166]. To address these limitations, researchers have developed quantum graph neural networks (QGNNs), which combine the structural advantages of GNNs with the computational power of quantum computing.

### 2) State-of-the-art:

The integration of quantum computing with GNNs involves designing quantum circuits that emulate the layers of a GNN, particularly the message-passing mechanism [101]. Fig. 14 illustrates the architecture of a QGNNs that relies on a quantum graph convolutional layer circuit. The process begins with the encoding of graph input data, where node and edge features are transformed into quantum states through

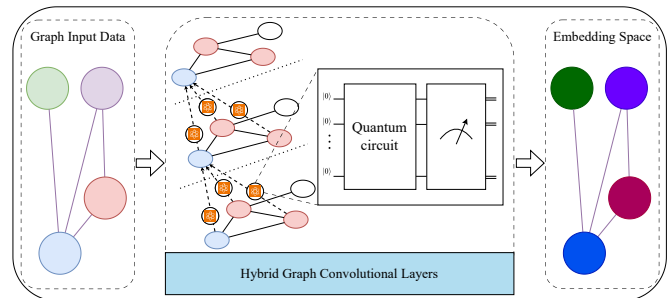


Fig. 15: Hybrid quantum GNN.

the node register encoding and edge register encoding blocks. These encoded quantum states are then processed through layers of quantum gates, represented by unitary operators ( $U$ ), within the quantum graph convolutional layers. By leveraging quantum properties like superposition and entanglement, the QGNN efficiently represents the relationships between nodes in the graph. Moreover, the adjacency matrix of a graph, which defines node connections, can be mirrored by the entanglement patterns between qubits, potentially enabling a parallelized representation of the graph structure.

Another promising scheme is constituted by the hybrid quantum graph neural network (HQGNN), which replaces the classical MLP in GNNs by quantum neural networks (QNNs) [102]. In details, as illustrated in Fig. 15, the HQGNN begins with graph input data, which is processed through hybrid graph convolutional layers that combine classical and quantum components. The quantum circuit performs updates on quantum states during training, effectively encoding node and edge relationships into the embedding space. By employing variational quantum circuits (VQC), QNNs are capable of facilitating quantum state updates during training, allowing for more efficient solution space exploration, while reducing the parameters and computational resources for large-scale graphs. This hybrid quantum-classical approach allows for more efficient exploration of the solution space than classical DNNs, hence reducing both the number of parameters and the computational resources required for processing large-scale graphs. By incorporating quantum circuits within the DQN, the computationally intensive parts of GNNs can be offloaded to quantum hardware, while the rest of the GNN relies on classical processors. This hybrid quantum-classical approach offloads computationally intensive tasks to quantum hardware, leaving the remaining calculations for classical processors, making it ideal for applications like NG networks. These include optimizing resource allocation, dynamic slicing, and traffic management. The simulated results presented in Fig. 8 highlighted the potential of the proposed hybrid quantum GNN. This approach demonstrates the potential of hybrid quantum GNNs and paves the way for future advances.

### 3) Challenges and future directions:

QGNNs hold promising potential in terms of addressing the key challenges of NG networks, but they also face limitations in the era of noisy intermediate-scale quantum (NISQ) devices. At the current state of quantum computing, these

NISQ devices have a limited qubit and significant quantum domain impairments. Naturally, the performance of a quantum computer depends on three key factors: scale, fidelity, and speed [167]. **Scale** refers to the number of qubits available in the quantum computer, which determines the dimension of the problem it can solve. **Fidelity** represents the level of quantum impairments in a quantum computer [168]. The so-called quantum volume characterizes the dimensions of quantum circuits that can be effectively run on a quantum computer, providing insight into the practical limits of these devices [169]. **Speed**, quantified in terms of the number of circuit layer operations per second (CLOPS), indicates the computational efficiency of quantum circuits [167]. Accordingly, implementing QGNNs on NISQ devices faces challenges such as representing high-dimensional problems using quantum circuits limited by the scale and quality of current quantum hardware [170]. Beyond optimization, QGNNs can significantly enhance the security and privacy of communications in NG-IoT networks by incorporating quantum cryptography. This would enable unbreakable encryption methods, providing robust defenses against sophisticated cyber threats. Quantum key distribution and quantum secure direct communications are already quite mature [171]–[173], but their standardization requires substantial future efforts.

## VI. GENERIC DESIGN GUIDELINES

In order to design an efficient GNN model for next-generation IoT networks, the following design guidelines may be considered:

- **Task specific design:** GNN models are highly effective for node and edge-level tasks, such as user association, resource allocation, and network routing, providing precise predictions and improved network performance. For larger-scale problems, graph-level tasks offer a holistic view of the network, capable of optimizing, for example, throughput and task offloading in complex environments like edge computing.
- **Ensuring effective graph representation and information propagation:** The design has to guarantee that the GNN model accurately captures the underlying structure and relationships within a network, reflecting the network’s topological and functional characteristics. The model should effectively propagate information across the graph, ensuring that all important connections and dependencies are learned. Techniques such as attention mechanisms, multi-hop message passing, and edge feature enhancement can help ensure that the GNN accurately captures both local and global relationships.
- **Scalability of GNN models:** When designing GNNs for NG IoT networks, ensuring scalability is critical for efficiently handling large and dynamically evolving graph structures. GNNs must be capable of processing vast, evolving networks having numerous nodes and edges, while minimizing both the computational and memory costs. Approaches such as partitioning large graphs into smaller subgraphs or leveraging hierarchical GNN models

can help scale solutions, while maintaining accuracy. Moreover, ensuring that the GNN models can generalize across various network sizes without performance degradation is essential for real-time network applications.

- **Balancing performance and computational complexity:** The objective is to design lightweight GNNs imposing a computational overhead, while maintaining high performance. Incorporating quantum computing has the potential of enhancing efficiency by offloading computationally intensive tasks to quantum circuits, in large-scale graphs. Besides, the depth of the GNN model must be carefully designed to strike a balance between achieving node feature uniqueness and avoiding over-smoothing.
- **Security and robustness:** It is vital to incorporate adversarial defense mechanisms, such as adversarial training or hybrid defense techniques for ensuring robustness in critical applications like healthcare or autonomous vehicles.

## VII. CONCLUSION

A critical appraisal of the application of Graph Neural Networks (GNNs) in NG-IoT networks was presented. We commenced by introducing the family of GNN paradigms and clarifying the roles and advantages of node, edge, and graph-level tasks in addressing wireless networking challenges. Through practical use cases and examples, we demonstrated how each task level can be effectively applied for improving problem-solving efficiency across various NG-IoT scenarios. We also examined the application of GNNs to key NG technologies, including massive MIMO schemes, RISs, satellites, THz, MEC, and URLLC solutions, highlighting their capability to circumvent the limitations of traditional methods. Furthermore, we explored the integration of GNNs with future technologies, including integrated sensing and communication, space-air-ground-sea integrated networks, and quantum computing, showcasing their potential to enhance NG-IoT networks. Additionally, we addressed a range of critical security concerns by discussing adversarial attacks on GNN-based systems and by appraising the family of effective defense strategies. In conclusion, our findings have emphasized the transformative potential of GNNs in optimizing, scaling, and securing NG-IoT networks, laying the groundwork for future research in this rapidly evolving field.

## REFERENCES

- [1] J. Lin, W. Yu, N. Zhang, X. Yang, H. Zhang, and W. Zhao, “A survey on Internet of Things: Architecture, enabling technologies, security and privacy, and applications,” *IEEE Internet of Things J.*, vol. 4, no. 5, pp. 1125–1142, Mar. 2017.
- [2] M. Jahanbakht, W. Xiang, L. Hanzo, and M. Rahimi Azghadi, “Internet of Underwater Things and big marine data analytics—a comprehensive survey,” *IEEE Commun. Surv. Tutor.*, vol. 23, no. 2, pp. 904–956, Jan. 2021.
- [3] D. C. Nguyen, M. Ding, P. N. Pathirana, A. Seneviratne, J. Li, D. Niyato, O. Dobre, and H. V. Poor, “6G Internet of Things: A comprehensive survey,” *IEEE Internet of Things J.*, vol. 9, no. 1, pp. 359–383, Aug. 2022.
- [4] E. W. Dijkstra, “A note on two problems in connexion with graphs,” *Numer. Math.*, vol. 1, no. 1, p. 269–271, Dec. 1959. [Online]. Available: <https://doi.org/10.1007/BF01386390>

- [5] L. C. Freeman, "A set of measures of centrality based on betweenness," *Sociometry*, vol. 40, no. 1, pp. 35–41, 1977. [Online]. Available: <http://www.jstor.org/stable/3033543>
- [6] M. Fiedler, "Algebraic connectivity of graphs," *Czechoslovak Mathematical Journal*, vol. 23, no. 2, pp. 298–305, 1973. [Online]. Available: <http://eudml.org/doc/12723>
- [7] D. Cvetkovic, M. Doob, and H. Sachs, *Spectra of Graphs: Theory and Application*, ser. Pure and applied mathematics: A series of monographs and textbooks. Academic Press, 1980. [Online]. Available: <https://books.google.co.kr/books?id=n-7uAAAAMAAJ>
- [8] M. Gori, G. Monfardini, and F. Scarselli, "A new model for learning in graph domains," in *Proc. 2005 IEEE Int. Joint Conf. Neural Netw.*, vol. 2, Aug. 2005, pp. 729–734, vol. 2.
- [9] B. Perozzi, R. Al-Rfou, and S. Skiena, "Deepwalk: Online learning of social representations," in *Proceedings of the 20th ACM SIGKDD international conference on Knowledge discovery and data mining*, vol. 2. ACM, Aug. 2014, p. 701–710. [Online]. Available: <http://dx.doi.org/10.1145/2623330.2623732>
- [10] T. N. Kipf and M. Welling, "Semi-supervised classification with graph convolutional networks," 2017. [Online]. Available: <https://arxiv.org/abs/1609.02907>
- [11] P. Velickovic, G. Cucurull, A. Casanova, A. Romero, P. Lio, and Y. Bengio, "Graph attention networks," 2018. [Online]. Available: <https://arxiv.org/abs/1710.10903>
- [12] G. Verdon, T. McCourt, E. Luzhnica, V. Singh, S. Leichenauer, and J. Hidary, "Quantum graph neural networks," 2019. [Online]. Available: <https://arxiv.org/abs/1909.12264>
- [13] Z. Liwen, F. Qamar, M. Liaqat, M. Nour Hindia, and K. Akram Zainol Ariffin, "Toward efficient 6G IoT networks: A perspective on resource optimization strategies, challenges, and future directions," *IEEE Access*, vol. 12, pp. 76 606–76 633, May. 2024.
- [14] M. R. Mahmood, M. A. Matin, P. Sarigiannidis, and S. K. Goudos, "A comprehensive review on artificial intelligence/machine learning algorithms for empowering the future IoT toward 6G era," *IEEE Access*, vol. 10, pp. 87 535–87 562, Aug. 2022.
- [15] M. Vaezi, A. Azari, S. R. Khosravirad, M. Shirvanimoghaddam, M. M. Azari, D. Chasaki, and P. Popovski, "Cellular, wide-area, and non-terrestrial IoT: A survey on 5G advances and the road toward 6G," *IEEE Commun. Surveys Tuts.*, vol. 24, no. 2, pp. 1117–1174, Feb. 2022.
- [16] M. A. Ferrag, O. Friha, B. Kantarci, N. Tihanyi, L. Cordeiro, M. Deb-bah, D. Hamouda, M. Al-Hawawreh, and K.-K. R. Choo, "Edge learning for 6G-enabled Internet of Things: A comprehensive survey of vulnerabilities, datasets, and defenses," *IEEE Commun. Surveys Tuts.*, vol. 25, no. 4, pp. 2654–2713, Sep. 2023.
- [17] A. Salh, L. Audah, N. S. M. Shah, A. Alhammedi, Q. Abdullah, Y. H. Kim, S. A. Al-Gailani, S. A. Hamzah, B. A. F. Esmail, and A. A. Alhammedi, "A survey on deep learning for ultra-reliable and low-latency communications challenges on 6G wireless systems," *IEEE Access*, vol. 9, pp. 55 098–55 131, Mar. 2021.
- [18] J. Wang, C. Jiang, H. Zhang, Y. Ren, K.-C. Chen, and L. Hanzo, "Thirty years of machine learning: The road to Pareto-optimal wireless networks," *IEEE Commun. Surv. Tutor.*, vol. 22, no. 3, pp. 1472–1514, Jan. 2020.
- [19] G. Dong, M. Tang, Z. Wang, J. Gao, S. Guo, L. Cai, R. Gutierrez, B. Campbell, L. E. Barnes, and M. Boukhechba, "Graph neural networks in IoT: A survey," *ACM Trans. Sen. Netw.*, vol. 19, no. 2, Apr. 2023. [Online]. Available: <https://doi.org/10.1145/3565973>
- [20] Y. Shen, J. Zhang, S. H. Song, and K. B. Letaief, "Graph neural networks for wireless communications: From theory to practice," *IEEE Trans. Wireless Commun.*, vol. 22, no. 5, pp. 3554–3569, 2023.
- [21] M. Lee, G. Yu, H. Dai, and G. Y. Li, "Graph neural networks meet wireless communications: Motivation, applications, and future directions," *IEEE Wireless Commun.*, vol. 29, no. 5, pp. 12–19, Oct. 2022.
- [22] A. Ivanov, K. Tonchev, V. Poulkov, A. Manolova, and N. N. Neshov, "Graph-based resource allocation for integrated space and terrestrial communications," *Sensors*, vol. 22, no. 15, Aug. 2022. [Online]. Available: <https://www.mdpi.com/1424-8220/22/15/5778>
- [23] P. Tam, I. Song, S. Kang, S. Ros, and S. Kim, "Graph neural networks for intelligent modelling in network management and orchestration: A survey on communications," *Electronics*, vol. 11, no. 20, Sep. 2022. [Online]. Available: <https://www.mdpi.com/2079-9292/11/20/3371>
- [24] J. Suarez-Varela, P. Almasan, M. Ferriol-Galmes, K. Rusek, F. Geyer, X. Cheng, X. Shi, S. Xiao, F. Scarselli, A. Cabellos-Aparicio, and P. Barlet-Ros, "Graph neural networks for communication networks: Context, use cases and opportunities," *IEEE Network*, vol. 37, no. 3, pp. 146–153, Aug. 2023.
- [25] S. K. Moorthy and J. Jagannath, "Survey of graph neural network for Internet of Things and NextG networks," 2024. [Online]. Available: <https://arxiv.org/abs/2405.17309>
- [26] Y. Zou, J. Zhu, X. Wang, and L. Hanzo, "A survey on wireless security: Technical challenges, recent advances, and future trends," *Proc. IEEE*, vol. 104, no. 9, pp. 1727–1765, May. 2016.
- [27] T. M. Hoang, A. Vahid, H. D. Tuan, and L. Hanzo, "Physical layer authentication and security design in the machine learning era," *IEEE Commun. Surv. Tutor.*, vol. 26, no. 3, pp. 1830–1860, Feb. 2024.
- [28] J. Zhang, G. Li, A. Marshall, A. Hu, and L. Hanzo, "A new frontier for IoT security emerging from three decades of key generation relying on wireless channels," *IEEE Access*, vol. 8, pp. 138 406–138 446, Jul. 2020.
- [29] W. Azizian and M. Lelarge, "Expressive power of invariant and equivariant graph neural networks," 2021. [Online]. Available: <https://arxiv.org/abs/2006.15646>
- [30] J. Zhou, G. Cui, S. Hu, Z. Zhang, C. Yang, Z. Liu, L. Wang, C. Li, and M. Sun, "Graph neural networks: A review of methods and applications," *AI Open*, vol. 1, pp. 57–81, 2020. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S2666651021000012>
- [31] S. Wu, F. Sun, W. Zhang, X. Xie, and B. Cui, "Graph neural networks in recommender systems: A survey," *ACM Comput. Surv.*, vol. 55, no. 5, dec 2022. [Online]. Available: <https://doi.org/10.1145/3535101>
- [32] H. Yuan, H. Yu, S. Gui, and S. Ji, "Explainability in graph neural networks: A taxonomic survey," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 45, no. 5, pp. 5782–5799, Sep. 2023.
- [33] Z. Wu, S. Pan, F. Chen, G. Long, C. Zhang, and P. S. Yu, "A comprehensive survey on graph neural networks," *IEEE Trans. Neural Netw. Learn. Syst.*, vol. 32, no. 1, pp. 4–24, 2021.
- [34] D. Abode, R. Adeogun, and G. Berardinelli, "Power control for 6G industrial wireless subnetworks: A graph neural network approach," in *Proc. IEEE WCNC*, 2023, pp. 1–6.
- [35] B. Li, L.-L. Yang, R. G. Maunder, S. Sun, and P. Xiao, "Heterogeneous graph neural network for power allocation in multicarrier-division duplex cell-free massive MIMO systems," *IEEE Trans. Wireless Commun.*, vol. 23, no. 2, pp. 962–977, 2024.
- [36] M. Lee, G. Yu, and G. Y. Li, "Graph embedding-based wireless link scheduling with few training samples," *IEEE Trans. Wireless Commun.*, vol. 20, no. 4, pp. 2282–2294, 2021.
- [37] T. Chen, X. Zhang, M. You, G. Zheng, and S. Lambotaran, "A GNN-based supervised learning framework for resource allocation in wireless IoT networks," *IEEE Internet of Things J.*, vol. 9, no. 3, pp. 1712–1724, 2022.
- [38] Z. Wang, Y. Zhou, Y. Zou, Q. An, Y. Shi, and M. Bennis, "A graph neural network learning approach to optimize RIS-assisted federated learning," *IEEE Trans. Wireless Commun.*, vol. 22, no. 9, pp. 6092–6106, 2023.
- [39] S. Lyu, L. Peng, and S. Y. Chang, "Investigating large-scale RIS-assisted wireless communications using GNN," *IEEE Trans. Consum. Electron.*, pp. 1–1, 2024.
- [40] N. Zhao, A. Wu, Y. Pei, Y.-C. Liang, and D. Niyato, "Spatial-temporal aggregation graph convolution network for efficient mobile cellular traffic prediction," *IEEE Commun. Lett.*, vol. 26, no. 3, pp. 587–591, 2022.
- [41] J. Xiao, L. Yang, F. Zhong, X. Wang, H. Chen, and D. Li, "Robust anomaly-based insider threat detection using graph neural network," *IEEE Trans. Netw. Service Manage.*, vol. 20, no. 3, pp. 3717–3733, 2023.
- [42] T.-L. Huoh, Y. Luo, P. Li, and T. Zhang, "Flow-based encrypted network traffic classification with graph neural networks," *IEEE Trans. Netw. Service Manage.*, vol. 20, no. 2, pp. 1224–1237, 2023.
- [43] X. Liu, C. She, Y. Li, and B. Vucetic, "Edge-wise gated graph neural network for user association in massive URLLC," in *Proc. IEEE Globecom Workshops*, 2021, pp. 1–6.
- [44] Z. Sun, Y. Mo, and C. Yu, "Graph-reinforcement-learning-based task offloading for multiaccess edge computing," *IEEE Internet of Things J.*, vol. 10, no. 4, pp. 3138–3150, 2023.



- [45] Y. Peng, J. Guo, and C. Yang, "Learning resource allocation policy: Vertex-GNN or Edge-GNN?" *IEEE Trans. Mach. Learn. Commun. Netw.*, vol. 2, pp. 190–209, Jan. 2024.
- [46] Y. Wang, Y. Li, Q. Shi, and Y.-C. Wu, "ENGNN: A general edge-update empowered GNN architecture for radio resource management in wireless networks," *IEEE Trans. Wireless Commun.*, pp. 1–1, 2023.
- [47] S. Liu, J. Guo, and C. Yang, "Multidimensional graph neural networks for wireless communications," *IEEE Trans. Wireless Commun.*, pp. 1–1, 2023.
- [48] Y. Yang, D. Zou, and X. He, "Graph neural network-based node deployment for throughput enhancement," *IEEE Trans. Neural Netw. Learn. Syst.*, pp. 1–15, 2023.
- [49] Z. Wu, X. Wu, and Y. Long, "Multi-level federated graph learning and self-attention based personalized Wi-Fi indoor fingerprint localization," *IEEE Commun. Lett.*, vol. 26, no. 8, pp. 1794–1798, 2022.
- [50] G. Wang, P. Cheng, Z. Chen, B. Vucetic, and Y. Li, "Inverse reinforcement learning with graph neural networks for full-dimensional task offloading in edge computing," *IEEE Trans. Mobile Comput.*, pp. 1–18, 2023.
- [51] A. Asheralieva and D. Niyato, "Secure and efficient coded multi-access edge computing with generalized graph neural networks," *IEEE Trans. Mobile Comput.*, vol. 22, no. 9, pp. 5504–5524, 2023.
- [52] B. Li, L.-L. Yang, R. G. Maunder, S. Sun, and P. Xiao, "Heterogeneous graph neural network for power allocation in multicarrier-division duplex cell-free massive MIMO systems," *IEEE Trans. Wireless Commun.*, vol. 23, no. 2, pp. 962–977, Jun. 2023.
- [53] N. X. Tung, T. Van Chien, H. Q. Ngo, and W. J. Hwang, "Distributed graph neural network design for sum ergodic spectral efficiency maximization in cell-free massive MIMO," *IEEE Trans. Veh. Technol.*, pp. 1–6, Nov. 2024.
- [54] L. Salaun, H. Yang, S. Mishra, and C. S. Chen, "A GNN approach for cell-free massive MIMO," in *Proc. IEEE GLOBECOM*, Dec. 2022, pp. 3053–3058.
- [55] V. Ranasinghe, N. Rajatheva, and M. Latva-aho, "Graph neural network based access point selection for cell-free massive MIMO systems," in *Proc. IEEE GLOBECOM*, Dec. 2021, pp. 01–06.
- [56] T. V. Chien, H. A. Le, T. H. Tung, H. Q. Ngo, and S. Chatzinotas, "Joint power allocation and user scheduling in integrated satellite-terrestrial cell-free massive MIMO IoT systems," Jan. 2024.
- [57] L. Schynol and M. Pesavento, "Coordinated sum-rate maximization in multicell MU-MIMO with deep unrolling," *IEEE J. Sel. Areas Commun.*, vol. 41, no. 4, pp. 1120–1134, 2023.
- [58] S. Singh, A. Trivedi, and D. Saxena, "Channel estimation for intelligent reflecting surface aided communication via graph transformer," *IEEE Trans. Green Commun. Netw.*, pp. 1–1, Dec. 2023.
- [59] Z. Zhang, T. Jiang, and W. Yu, "Learning based user scheduling in reconfigurable intelligent surface assisted multiuser downlink," *IEEE J. Sel. Topics Signal Process.*, vol. 16, no. 5, pp. 1026–1039, May. 2022.
- [60] H. Cao, W. Zhu, W. Feng, and J. Fan, "Robust beamforming based on graph attention networks for IRS-assisted satellite IoT communications," *Entropy*, vol. 24, no. 3, Feb. 2022. [Online]. Available: <https://www.mdpi.com/1099-4300/24/3/326>
- [61] Y. Huang, D. Yang, B. Feng, A. Tian, P. Dong, S. Yu, and H. Zhang, "A GNN-enabled multipath routing algorithm for spatial-temporal varying LEO satellite networks," *IEEE Trans. Veh. Technol.*, pp. 1–15, Nov. 2023.
- [62] Y. Chen, H. Cao, Y. Zhou, Z. Liu, D. Chen, J. Zhao, and J. Shi, "A GCN-GRU based end-to-end LEO satellite network dynamic topology prediction method," in *Proc. IEEE WCNC*, Mar. 2023, pp. 1–6.
- [63] J. He, N. Cheng, Z. Yin, H. Zhou, C. Zhou, K. Aldubaihy, A. Alqasir, and X. S. Shen, "Load-aware network resource orchestration in LEO satellite network: A GAT-based approach," *IEEE Internet of Things J.*, pp. 1–1, Jan. 2024.
- [64] H. Wang, Y. Ran, L. Zhao, J. Wang, J. Luo, and T. Zhang, "GRouting: Dynamic routing for LEO satellite networks with graph-based deep reinforcement learning," in *Proc. Int. Conf. Hot Inf.-Centric Netw. (HotICN)*, 2021, pp. 123–128.
- [65] A. Asheralieva, D. Niyato, and X. Wei, "Ultrareliable low-latency slicing in space-air-ground multiaccess edge computing networks for next-generation Internet of Things and mobile applications," *IEEE Internet of Things J.*, vol. 11, no. 3, pp. 3956–3978, Jul. 2024.
- [66] K. Tekbilyk, G. K. Kurt, A. R. Ekti, and H. Yanikomeroglu, "Graph attention networks for channel estimation in RIS-assisted satellite IoT communications," Jul. 2022.
- [67] H. Zhang, X. Ma, X. Liu, L. Li, and K. Sun, "GNN-based power allocation and user association in digital twin network for the terahertz band," *IEEE J. Sel. Areas Commun.*, vol. 41, no. 10, pp. 3111–3121, Sep. 2023.
- [68] A. Mehrabian and V. W. Wong, "Joint spectrum, precoding, and phase shifts design for RIS-aided multiuser MIMO THz systems," *IEEE Trans. Commun.*, pp. 1–1, Mar. 2024.
- [69] X. Li, M. Chen, Y. Liu, Z. Zhang, D. Liu, and S. Mao, "Graph neural networks for joint communication and sensing optimization in vehicular networks," *IEEE J. Sel. Areas Commun.*, vol. 41, no. 12, pp. 3893–3907, Oct. 2023.
- [70] Z. Sun, Y. Mo, and C. Yu, "Graph-reinforcement-learning-based task offloading for multiaccess edge computing," *IEEE Internet of Things J.*, vol. 10, no. 4, pp. 3138–3150, Oct. 2021.
- [71] G. Wang, P. Cheng, Z. Chen, B. Vucetic, and Y. Li, "Inverse reinforcement learning with graph neural networks for full-dimensional task offloading in edge computing," *IEEE Trans. Mobile Comput.*, pp. 1–18, Oct. 2023.
- [72] K. Li, W. Ni, X. Yuan, A. Noor, and A. Jamalipour, "Deep-graph-based reinforcement learning for joint cruise control and task offloading for aerial edge Internet of Things (EdgeIoT)," *IEEE Internet of Things J.*, vol. 9, no. 21, pp. 21676–21686, Jun. 2022.
- [73] X. Xu, C. Yang, M. Bilal, W. Li, and H. Wang, "Computation offloading for energy and delay trade-offs with traffic flow prediction in edge computing-enabled IoV," *IEEE Trans. Intell. Transp. Syst.*, vol. 24, no. 12, pp. 15613–15623, Nov. 2023.
- [74] X. Zhou, M. Bilal, R. Dou, J. J. P. C. Rodrigues, Q. Zhao, J. Dai, and X. Xu, "Edge computation offloading with content caching in 6G-enabled IoV," *IEEE Trans. Intell. Transp. Syst.*, pp. 1–15, Jan. 2023.
- [75] R. W. Liu, M. Liang, J. Nie, Y. Yuan, Z. Xiong, H. Yu, and N. Guizani, "STMGCN: Mobile edge computing-empowered vessel trajectory prediction using spatio-temporal multigraph convolutional network," *IEEE Trans. Ind. Informat.*, vol. 18, no. 11, pp. 7977–7987, Apr. 2022.
- [76] F. Gao, Z. Xiao, S. Chen, R. Yu, and X. Li, "MedGCN: An IoT-edge thrombus graph convolutional network for accurate prediction and prescription diagnosis of vascular occlusive diseases from unstructured clinical reports," *Comput. Commun.*, vol. 214, pp. 123–135, Jan. 2024. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0140366423003924>
- [77] Z. Sun, J. Yu, and X. Liu, "Edge-gateway intrusion detection for smart home," in *Parallel and Distributed Computing, Applications and Technologies*, H. Takizawa, H. Shen, T. Hanawa, J. Hyuk Park, H. Tian, and R. Egawa, Eds. Cham: Springer Nature Switzerland, "Apr." 2023, pp. 123–135.
- [78] L. Tang, C. Xue, Y. Zhao, and Q. Chen, "Anomaly detection of service function chain based on distributed knowledge distillation framework in cloud-edge Industrial Internet of Things scenarios," *IEEE Internet of Things J.*, vol. 11, no. 6, pp. 10843–10855, Oct. 2023.
- [79] Y. Liu, C. She, Y. Zhong, W. Hardjawana, F.-C. Zheng, and B. Vucetic, "Graph neural networks for quality of service improvement in interference-limited ultra-reliable and low-latency communications," *IEEE Trans. Veh. Technol.*, vol. 73, no. 3, pp. 3718–3732, Oct. 2023.
- [80] R. Jiaqi, W. Jing, X. Wen, Z. Lu, and S. Zhao, "Scalable and efficient URLLC resource allocation based on offline graph reinforcement learning," in *Proc. Int. Conf. Artif. Intell. Inf. Commun. (ICAIC)*, Feb. 2024, pp. 348–353.
- [81] X. Liu, C. She, Y. Li, and B. Vucetic, "Edge-wise gated graph neural network for user association in massive URLLC," in *Proc. IEEE Globecom*, Dec. 2021, pp. 1–6.
- [82] Y. Gu, C. She, S. Bi, Z. Quan, and B. Vucetic, "Graph neural network for distributed beamforming and power control in massive URLLC networks," *IEEE Trans. Wireless Commun.*, pp. 1–1, Feb. 2024.
- [83] J. Cai, W. Liang, X. Li, K. Li, Z. Gui, and M. K. Khan, "GTxChain: A secure IoT smart blockchain architecture based on graph neural network," *IEEE Internet of Things J.*, vol. 10, no. 24, pp. 21502–21514, Jul. 2023.
- [84] J.-H. Kim, S. Lee, and S. Hong, "Autonomous operation control of IoT blockchain networks," *Electronics*, vol. 10, no. 2, Nov. 2021. [Online]. Available: <https://www.mdpi.com/2079-9292/10/2/204>
- [85] Z. Wang, N. Luo, and P. Zhou, "GuardHealth: Blockchain empowered secure data management and graph convolutional network

- enabled anomaly detection in smart healthcare,” *J. Parallel Distrib. Comput.*, vol. 142, pp. 1–12, Aug. 2020. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0743731519308470>
- [86] J. Ma, S. Ding, and Q. Mei, “Towards more practical adversarial attacks on graph neural networks,” *Adv. Neural Inf. Process. Syst.*, vol. 33, pp. 4756–4766, 2020.
- [87] K. Sharma, S. Verma, S. Medya, A. Bhattacharya, and S. Ranu, “Task and model agnostic adversarial attack on graph neural networks,” in *Proc. AAAI Conf. Artif. Intell.*, vol. 37, no. 12, 2023, pp. 15 091–15 099.
- [88] H. Dai, H. Li, T. Tian, X. Huang, L. Wang, J. Zhu, and L. Song, “Adversarial attack on graph structured data,” in *Proc. Int. Conf. Mach. Learn. (ICML)*. PMLR, 2018, pp. 1115–1124.
- [89] H. Chang, Y. Rong, T. Xu, W. Huang, H. Zhang, P. Cui, W. Zhu, and J. Huang, “A restricted black-box adversarial framework towards attacking graph embedding models,” in *Proc. AAAI Conf. Artif. Intell.*, vol. 34, no. 04, 2020, pp. 3389–3396.
- [90] B. Wang, T. Zhou, M. Lin, P. Zhou, A. Li, M. Pang, C. Fu, H. Li, and Y. Chen, “Evasion attacks to graph neural networks via influence function,” *arXiv preprint arXiv:2009.00203*, 2020.
- [91] Y. Sun, S. Wang, X. Tang, T.-Y. Hsieh, and V. Honavar, “Adversarial attacks on graph neural networks via node injections: A hierarchical reinforcement learning approach,” in *Proceedings of the Web Conference 2020*, 2020, pp. 673–683.
- [92] H. Zhao, Z. Zeng, Y. Wang, D. Ye, and C. Miao, “HGAttack: Transferable heterogeneous graph adversarial attack,” *arXiv preprint arXiv:2401.09945*, 2024.
- [93] D. Zhu, Z. Zhang, P. Cui, and W. Zhu, “Robust graph convolutional networks against adversarial attacks,” in *Proc. ACM SIGKDD Int. Conf. Knowl. Discov. Data Min.*, 2019, pp. 1399–1407.
- [94] X. Zhang and M. Zitnik, “Gnnguard: Defending graph neural networks against adversarial attacks,” *Adv. Neural Inf. Process. Syst.*, vol. 33, pp. 9263–9275, 2020.
- [95] M. Zhang, X. Wang, M. Zhu, C. Shi, Z. Zhang, and J. Zhou, “Robust heterogeneous graph neural networks against adversarial attacks,” in *Proc. ACM SIGKDD Int. Conf. Knowl. Discov. Data Min.*, vol. 36, no. 4, 2022, pp. 4363–4370.
- [96] L. Sang, M. Xu, S. Qian, and X. Wu, “Adversarial heterogeneous graph neural network for robust recommendation,” *IEEE Trans. Comput. Social Syst.*, vol. 10, no. 5, pp. 2660–2671, 2023.
- [97] J. Lee, Y. Cheng, D. Niyato, Y. L. Guan, and D. González G., “Intelligent resource allocation in joint radar-communication with graph neural networks,” *IEEE Trans. Veh. Technol.*, vol. 71, no. 10, pp. 11 120–11 135, Oct. 2022.
- [98] S.-G. Jeong, Q.-V. Do, H.-J. Hwang, M. Hasegawa, H. Sekiya, and W.-J. Hwang, “Hybrid quantum convolutional neural networks for UWB signal classification,” *IEEE Access*, vol. 11, pp. 113 726–113 739, 2023.
- [99] S.-G. Jeong, Q. V. Do, and W.-J. Hwang, “Short-term photovoltaic power forecasting based on hybrid quantum gated recurrent unit,” *ICT Express*, vol. 10, no. 3, pp. 608–613, 2024. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S2405959523001637>
- [100] G. Verdon, T. McCourt, E. Luzhnica, V. Singh, S. Leichenauer, and J. Hidayat, “Quantum graph neural networks,” *arXiv preprint arXiv:1909.12264*, 2019.
- [101] J. Zheng, Q. Gao, M. Ogorzalek, J. Lu, and Y. Deng, “A quantum spatial graph convolutional neural network model on quantum circuits,” *IEEE Trans. Neural Netw. Learn. Syst.*, pp. 1–15, Apr. 2024.
- [102] Y. Liao, X.-M. Zhang, and C. Ferrie, “Graph neural networks on quantum computers,” *arXiv preprint arXiv:2405.17060*, 2024.
- [103] S. He, S. Xiong, Y. Ou, J. Zhang, J. Wang, Y. Huang, and Y. Zhang, “An overview on the application of graph neural networks in wireless networks,” *IEEE Open J. Commun. Soc.*, vol. 2, pp. 2547–2565, Nov. 2021.
- [104] Y. Li, S. Xie, Z. Wan, H. Lv, H. Song, and Z. Lv, “Graph-powered learning methods in the Internet of Things: A survey,” *Mach. Learn. Appl.*, vol. 11, p. 100441, Mar. 2023. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S2666827022001165>
- [105] S. Pan, R. Hu, G. Long, J. Jiang, L. Yao, and C. Zhang, “Adversarially regularized graph autoencoder for graph embedding,” *arXiv preprint arXiv:1802.04407*, 2018.
- [106] C. Song, Y. Lin, S. Guo, and H. Wan, “Spatial-temporal synchronous graph convolutional networks: A new framework for spatial-temporal network data forecasting,” in *Proceedings of the AAAI conference on artificial intelligence*, vol. 34, no. 01, 2020, pp. 914–921.
- [107] O. Atkinson, A. Bhardwaj, C. Englert, V. S. Ngairangbam, and M. Spannowsky, “Anomaly detection with convolutional graph neural networks,” *Journal of High Energy Physics*, vol. 2021, no. 8, pp. 1–19, 2021.
- [108] Z. Fang, Q. Long, G. Song, and K. Xie, “Spatial-temporal graph ODE networks for traffic flow forecasting,” in *Proc. ACM SIGKDD Int. Conf. Knowl. Discov. Data Min.*, 2021, pp. 364–373.
- [109] S. Guo, Y. Lin, N. Feng, C. Song, and H. Wan, “Attention based spatial-temporal graph convolutional networks for traffic flow forecasting,” in *Proc Int AAAI Conf Weblogs Soc Media*, vol. 33, no. 01, 2019, pp. 922–929.
- [110] S. Lan, Y. Ma, W. Huang, W. Wang, H. Yang, and P. Li, “DSTAGNN: Dynamic spatial-temporal aware graph neural network for traffic flow forecasting,” in *International conference on machine learning*. PMLR, 2022, pp. 11 906–11 917.
- [111] C. Shan, Y. Shen, Y. Zhang, X. Li, and D. Li, “Reinforcement learning enhanced explainer for graph neural networks,” *Adv. Neural Inf. Process. Syst.*, vol. 34, pp. 22 523–22 533, 2021.
- [112] S. Munikoti, D. Agarwal, L. Das, M. Halappanavar, and B. Natarajan, “Challenges and opportunities in deep reinforcement learning with graph neural networks: A comprehensive review of algorithms and applications,” *IEEE Trans. Neural Netw. Learn. Syst.*, pp. 1–21, Jun. 2023.
- [113] P. Almasan, J. Suárez-Varela, K. Rusek, P. Barlet-Ros, and A. Cabellos-Aparicio, “Deep reinforcement learning meets graph neural networks: Exploring a routing optimization use case,” *Computer Communications*, vol. 196, pp. 184–194, 2022. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0140366422003784>
- [114] Z. Yao, J. Yu, J. Zhang, and W. He, “Graph and dynamics interpretation in robotic reinforcement learning task,” *Information Sciences*, vol. 611, pp. 317–334, 2022.
- [115] Y. Lu, Y. Chen, D. Zhao, and D. Li, “MGRL: Graph neural network based inference in a Markov network with reinforcement learning for visual navigation,” *Neurocomputing*, vol. 421, pp. 140–150, 2021.
- [116] S. Chen, J. Dong, P. Ha, Y. Li, and S. Labi, “Graph neural network and reinforcement learning for multi-agent cooperative control of connected autonomous vehicles,” *Comput.-Aided Civil Infrastruct. Eng.*, vol. 36, no. 7, pp. 838–857, 2021.
- [117] W. Fan, Y. Ma, Q. Li, J. Wang, G. Cai, J. Tang, and D. Yin, “A graph neural network framework for social recommendations,” *IEEE Trans. Knowl. Data Eng.*, vol. 34, no. 5, pp. 2033–2047, Jul. 2022.
- [118] R. Li, X. Yuan, M. Radfar, P. Marendy, W. Ni, T. J. O’Brien, and P. M. Casillas-Espinosa, “Graph signal processing, graph neural network and graph learning on biological data: A systematic review,” *IEEE Rev. Biomed. Eng.*, vol. 16, pp. 109–135, Oct. 2023.
- [119] S. Wu, F. Sun, W. Zhang, X. Xie, and B. Cui, “Graph neural networks in recommender systems: A survey,” *ACM Comput. Surv.*, vol. 55, no. 5, May. 2022. [Online]. Available: <https://doi.org/10.1145/3535101>
- [120] K. Xu, W. Hu, J. Leskovec, and S. Jegelka, “How powerful are graph neural networks?” 2019. [Online]. Available: <https://arxiv.org/abs/1810.00826>
- [121] Z. Wu, S. Pan, F. Chen, G. Long, C. Zhang, and P. S. Yu, “A comprehensive survey on graph neural networks,” *IEEE Trans. Neural Netw. Learn. Syst.*, vol. 32, no. 1, pp. 4–24, Mar. 2021.
- [122] K. Xu, H. Chen, S. Liu, P.-Y. Chen, T.-W. Weng, M. Hong, and X. Lin, “Topology attack and defense for graph neural networks: An optimization perspective,” 2019. [Online]. Available: <https://arxiv.org/abs/1906.04214>
- [123] M. Z. Chowdhury, M. Shahjalal, S. Ahmed, and Y. M. Jang, “6G wireless communication systems: Applications, requirements, technologies, challenges, and research directions,” *IEEE Open J. Commun. Soc.*, vol. 1, pp. 957–975, 2020.
- [124] W. Jiang, B. Han, M. A. Habibi, and H. D. Schotten, “The road towards 6G: A comprehensive survey,” *IEEE Open J. Commun. Soc.*, vol. 2, pp. 334–366, 2021.
- [125] Y. Shen, Y. Shi, J. Zhang, and K. B. Letaief, “Graph neural networks for scalable radio resource management: Architecture design and theoretical analysis,” *IEEE J. Sel. Areas Commun.*, vol. 39, no. 1, pp. 101–115, Jan. 2021.
- [126] D. Liu, L. Wang, Y. Chen, M. Elkashlan, K.-K. Wong, R. Schober, and L. Hanzo, “User association in 5G networks: A survey and an outlook,” *IEEE Commun. Surv. Tutor.*, vol. 18, no. 2, pp. 1018–1044, Jan. 2016.

- [127] H. Q. Ngo, A. Ashikhmin, H. Yang, E. G. Larsson, and T. L. Marzetta, "Cell-free massive MIMO versus small cells," *IEEE Trans. Wireless Commun.*, vol. 16, no. 3, pp. 1834–1850, Jan. 2017.
- [128] J. Cai, W. Liang, X. Li, K. Li, Z. Gui, and M. K. Khan, "GTxChain: A secure IoT smart blockchain architecture based on graph neural network," *IEEE Internet of Things J.*, vol. 10, no. 24, pp. 21 502–21 514, Jul. 2023.
- [129] H. Yan, A. Ashikhmin, and H. Yang, "A scalable and energy-efficient IoT system supported by cell-free massive MIMO," *IEEE Internet of Things J.*, vol. 8, no. 19, pp. 14 705–14 718, Apr. 2021.
- [130] B. M. Lee, "Cell-free massive MIMO for massive low-power Internet of Things networks," *IEEE Internet of Things J.*, vol. 9, no. 9, pp. 6520–6535, Sep. 2021.
- [131] M. Ke, Z. Gao, Y. Wu, X. Gao, and K.-K. Wong, "Massive access in cell-free massive MIMO-based Internet of Things: Cloud computing and edge computing paradigms," *IEEE J. Sel. Areas Commun.*, vol. 39, no. 3, pp. 756–772, Aug. 2021.
- [132] H. Q. Ngo, A. Ashikhmin, H. Yang, E. G. Larsson, and T. L. Marzetta, "Cell-free massive MIMO versus small cells," *IEEE Trans. Wireless Commun.*, vol. 16, no. 3, pp. 1834–1850, Jan. 2017.
- [133] Y. Liu, X. Liu, X. Mu, T. Hou, J. Xu, M. Di Renzo, and N. Al-Dhahir, "Reconfigurable intelligent surfaces: Principles and opportunities," *IEEE Commun. Surveys Tuts.*, vol. 23, no. 3, pp. 1546–1577, May. 2021.
- [134] T. Van Chien, H. Q. Ngo, S. Chatzinotas, M. Di Renzo, and B. Ottersten, "Reconfigurable intelligent surface-assisted cell-free massive MIMO systems over spatially-correlated channels," *IEEE Trans. Wireless Commun.*, vol. 21, no. 7, pp. 5106–5128, Dec. 2022.
- [135] K. K. Nguyen, A. Masaracchia, V. Sharma, H. V. Poor, and T. Q. Duong, "RIS-assisted UAV communications for IoT with wireless power transfer using deep reinforcement learning," *IEEE J. Sel. Topics Signal Process.*, vol. 16, no. 5, pp. 1086–1096, May. 2022.
- [136] B. Sagir, E. Aydin, and H. Ilhan, "Deep-learning-assisted IoT-based RIS for cooperative communications," *IEEE Internet of Things J.*, vol. 10, no. 12, pp. 10 471–10 483, Jan. 2023.
- [137] H. Niu, Z. Lin, Z. Chu, Z. Zhu, P. Xiao, H. X. Nguyen, I. Lee, and N. Al-Dhahir, "Joint beamforming design for secure RIS-assisted IoT networks," *IEEE Internet of Things J.*, vol. 10, no. 2, pp. 1628–1641, Sep. 2022.
- [138] H. Cao, S. Garg, G. Kaddoum, M. Alrashoud, and L. Yang, "Efficient resource allocation of slicing services in software-defined space-aerial-ground integrated networks for seamless and open access services," *IEEE Trans. Veh. Technol.*, pp. 1–13, Nov. 2023.
- [139] S. Sharif, S. Zeadally, and W. Ejaz, "Space-aerial-ground-sea integrated networks: Resource optimization and challenges in 6G," *J. Netw. Comput. Appl.*, vol. 215, p. 103647, Jun. 2023. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S1084804523000668>
- [140] T. Hong, W. Zhao, R. Liu, and M. Kadoch, "Space-air-ground IoT network and related key technologies," *IEEE Wireless Commun.*, vol. 27, no. 2, pp. 96–104, Jan. 2020.
- [141] H. Chen, H. Sameddeen, T. Ballal, H. Wymeersch, M.-S. Alouini, and T. Y. Al-Naffouri, "A tutorial on terahertz-band localization for 6G communication systems," *IEEE Commun. Surveys Tuts.*, vol. 24, no. 3, pp. 1780–1815, May. 2022.
- [142] N. Khalid, N. A. Abbasi, and O. B. Akan, "300 GHz broadband transceiver design for low-THz band wireless communications in indoor internet of things," in *Proc. IEEE Int. Conf. Internet Things (iThings), GreenCom, CPSCom, SmartData*, Jun. 2017, pp. 770–775.
- [143] T. Yilmaz and O. B. Akan, "On the use of the millimeter wave and low terahertz bands for Internet of Things," in *Proc. IEEE World Forum Internet Things (WF-IoT)*, Dec. 2015, pp. 177–180.
- [144] Z. Liu, J. Liu, Y. Zeng, and J. Ma, "Covert wireless communication in IoT network: From AWGN channel to THz band," *IEEE Internet of Things J.*, vol. 7, no. 4, pp. 3378–3388, Liu. 2020.
- [145] L. Zeng, X. Chen, P. Huang, K. Luo, X. Zhang, and Z. Zhou, "Serving graph neural networks with distributed fog servers for smart IoT services," *IEEE/ACM Trans. Netw.*, vol. 32, no. 1, pp. 550–565, Jul. 2023.
- [146] P. Schulz, M. Matthe, H. Klessig, M. Simsek, G. Fettweis, J. Ansari, S. A. Ashraf, B. Almeroth, J. Voigt, I. Riedel, A. Puschmann, A. Mitschele-Thiel, M. Muller, T. Elste, and M. Windisch, "Latency critical IoT applications in 5G: Perspective on the design of radio interface and network architecture," *IEEE Commun. Mag.*, vol. 55, no. 2, pp. 70–78, Feb. 2017.
- [147] H. Ren, C. Pan, Y. Deng, M. ElKashlan, and A. Nallanathan, "Resource allocation for secure URLLC in mission-critical IoT scenarios," *IEEE Transactions on Communications*, vol. 68, no. 9, pp. 5793–5807, Jun. 2020.
- [148] W. L. Hamilton, R. Ying, and J. Leskovec, "Inductive representation learning on large graphs," 2018. [Online]. Available: <https://arxiv.org/abs/1706.02216>
- [149] Z. Wang, Y. Zhou, Y. Zou, Q. An, Y. Shi, and M. Bennis, "A graph neural network learning approach to optimize RIS-assisted federated learning," *IEEE Trans. Wireless Commun.*, vol. 22, no. 9, pp. 6092–6106, Jan. 2023.
- [150] K. Cho, B. van Merriënboer, C. Gulcehre, D. Bahdanau, F. Bougares, H. Schwenk, and Y. Bengio, "Learning phrase representations using RNN encoder-decoder for statistical machine translation," 2014. [Online]. Available: <https://arxiv.org/abs/1406.1078>
- [151] Y.-J. Chen, W. Chen, and M.-L. Ku, "Trajectory design and link selection in UAV-assisted hybrid satellite-terrestrial network," *IEEE Commun. Lett.*, vol. 26, no. 7, pp. 1643–1647, Apr. 2022.
- [152] H.-N. Dai, Z. Zheng, and Y. Zhang, "Blockchain for Internet of Things: A survey," *IEEE Internet of Things J.*, vol. 6, no. 5, pp. 8076–8094, Jun. 2019.
- [153] X. Sun, F. R. Yu, P. Zhang, Z. Sun, W. Xie, and X. Peng, "A survey on zero-knowledge proof in blockchain," *IEEE Network*, vol. 35, no. 4, pp. 198–205, Aug. 2021.
- [154] A. K. McCullum, K. Nigam, J. Rennie, and K. Seymore, "Automating the construction of internet portals with machine learning," *Information Retrieval*, vol. 3, no. 2, pp. 127–163, 2000. [Online]. Available: <https://doi.org/10.1023/A:1009953814988>
- [155] P. Sen, G. Namata, M. Bilgic, L. Getoor, B. Gallagher, and T. Eliassi-Rad, "Collective classification in network data," *AI Magazine*, vol. 29, no. 3, pp. 93–106, 2008. [Online]. Available: <https://onlinelibrary.wiley.com/doi/abs/10.1609/aimag.v29i3.2157>
- [156] H. Wu, C. Wang, Y. Tyshetskiy, A. Docherty, K. Lu, and L. Zhu, "Adversarial examples on graph data: Deep insights into attack and defense," 2019. [Online]. Available: <https://arxiv.org/abs/1903.01610>
- [157] N. Entezari, S. A. Al-Sayouri, A. Darvishzadeh, and E. E. Papalexakis, "All you need is low (rank): Defending against adversarial attacks on graphs," in *Proceedings of the 13th International Conference on Web Search and Data Mining*, ser. WSDM '20. New York, NY, USA: ACM, 2020, p. 169–177. [Online]. Available: <https://doi.org/10.1145/3336191.3371789>
- [158] W. Hu, M. Fey, M. Zitnik, Y. Dong, H. Ren, B. Liu, M. Catasta, and J. Leskovec, "Open graph benchmark: Datasets for machine learning on graphs," 2021. [Online]. Available: <https://arxiv.org/abs/2005.00687>
- [159] M. Agrawal, M. Zitnik, and J. Leskovec, "Large-scale analysis of disease pathways in the human interactome," 2017. [Online]. Available: <https://arxiv.org/abs/1712.00843>
- [160] S. Lu, F. Liu, Y. Li, K. Zhang, H. Huang, J. Zou, X. Li, Y. Dong, F. Dong, J. Zhu, Y. Xiong, W. Yuan, Y. Cui, and L. Hanzo, "Integrated sensing and communications: Recent advances and ten open challenges," *IEEE Internet of Things J.*, pp. 1–1, Feb. 2024.
- [161] H. Guo, J. Li, J. Liu, N. Tian, and N. Kato, "A survey on space-air-ground-sea integrated network security in 6G," *IEEE Commun. Surv. Tutor.*, vol. 24, no. 1, pp. 53–87, Nov. 2022.
- [162] P. Yue, J. An, J. Zhang, J. Ye, G. Pan, S. Wang, P. Xiao, and L. Hanzo, "Low earth orbit satellite security and reliability: Issues, solutions, and the road ahead," *IEEE Commun. Surv. Tutor.*, vol. 25, no. 3, pp. 1604–1652, Aug. 2023.
- [163] T. Hur, L. Kim, and D. K. Park, "Quantum convolutional neural network for classical data classification," *Quantum Mach. Intell.*, vol. 4, no. 1, p. 3, 2022.
- [164] O. Simeone, "An introduction to quantum machine learning for engineers," *Found. Trends Signal Process.*, vol. 16, no. 1–2, p. 1–223, Jul. 2022. [Online]. Available: <https://doi.org/10.1561/20000000118>
- [165] J. Cerviño, L. Ruiz, and A. Ribeiro, "Training graph neural networks on growing stochastic graphs," in *Proc. IEEE Int. Conf. Acoust. Speech Signal Process. (ICASSP)*, 2023, pp. 1–5.
- [166] J. Cervino, L. Ruiz, and A. Ribeiro, "Learning by transference: Training graph neural networks on growing graphs," *IEEE Trans. Signal Process.*, vol. 71, pp. 233–247, 2023.
- [167] A. Wack, H. Paik, A. Javadi-Abhari, P. Jurcevic, I. Faro, J. M. Gambetta, and B. R. Johnson, "Quality, speed, and scale: Three key attributes to measure the performance of near-term quantum computers," 2021. [Online]. Available: <https://arxiv.org/abs/2110.14108>

- [168] A. W. Cross, L. S. Bishop, S. Sheldon, P. D. Nation, and J. M. Gambetta, "Validating quantum computers using randomized model circuits," *Phys. Rev. A*, vol. 100, p. 032328, Sep 2019. [Online]. Available: <https://link.aps.org/doi/10.1103/PhysRevA.100.032328>
- [169] E. Pelofske, A. Bäertschi, and S. Eidenbenz, "Quantum volume in practice: What users can expect from NISQ devices," *IEEE Trans. Quantum Eng.*, vol. 3, pp. 1–19, 2022.
- [170] M. Periyasamy, N. Meyer, C. Ufrecht, D. D. Scherer, A. Plinge, and C. Mutschler, "Incremental data-uploading for full-quantum classification," in *Proc. IEEE Int. Conf. Quantum Comput. Eng. (QCE)*. IEEE, 2022, pp. 31–37.
- [171] Y. Cao, Y. Zhao, Q. Wang, J. Zhang, S. X. Ng, and L. Hanzo, "The evolution of quantum key distribution networks: On the road to the Qinternet," *IEEE Commun. Surv. Tutor.*, vol. 24, no. 2, pp. 839–894, Jan. 2022.
- [172] D. Pan, G.-L. Long, L. Yin, Y.-B. Sheng, D. Ruan, S. X. Ng, J. Lu, and L. Hanzo, "The evolution of quantum secure direct communication: On the road to the Qinternet," *IEEE Commun. Surv. Tutor.*, vol. 26, no. 3, pp. 1898–1949, Feb. 2024.
- [173] N. Hosseinidehaj, Z. Babar, R. Malaney, S. X. Ng, and L. Hanzo, "Satellite-based continuous-variable quantum communications: State-of-the-art and a predictive outlook," *IEEE Commun. Surv. Tutor.*, vol. 21, no. 1, pp. 881–919, Aug. 2019.