

---

# QUANTUM DIFFUSION MODEL FOR QUARK AND GLUON JET GENERATION

---

A PREPRINT

**Mariia Baidachna\***  
University of Glasgow

**Rey Guadarrama**  
Benemérita Universidad Autónoma de Puebla

**Gopal Ramesh Dahale**  
EPFL

**Tom Magorsch**  
Technische Universität Dortmund

**Isabel Pedraza**  
CERN

**Konstantin T. Matchev**  
University of Florida

**Katia Matcheva**  
University of Florida

**Kyoungchul Kong**  
University of Kansas

**Sergei Gleyzer**  
University of Alabama

December 31, 2024

## ABSTRACT

Diffusion models have demonstrated remarkable success in image generation, but they are computationally intensive and time-consuming to train. In this paper, we introduce a novel diffusion model that benefits from quantum computing techniques in order to mitigate computational challenges and enhance generative performance within high energy physics data. The fully quantum diffusion model replaces Gaussian noise with random unitary matrices in the forward process and incorporates a variational quantum circuit within the U-Net in the denoising architecture. We run evaluations on the structurally complex quark and gluon jets dataset from the Large Hadron Collider. The results demonstrate that the fully quantum and hybrid models are competitive with a similar classical model for jet generation, highlighting the potential of using quantum techniques for machine learning problems.

## 1 Introduction

Denoising diffusion models (DDMs) have revolutionized the field of generative artificial intelligence (GenAI) by demonstrating their ability to generate high-quality images [1]. They overcome the drawbacks of generative adversarial networks (GANs), which are prone to mode collapse, becoming a new state-of-the-art architecture for image generation [2, 3]. Consequently, DDMs have been applied in many generative tasks for science from molecular biology to medical image synthesis to gravitational lensing [4, 26, 6, 5, 7].

Despite their successes, DDMs face significant challenges concerning the extensive computational resources required for training [9, 10]. New compute paradigms must be employed in order to overcome the computational bottleneck. Quantum machine learning (QML) offers a promising solution [13]. By cleverly incorporating quantum components into classical algorithms, quantum computers can efficiently solve problems that are difficult for classical computers with accelerated computations [12]. This paradigm shift has the potential to surpass current limitations and unlock the full potential of DDMs.

---

\*Corresponding author: 2828197b@student.gla.ac.uk

## 2 Background

### 2.1 Denoising Diffusion Model

There have been multiple variants of a DDM proposed, such as denoising diffusion probabilistic model (DDPM) [16, 14] and denoising diffusion implicit model (DDIM) [9], but we generalize these into DDMs with the common factors being a noising scheduling algorithm and a learned denoising process.

#### Forward Diffusion Process

The forward diffusion process gradually adds Gaussian noise to the data, leading to a series of latent variables  $\mathbf{x}_1, \mathbf{x}_2, \dots, \mathbf{x}_T$ . The forward process is defined as:

$$q(\mathbf{x}_t | \mathbf{x}_{t-1}) = \mathcal{N}(\mathbf{x}_t | \sqrt{1 - \beta_t} \mathbf{x}_{t-1}, \beta_t \mathbf{I}), \quad (1)$$

where  $\beta_t$  is the variance schedule that controls the amount of noise added at each step  $t$ .

Starting from the original data distribution  $q(\mathbf{x}_0)$ , the joint distribution over the sequence of latent variables is given by:

$$q(\mathbf{x}_{1:T} | \mathbf{x}_0) = \prod_{t=1}^T q(\mathbf{x}_t | \mathbf{x}_{t-1}), \quad (2)$$

and the marginal distribution of any  $\mathbf{x}_t$  given  $\mathbf{x}_0$  is:

$$q(\mathbf{x}_t | \mathbf{x}_0) = \mathcal{N}(\mathbf{x}_t | \sqrt{\bar{\alpha}_t} \mathbf{x}_0, (1 - \bar{\alpha}_t) \mathbf{I}), \quad (3)$$

where  $\bar{\alpha}_t = \prod_{s=1}^t (1 - \beta_s)$ .

#### Reverse Diffusion Process

The reverse diffusion process is modeled as:

$$p_\theta(\mathbf{x}_{t-1} | \mathbf{x}_t) = \mathcal{N}(\mathbf{x}_{t-1} | \boldsymbol{\mu}_\theta(\mathbf{x}_t, t), \sigma_t^2 \mathbf{I}), \quad (4)$$

where  $\boldsymbol{\mu}_\theta(\mathbf{x}_t, t)$  is a neural network parameterized by  $\theta$  that is trained to predict the mean, and  $\sigma_t^2$  is typically set to  $\beta_t$  or some other small variance.

The training objective is to minimize the variational lower bound on the negative log-likelihood:

$$L_{\text{vib}} = \mathbb{E}_q \left[ D_{\text{KL}}(q(\mathbf{x}_T | \mathbf{x}_0) \| p(\mathbf{x}_T)) + \sum_{t=2}^T D_{\text{KL}}(q(\mathbf{x}_{t-1} | \mathbf{x}_t, \mathbf{x}_0) \| p_\theta(\mathbf{x}_{t-1} | \mathbf{x}_t)) - \log p_\theta(\mathbf{x}_0 | \mathbf{x}_1) \right], \quad (5)$$

where  $D_{\text{KL}}$  denotes the Kullback-Leibler divergence, though the loss is often simplified to the mean squared error (MSE).

## 2.2 Quantum Theory for Machine Learning

### Qubit States and Measurement

Quantum bits, or qubits, can exist in superpositions of states, allowing them to represent more information and process it more efficiently than classical bits [19]. Unlike a classical bit that can be either 0 or 1, a qubit can be in a superposition of both states simultaneously. Mathematically, the state of a qubit can be written as:

$$|\psi\rangle = \alpha|0\rangle + \beta|1\rangle, \quad (6)$$

where  $|0\rangle$  and  $|1\rangle$  are the basis states, and  $\alpha$  and  $\beta$  are complex numbers representing the probability amplitudes. These amplitudes are normalized so that:

$$|\alpha|^2 + |\beta|^2 = 1. \quad (7)$$

When a measurement is made on a qubit, the superposition collapses to one of the basis states. The probability of measuring the state  $|0\rangle$  is  $|\alpha|^2$ , and the probability of measuring the state  $|1\rangle$  is  $|\beta|^2$ .

One method of measurement relevant in quantum computing and QML is the Haar measurement. Haar measurement involves sampling unitary operations uniformly according to the Haar measure, which is the unique, invariant measure on the group of unitary matrices. This type of measurement is useful in QML because it provides a way to generate random quantum states and operations, which is important for algorithms that require randomization [17].

### Variational Quantum Circuits in Machine Learning

Variational quantum circuits (VQCs) are a central tool in QML used in various architectures [20, 21, 22, 23, 24]. A VQC is a parameterized quantum circuit where some of the gates depend on adjustable parameters represented by quantum gates in the unitary operations. The general form of a VQC can be represented as:

$$|\psi(\boldsymbol{\theta})\rangle = U(\boldsymbol{\theta})|0\rangle, \quad (8)$$

where  $U(\boldsymbol{\theta})$  is a unitary operation that depends on the parameters  $\boldsymbol{\theta}$ .

In the context of machine learning, these parameters are optimized using classical optimization techniques to minimize the cost function that measures the performance of the circuit throughout training. The power of VQCs in machine learning arises from their ability to exploit superposition and entanglement to potentially represent and solve problems more efficiently than classical algorithms [18].

### 2.3 Quark-Gluon Data Description

In this work, we generate quark and gluon jet data from the open-source LHC Compact Muon Solenoid (CMS) detector data. The data contains two classes that follow different distributions: hits from quark and gluon jets. Each sample is captured by three CMS subdetectors: electromagnetic calorimeter (ECAL), hadronic calorimeter (HCAL), and the reconstructed tracks as described in [25]. The dataset is preprocessed to crop a subset of 1,000 ECAL-detected jets of 125x125 pixels to 16x16 pixels for faster inference.

## 3 Related Work

Multiple works have combined the classical DDM and quantum algorithms. The paper in [15] proposed a fully quantum DDPM (QuDDPM) for generating an unknown quantum state distribution. Their method consists of applying random unitaries to quantum states, thus scrambling them into noise, and summing three error functions to optimize during training. The QuDDPM performed best compared to a quantum GAN and a quantum direct transport model.

Another work in [28] proposed a hybrid quantum-classical DDM. The algorithm involved a quantum denoising U-Net and classical noising and optimization. Good results were achieved on the MNIST dataset. However, tests on MNIST are not generalizable to other data, and a physics-conscious approach is required for the more complex Quark-Gluon data.

## 4 Methodology

In this section, we outline the methods used to construct fully quantum, hybrid, and fully classical models. The pipeline in Figure 1 shows all the models and their combinations.

### 4.1 Quantum Embedding

The first step of the pipeline is embedding classical data into quantum. We implemented angle encoding with  $R_x$  rotation gates in groups of four pixels. Each sample is split into four channels, as shown in Figure 2.

### 4.2 Forward Quantum Diffusion

The forward diffusion process was inspired by the scrambling implementation in [15] using Haar random unitaries to mimic random noise application, as shown in Figure 3. Since the choice of forward scrambling does not significantly

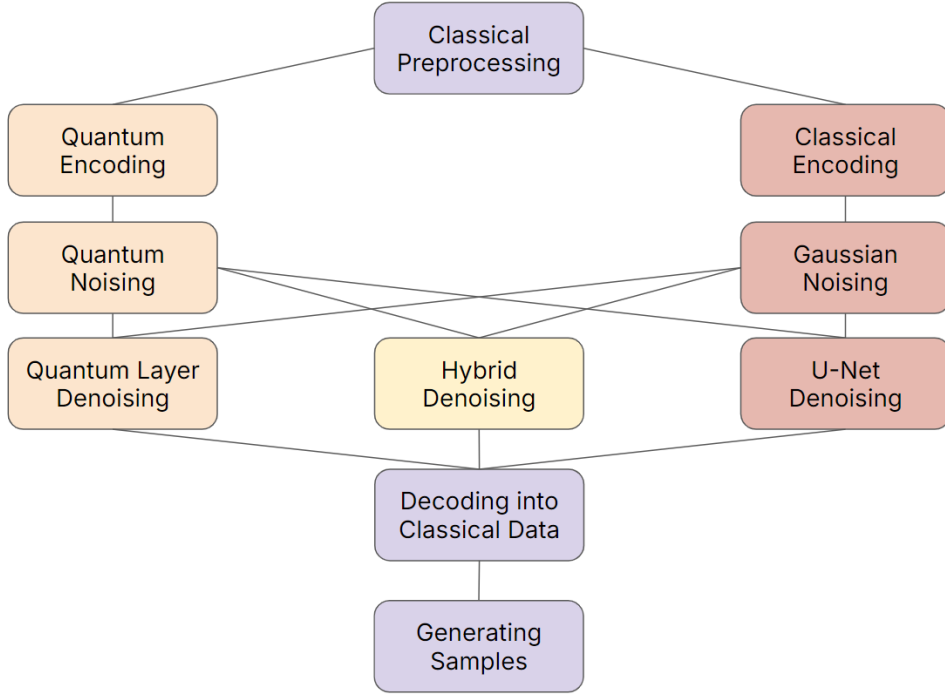


Figure 1: The pipeline that the data goes through with all the possible classical-quantum combinations of the forward and backward diffusion process.

impact model performance, as the authors in [29] have shown, an arbitrary noising transformation can be used. We chose to use the Haar measure for the quantum model as it allows for the unitary matrix transforms to scale with increasing resolution and dataset size. The final unitary is applied to each encoded channel, avoiding costly calculations associated with each timestep.

### 4.3 Denoising Quantum U-Net

Similar to classical DDMs, the denoising neural network is trained on learned parameters with the MSE loss function. The hybrid model uses a quantum strongly entangling layer surrounded by fully convolutional layers, and the fully quantum model relies only on the quantum layers. The circuit in the quantum layer, consisting of rotation and strongly entangling gates, is kept uniform across all models, with the number of layers treated as a tunable parameter.

## 5 Experiments

In each experiment, we compare the performance using the Fréchet Inception Distance (FID) function, originally introduced in [27] for evaluating GANs, along with the loss function. The FID is defined as:

$$\text{FID}(x, g) = \|\mu_x - \mu_g\|_2^2 + \text{Tr}(\Sigma_x + \Sigma_g - 2(\Sigma_x \Sigma_g)^{1/2}),$$

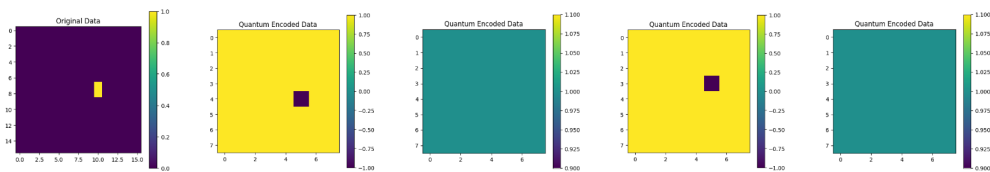


Figure 2: A sample of an encoded jet image.

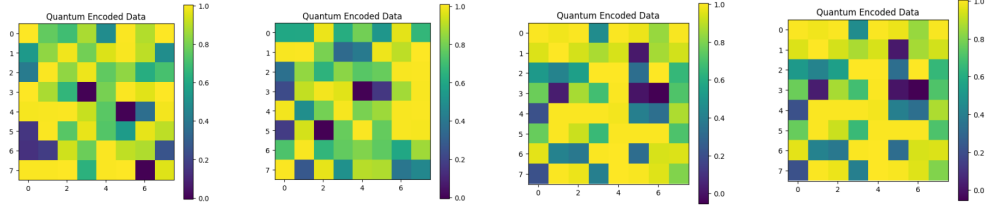


Figure 3: Haar noise applied to one encoded sample of four channels.

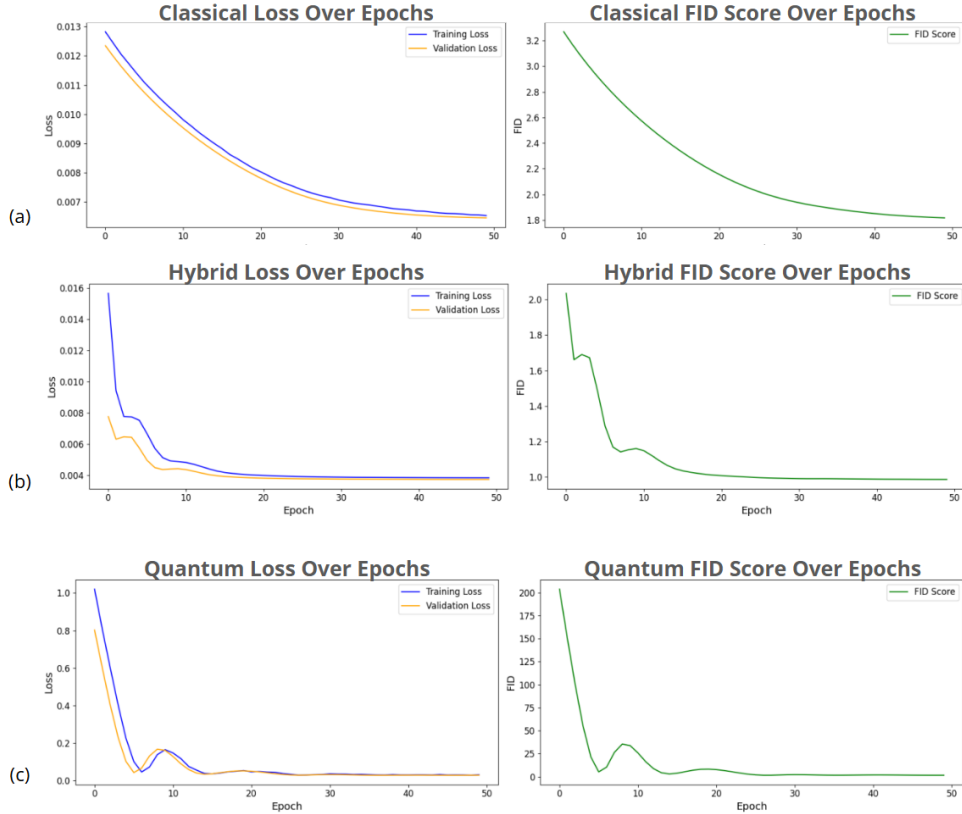


Figure 4: The losses and FID graphs of fully classical (a), hybrid (b), and fully quantum (c) models. For all models, MSE and Adam optimizer was used to reach convergence, and the FID function remained the same.

where  $\mu_x$  and  $\mu_g$  are the mean feature vectors of the real and generated images, respectively, and  $\Sigma_x$  and  $\Sigma_g$  are their corresponding covariance matrices. Though we do not currently have access to quantum computers, we can simulate the behavior of quantum systems using simulators like PennyLane [11] and compare the results to classical models.

First, we present the loss and FID functions of the classical, hybrid, and quantum models, respectively, in Figure 4. Training on 50 epochs seems to be sufficient to reach convergence for all models.

Some qualitative results in the form of generated samples are visualized in Figure 5. The generated images correspond to the best-performing model, which is the fully quantum architecture.

## 6 Discussion

All models exhibited a significant decrease in loss, approaching near-zero values, which confirms effective learning. The FID scores followed a similar downward trajectory, with final values of 1.8169, 1.8123, and 2.7362. These results show that the performance of the models that leverage quantum circuits is comparable in relation to a structurally

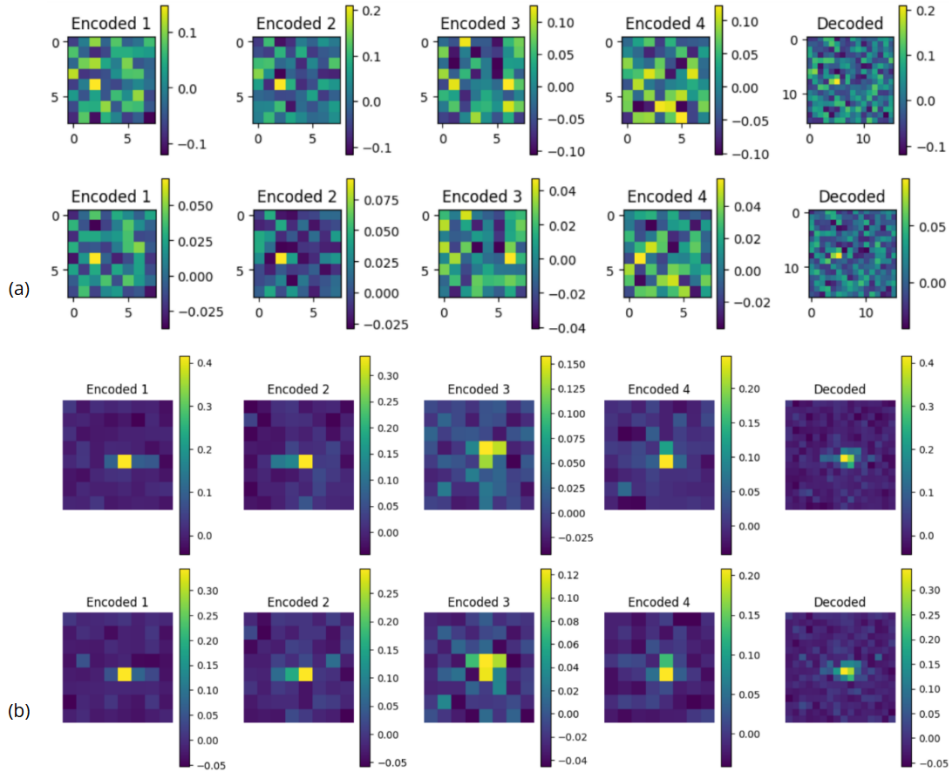


Figure 5: Samples generated from random noise with the four encoded channels on the left four rows and the decoded image on the far right for each sample. Subfigure (a) uses the hybrid model and (b) uses the fully quantum model.

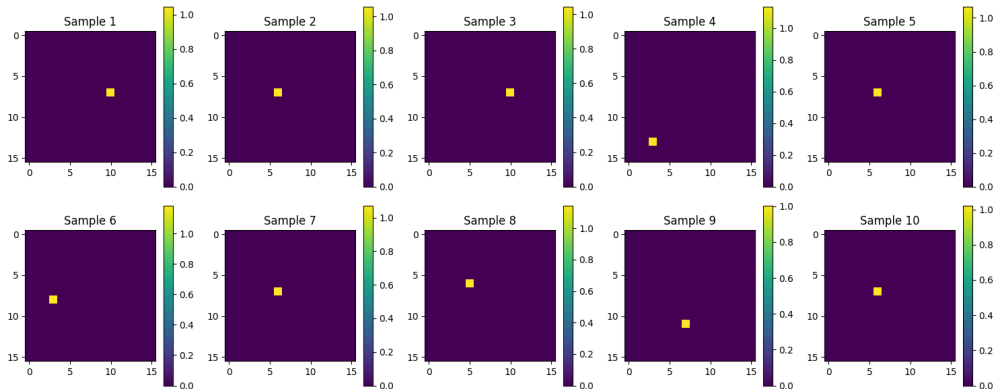


Figure 6: The most likely jet values of hybrid generated jets.

similar classical model. This implies that all or some parts of deep neural network computations can be offloaded to faster quantum processors to reduce training time without a performance trade-off.

A potential reason for the plateau in FID scores across all models could be the sparsity of the data, where each sample contains only a few non-zero points. This sparsity may prevent the complete removal of noise in some of the encoded channels. A possible solution is a post-processing step where only the most prominent values are retained in the decoded data, increasing the confidence in jet locations. As a result, the generated samples would align more closely with the originals, as shown in Figure 6.

## 7 Conclusion and Future Direction

This work marks significant progress in leveraging quantum computing for machine learning applications, specifically for a generative DDM. In the future, our aim is to extend the models to generate all three jet channels for every sample. Additionally, experimenting with different parametric circuits and forward scrambling, such as using Gaussian transformations instead of Haar unitaries, may provide further insight into the impact that the architecture has on quantum generative learning. Finally, testing the quantum model on hardware with a limited number of qubits under practical constraints will be crucial in evaluating its scalability, real-world performance, and resilience to quantum noise.

## 8 Data Availability

The code is open source and can be found here: <https://github.com/mashathepotato/GSoC-Quantum-Diffusion-Model>.

## References

- [1] Hanqun Cao, Cheng Tan, Zhangyang Gao, Yilun Xu, Guangyong Chen, Pheng-Ann Heng, and Stan Z. Li. A survey on generative diffusion models. In *IEEE Transactions on Knowledge and Data Engineering*, volume 36, number 7, pages 2814–2830, 2024.
- [2] Prafulla Dhariwal and Alexander Nichol. Diffusion models beat gans on image synthesis. In *Advances in Neural Information Processing Systems*, volume 34, pages 8780–8794, 2021.
- [3] Michał Stypułkowski, Konstantinos Vougioukas, Sen He, Maciej Zięba, Stavros Petridis, and Maja Pantic. Diffused heads: Diffusion models beat gans on talking-face generation. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, pages 5091–5100, 2024.
- [4] Duo Xu, Jonathan C. Tan, Chia-Jung Hsu, and Ye Zhu. Denoising diffusion probabilistic models to predict the density of molecular clouds. In *The Astrophysical Journal*, volume 950, number 2, pages 146, 2023.
- [5] Shaoyan Pan, Tonghe Wang, Richard L.J. Qiu, Marian Axente, Chih-Wei Chang, Junbo Peng, Ashish B. Patel, Joseph Shelton, Sagar A. Patel, Justin Roper, and others. 2D medical image synthesis using transformer-based denoising diffusion probabilistic model. In *Physics in Medicine & Biology*, volume 68, number 10, pages 105004, 2023.
- [6] Kai Yi, Bingxin Zhou, Yiqing Shen, Pietro Liò, and Yuguang Wang. Graph denoising diffusion for inverse protein folding. In *Advances in Neural Information Processing Systems*, volume 36, 2024.
- [7] Pranath Reddy, Michael W. Toomey, Hanna Parul, and Sergei Gleyzer. A conditional diffusion model for super-resolution of gravitational lensing data. In *arXiv preprint arXiv:2406.08442*, 2024.
- [8] Alexander Quinn Nichol and Prafulla Dhariwal. Improved denoising diffusion probabilistic models. In *International Conference on Machine Learning*, pages 8162–8171, 2021.
- [9] Jiaming Song, Chenlin Meng, and Stefano Ermon. Denoising diffusion implicit models. In *arXiv preprint arXiv:2010.02502*, 2020.
- [10] Bahjat Kawar, Michael Elad, Stefano Ermon, and Jiaming Song. Denoising diffusion restoration models. In *Advances in Neural Information Processing Systems*, volume 35, pages 23593–23606, 2022.
- [11] Ville Bergholm, Josh Izaac, Maria Schuld, Christian Gogolin, Shahnawaz Ahmed, Vishnu Ajith, M. Sohaib Alam, Guillermo Alonso-Linaje, B. AkashNarayanan, Ali Asadi, and others. PennyLane: Automatic differentiation of hybrid quantum-classical computations. In *arXiv preprint arXiv:1811.04968*, 2018.
- [12] Carlo Ciliberto, Mark Herbster, Alessandro Davide Ialongo, Massimiliano Pontil, Andrea Rocchetto, Simone Severini, and Leonard Wossnig. Quantum machine learning: a classical perspective. In *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, volume 474, number 2209, pages 20170551, 2018.
- [13] Maria Schuld, Ilya Sinayskiy, and Francesco Petruccione. An introduction to quantum machine learning. In *Contemporary Physics*, volume 56, number 2, pages 172–185, 2015.
- [14] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. In *Advances in Neural Information Processing Systems*, volume 33, pages 6840–6851, 2020.
- [15] Bingzhi Zhang, Peng Xu, Xiaohui Chen, and Quntao Zhuang. Generative quantum machine learning via denoising diffusion probabilistic models. In *Physical Review Letters*, volume 132, number 10, pages 100602, 2024.

- [16] Jascha Sohl-Dickstein, Eric Weiss, Niru Maheswaranathan, and Surya Ganguli. Deep unsupervised learning using nonequilibrium thermodynamics. In *International Conference on Machine Learning*, pages 2256–2265, 2015.
- [17] Alfred Haar. Der massbegriff in der theorie der kontinuierlichen gruppen. In *Annals of Mathematics*, volume 34, number 1, pages 147–169, 1933.
- [18] Jacob Biamonte, Peter Wittek, Nicola Pancotti, Patrick Rebentrost, Nathan Wiebe, and Seth Lloyd. Quantum machine learning. In *Nature*, volume 549, number 7671, pages 195–202, 2017.
- [19] Michael A. Nielsen and Isaac L. Chuang. *Quantum Computation and Quantum Information*. Cambridge University Press, 2002.
- [20] Samuel Yen-Chi Chen, Chao-Han Huck Yang, Jun Qi, Pin-Yu Chen, Xiaoli Ma, and Hsi-Sheng Goan. Variational quantum circuits for deep reinforcement learning. In *IEEE access*, volume 8, pages 141007–141024, 2020.
- [21] Israel Griol-Barres, Sergio Milla, Antonio Cebrián, Yashar Mansoori, and José Millet. Variational quantum circuits for machine learning. an application for the detection of weak signals. In *Applied Sciences*, volume 11, number 14, pages 6427, 2021.
- [22] Jonathan Romero and Alán Aspuru-Guzik. Variational quantum generators: Generative adversarial quantum machine learning for continuous distributions. In *Advanced Quantum Technologies*, volume 4, number 1, pages 2000003, 2021.
- [23] Runqiu Shu, Xusheng Xu, Man-Hong Yung, and Wei Cui. Variational Quantum Circuits Enhanced Generative Adversarial Network. In *arXiv preprint arXiv:2402.01791*, 2024.
- [24] Marçal Comajoan Cara, Gopal Ramesh Dahale, Zhongtian Dong, Roy T Forestano, Sergei Gleyzer, Daniel Justice, Kyoungchul Kong, Tom Magorsch, Konstantin T Matchev, Katia Matcheva, and others. Quantum Vision Transformers for Quark–Gluon Classification. In *Axioms*, volume 13, number 5, pages 323, 2024.
- [25] Michael Andrews, John Alison, Sitong An, B. Burkle, S. Gleyzer, M. Narain, M. Paulini, B. Poczoz, and E. Usai. End-to-end jet classification of quarks and gluons with the CMS Open Data. In *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment*, volume 977, pages 164304. Elsevier, 2020.
- [26] Mariia Baidachna, Haneen Fatima, Rahaf Omran, Nour Ghadban, Muhammad Ali Imran, Ahmad Taha, and Lina Mohjazi. Mirror, Mirror on the Wall: Automating Dental Smile Analysis with AI in Smart Mirrors. In *Computing&AI Connect*, volume 1, number 1, pages 1–10. Scifiniti, 2024.
- [27] Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter. GANs trained by a two time-scale update rule converge to a local Nash equilibrium. In *Advances in Neural Information Processing Systems*, volume 30, 2017.
- [28] Francesca De Falco, Andrea Ceschini, Alessandro Sebastianelli, Bertrand Le Saux, and Massimo Panella. Towards Efficient Quantum Hybrid Diffusion Models. In *arXiv preprint arXiv:2402.16147*, 2024.
- [29] Arpit Bansal, Eitan Borgnia, Hong-Min Chu, Jie Li, Hamid Kazemi, Furong Huang, Micah Goldblum, Jonas Geiping, and Tom Goldstein. Cold diffusion: Inverting arbitrary image transforms without noise. In *Advances in Neural Information Processing Systems*, volume 36, 2024.