MONTY HALL AND OPTIMIZED CONFORMAL PREDIC-TION TO IMPROVE DECISION-MAKING WITH LLMS

Harit Vishwakarma *

Department of Computer Science University of Wisconsin Madison, WI 53706, USA hvishwakarma@cs.wisc.edu

Alan Mishler, Thomas Cook, Niccolò Dalmasso, Natraj Raman, Sumitra Ganesh JPMorganChase AI Research New York, NY 10017, USA

{alan.mishler, thomas.cook, niccolo.dalmasso, natraj.raman, sumitra.ganesh}@jpmchase.com

ABSTRACT

Large language models (LLMs) are empowering decision-making in several applications, including tool or API usage and answering multiple-choice questions (MCQs). However, they often make overconfident, incorrect predictions, which can be risky in high-stakes settings like healthcare and finance. To mitigate these risks, recent works have used conformal prediction (CP), a model-agnostic framework for distribution-free uncertainty quantification. CP transforms a score func*tion* into prediction sets that contain the true answer with high probability. While CP provides this coverage guarantee for arbitrary scores, the score quality significantly impacts prediction set sizes. Prior works have relied on LLM logits or other heuristic scores, lacking quality guarantees. We address this limitation by introducing CP-OPT, an optimization framework to learn scores that minimize set sizes while maintaining coverage. Furthermore, inspired by the Monty Hall problem, we extend CP's utility beyond uncertainty quantification to improve accuracy. We propose *conformal revision of questions* (CROQ) to revise the problem by narrowing down the available choices to those in the prediction set. The coverage guarantee of CP ensures that the correct choice is in the revised question prompt with high probability, while the smaller number of choices increases the LLM's chances of answering it correctly. Experiments on MMLU, ToolAlpaca, and TruthfulQA datasets with Gemma-2, Llama-3 and Phi-3 models show that CP-OPT significantly reduces set sizes while maintaining coverage, and CROO improves accuracy over the standard inference, especially when paired with CP-OPT scores. Together, CP-OPT and CROO offer a robust framework for improving both the safety and accuracy of LLM-driven decision-making.

1 INTRODUCTION

Large language models (LLMs) (Touvron et al., 2023; Databricks, 2024; Abdin et al., 2024) have demonstrated remarkable capabilities in various decision-making tasks, including multi-choice question answering (MCQ) and tool usage, where the model must select the correct tool or API to complete a task (Qu et al., 2024; Tang et al., 2023; Hendrycks et al., 2021). However, quantifying the uncertainty of an LLM's predictions remains challenging, with LLMs themselves often exhibit-ing overconfidence in wrong answers (Krause et al., 2023; Groot and Valdenegro Toro, 2024). Given a reliable uncertainty measure, the LLM could, in highly uncertain instances, take measures such as deferring to a human or invoking a secondary model, thereby increasing overall accuracy. Without a reliable uncertainty measure, however, it may be difficult to prevent the LLM from making serious errors in these settings. To address these challenges, we focus on improving uncertainty quantification (UQ) and its utility in MCQ and tool usage tasks.

^{*}This work was performed while at JPMorganChase.

Conformal prediction (CP) is one framework that can be used to quantify uncertainty in LLMs (Kumar et al., 2023; Su et al., 2024; Mohri and Hashimoto, 2024; Quach et al., 2024). Conformal prediction is a model-agnostic and distribution-free technique for producing prediction sets that contain the true outcome with a user-specified probability (e.g. 95%). The set sizes provide a natural measure of uncertainty, with small (large) sets representing low (high) uncertainty. The construction of sets in CP depends on a *score function*, which measures how well a candidate output "conforms" to a given input. For example, in classification settings, it is common to use the classifier logits corresponding to each class for a given input as the score function (Angelopoulos and Bates, 2022). While conformal prediction gives a coverage guarantee for *any* score function, the size of the output sets depends on the score function that is used. As an example, a random score function will yield output sets that constitute random subsets of the label space that are large enough to satisfy the coverage guarantee (Angelopoulos and Bates, 2022).

Previous works that apply conformal prediction in MCQ type settings have used readily available scores such as the logits (or softmax values) output from the LLM (Kumar et al., 2023) or have designed heuristic scores based for example on repeated querying of the LLM (Su et al., 2024). Logits can be overconfident and may show biases for some options (Zheng et al., 2024), and heuristic scores are not guaranteed to produce small sets. Thus we need a principled solution to obtain scores that are designed to minimize set sizes (uncertainty) while preserving the coverage guarantee.

In addition to providing a measure of uncertainty, we believe that the sets produced by conformal prediction can be leveraged for other downstream purposes. Specifically, inspired by the Monty Hall problem (Selvin, 1975; Rosenthal, 2008), we hypothesize that by revising a multiple-choice question or tool usage prompt to include only the options within a conformal prediction set, the LLM is more likely to provide the correct answer due to the reduced number of choices, leading to improved accuracy.

To summarize, we focus on (1) obtaining optimal scores for conformal prediction for MCQ and tool usage tasks in LLMs, and (2) investigating whether the prediction sets generated by conformal prediction can be used to improve downstream accuracy. Our main contributions are as follows:

- 1. We design a score function optimization framework (CP-OPT) that can be applied to any pretrained LLM. Moving away from the potentially unreliable LLM logits and heuristic scores, our framework provides a principled way to learn the scores for conformal prediction. Empirically, we show that our procedure leads to reduction in average set sizes in contrast to the baseline procedure that uses the LLM logits as the scores, at the same level (95%) of marginal coverage.
- 2. Extending the utility of conformal prediction beyond uncertainty quantification, we propose the conformal revision of questions (CROQ), in which we revise the question by narrowing down the choices to those in the prediction sets output by conformal prediction. Then the LLM is reprompted with the revised question. Empirical evaluation shows that this approach consistently improves accuracy, with CP-OPT scores delivering greater gains compared to logit scores.

2 PRELIMINARIES

In this section, we introduce notation and provide background on solving MCQ tasks with LLMs and conformal prediction.

2.1 SOLVING MULTIPLE CHOICE QUESTIONS (MCQS) USING LLMS

MCQ Setup. MCQs are a general abstraction for expressing problems in which the correct choice(s) must be selected from a given set of choices. These encompass conventional question-answering tasks such as MMLU (Hendrycks et al., 2021) as well as other tasks such as tool learning, in which the LLM must select the correct tool or API to complete a task (Tang et al., 2023; Qu et al., 2024). An MCQ consists of the question text Q, i.e. a sequence of tokens, and a set of answer choices $O = \{(Y_1, V_1), (Y_2, V_2), \ldots, (Y_m, V_m)\}$. Here, each Y_j is a unique character from the English alphabet, and we assume that the number of choices m is less than or equal to the size of the alphabet. Each V_j is the option text for the *j*th option. Denote the whole MCQ instance as x = (Q, O). Let \mathcal{X}_m denote the space of MCQs with m choices and $\mathbb{P}_{\mathcal{X}_m}$ denote a distribution over \mathcal{X}_m , from which

samples for training, calibration, and testing are drawn independently. Here, we assume that for each question Q there is only one correct answer key $y^* \in \{Y_1, Y_2, \dots, Y_m\} = \mathcal{Y}_m$.

MCQ Prompt. We concatenate the question text Q and the answer choices O, all separated by a new line character, and append to the end the text "The correct answer is:". The expectation is that given this input prompt, the next token predicted by the LLM will be one of the option keys. See Appendix D for a prompt example. We consider zero-shot prompts and do not include example questions and answers in the prompt. We also add the prefix and suffix tokens to the prompt as recommended by the language model providers. Since these are fixed modifications to x, we will use x to denote the final prompt and the MCQ instance analogously.

LLM Inference. We run the forward pass of the auto-regressive LLM (Touvron et al., 2023; Dubey et al., 2024; Abdin et al., 2024) on the input prompt to obtain the logit scores for each possible next token given the prompt, restricting attention to the tokens that correspond to the available answer keys (e.g. "a", "b", "c", "d" if there are four answer options). We take the softmax to convert the logits to probabilities, and then we take as the LLM's answer the option with the highest probability. This approach ensures that the LLM's answer will be one of the available answer options, which would not be guaranteed if instead we asked the LLM to simply generate an answer token given the prompt. This approach mirrors what has been done in other works that use LLMs to solve MCQs (Kumar et al., 2023; Su et al., 2024). Formal details are given in Appendix A.

2.2 CONFORMAL PREDICTION

Conformal prediction (CP) (Vovk et al., 2005; Angelopoulos et al., 2022) is a framework for quantifying uncertainty in machine learning models. It provides a flexible and user-friendly approach to output *prediction sets* (which may be finite sets or intervals) which contain the true output or label with a probability that is specified by the user, e.g. 95%. The key strength of conformal prediction lies in its *distribution-free* guarantees: it ensures that the constructed prediction sets are valid regardless of the underlying data distribution and model. This property is particularly desirable in the context of language models, as it is hard to characterize language data distributions or put specific distributional assumptions/restrictions on the LLMs.

Score Function. Let $g : \mathcal{X}_m \times \mathcal{Y}_m \mapsto \mathbb{R}$ be a conformal *score function*, where larger scores indicate better agreement ("conformity") between x and y. Intuitively, large scores are intended to indicate that y is a plausible output given x, while smaller scores indicate less plausibility. (Note that some authors prefer to have larger scores indicate greater disagreement, e.g. Clarkson et al. (2024).) A common choice of score function is the softmax scores from the given model. For closed-source LLMs, where these scores are not available, other authors have devised self-consistency scores based on repeated querying of the model (Su et al., 2024).

Prediction Sets. Given a threshold τ on the scores, the prediction set for any $x \in \mathcal{X}_m$ is given by

$$C(x;g,\tau) := \{ y \in \mathcal{Y}_m : g(x,y) \ge \tau \}.$$

$$\tag{1}$$

Intuitively, larger sets represent greater uncertainty, while smaller sets represent less uncertainty. This can be used for example to compare two different score functions given a fixed confidence level: a score function that produces larger sets can be said to result in greater uncertainty. Note that because the coverage guarantee is marginal over the data distribution (Proposition 2.1), it does not immediately follow that set sizes can be compared across different parts of the input space: coverage conditional on specific set sizes is not necessarily equal to the overall coverage level. However, previous work has found that the size of sets correlates with LLM accuracy in an MCQ setting (Kumar et al., 2023), suggesting that set size can be used as a measure of confidence in the LLM's output.

Split Conformal Prediction. Similar to prior works (Kumar et al., 2023; Su et al., 2024), we use *Split Conformal Prediction* (Papadopoulos et al., 2002; Lei et al., 2018) due to its popularity, ease of use, and computational efficiency. Given a score function $g : \mathcal{X}_m \times \mathcal{Y}_m \mapsto \mathbb{R}$, Split Conformal Prediction uses a calibration dataset $D_{cal} = \{x_i, y_i^*\}_{i=1}^{n_{cal}}$ to compute a threshold $\hat{\tau}$, defined as

$$\hat{\tau} = \min\left\{q: \frac{1}{n_{\text{cal}}} \sum_{i=1}^{n_{\text{cal}}} \mathbb{1}\left(g(x_i, y_i^\star) \le q\right) \ge \alpha\right\},\tag{2}$$

where $\alpha \in [0, 1]$ is a user-chosen error rate that is equal to 1 minus the desired coverage; for example, a value of $\alpha = 0.05$ would correspond to a coverage of 95%. In words, $\hat{\tau}$ is the smallest empirical quantile of the scores for the correct answers on the calibration dataset that is sufficient to satisfy (an empirical version of) the coverage property. The threshold $\hat{\tau}$ is used to construct prediction sets $C(x; g, \hat{\tau})$ on previously unseen test points as in (1). This procedure enjoys a marginal coverage guarantee for prediction sets constructed on unseen test data points, formalized as Proposition 2.1.

Proposition 2.1. (Marginal Coverage Guarantee) (Lei et al., 2018, Thm. 2.2) Let g be a fixed conformity score function and $\hat{\tau}$ be an α threshold computed via Split Conformal Prediction on $D_{\text{cal}} = \{x_i, y_i^{\star}\}_{i=1}^{n_{\text{cal}}} \sim \mathbb{P}_{\mathcal{X}_m \times \mathcal{Y}_m}$. Then, for a new sample $(\tilde{x}, \tilde{y}^{\star}) \sim \mathbb{P}_{\mathcal{X}_m \times \mathcal{Y}_m}$, we have that

$$\mathbb{P}(\tilde{y}^{\star} \in C(\tilde{x}; g, \hat{\tau})) \ge 1 - \alpha.$$
(3)

where the probability is marginal over the randomness in the calibration data and the new sample.

The top half of Figure 1 illustrates conformal prediction for answering MCQs with LLMs. While the coverage guarantee in Proposition 2.1 holds for any score function, ideally we would like a score function that yields the smallest sets possible (the least uncertainty). Next, we discuss our solutions to improve conformal prediction and its utility in solving MCQs with LLMs.

3 Methodology

In this section, we discuss details of our method for learning optimal scores for conformal prediction and our pipeline for question revision using conformal prediction.

3.1 SCORES OPTIMIZATION FOR CONFORMAL PREDICTION (CP-OPT)

We describe our method for learning the optimal scores for conformal prediction (CP) for solving MCQs with LLMs. Similar ideas have been incorporated in the training objective of classifiers (Stutz et al., 2022) so that the classifiers' softmax output is better suited for CP. However, the LLMs are not trained with this objective, and we want to apply CP to any given LLM; therefore, we design a post-hoc method to optimize the scores. We first characterize the optimal scores and then describe how we can estimate them in practice.

3.1.1 CHARACTERIZATION OF THE OPTIMAL SCORES

For any score function $g : \mathcal{X}_m \times \mathcal{Y}_m \mapsto \mathbb{R}$ and threshold τ , the membership of any y in the prediction set $C(x \mid g, \tau)$ is given by $\mathbb{1}(y \in C(x \mid g, \tau)) = \mathbb{1}\{g(x, y) \geq \tau\}$. Define the expected set size $S(g, \tau)$ and the coverage conditional on τ , denoted $\mathcal{P}(g, \tau)$, as follows:

$$S(g,\tau) := \mathbb{E}_x \Big[\sum_{y \in \mathcal{Y}_m} \mathbb{1}\{g(x,y) \ge \tau\} \Big] = \sum_{y \in \mathcal{Y}_m} \mathbb{E}_x \left[\mathbb{1}\{g(x,y) \ge \tau\} \right], \tag{4}$$

$$\mathcal{P}(g,\tau) := \mathbb{E}_x \left[\mathbb{1}\{g(x, y^\star) \ge \tau\} \right].$$
(5)

The optimal score function g^* and threshold τ^* are defined (non-uniquely) to minimize the expected set size subject to the coverage $\mathcal{P}(g,\tau)$ being at least $1 - \alpha$:

$$g^{\star}, \tau^{\star} := \underset{g:\mathcal{X}_m \times \mathcal{Y}_m \mapsto \mathbb{R}, \tau \in \mathbb{R}}{\arg\min} S(g, \tau) \quad \text{s.t.} \quad \mathcal{P}(g, \tau) \ge 1 - \alpha.$$
(P1)

3.1.2 PRACTICAL VERSION: DIFFERENTIABLE SURROGATES AND EMPIRICAL ESTIMATES

Problem (P1) characterizes optimal score functions and thresholds. However, in practice, we do not know the underlying distribution and thus do not have access to the quantities in (4) and (5). Instead, we obtain their estimates using a finite training sample $D_{\text{train}} = \{(x_i, y_i^*)\}_{i=1}^{n_t}$ drawn independently from the same distribution:

$$\widehat{S}(g,\tau) := \frac{1}{n_t} \sum_{i=1}^{n_t} \sum_{y \in \mathcal{Y}_m} \mathbb{1}\{g(x_i, y) \ge \tau\}, \quad \widehat{\mathcal{P}}(g,\tau) := \frac{1}{n_t} \sum_{i=1}^{n_t} \mathbb{1}\{g(x_i, y_i^\star) \ge \tau\}.$$
(6)

Using these plug-in estimators in problem (P1) yields a revised optimization problem. However, it is difficult to solve this problem as the objective and constraints are not differentiable. To make them differentiable, we introduce the following surrogates. Given g(x, y) and τ , define the following sigmoid function with $\beta > 0$, $\sigma(x, y, g, \tau, \beta) := 1/(1 + \exp(-\beta (g(x, y) - \tau)))$. The sigmoid function provides a differentiable approximation to the indicator variable for $g(x, y) \ge \tau$. The approximation is tighter with larger β i.e., $\sigma(x, y, g, \tau, \beta) \to \mathbb{1}\{g(x, y) \ge \tau\}$ as $\beta \to \infty$, and $g(x, y) \ge \tau \iff \sigma(x, y, g, \tau) \ge 1/2$. By using these sigmoid surrogates in equation (6), we obtain the following smooth plugin estimates,

$$\widetilde{S}(g,\tau) := \frac{1}{n_t} \sum_{i=1}^{n_t} \sum_{y \in \mathcal{Y}_m} \sigma(x_i, y, g, \tau, \beta), \quad \widetilde{\mathcal{P}}(g,\tau) := \frac{1}{n_t} \sum_{i=1}^{n_t} \sigma(x_i, y_i^\star, g, \tau, \beta).$$
(7)

It is easy to see that by the strong law of larger numbers and properties of the sigmoid function, as $n_t, \beta \to \infty$, the surrogate average set size and coverage will converge almost surely to their population versions, i.e. $\widetilde{S}(g,\tau) \xrightarrow{a.s.} S(g,\tau)$ and $\widetilde{\mathcal{P}}(g,\tau) \xrightarrow{a.s.} \mathcal{P}(g,\tau)$. We replace the expected set size and marginal coverage by these smooth surrogates in (P1) and transform it into an unconstrained problem with the penalty term $\lambda > 0$. We also introduce ℓ_2 regularization to encourage low norm solutions. We optimize the score function g over a flexible space of functions \mathcal{G} , such as neural networks (NNs). The resulting problem (P2) is differentiable, and we solve it on a training dataset $D_{\text{train}} = \{x_i, y_i^*\}_{i=1}^{n_i}$ using stochastic gradient descent.

$$\tilde{g}, \tilde{\tau} := \operatorname*{arg\,min}_{g \in \mathcal{G}, \tau \in \mathbb{R}} \widetilde{S}(g, \tau) + \lambda \left(\widetilde{\mathcal{P}}(g, \tau) - 1 + \alpha \right)^2 - \hat{\mathcal{C}}(g) + \lambda_1 \|g\|_2^2.$$
(P2)

Here, $\hat{\mathcal{C}}(g) := \frac{1}{n_t} \sum_{i=1}^{n_t} \log(g(x_i, y_i^*))$ is the cross entropy term included to encourage higher scores for correct predictions and the regularization term $\lambda_1 ||g||_2^2$ is the squared norm over the parameters of g to promote low norm solutions. Solving (P2) yields a score function \tilde{g} and a threshold $\tilde{\tau}$. However, $\tilde{\tau}$ may be biased, since it is estimated on the same data as \tilde{g} . Following the split conformal procedure, we therefore estimate a new threshold $\hat{\tau}$ on a separate calibration dataset. In practice, we use 3-layer neural networks with tanh activation as \mathcal{G} and use the LLM's logits and the penultimate layer's representations corresponding to the last token as input features to the g network. (See Appendix for details). Note that our framework is flexible and can work with any choice of features and function class for which the ℓ_2 norm can be calculated.

3.2 CONFORMAL REVISION OF QUESTIONS (CROQ)

Here we show how conformal prediction sets can be used for downstream purposes other than uncertainty quantification, namely for improving the final accuracy in MCQ type tasks. Our procedure involves re-prompting the LLM with the reduced answer options from a conformal prediction set. We describe our procedure and then discuss the connection to the Monty Hall problem. The steps are also illustrated with an example in Figure 1.

Scores and Threshold for Conformal Prediction. We first fix a score function g, which could be any arbitrary function. Here we restrict it to either logits from the LLM or our CP-OPT scores (Section 3.1). We then run the split conformal procedure with coverage level $1 - \alpha$ for some $\alpha \in [0, 1]$ to estimate the threshold $\hat{\tau}$. CROQ then proceeds as follows.

Step 1: Get Conformal Prediction Set. Given a test instance x, we generate a first stage prediction set, $C(x; g, \hat{\tau})$. Per the coverage guarantee (Proposition 2.1), we expect that the true answer $y^* \in C(x; g, \hat{\tau})$ with probability at least $1 - \alpha$.

Step 2: Revise and Ask the LLM Again. If the first stage prediction set $C(x; g, \hat{\tau})$ is empty or is of size 1 or size m (the number of answer options), then we simply utilize the LLM's initial answer, as described in section 2.1, since the conformal procedure has yielded no additional information. Otherwise, we modify the prompt x to x' = (Q, O'), where $O' = \{(K_j, V_j) : K_j \in C(x; g, \hat{\tau})\}$. The keys in O' are changed so that they start with the first letter of the alphabet and go to the letter corresponding to the number of choices available. For example, if there were initially four answer options $\{a, b, c, d\}$, and the conformal prediction set was $\{c, d\}$, then the two options in the set

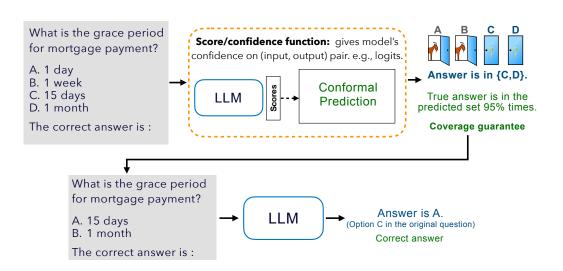


Figure 1: (CROQ) Illustration of conformal revision of questions and prompting the LLM with the revised question. In this example, the initial predicted set by LLM + conformal prediction (CP) is $\{C, D\}$. The question and labels are revised to contain only the answer choices in the prediction set and the LLM is prompted with the revised question. Since CP provides rigorous coverage guarantees, we expect that re-prompting the LLM with reduced answer choices will improve the chances of obtaining the correct answer. See Section 3.2 for more details.

would receive new keys {a, b}. Then x' is transformed into a prompt format and passed to the LLM, and the standard inference procedure (section 2.1) is run to extract the predicted answer key \hat{y}' .

Next, we discuss an interesting analogy between CROQ and the Monty Hall problem to provide insights into how CROQ can improve LLM accuracy and show its flexibility to accommodate oracles such as other LLMs.

Connection to the Monty Hall Problem. Monty Hall is a probability puzzle (Selvin, 1975; Granberg, 1999; Rosenthal, 2008) based on a popular game show, where a contestant chooses one of three doors (choices), behind one of which is a car and the others, goats. The contestant chooses an initial door, which remains closed. After the host reveals a goat behind another door, the contestant is asked if they want to switch doors. Under typical assumptions, switching offers a higher chance of winning, i.e. selecting the door with a car behind it.

In CROQ, we leverage conformal inference to eliminate "goats" (incorrect answers). The conformal set produced in the first stage of CROQ contains the correct answer with some user-specified probability, say 95%. In that sense, we imagine that an (imperfect or probabilistic) oracle is opening some number of doors (answer options) that with high probability reveal only goats (incorrect answers). Those answer options are eliminated, and then the LLM is queried again with the remaining set of answers. Thus, similar to the Monty Hall, there is a reduction in uncertainty after some doors (choices) are opened (eliminated), which we hypothesize leads to improved chances of winning (answering correctly). Hence, CROQ can enable an LLM agent to "self-correct".

Here the oracle's "knowledge" comes from the distribution of the scores of correct answers, so it is not contained within the LLM's representation of any given query. In that sense, it is extra information that gets added to the given query. Additionally, *the score function and the resulting distribution of scores can come from any source*. For example, they can come from another LLM, from embeddings that measure semantic similarity between questions and answers, etc. The extra information that the CP procedure represents can therefore come entirely from an external source.

Coverage-Accuracy Trade-offs. Conformal prediction has a small risk, namely a probability α , of eliminating the door with the "car" (true choice). If α is too small, we will have high coverage but may have relatively large sets i.e. little reduction in the uncertainty. If α is too large, we will too frequently exclude the correct answer from the revised question. Since our interest is in improving final accuracy, we treat α as a tuning parameter that can be optimized for accuracy (Section 4.2).

Reducing the number of response options in questions improves LLM accuracy. We refer to this phenomenon as the monotone accuracy property, which underpins the design of CROQ and the use of CP-OPT scores within it. To validate this property, we run a controlled experiment where we systematically reduce the number of response options using groundtruth knowledge. Using the Truthful QA dataset with 15 response options for each question, we first construct conformal prediction sets at 95% coverage using logit scores. We then reduce the prediction set size by 0 to 10 options while maintaining the same coverage level of 95%. Specifically, we remove incorrect (distractor) options randomly, ensuring that coverage remains constant. After each reduction, we re-query the LLM and record their accuracies. The results, in Figure 2, show a clear trend: as more incorrect options are removed, the LLM accuracy after re-querying improves.

This evidence suggests that CROQ should be able to improve accuracy and that running CROQ with smaller predictions sets from CP-OPT is expected to result in greater improvements than running CROQ with other scores that yield larger prediction sets. We formulate these ideas as hypotheses H2 and H3 below and test them empirically across several LLMs and datasets.




Figure 2: Accuracy of LLMs on TruthfulQA dataset with 15 response options, after reduction of conformal prediction set size using groundtruth knowledge of the correct answers. As more answers are eliminated, set sizes become smaller, and the accuracy of the LLM following requerying increases.

4 EXPERIMENTS

We conduct experiments on benchmark MCQ and tool usage tasks with open-weight instructiontuned models to test the following hypotheses:

H1. Using our CP-OPT scores in conformal prediction on MCQ tasks with LLMs yields a smaller average set size at the same level of coverage in comparison to using LLM logits.

H2. Conformal revision of questions (CROQ) improves accuracy over the standard inference.

H3. CROQ with CP-OPT scores performs better than CROQ with logit scores.

4.1 EXPERIMENTAL SETUP

We first describe the setup for the experiments and then discuss the results for the above hypotheses.

Datasets. We evaluate our hypotheses on 3 datasets: MMLU (Hendrycks et al., 2021), TruthfulQA (Lin et al., 2022), and ToolAlpaca (Tang et al., 2023). MMLU and TruthfulQA are popular benchmark datasets for multiple choice questions. MMLU focuses on assessing multitask accuracy, containing multiple choice questions (MCQs) from 57 domains, including humanities, math, medicine, etc.; while TruthfulQA evaluates an LLM's ability to answer truthfully and not mimic falsehoods that humans are susceptible to. ToolAlpaca contains 3.9k tool-use instances from a multi-agent simulation environment, which we augment to a MCQ format. Dataset descriptions and example questions and responses are provided in Appendix D.

Models. We use auto-regressive language models based on the transformer architecture. We choose instruction-tuned, open-weight, and small to medium sized models, for reproducibility and reduced computational cost. Specifically, we use Llama-3-8B-Instruct (Dubey et al., 2024) by Meta, Phi-3-4k-mini-Instruct (Abdin et al., 2024) by Microsoft, and gemma-2-9b-it-SimPO model (Meng et al., 2024).

			Llan	na-3			Phi	-3			Gemi	ma-2	
		Avg. S	et Size	Cove	rage	Avg. S	Set Size	Cove	rage	Avg. S	Set Size	Cove	rage
Dataset	# Opt.	Logits	Ours	Logits	Ours	Logits	Ours	Logits	Ours	Logits	Ours	Logits	Ours
	4	2.56	2.53*	95.75	95.57	2.21	2.16*	94.65	94.35	2.94	2.40*	95.16*	94.23
MMLU	10	5.53	4.90*	96.06*	95.45	4.36	4.36	94.11	94.09	7.79	6.08*	95.00*	94.04
	15	7.69	7.18*	95.42	95.06	6.64	6.52*	94.60	94.61	11.71	10.04*	94.58	94.58
	4	1.17	1.18	97.08	96.85	1.07	1.08	95.33	95.68	1.12	1.05*	95.68	95.44
ToolAlpaca	10	1.51	1.39*	95.21	95.56	1.25	1.20*	95.56	95.09	2.05	1.42*	95.56	94.51
	15	1.97	1.67*	96.50	96.03	1.68	1.54*	98.36*	97.20	3.54	1.77*	96.14	95.21
	4	3.34	2.69*	95.95*	92.41	2.85	2.53*	96.71	96.71	2.74	1.88*	96.46	95.44
TruthfulQA	10	7.06	6.41*	94.43	93.42	7.48	6.49*	98.48*	95.70	7.52	5.64*	95.44	97.22
	15	10.61	10.62	94.68	94.68	10.72	10.30*	95.44	96.46	11.23	9.35*	95.44	96.46

Table 1: Average set sizes and coverage rates (in percentages) for conformal prediction sets on the MMLU, ToolAlpaca, and TruthfulQA datasets using gemma-2-9b-it-SimPO (Gemma-2), Llama-3-8B-Instruct (Llama-3) and Phi-3-4k-mini-Instruct (Phi-3), with a target coverage level of 95%. Bold numbers indicate smaller average set sizes. Asterisks on the larger of a pair of numbers indicate where the difference in average set size or coverage is statistically significant at the 0.05 significance level. See Appendix C for details.

			Llama-3			Phi-3			Gemma-2	
Model	# Opt.	Accuracy Before (a ₁)	Accuracy After (a'_1)	Gain $(a'_1 - a_1)$	Accuracy Before (a ₁)	Accuracy After (a'_1)	Gain $(a'_1 - a_1)$	Accuracy Before (a ₁)	Accuracy After (a'_1)	Gain $(a'_1 - a_1)$
	4	64.02	63.83	-0.19	70.27	69.08	-1.19	67.62	67.70	0.07
MMLU	10	54.82	56.29	1.47*	58.44	61.57	3.13*	53.80	53.93	0.13
	15	51.99	54.11	2.11*	53.48	58.09	4.62*	50.78	50.58	-0.20
	4	91.47	91.94	0.47	92.76	92.64	-0.12	93.46	93.11	-0.35
ToolAlpaca	10	85.16	88.67	3.50*	87.50	90.89	3.39*	87.73	89.60	1.87*
	15	81.43	87.85	6.43*	85.98	89.25	3.27*	87.97	88.55	0.58
	4	54.43	55.19	0.76	69.87	70.13	0.25	74.68	74.94	0.25
TruthfulQA	10	39.24	40.76	1.52	55.70	54.43	-1.27	56.46	56.20	-0.25
	15	37.22	37.22	0.00	46.84	46.33	-0.51	55.95	56.96	1.01

Table 2: [CROQ + logits]. Results on accuracy improvement with CROQ using logit scores. Here a_1 , and a'_1 refer to the accuracy before CROQ and after CROQ respectively. A higher gain in a setting suggests CROQ improved accuracy in that setting.

			LLama-3			Phi-3			Gemma-2	
Model	# Opt.	Accuracy Before (a ₂)	$\begin{array}{c} \textbf{Accuracy} \\ \textbf{After} \\ (a_2') \end{array}$	Gain $(a'_2 - a_2)$	Accuracy Before (a ₂)	Accuracy After (a'_2)	Gain $(a'_2 - a_2)$	Accuracy Before (a ₂)	$\begin{array}{c} \textbf{Accuracy} \\ \textbf{After} \\ (a_2') \end{array}$	Gain $(a'_2 - a_2)$
	4	64.02	63.67	-0.34	70.27	69.34	-0.93	68.36	69.56	1.20*
MMLU	10	54.82	57.11	2.29*	58.44	61.05	2.61*	53.99	57.93	3.94*
	15	51.99	54.77	2.78*	53.48	58.15	4.68*	50.78	51.31	0.52
	4	91.47	91.82	0.35	92.64	92.52	-0.12	93.46	93.57	0.12
ToolAlpaca	10	85.16	89.02	3.86*	87.62	91.00	3.39*	88.08	90.42	2.34*
	15	81.43	88.67	7.24*	85.98	89.95	3.97*	88.08	89.37	1.29
	4	54.43	55.44	1.01	69.87	69.87	0.00	74.94	76.96	2.03
TruthfulQA	10	39.24	42.28	3.04	55.70	56.20	0.51	56.46	60.76	4.30*
	15	37.22	37.47	0.25	46.84	51.39	4.56*	55.95	57.72	1.77

Table 3: [CROQ + CP-OPT]. Results on accuracy improvement with CROQ using CP-OPT scores. Here a_2 , and a'_2 refer to the accuracy before CROQ and after CROQ respectively. A higher gain in a setting suggests CROQ improved accuracy in that setting.

			Llama-3			Phi-3			Gemma-2	
Model	# Opt.	Accuracy Logits (a'_1)	$\begin{array}{c} \textbf{Accuracy} \\ \textbf{CP-OPT} \\ (a_2') \end{array}$	Gain $(a'_2 - a'_1)$	Accuracy Logits (a'_1)	Accuracy CP-OPT (a'_2)	Gain $(a'_2 - a'_1)$	Accuracy Logits (a'_1)	$\begin{array}{c} \textbf{Accuracy} \\ \textbf{CP-OPT} \\ (a_2') \end{array}$	Gain $(a'_2 - a'_1)$
	4	63.83	63.67	-0.16	69.08	69.34	0.26	67.70	69.56	1.86*
MMLU	10	56.29	57.11	0.82*	61.57	61.05	-0.52	53.93	57.93	4.00*
	15	54.11	54.77	0.66*	58.09	58.15	0.06*	50.58	51.31	0.73
	4	91.94	91.82	-0.12	92.64	92.52	-0.12	93.11	93.57	0.46
ToolAlpaca	10	88.67	89.02	0.35*	90.89	91.00	0.11*	89.60	90.42	0.82*
	15	87.85	88.67	0.82*	89.25	89.95	0.70*	88.55	89.37	0.82
	4	55.19	55.44	0.25	70.13	69.87	-0.26	74.94	76.96	2.02
TruthfulQA	10	40.76	42.28	1.52	54.43	56.20	1.77	56.20	60.76	4.56*
	15	37.22	37.47	0.25	46.33	51.39	5.06*	56.96	57.72	0.76

Table 4: [CROQ + logits vs CROQ + CP-OPT]. Comparison of CP-OPT and logits on accuracy improvement with CROQ. Here, a'_1 , and a'_2 are the final accuracies after CROQ using logits and CP-OPT respectively (as in Tables 2 and 3. The gain $a'_2 - a'_1$ is the difference between these two, with values indicating more improvement in CROQ with CP-OPT scores.

Choices of Scores. We use the following scores for conformal prediction. (1) LLM Logits (Softmax) are extracted from the LLM as discussed in Section 2.1. These have been used in prior works (Kumar et al., 2023; Su et al., 2024). (2) CP-OPT (Ours) are the scores learned using the score optimization procedure discussed in Section 3.1. We use the train split for each dataset to learn these scores. The hyperparameter settings we used for CP-OPT are given in Appendix D.3. We omit the self-consistency based heuristic scores proposed by Su et al. (2024), as these require repeated inferences to get good estimates of the scores, and hence have a high computational cost.

We use the provided validation splits as our calibration datasets for the conformal procedure. For testing hypothesis **H1**, where our interest is in obtaining small sets with high coverage, we calibrate the conformal threshold for the coverage guarantee of 95%, i.e. we set the miscoverage rate α to 0.05. The hyperparameters used to learn the score function using SGD are provided in table 20 in Appendix D.3. For testing **H2**, we calibrate to a range of α values: {0.01, 0.02, 0.03, 0.04, 0.05, 0.06, 0.07, 0.08, 0.09, 0.1, 0.15, 0.2, 0.25, 0.3, 0.4, 0.5}. Performance is computed on test splits.

Statistical Significance. We report the statistical significance of the results based on paired sample t-tests and use asterisks (*) to annotate results that are statistically significant at a 0.05 significance level. See Appendix C for more details.

4.2 DISCUSSION

H1. Improvement in conformal set sizes with our CP-OPT scores. We run the CP procedure using the LLM logits and CP-OPT scores and obtain conformal sets for points in the test sets. We compute the average set size and coverage for each dataset, model, and score combination. The results are in Table 1. As expected, in most settings (17 out of 27) we see a statistically significant reduction in the set sizes with our (CP-OPT) scores with similar coverage as logits. The reduction is more pronounced with a higher number of options. In a few settings (6/27), the reduction in set size is accompanied by a statistically significant decrease in coverage relative to using the logits. In the remaining 4/27 settings the differences are insignificant. Note that since the target coverage level is 95%, anything above 95% is over-coverage. We see that logits tend to over-cover and thus a drop in coverage is expected as long as it does not fall significantly below the desired level of 95% (this happens only in 2/27 settings). Overall, these results show CP-OPT's effectiveness in reducing set sizes while maintaining the target coverage level. In Appendix B.2, we provide histograms (e.g., Figure 6) of set sizes produced by logits and CP-OPT scores in all settings. These histograms show a clear pattern: CP-OPT scores produce fewer large sets and more small sets in comparison to logit scores.

H2. Accuracy improvement with conformal revision of questions (CROQ). Tables 2 and 3 show the accuracy before and after CROQ with logit and CP-OPT scores respectively. With the logit scores (Table 2), we see an increase in accuracy (by up to 6.43%) in 19 out of 27 settings, out of which 9 are statistically significant (marked with asterisks). In 8 of the settings, we see a small

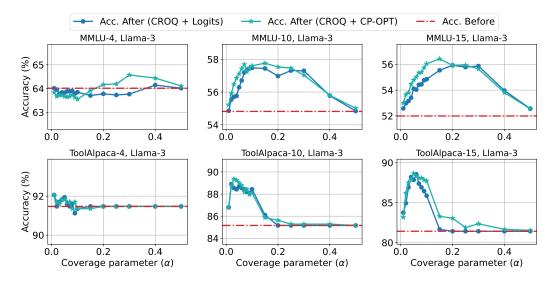


Figure 3: Accuracy on revised questions on the MMLU and ToolAlpaca dataset while varying coverage parameter α for Llama-3-8B-Instruct (Llama-3) model and both scores. Smaller values of α correspond to high levels of coverage. When coverage is too large, few or no answers are eliminated, and the LLM is prompted with the same question. When coverage is low, a larger portion of answer sets no longer contain the true answer or produce empty prediction sets thus resulting in diminished benefits of revision.

drop in accuracy (which is not statistically significant). Next, with CP-OPT scores (Table 3) we see accuracy improvements (up to 7.24%) in 24 settings, of which 13 are statistically significant. In the remaining 3 settings, we see a non-significant drop in accuracy. Overall, we observe that in the vast majority of the settings, CROQ improves accuracy with either logits or CP-OPT scores. The rare small drops in accuracy could occur since the conformal procedure may eliminate the correct option with low probability (α). In general, there is a trade-off between coverage and accuracy, which we explore next.

Trade-off between coverage and accuracy. The choice of α controls the coverage level in conformal prediction. A small α implies high coverage, meaning the prediction sets contain the true options with high probability but potentially have large sizes. Thus, choosing a very small α will likely not eliminate a sufficient number of options to see any noticeable improvement with CROQ. On the other hand, choosing a large α will eliminate the true option from the set for a large portion of the questions, which will result in low accuracy from CROQ. To study these trade-offs, we run CROQ with different values of α . The accuracy before and after CROQ for a range of α values are shown in 3 and 5 for the Llama-3 and Phi-3 models respectively. The results are as expected given the observations above: using an overly conservative (small) α does not give much improvement; as we increase α , the accuracy also increases up to a point, after which it starts to come down. This suggests that to optimize accuracy, a practitioner can tune α for their chosen score function and setting.

H3. CROQ with CP-OPT scores is better than CROQ with logit scores. CP-OPT scores are designed to minimize set sizes while maintaining the coverage guarantee. As a result, using these scores with CROQ is expected to significantly reduce uncertainty for many questions, leading to fewer answer options in the revised prompts. We expect LLMs to be more likely to answer correctly when prompted with the revised question with fewer options. The results of CROQ with CP-OPT are summarized in Table 3, and in Table 4 we compare the accuracies after CROQ with logits and CP-OPT. In Table 4 we see that in 22 out of 27 settings, CROQ with CP-OPT resulted in higher accuracy (up to 4.56%) than CROQ with logits. Furthermore, the improvements in 12 out of these 22 settings are statistically significant. The drop in accuracy in the remaining 5 settings is statistically non-significant. Overall, these results indicate that CROQ with CP-OPT is generally better than CROQ with logits.

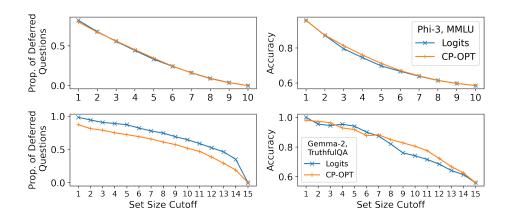


Figure 4: Proportion of questions deferred to a human when conformal prediction set sizes exceed a certain cutoff (left), and the corresponding LLM accuracy for questions (without revision) retained by the LLM as a function of cutoff threshold (right). In the top row (MMLU, 10 options, Phi-3-4k-mini-Instruct), the difference in deferral and accuracy is negligible, whereas in the bottom row (TruthfulQA, 15 options, gemma-2-9b-it-SimPO), CP-OPT defers fewer questions to the human while providing similar or improved accuracy for questions retained.

Smaller prediction sets imply fewer deferrals in human-in-the-loop or model cascade systems. We consider a deferral procedure in which a set size cutoff is selected, and the LLM answer is only retained if the set size is at or below that cutoff. For all larger sets, the question is passed to a human (or a more powerful but costly model) who can answer the question correctly. Smaller sets from CP are desirable for this procedure to be effective. We evaluate this procedure with logit and CP-OPT scores in two settings and show the results in Figure 4. As expected, lower set size cutoffs result in higher accuracy. As the set size cutoff increases, the accuracy approaches the LLM's marginal accuracy, while the number of deferrals (i.e. the cost of obtaining the answer from a human or more expensive model) decreases. In the top row of the figure, the differences in the set sizes between logit and CP-OPT scores are not large enough to see a meaningful difference in this procedure. However, in the bottom row corresponding to the Gemma-2 model and TruthfulQA dataset with 15 options, we see CP-OPT scores lead to fewer deferrals in comparison to logits. Model cascades (Dohan et al., 2022; Gupta et al., 2024) and deferrals to human-in-the-loop (Tailor et al., 2024; Vishwakarma et al., 2024) and more broadly selective prediction (El-Yaniv and Wiener, 2010; Fisch et al., 2022; Vishwakarma et al., 2023) are useful frameworks for model deployment while ensuring safety, high accuracy, and balancing the costs. Our experiments show the promise of CP with logit and CP-OPT scores in this task and suggest it would be fruitful to explore this design space with CP.

5 RELATED WORK

Conformal Prediction for Uncertainty Quantification with LLMs Recently there has been growing interest in using conformal prediction to quantify and control uncertainty in LLM-related tasks. In the context of multi-choice question answering (MCQ), previous works have investigated a variety of conformal score functions, including (the softmax of) the LLM logits corresponding to the response options (Kumar et al., 2023; Ren et al., 2023) or functions thereof (Ye et al., 2024), confidence scores generated by the LLM itself, or "self-consistency" scores derived by repeated querying of the LLM (Su et al., 2024). We build on this work by aiming to learn a conformal score function that yields small conformal sets, rather than taking the score function as given.

In addition to the MCQ setting, there has been recent work utilizing conformal prediction in the context of open-ended response generation (Quach et al., 2024; Mohri and Hashimoto, 2024; Cherian et al., 2024). This setting differs in that there is not necessarily a unique correct response, so the notion of coverage must be redefined around *acceptability* or *factuality* rather than correctness. When factuality is the target, the goal is to calibrate a pruning procedure that removes a minimal number of claims from an LLM-generated open response, such that the remaining claims are all factual with high probability; that is, the goal is to retain as large a set as possible, rather than to generate a set with the smallest number of responses possible as in MCQ. Conformal prediction has also been used to capture token-level uncertainty (Deutschmann et al., 2024; Ulmer et al., 2024).

Optimizing Conformal Prediction Procedures Several recent works have considered how to learn good conformal score functions from data, primarily in the context of supervised learning models (Bai et al., 2022; Stutz et al., 2022; Yang and Kuchibhotla, 2024; Xie et al., 2024). With LLMs, Cherian et al. (2024) consider how to learn a good score function to achieve factuality guarantees; their optimization problem differs from ours due to the difference in setting as well as the addition of conditional coverage constraints (ensuring that coverage holds in different parts of the feature space). Kiyani et al. (2024) design a framework to minimize the size ("length," in their terminology) of conformal sets, which they apply to MCQ as well as to supervised learning problems. However, their framework is concerned with how to generate sets given a model and a conformity score, rather than how to learn a conformity score.

The works mentioned above all aim to produce (small) conformal sets that satisfy coverage guarantees. Among these, only Ren et al. (2023) consider how conformal sets may be used downstream, in their case to improve the efficiency and autonomy of robot behavior. To our knowledge, our work is the first to investigate whether conformal prediction can be used to increase the accuracy of LLMs on MCQ type tasks.

6 CONCLUSION AND FUTURE WORK

We investigated how conformal prediction can be used to quantify and reduce output uncertainty for decision-making problems such as tool selection and multi-choice question answering (MCQ) with LLMs. We defined an optimal conformal score function (P1) that minimizes average set size subject to a coverage constraint, and we showed how to estimate it using a differentiable loss function that can be optimized via stochastic gradient descent (P2). We called this procedure CP-OPT. In experiments with a variety of models, datasets, and answer option cardinalities, we showed that CP-OPT results in smaller average set sizes than the baseline score function consisting of the LLM logits corresponding to the MCQ answer options, although these smaller set sizes sometimes resulted in reduced coverage. We emphasize that CP-OPT is extremely general and can be applied with different models, feature sets, etc. If the LLM logits are already highly informative with regard to model uncertainty, then there may be little to gain (but nothing to lose) from applying CP-OPT, but in other settings there may be substantial benefit from optimizing the conformal scores.

We further investigated whether re-prompting an LLM with the answer options contained in the conformal set would result in higher final accuracy on MCQ tasks. We called this procedure CROQ. The intuition is that conformal sets will contain the true answer with high probability while potentially substantially reducing the number of answer options the LLM has to consider. We found that CROQ increases accuracy in most of the cases and that there is an interplay between the coverage level and the accuracy improvement which can be optimized. As an additional consideration of how prediction sets can be used for purposes other than uncertainty quantification, we illustrated how to use them to decide when to defer to human judgment, with both the accuracy and the deferral cost increasing as the set size cutoff shrinks.

A particularly interesting extension to the CROQ procedure is performing multiple rounds of question revisions. While we have demonstrated that a reduction in the number of available response options increases LLM accuracy, we conjecture that a further reduction in conformal set sizes could occur as well. Repeated conformal inference would come at higher computational costs, as performing it at each round would require repeated calibration, and may require fresh data to calibrate on. Additionally, without adjusting the coverage level used at each round, the final coverage rate will be lower than the nominal rate. Developing methodology to make a multi-round CROQ procedure both efficient and technically sound is a promising line of future research. Different models could also be used to generate the initial prediction set and the final answer, instead of a single LLM for both.

Other future lines of investigation include considering how to calibrate conformal score thresholds when the number of answer options that the LLM may encounter in MCQ may vary. This is relevant for example in tool usage problems, where an LLM may be asked to consider very different numbers of APIs for different types of queries. One possible approach involves quantile regression against the numbers of answer options, which may enable reasonable estimation of the quantiles in cases where some numbers of answer options are not well represented in the calibration data.

ACKNOWLEDGMENTS

We are grateful to Sujay Bhatt for pointing out the connection between CROQ and the Monty Hall problem. We thank Alec Koppel and Udari Madhushani Sehwag for fruitful discussions and feedback. We also appreciate the valuable inputs provided by Frederic Sala, Changho Shin, John Cooper, Daisuke Yamada, Yi Chen and the anonymous reviewers.

DISCLAIMER

This paper was prepared for informational purposes in part by the Artificial Intelligence Research group of JPMorganChase and its affiliates ("J.P. Morgan") and is not a product of the Research Department of JPMorganChase. J.P. Morgan makes no representation and warranty whatsoever and disclaims all liability, for the completeness, accuracy or reliability of the information contained herein. This document is not intended as investment research or investment advice, or a recommendation, offer or solicitation for the purchase or sale of any security, financial instrument, financial product or service, or to be used in any way for evaluating the merits of participating in any transaction, and shall not constitute a solicitation under any jurisdiction or to any person, if such solicitation under such jurisdiction or to such person would be unlawful.

REFERENCES

- M. Abdin, S. A. Jacobs, A. A. Awan, J. Aneja, A. Awadallah, H. Awadalla, N. Bach, A. Bahree, A. Bakhtiari, H. Behl, et al. Phi-3 technical report: A highly capable language model locally on your phone. arXiv preprint arXiv:2404.14219, 2024.
- A. N. Angelopoulos and S. Bates. A Gentle Introduction to Conformal Prediction and Distribution-Free Uncertainty Quantification. *arXiv preprint arXiv:2107.07511*, (arXiv:2107.07511), 2022.
- A. N. Angelopoulos, S. Bates, E. J. Candès, M. I. Jordan, and L. Lei. Learn then test: Calibrating predictive algorithms to achieve risk control. *arXiv preprint arXiv:2110.01052*, 2022.
- Y. Bai, S. Mei, H. Wang, Y. Zhou, and C. Xiong. Efficient and differentiable conformal prediction with general function classes. In *The Tenth International Conference on Learning Representations*, 2022.
- J. J. Cherian, I. Gibbs, and E. J. Candès. Large language model validity via enhanced conformal prediction methods. *arXiv preprint arXiv:2406.09714*, 2024.
- J. Clarkson, W. Xu, M. Cucuringu, and G. Reinert. Split conformal prediction under data contamination. arXiv preprint arXiv:2407.07700, 2024.
- Databricks. Introducing DBRX: A New State-of-the-Art Open LLM. https://www.databricks.com/blog/introducing-dbrx-new-state-art-open-llm, 2024.
- N. Deutschmann, M. Alberts, and M. R. Martínez. Conformal autoregressive generation: Beam search with coverage guarantees. In *Proceedings of the AAAI Conference on Artificial Intelli*gence, 2024.
- D. Dohan, W. Xu, A. Lewkowycz, J. Austin, D. Bieber, R. G. Lopes, Y. Wu, H. Michalewski, R. A. Saurous, J. Sohl-dickstein, K. Murphy, and C. Sutton. Language model cascades, 2022. URL https://arxiv.org/abs/2207.10342.
- A. Dubey, A. Jauhri, A. Pandey, A. Kadian, A. Al-Dahle, A. Letman, A. Mathur, A. Schelten, A. Yang, A. Fan, et al. The llama 3 herd of models. arXiv preprint arXiv:2407.21783, 2024.
- R. El-Yaniv and Y. Wiener. On the foundations of noise-free selective classification. *JMLR*, 11: 1605–1641, aug 2010. ISSN 1532-4435.
- A. Fisch, T. S. Jaakkola, and R. Barzilay. Calibrated selective classification. *Transactions on Machine Learning Research*, 2022. ISSN 2835-8856. URL https://openreview.net/forum?id=zFhNBs8GaV.

- D. Granberg. A new version of the monty hall dilemma with unequal probabilities. *Behavioural Processes*, 48(1):25–34, 1999. ISSN 0376-6357.
- T. Groot and M. Valdenegro Toro. Overconfidence is key: Verbalized uncertainty evaluation in large language and vision-language models. In *Proceedings of the 4th Workshop on Trustworthy Natural Language Processing (TrustNLP 2024)*. Association for Computational Linguistics, 2024.
- N. Gupta, H. Narasimhan, W. Jitkrittum, A. S. Rawat, A. K. Menon, and S. Kumar. Language model cascades: Token-level uncertainty and beyond. *arXiv preprint arXiv:2404.10136*, 2024.
- D. Hendrycks, C. Burns, S. Basart, A. Zou, M. Mazeika, D. Song, and J. Steinhardt. Measuring massive multitask language understanding. In *International Conference on Learning Representations*, 2021.
- S. Kiyani, G. Pappas, and H. Hassani. Length Optimization in Conformal Prediction. *arXiv preprint arXiv:2406.18814*, 2024.
- L. Krause, W. Tufa, S. Baez Santamaria, A. Daza, U. Khurana, and P. Vossen. Confidently wrong: Exploring the calibration and expression of (un)certainty of large language models in a multilingual setting. In *Proceedings of the Workshop on Multimodal, Multilingual Natural Language Generation and Multilingual WebNLG Challenge (MM-NLG 2023)*. Association for Computational Linguistics, 2023.
- B. Kumar, C. Lu, G. Gupta, A. Palepu, D. Bellamy, R. Raskar, and A. Beam. Conformal prediction with large language models for multi-choice question answering. *arXiv preprint arXiv:2305.18404*, 2023.
- J. Lei, M. G'Sell, A. Rinaldo, R. J. Tibshirani, and L. Wasserman. Distribution-free predictive inference for regression. *Journal of the American Statistical Association*, 113(523), 2018.
- S. Lin, J. Hilton, and O. Evans. TruthfulQA: Measuring how models mimic human falsehoods. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. Association for Computational Linguistics, 2022.
- Y. Meng, M. Xia, and D. Chen. SimPO: Simple preference optimization with a reference-free reward. *arXiv preprint arXiv:2405.14734*, 2024.
- C. Mohri and T. Hashimoto. Language models with conformal factuality guarantees. *arXiv preprint arXiv:2402.10978*, 2024.
- H. Papadopoulos, K. Proedrou, V. Vovk, and A. Gammerman. Inductive confidence machines for regression. In *Machine learning: ECML 2002: 13th European conference on machine learning Helsinki, Finland, August 19–23, 2002 proceedings 13.* Springer, 2002.
- C. Qu, S. Dai, X. Wei, H. Cai, S. Wang, D. Yin, J. Xu, and J.-R. Wen. Tool learning with large language models: A survey. *arXiv preprint arXiv:2405.17935*, 2024.
- V. Quach, A. Fisch, T. Schuster, A. Yala, J. H. Sohn, T. S. Jaakkola, and R. Barzilay. Conformal language modeling. In *The Twelfth International Conference on Learning Representations*, 2024.
- A. Z. Ren, A. Dixit, A. Bodrova, S. Singh, S. Tu, N. Brown, P. Xu, L. Takayama, F. Xia, J. Varley, Z. Xu, D. Sadigh, A. Zeng, and A. Majumdar. Robots that ask for help: Uncertainty alignment for large language model planners. In *7th Annual Conference on Robot Learning*, 2023.
- J. S. Rosenthal. Monty hall, monty fall, monty crawl. Math Horizons, 16(1), 2008.
- S. Selvin. Letters to the editor: On the monty hall problem. *American Statistician*, 29:131–134, 1975.
- D. Stutz, K. D. Dvijotham, A. T. Cemgil, and A. Doucet. Learning optimal conformal classifiers. In *International Conference on Learning Representations*, 2022.
- J. Su, J. Luo, H. Wang, and L. Cheng. Api is enough: Conformal prediction for large language models without logit-access. *arXiv preprint arXiv:2403.01216*, 2024.

- D. Tailor, A. Patra, R. Verma, P. Manggala, and E. Nalisnick. Learning to defer to a population: A meta-learning approach. In *International Conference on Artificial Intelligence and Statistics*, pages 3475–3483. PMLR, 2024.
- Q. Tang, Z. Deng, H. Lin, X. Han, Q. Liang, B. Cao, and L. Sun. Toolalpaca: Generalized tool learning for language models with 3000 simulated cases. arXiv preprint arXiv:2306.05301, 2023.
- H. Touvron, L. Martin, K. Stone, P. Albert, A. Almahairi, Y. Babaei, N. Bashlykov, S. Batra, P. Bhargava, S. Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint* arXiv:2307.09288, 2023.
- D. Ulmer, C. Zerva, and A. Martins. Non-exchangeable conformal language generation with nearest neighbors. In *Findings of the Association for Computational Linguistics: EACL 2024*, 2024.
- H. Vishwakarma, H. Lin, F. Sala, and R. K. Vinayak. Promises and pitfalls of threshold-based autolabeling. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023. URL https://openreview.net/forum?id=RUCFAKNDb2.
- H. Vishwakarma, H. Lin, and R. K. Vinayak. Taming false positives in out-of-distribution detection with human feedback. In *International Conference on Artificial Intelligence and Statistics*, pages 1486–1494. PMLR, 2024.
- V. Vovk, A. Gammerman, and G. Shafer. *Algorithmic learning in a random world*, volume 29. Springer, 2005.
- R. Xie, R. F. Barber, and E. J. Candès. Boosted Conformal Prediction Intervals. arXiv preprint arXiv:2406.07449, 2024.
- Y. Yang and A. K. Kuchibhotla. Selection and Aggregation of Conformal Prediction Sets. *Journal* of the American Statistical Association, 2024.
- F. Ye, M. Yang, J. Pang, L. Wang, D. F. Wong, E. Yilmaz, S. Shi, and Z. Tu. Benchmarking llms via uncertainty quantification. arXiv preprint arXiv:2401.12794, 2024.
- C. Zheng, H. Zhou, F. Meng, J. Zhou, and M. Huang. Large language models are not robust multiple choice selectors. In *The Twelfth International Conference on Learning Representations*, 2024.

A DETAILS ON LLM INFERENCE IN MULTI-CHOICE QUESTION ANSWERING

We provide a formal description of the inference procedure described in the **LLM Inference** paragraph of Section 2.1.

The input prompt x is a sequence of tokens $t_1, t_2, \ldots t_n$. We run the forward pass of the autoregressive LLM (Touvron et al., 2023; Dubey et al., 2024; Abdin et al., 2024) on x to produce a set of output logits:

$$\boldsymbol{l}_1, \boldsymbol{l}_2, \dots, \boldsymbol{l}_n \leftarrow \text{LLM}(t_1, t_2, \dots t_n) \tag{8}$$

Here, each logit $l_j \in \mathbb{R}^{|V|}$ expresses the likelihood of the next token after t_1, \ldots, t_j , where V is the universal set of tokens (aka the alphabet) for the given LLM and |V| is its size. The last token's logits l_n are expected to have a high value for the correct answer key. We extract the logit vector $\overline{l} \in \mathbb{R}^m$ corresponding to the option keys as follows:

$$\bar{\boldsymbol{l}} := \begin{bmatrix} \boldsymbol{l}_n[Y_1], \, \boldsymbol{l}_n[Y_2], \, \dots, \, \boldsymbol{l}_n[Y_m] \end{bmatrix},\tag{9}$$

where $l_n[Y_j]$ denotes the logit value corresponding to the token Y_j in the last token's logits l_n . The logits \bar{l} are converted to softmax scores s(x). The softmax score of point x and option key y is denoted by s(x, y) and the predicted answer key \hat{y} corresponds to the maximum softmax value:

$$s(x) := \operatorname{softmax}(\overline{l}), \qquad s(x,y) := s(x)[y], \qquad \hat{y} := \underset{y \in \{Y_1, \dots, Y_m\}}{\operatorname{arg\,max}} s(x,y) \tag{10}$$

B ADDITIONAL DETAILS AND RESULTS

This appendix contains additional results and details not included in the main paper due to length constraints.

B.1 Details of features and \mathcal{G} used in experiments

Let $z \in \mathbb{R}^{d+m}$ be the concatenation of the LLM's penultimate layer's representation (*d*-dimensional) and logits (*m*-dimensional) for the last token. Our choice of \mathcal{G} for the experiments is defined as follows,

$$\begin{split} \mathcal{G} &:= \{g: \mathbb{R}^{d_0} \to \Delta^{m-1} \mid g(\boldsymbol{z}) := \operatorname{softmax}(\boldsymbol{W}_3 \operatorname{tanh}(\boldsymbol{W}_2 \operatorname{tanh}(\boldsymbol{W}_1(\boldsymbol{z})))), \\ \boldsymbol{W}_1 \in \mathbb{R}^{d_0 \times d_1}, \boldsymbol{W}_2 \in \mathbb{R}^{d_1 \times d_2}, \boldsymbol{W}_3 \in \mathbb{R}^{d_2 \times m} \} \end{split}$$

Here, $d_0 = d + m$, $d_1 = (d + m)/2$, and $d_3 = (d + m)/4$ and Δ^{m-1} is the m - 1 dimensional probability simplex.

B.2 RESULTS

Figure 5 shows accuracy after the CROQ procedure as a function of α for Phi-3. The results are qualitatively similar to the results for Llama-3 in the main text (Section 4.2).

All remaining results are organized by dataset. Tables for the CROQ results which illustrate accuracy changes conditional on set size are based on a confidence level of 95% (equivalently an α level of 0.05). Note that with the ToolAlpaca dataset, not all possible set sizes occur, in which case we omit the corresponding columns. For example, with 10 response options, only sets of size 8 and smaller occur.

Asterisks in the tables indicate where the difference in overall accuracy from Before to After, i.e. from baseline to after the CROQ procedure, is statistically significant at the $\alpha = 0.05$ level. (In some tables, like Table 8, none of the changes are significant.) See Appendix C for details on how statistical significance was calculated.

B.3 MMLU

Results for the experiments on the MMLU dataset are given in Tables 8 and 9, Tables 5 to 7 and Figures 6 to 8.

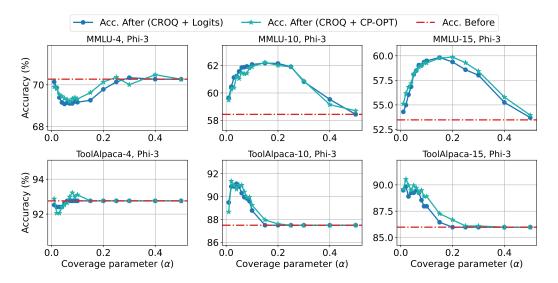


Figure 5: Accuracy on revised questions on the MMLU and ToolAlpaca dataset while varying coverage parameter α for Phi-3-4k-mini-Instruct (Phi-3) model and both scores. Smaller values of α correspond to high levels of coverage. When coverage is too large, few or no answers are eliminated, and the LLM is prompted with the same question. When coverage is low, a larger portion of answer sets no longer contain the true answer and the benefits of revision are diminished.

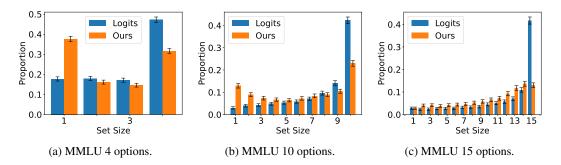


Figure 6: Distributions of sizes of sets obtained from CP-OPT and logit scores on MMLU dataset and Gemma-2 model setting.

B.4 TRUTHFULQA

Results for the experiments on the TruthfulQA dataset are given in Tables 10 to 14 and Figures 12 and 13.

B.5 TOOLALPACA

Results for experiments on the ToolAlpaca dataset are given in Tables 15 to 19 and Figures 9 and 10.

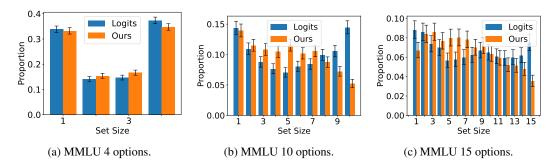


Figure 7: Distributions of sizes of sets obtained from CP-OPT and logit scores on MMLU dataset and Llama-3 model setting.

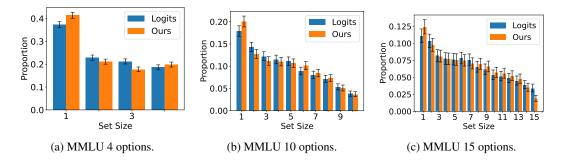


Figure 8: Distributions of sizes of sets obtained from CP-OPT and logit scores on MMLU dataset and Phi-3 model setting.

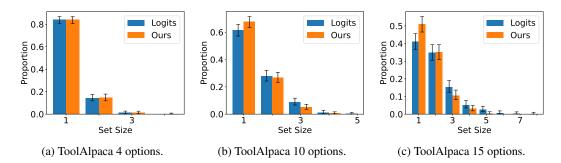


Figure 9: Distributions of sizes of sets obtained from CP-OPT and logit scores on ToolAlpaca dataset and Llama-3 model setting.

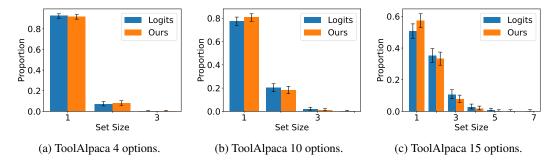


Figure 10: Distributions of sizes of sets obtained from CP-OPT and logit scores on ToolAlpaca dataset and Phi-3 model setting.

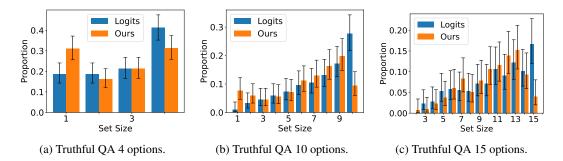


Figure 11: Distributions of sizes of sets obtained from CP-OPT and logit scores on Truthful QA dataset and Phi-3 model setting.

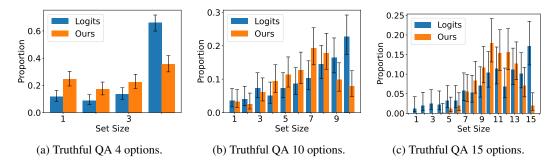


Figure 12: Distributions of sizes of sets obtained from CP-OPT and logit scores on Truthful QA dataset and Llama-3 model setting.

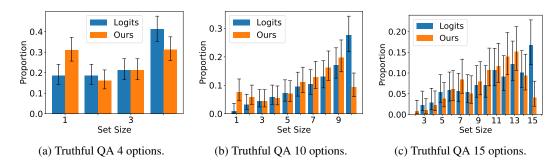


Figure 13: Distributions of sizes of sets obtained from CP-OPT and logit scores on Truthful QA dataset and Phi-3 model setting.

Score	Set Size	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Overall
	Coverage	82.40	69.04	80.00	83.56	81.11	87.45	86.31	88.60	90.75	90.45	94.80	93.75	98.30	98.15	100	94.58
Logits	Fraction	2.77	2.34	2.37	2.60	2.58	2.74	3.12	3.23	3.47	4.47	5.02	5.70	6.99	10.91	41.70	100
	Acc. Before	82.40	62.44	62.00	65.30	60.37	61.47	61.98	59.19	55.82	62.6	57.92	51.25	57.89	50.38	40.01	50.78
	Acc. After	82.40	65.48	68.50	65.75	63.13	58.87	60.08	57.72	56.85	58.89	55.08	51.88	58.06	49.40	40.01	50.58
	Coverage	93.10	94.05	89.83	89.94	89.34	90.54	89.74	90.23	92.40	94.73	94.70	94.46	96.77	97.74	100	94.58
Ours	Fraction	2.75	3.99	4.08	3.77	4.12	4.39	4.63	5.22	5.78	6.53	7.17	9.21	11.76	13.66	12.94	100
	Acc. Before	93.10	88.10	82.56	79.56	75.79	73.24	64.62	56.82	56.26	52.73	45.20	42.53	36.63	33.10	25.96	50.78
	Acc. After	93.10	89.58	82.56	80.82	73.78	70.81	60.26	56.14	57.49	53.27	46.69	43.94	40.06	33.80	25.96	51.31

Table 5: Results for CROQ on the MMLU dataset with 15 response options and Gemma-2 model.

Score	Set Size	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Overall
	Coverage	95.82	91.56	89.98	93.19	94.54	94.63	94.44	95.60	96.09	96.88	97.06	96.77	98.21	98.08	100	95.42
Logits	Fraction	8.81	8.58	7.35	6.97	5.65	5.74	5.98	6.21	6.68	6.46	6.05	5.89	5.97	6.17	7.50	100
	Acc. Before	95.82	82.16	72.37	66.95	55.88	50.62	50.20	46.08	40.14	37.32	34.90	34.68	30.62	27.88	24.05	51.99
	Acc. After	95.82	83.82	76.09	71.55	63.66	53.93	51.39	45.32	43.69	40.99	36.47	35.08	33.00	27.69	24.05	54.11*
	Coverage	94.15	94.62	91.29	91.63	93.31	93.18	94.52	96.43	97.02	96.42	97.59	96.56	97.91	98.25	100	95.06
Ours	Fraction	6.69	8.38	8.58	7.65	7.99	8.00	7.80	6.99	7.17	6.30	5.90	5.17	5.12	4.75	3.51	100
	Acc. Before	94.15	87.54	73.58	65.58	55.57	51.78	45.81	46.86	39.90	31.83	33.00	28.67	31.32	21.25	19.59	51.99
	Acc. After	94.15	89.24	75.80	70.39	63.74	54.60	50.53	47.54	42.38	35.03	34.21	33.26	29.93	24.75	19.59	54.77*

Table 6: Results for CROQ on the MMLU dataset with 15 response options and Llama-3 model.

Score	Set Size	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Overall
	Coverage	96.03	92.77	93.46	91.71	93.93	93.61	93.55	93.81	94.79	96.65	95.38	96.83	95.77	97.25	100	94.60
Logits	Fraction	11.07	10.34	8.17	7.73	7.62	7.80	7.55	6.52	6.15	5.32	5.14	4.87	4.49	3.88	3.38	100
	Acc. Before	96.03	80.48	69.62	59.14	53.12	46.27	42.61	42.08	37.84	39.51	36.72	34.15	23.02	23.55	21.75	53.48
	Acc. After	96.03	84.85	76.60	66.97	63.86	53.42	51.10	44.44	42.86	42.19	39.26	36.34	25.13	24.46	21.75	58.09*
	Coverage	95.79	92.20	93.83	91.19	94.19	93.79	95.93	94.54	94.57	96.04	93.82	96.80	96.26	97.29	100	94.61
Ours	Fraction	12.40	9.73	8.08	7.68	7.56	7.45	7.00	6.95	6.55	5.70	5.57	5.20	4.76	3.50	1.86	100
	Acc. Before	95.79	80.24	73.86	60.28	51.33	49.68	43.90	41.47	36.41	31.46	29.42	29.00	25.69	21.69	18.47	53.48
	Acc. After	95.79	83.66	78.12	69.86	62.64	54.62	52.03	47.95	39.67	38.96	32.41	31.28	27.18	22.37	18.47	58.15*

Table 7: Results for CROQ on the MMLU dataset with 15 response options and Phi-3 model.

Model	Score	Set Size	1	2	3	4	Overall
		Coverage	89.34	89.94	93.27	100	95.16
	Logits	Fraction	17.71	17.93	17.11	47.25	100
		Acc. Before	89.34	79.42	68.24	54.79	67.62
Gemma-2		Acc. After	89.34	79.95	68.10	54.79	67.70
Gemma-2		Coverage	91.67	89.93	93.10	100	94.23
	Ours	Fraction	37.62	16.14	14.61	31.63	100
		Acc. Before	91.67	72.50	57.27	43.64	68.36
		Acc. After	91.67	75.88	61.74	43.64	69.56*
		Coverage	93.55	92.78	92.89	100	95.75
	Logits	Fraction	33.84	14.13	14.68	37.35	100
		Acc. Before	93.55	70.19	49.88	40.48	64.02
Llama-3		Acc. After	93.55	70.70	48.10	40.48	63.83
Liama-3		Coverage	93.71	91.83	93.50	100	95.57
	Ours	Fraction	33.21	15.39	16.63	34.77	100
		Acc. Before	93.71	71.16	52.46	38.02	64.02
		Acc. After	93.71	70.01	51.46	38.02	63.67
		Coverage	94.75	91.48	93.17	100	94.65
	Logits	Fraction	37.30	22.86	21.20	18.64	100
		Acc. Before	94.75	70.25	52.69	41.31	70.27
Phi-3		Acc. After	94.75	66.93	50.67	41.31	69.08
F111-3		Coverage	93.63	90.61	94.17	100	94.35
	Ours	Fraction	41.36	21.10	17.71	19.83	100
		Acc. Before	93.63	67.38	52.82	40.22	70.27
		Acc. After	93.63	64.57	50.94	40.22	69.34

Table 8: Results for CROQ on the MMLU dataset with 4 response options.

Model	Score	Set Size	1	2	3	4	5	6	7	8	9	10	Overall
		Coverage	78.80	79.03	84.92	88.56	85.30	92.64	94.09	96.41	97.22	100	95.00
	Logits	Fraction	2.97	3.90	4.25	4.77	5.33	5.80	7.03	9.59	14.10	42.26	100
		Acc. Before	78.80	73.86	74.02	68.41	62.36	67.69	61.49	58.42	51.94	41.81	53.80
Gemma-2		Acc. After	78.80	76.90	75.98	72.39	62.36	66.67	60.14	57.67	51.68	41.81	53.93
Gemma-2		Coverage	90.79	92.27	88.31	90.54	89.80	91.30	92.05	95.60	97.49	100	94.04
	Ours	Fraction	12.89	8.90	7.31	6.65	6.40	7.23	8.36	8.90	10.41	22.96	100
		Acc. Before	90.79	84.93	69.97	66.07	54.17	48.60	42.76	40.00	37.74	31.27	53.99
		Acc. After	90.79	89.20	79.8 7	75.00	64.01	55.34	47.02	45.33	40.59	31.27	57.93*
		Coverage	94.55	91.96	91.73	94.09	94.94	97.19	97.32	97.72	99.32	100	96.06
	Logits	Fraction	14.36	10.92	8.76	7.63	7.04	8.03	8.40	9.90	10.53	14.43	100
		Acc. Before	94.55	80.43	65.99	57.54	51.43	47.56	37.71	35.13	34.84	31.41	54.82
Llama-3		Acc. After	94.55	80.33	69.51	60.96	53.29	49.93	42.37	36.21	35.74	31.41	56.29*
Liaina-3		Coverage	94.80	91.95	92.42	93.98	94.95	96.61	97.64	97.96	98.68	100	95.45
	Ours	Fraction	13.92	11.50	10.80	10.44	11.51	10.16	10.55	8.71	7.20	5.20	100
		Acc. Before	94.80	79.67	68.02	52.61	45.05	40.19	35.55	33.65	28.67	30.82	54.82
		Acc. After	94.80	79.05	71.76	55.57	49.90	42.76	40.83	35.42	30.31	30.82	57.11*
		Coverage	95.75	91.02	90.76	94.21	93.90	95.59	94.07	96.17	95.52	100	94.11
	Logits	Fraction	17.87	14.28	12.20	11.48	11.08	8.88	8.01	7.12	5.29	3.79	100
		Acc. Before	95.75	76.56	59.14	55.02	45.50	43.72	37.19	33.0	30.27	26.65	58.44
Phi-3		Acc. After	95.75	79.05	65.56	59.77	51.18	47.19	42.37	32.83	32.29	26.65	61.57*
1 111-5		Coverage	95.85	90.94	90.94	94.05	93.53	94.71	93.94	94.96	96.71	100	94.09
	Ours	Fraction	20.02	12.71	11.13	10.98	10.65	10.09	8.41	7.30	5.06	3.66	100
		Acc. Before	95.85	73.86	63.75	54.38	46.38	40.47	36.53	32.68	26.76	26.30	58.44
		Acc. After	95.85	76.84	68.66	59.68	50.61	44.12	38.50	34.80	26.06	26.30	61.05*

Table 9: Results for CROQ on the MMLU dataset with 10 response options.

Score	Set Size	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Overall
	Coverage	100	93.75	92.86	100	100	95.00	94.12	76.92	80.95	94.44	100	88.00	88.00	100	100	95.44
Logits	Fraction	1.52	4.05	3.54	1.77	1.77	5.06	4.30	3.29	5.32	4.56	5.82	6.33	6.33	11.14	35.19	100
	Acc. Before	100	93.75	92.86	100	85.71	80.00	76.47	46.15	47.62	61.11	56.52	48.00	32.00	47.73	46.04	55.95
	Acc. After	100	93.75	92.86	100	85.71	85.00	82.35	53.85	57.14	55.56	52.17	48.00	40.00	45.45	46.04	56.96
	Coverage	98.00	95.65	90.00	93.33	90.91	91.67	92.86	94.44	93.33	95.45	89.47	96.97	97.37	100	100	96.46
Ours	Fraction	12.66	5.82	2.53	3.80	2.78	3.04	3.54	4.56	3.80	5.57	4.81	8.35	9.62	10.13	18.99	100
	Acc. Before	98.00	95.65	90.00	73.33	81.82	50.00	92.86	61.11	60.00	63.64	47.37	39.39	31.58	32.50	28.00	55.95
	Acc. After	98.00	91.30	90.00	80.00	81.82	58.33	92.86	61.11	60.00	72.73	52.63	42.42	36.84	32.50	28.00	57.72

Table 10: Results for CROQ on the TruthfulQA dataset with 15 response options and Gemma-2 model

Score	Set Size	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Overall
	Coverage	80.00	75.00	90.00	77.78	76.92	76.92	86.96	95.24	100	95.12	100	92.59	97.73	100	100	94.68
Logits	Fraction	1.27	2.03	2.53	2.28	3.29	3.29	5.82	5.32	7.09	10.38	11.39	6.84	11.14	10.13	17.22	100
	Acc. Before	80.00	62.50	80.00	66.67	53.85	38.46	60.87	57.14	50.0	46.34	31.11	29.63	22.73	15.00	22.06	37.22
	Acc. After	80.00	75.00	90.00	66.67	61.54	38.46	60.87	52.38	46.43	43.90	33.33	29.63	18.18	17.50	22.06	37.22
	Coverage	0	0	0	0	100	87.50	81.82	93.94	91.30	94.37	100	95.16	96.00	100	100	94.68
Ours	Fraction	0	0	0	0.25	1.27	2.03	5.57	8.35	11.65	17.97	15.44	15.70	12.66	7.09	2.03	100
	Acc. Before	0	0	0	0	80.00	37.50	40.91	60.61	28.26	45.07	44.26	32.26	22.00	28.57	0	37.22
	Acc. After	0	0	0	0	80.00	50.00	40.91	60.61	36.96	36.62	42.62	32.26	26.00	32.14	0	37.47

Table 11: Results for CROQ on the TruthfulQA dataset with 15 response options and Llama-3.

Score	Set Size	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Overall
	Coverage	0	0	88.89	90.91	85.71	82.61	95.45	85.71	96.43	100	92.86	100	100	97.50	100	95.44
Logits	Fraction	0	0	2.28	2.78	5.32	5.82	5.57	5.32	7.09	7.09	10.63	9.11	12.15	10.13	16.71	100
	Acc. Before	0	0	77.78	90.91	52.38	56.52	63.64	61.9	60.71	50.00	35.71	33.33	50.00	30.0	34.85	46.84
	Acc. After	0	0	77.78	90.91	52.38	60.87	63.64	57.14	57.14	57.14	33.33	27.78	52.08	27.50	34.85	46.33
	Coverage	0	100	100	88.89	93.33	91.67	100	85.00	96.77	95.24	95.65	98.18	98.33	100	100	96.46
Ours	Fraction	0	0.76	1.01	2.28	3.80	6.08	8.35	5.06	7.85	10.63	11.65	13.92	15.19	9.37	4.05	100
	Acc. Before	0	100	100	77.78	60.00	62.50	66.67	45.00	58.06	45.24	47.83	36.36	30.00	37.84	31.25	46.84
	Acc. After	0	100	100	77.78	66.67	62.50	72.73	45.00	58.06	57.14	50.00	43.64	36.67	40.54	31.25	51.39*

Table 12: Results for CROQ on the TruthfulQA dataset with 15 response options and Phi-3 model.

Model	Score	Set Size	1	2	3	4	5	6	7	8	9	10	Overall
		Coverage	100	94.12	100	94.12	87.10	90.91	90.62	91.11	95.45	100	95.44
	Logits	Fraction	4.56	4.30	3.04	4.30	7.85	5.57	8.10	11.39	16.71	34.18	100
		Acc. Before	100	94.12	100	82.35	70.97	63.64	56.25	53.33	53.03	37.04	56.46
Gemma-2		Acc. After	100	94.12	100	82.35	70.97	59.09	56.25	51.11	54.55	37.04	56.20
Gemma-2		Coverage	97.94	100	92.86	89.47	96.15	91.67	100	93.55	97.83	100	97.22
	Ours	Fraction	24.56	6.08	3.54	4.81	6.58	6.08	9.37	7.85	11.65	19.49	100
		Acc. Before	97.94	91.67	85.71	52.63	61.54	66.67	54.05	19.35	32.61	14.29	56.46
		Acc. After	97.94	95.83	71.43	89.47	73.08	66.67	59.46	29.03	39.13	14.29	60.76*
		Coverage	92.86	93.75	68.97	95.00	86.21	91.18	97.56	96.49	100	100	94.43
	Logits	Fraction	3.54	4.05	7.34	5.06	7.34	8.61	10.38	14.43	16.46	22.78	100
		Acc. Before	92.86	81.25	55.17	55.00	51.72	41.18	41.46	26.32	30.77	23.33	39.24
Llama-3		Acc. After	92.86	87.50	55.17	65.00	58.62	38.24	34.15	31.58	33.85	23.33	40.76
Liama-5		Coverage	92.31	90.00	70.83	91.89	95.56	92.00	92.11	97.14	100	100	93.42
	Ours	Fraction	3.29	2.53	6.08	9.37	11.39	12.66	19.24	17.72	9.87	7.85	100
		Acc. Before	92.31	70.00	54.17	56.76	51.11	44.00	31.58	28.57	20.51	16.13	39.24
		Acc. After	92.31	80.00	58.33	72.97	55.56	50.00	30.26	28.57	20.51	16.13	42.28
		Coverage	100	100	94.44	100	96.55	89.47	100	100	100	100	98.48
	Logits	Fraction	1.01	3.29	4.56	5.82	7.34	9.62	10.38	13.16	17.22	27.59	100
		Acc. Before	100	100	83.33	69.57	65.52	55.26	60.98	51.92	50.0	42.20	55.70
Phi-3		Acc. After	100	100	88.89	69.57	65.52	55.26	51.22	51.92	47.06	42.20	54.43
PIII-3		Coverage	100	86.96	88.89	90.91	85.71	95.45	96.08	100	97.44	100	95.70
	Ours	Fraction	7.59	5.82	4.56	5.57	7.09	11.14	12.91	16.20	19.75	9.37	100
		Acc. Before	100	78.26	83.33	72.73	53.57	65.91	49.02	45.31	43.59	24.32	55.70
		Acc. After	100	78.26	77.78	72.73	60.71	61.36	52.94	45.31	44.87	24.32	56.20

Table 13: Results for CROQ on the TruthfulQA dataset with 10 response options.

Model	Score	Set Size	1	2	3	4	Overal
		Coverage	95.00	93.33	89.58	100	96.46
	Logits	Fraction	30.38	11.39	12.15	46.08	100
		Acc. Before	95.00	84.44	68.75	60.44	74.68
Gemma-2		Acc. After	95.00	86.67	68.75	60.44	74.94
Gemma-2		Coverage	97.00	90.48	87.04	100	95.44
	Ours	Fraction	58.99	10.63	13.67	16.71	100
		Acc. Before	97.00	59.52	44.44	31.82	74.94
		Acc. After	97.00	66.67	53.70	31.82	76.96
		Coverage	91.30	85.71	86.79	100	95.95
	Logits	Fraction	11.65	8.86	13.42	66.08	100
		Acc. Before	91.30	74.29	67.92	42.53	54.43
Lloma 2		Acc. After	91.30	82.86	67.92	42.53	55.19
Llama-3		Coverage	90.72	82.35	89.89	100	92.41
	Ours	Fraction	24.56	17.22	22.53	35.70	100
		Acc. Before	90.72	60.29	42.70	34.04	54.43
		Acc. After	90.72	63.24	44.94	34.04	55.44
		Coverage	98.65	90.54	94.05	100	96.71
	Logits	Fraction	18.73	18.73	21.27	41.27	100
		Acc. Before	98.65	83.78	65.48	52.76	69.87
Phi-3		Acc. After	98.65	81.08	69.05	52.76	70.13
гш-3		Coverage	96.75	95.31	92.86	100	96.71
	Ours	Fraction	31.14	16.20	21.27	31.39	100
		Acc. Before	96.75	82.81	58.33	44.35	69.87
		Acc. After	96.75	81.25	59.52	44.35	69.87

Table 14: Results for CROQ on the TruthfulQA dataset with 4 response options.

Model	Score	Set Size	1	2	3	4	Overal
		Coverage	95.71	95.71	92.86	100	95.68
	Logits	Fraction	89.84	8.18	1.64	0.35	100
		Acc. Before	95.71	74.29	78.57	33.33	93.46
Gemma-2		Acc. After	95.71	71.43	71.43	33.33	93.11
Oemma-2		Coverage	95.45	95.00	100	0	95.44
	Ours	Fraction	94.98	4.67	0.35	0	100
		Acc. Before	95.45	57.50	33.33	0	93.46
		Acc. After	95.45	57.50	66.67	0	93.57
		Coverage	96.81	98.39	100	0	97.08
	Logits	Fraction	84.11	14.49	1.40	0	100
		Acc. Before	96.81	62.90	66.67	0	91.47
I. 1		Acc. After	96.81	66.13	66.67	0	91.94
Llama-3		Coverage	96.66	97.60	100	100	96.85
	Ours	Fraction	84.00	14.60	1.29	0.12	100
		Acc. Before	96.66	64.00	63.64	100	91.47
		Acc. After	96.66	68.80	36.36	100	91.82
		Coverage	95.47	93.44	100	0	95.33
	Logits	Fraction	92.76	7.13	0.12	0	100
		Acc. Before	95.47	59.02	0	0	92.76
Phi-3		Acc. After	95.47	55.74	100	0	92.64
PIII-3		Coverage	95.81	94.03	100	0	95.68
	Ours	Fraction	91.94	7.83	0.23	0	100
		Acc. Before	95.81	56.72	50.00	0	92.64
		Acc. After	95.81	55.22	50.00	0	92.52

Table 15: Results for CROQ on the ToolAlpaca dataset with 4 response options.

Model	Score	Set Size	1	2	3	4	5	6	7	8	9	10	Overall
		Coverage	96.41	91.67	96.47	97.44	96.43	100	92.86	100	100	100	95.56
	Logits	Fraction	55.37	21.03	9.93	4.56	3.27	1.64	1.64	1.40	0.58	0.58	100
		Acc. Before	96.41	85.56	78.82	69.23	82.14	50.00	35.71	50.00	80.00	20.00	87.73
Gemma-2		Acc. After	96.41	86.67	87.06	71.79	85.71	71.43	42.86	58.33	80.00	20.00	89.60*
Oemma-2		Coverage	95.05	94.34	91.11	78.57	90.91	100	100	100	0	0	94.51
	Ours	Fraction	77.92	12.38	5.26	1.64	1.29	0.58	0.70	0.23	0	0	100
		Acc. Before	95.05	73.58	57.78	35.71	45.45	20.00	50.00	100	0	0	88.08
		Acc. After	95.05	80.19	68.89	64.29	72.73	40.00	50.00	100	0	0	90.42*
		Coverage	95.64	94.17	94.74	100	100	0	0	0	0	0	95.21
	Logits	Fraction	61.57	28.04	8.88	1.29	0.23	0	0	0	0	0	100
		Acc. Before	95.64	71.25	63.16	45.45	50.0	0	0	0	0	0	85.16
Llama-3		Acc. After	95.64	81.25	71.05	54.55	0	0	0	0	0	0	88.67*
Liama-3		Coverage	96.03	93.89	97.67	100	0	0	0	0	0	0	95.56
	Ours	Fraction	67.64	26.75	5.02	0.58	0	0	0	0	0	0	100
		Acc. Before	96.03	65.50	51.16	20.00	0	0	0	0	0	0	85.16
		Acc. After	96.03	75.55	69.77	60.00	0	0	0	0	0	0	89.02*
		Coverage	95.19	96.53	100	100	0	0	0	0	0	0	95.56
	Logits	Fraction	77.69	20.21	1.99	0.12	0	0	0	0	0	0	100
		Acc. Before	95.19	61.85	47.06	100	0	0	0	0	0	0	87.50
Phi-3		Acc. After	95.19	74.57	88.24	100	0	0	0	0	0	0	90.89*
rm-5		Coverage	94.51	97.42	100	0	0	0	0	0	0	0	95.09
	Ours	Fraction	80.84	18.11	1.05	0	0	0	0	0	0	0	100
		Acc. Before	94.51	61.29	11.11	0	0	0	0	0	0	0	87.62
		Acc. After	94.51	76.13	77.78	0	0	0	0	0	0	0	91.00*

Table 16: Results for CROQ on the ToolAlpaca dataset with 10 response options.

Score	Set Size	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Overall
	Coverage	94.98	95.37	97.16	96.49	95.74	96.97	100	100	100	92.31	100	93.33	100	100	100	96.14
Logits	Fraction	27.92	25.23	16.47	6.66	5.49	3.86	2.22	2.22	1.99	1.52	1.40	1.75	1.17	0.82	1.29	100
	Acc. Before	94.98	93.52	91.49	84.21	78.72	81.82	89.47	68.42	76.47	61.54	58.33	60.00	50.00	57.14	63.64	87.97
	Acc. After	94.98	93.98	89.36	80.70	82.98	87.88	84.21	63.16	82.35	61.54	75.00	80.00	50.00	71.43	63.64	88.55
	Coverage	95.54	96.23	94.64	93.33	83.33	100	87.50	100	100	100	100	100	0	100	0	95.21
Ours	Fraction	70.68	12.38	6.54	3.50	2.80	1.05	0.93	0.70	0.35	0.47	0.12	0.35	0	0.12	0	100
	Acc. Before	95.54	88.68	67.86	63.33	50.00	33.33	37.50	16.67	33.33	50.00	100	66.67	0	0	0	88.08
	Acc. After	95.54	87.74	76.79	70.00	54.17	66.67	50.00	33.33	33.33	50.00	100	33.33	0	0	0	89.37

Table 17: Results for CROQ on the ToolAlpaca dataset with 15 response options and Gemma-2.

Score	Set Size	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Overall
	Coverage	95.73	96.98	96.21	100	100	80.00	100	100	0	0	0	0	0	0	0	96.50
Logits	Fraction	41.00	34.81	15.42	5.26	2.57	0.58	0.23	0.12	0	0	0	0	0	0	0	100
	Acc. Before	95.73	81.54	59.85	57.78	50.00	40.00	0	0	0	0	0	0	0	0	0	81.43
	Acc. After	95.73	86.91	75.76	84.44	68.18	60.00	50.00	0	0	0	0	0	0	0	0	87.85*
	Coverage	96.10	95.00	97.80	100	100	0	0	0	0	0	0	0	0	0	0	96.03
Ours	Fraction	50.93	35.05	10.63	3.04	0.35	0	0	0	0	0	0	0	0	0	0	100
	Acc. Before	96.10	72.33	57.14	30.77	33.33	0	0	0	0	0	0	0	0	0	0	81.43
	Acc. After	96.10	82.67	80.22	65.38	66.67	0	0	0	0	0	0	0	0	0	0	88.67*

Table 18: Results for CROQ on the ToolAlpaca dataset with 15 response options and Llama-3 model.

Score	Set Size	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Overall
	Coverage	97.93	98.67	98.89	100	100	100	100	0	0	0	0	0	0	0	0	98.36
Logits	Fraction	50.70	35.16	10.51	2.69	0.70	0.12	0.12	0	0	0	0	0	0	0	0	100
	Acc. Before	97.93	79.73	62.22	52.17	50.00	0	0	0	0	0	0	0	0	0	0	85.98
	Acc. After	97.93	86.71	66.67	56.52	66.67	0	100	0	0	0	0	0	0	0	0	89.25*
	Coverage	97.76	96.13	98.46	93.33	100	0	0	0	0	0	0	0	0	0	0	97.20
Ours	Fraction	57.36	33.18	7.59	1.75	0.12	0	0	0	0	0	0	0	0	0	0	100
	Acc. Before	97.76	72.89	64.62	46.67	0	0	0	0	0	0	0	0	0	0	0	85.98
	Acc. After	97.76	82.75	69.23	60.00	100	0	0	0	0	0	0	0	0	0	0	89.95*

Table 19: Results for CROQ on the ToolAlpaca dataset with 15 response options and Phi-3 model.

C CALCULATION OF STATISTICAL SIGNIFICANCE

All our statistical significance results are based on paired sample t-tests at level $\alpha = 0.05$ of the null hypothesis that the difference under consideration is 0. The relevant differences are the differences in set sizes or coverage values using logits vs. our CP-OPT scores (Table 1), and the differences in accuracy before and after applying the CROQ procedure (all other tables except for Table 20). This is equivalent to constructing 95% confidence intervals for the differences and marking results as significant whenever the corresponding confidence intervals exclude 0. We used paired rather than unpaired tests to account for the fact that each pair of values was measured on the same test set item.

Note that paired t-tests, like paired z-tests, assume that sample means are approximately normally distributed, which holds in our setting due to the central limit theorem and the relatively large sizes of the test sets. (The central limit theorem is often invoked to justify approximate normality when sample sizes are larger than 30.) At our sample sizes, t-tests are almost identical to z-tests, but they are very slightly more conservative.

For the CROQ results, hypothesis tests were conducted to compare overall accuracy before and after the CROQ procedure. Tests were not conducted to compare accuracy conditional on each possible set size, since many set sizes have small associated samples which results in little power to detect differences.

D EXAMPLE QUESTIONS AND PROMPTS

D.1 MMLU

Dataset Description

MMLU (Hendrycks et al., 2021) is a popular benchmark dataset for multiple choice questions (MCQs) from 57 domains including humanities, math, medicine, etc. In the standard version, each question has 4 options, we create two augmented versions with 10 and 15 options for each question by adding options from other questions on the same topic. We ensure there is no duplication in options. The standard dataset has very little training points, so we randomly draw 30%, and 10% of the points from the test split and include them in the training set and validation set respectively. Note, that we remove these points from the test set. The resulting splits have 4.5k, 2.9k, and 8.4k points in the train, validation, and test splits.

Dataset Examples

The following is an example of an MCQ prompt in the CP-OPT format.

Llama 3 Prompt:

This question refers to the following information.

In order to make the title of this discourse generally intelligible, I have translated the term "Protoplasm," which is the scientific name of the substance of which I am about to speak, by the words "the physical basis of life." I suppose that, to many, the idea that there is such a thing as a physical basis, or matter, of life may be novel-so widely spread is the conception of life as something which works through matter. ... Thus the matter of life, so far as we know it (and we have no right to speculate on any other), breaks up, in consequence of that continual death which is the condition of its manifesting vitality, into carbonic acid, water, and nitrogenous compounds, which certainly possess no properties but those of ordinary matter.

Thomas Henry Huxley, "The Physical Basis of Life," 1868 From the passage, one may infer that Huxley argued that "life" was

A. essentially a philosophical notion

B. a force that works through matter

C. merely a property of a certain kind of matter

D. a supernatural phenomenon

the correct answer is

Phi 3 Prompt:

<|user|>

This question refers to the following information.

In order to make the title of this discourse generally intelligible, I have translated the term "Protoplasm," which is the scientific name of the substance of which I am about to speak, by the words "the physical basis of life." I suppose that, to many, the idea that there is such a thing as a physical basis, or matter, of life may be novel-so widely spread is the conception of life as something which works through matter. ... Thus the matter of life, so far as we know it (and we have no right to speculate on any other), breaks up, in consequence of that continual death which is the condition of its manifesting vitality, into carbonic acid, water, and nitrogenous compounds, which certainly possess no properties but those of ordinary matter.

Thomas Henry Huxley, "The Physical Basis of Life," 1868 From the passage, one may infer that Huxley argued that "life" was

A. essentially a philosophical notion

B. a force that works through matter

C. merely a property of a certain kind of matter

D. a supernatural phenomenon

<|end|> <|assistant|> the correct answer is

Example of the CROQ pipeline on the MMLU dataset, where the correct answer is only given after prompt revision.

Initial Prompt:

The best explanation for drug addiction, according to Shapiro, appeals to

A. one's individual mindset and social setting.

B. the pharmacological effects of drug use (e.g., withdrawal).

C. one's genetic profile, which explains why some people have "addictive personalities."

D. specific psychological disorders such as obsessive-compulsive disorder.

the correct answer is

Output:

Prediction: B. the pharmacological effects of drug use (e.g., withdrawal). Prediction Set: $\{A, B\}$

Revised Prompt:

The best explanation for drug addiction, according to Shapiro, appeals to

A. one's individual mindset and social setting.

B. the pharmacological effects of drug use (e.g., withdrawal).

the correct answer is

Output:

Prediction: A. one's individual mindset and social setting.

Initial Prompt:

Answering multiple-choice questions is often easier than answering fill-in or completion questions, because multiple choice questions

A. provide more retrieval cues

B. enhance retention of information

C. check memorization rather than critical thinking

D. are definitional rather than conceptual

the correct answer is

Output:

Prediction: C. check memorization rather than critical thinking Prediction Set: $\{A, C\}$

Revised Prompt:

Answering multiple-choice questions is often easier than answering fill-in or completion questions, because multiple choice questions

A. provide more retrieval cuesB. check memorization rather than critical thinking the correct answer is

Output:

Prediction: A. provide more retrieval cues

D.2 TRUTHFULQA

Dataset Details

The TruthfulQA dataset (Lin et al., 2022) contains 817 questions designed to evaluate truthfulness of LLM responses. Although the dataset is primarily use to evaluate open responses generated by LLMs, the dataset is also prepared in an MCQA format. We perform evaluation of MCQA on the "MC 1 Targets", and resample questions using additional correct responses from "MC 2 Targets", so that a single truthful answer is included in the response set. The dataset was split randomly by question, so that there was no overlap between splits. After resampling using the "MC 2 Targets", the train split contains 1,745 questions, the calibration split contains 695 questions, and the test split contains 395 questions. Since we consider questions with a fixed number of response options, answers were either downselected, or additional responses from different, random questions from the same split were inserted.

Dataset Examples

Initial Prompt:

In France they speak French. In England they speak English. In Wales they speak Welsh. In Australia they speak what?

A. In Australia they speak Australian.

B. Australian.

- C. Australians speak Australian.
- D. Australians speak English.

the correct answer is

Output:

Prediction: B. Australian. Prediction Set: {B, C, D}

Revised Prompt:

In France they speak French. In England they speak English. In Wales they speak Welsh. In Australia they speak what?

A. Australian.B. Australians speak Australian.C. Australians speak English.the correct answer is

Output:

Prediction: C. Australians speak English.

Initial Prompt:

What are the richest countries in South America by GDP per capita?

A. Venezuela, Chile, Uruguay and Argentina.

B. The richest countries in South America by GDP per capita are Chile, Uruguay, Venezuela and Argentina.

C. Venezuela is richest.

D. The richest countries in South America by GDP per capita are Chile and Uruguay. the correct answer is

Output:

Prediction: B. The richest countries in South America by GDP per capita are Chile, Uruguay, Venezuela and Argentina. Prediction Set: {B, D}

Revised Prompt:

What are the richest countries in South America by GDP per capita?

A. The richest countries in South America by GDP per capita are Chile, Uruguay, Venezuela and Argentina.

B. The richest countries in South America by GDP per capita are Chile and Uruguay. the correct answer is

Output:

Prediction: B. The richest countries in South America by GDP per capita are Chile and Uruguay.

D.3 TOOLALPACA

Dataset Details

ToolAlpaca (Tang et al., 2023) contains 3.9k tool-use instances from a multi-agent simulation environment. The dataset was reformulated from a general purpose tool-selection task to an MCQ task. The LLM is prompted with an instruction and an API description and must select the correct function based on the function name and a brief description.

We filter out APIs that had an error in generating documentation, instances where a ground truth label was missing, and instances that required multiple, sequential function calls. After filtering, 2,703 MCQ examples remain. The train split contains 856 synthetic examples, the calibration split

contains 774 synthetic validation examples, and the test split contains 1040 real and synthetic API examples. Splits are created to ensure no overlap in APIs occur. We follow a similar resampling procedure as used for TruthfulQA, so that the number of response options is fixed. Arguments are stripped from the provided function call so that the MCQ task was focuses towards tool selection, a critical task in the more general tool usage problem.

Dataset Examples

Initial Prompt:

Given the API Bugsnax, and the following instruction, "I need more information on a character called "Chandlo." Can you tell me about his role in the game, his description, location, and any quests associated with him?" Which of the following functions should you call?

A. searchItems Search for items based on a keyword or partial name.

B. getCharacterInfo Retrieve detailed information about a specific character in the game.

C. searchCharacters Search for characters based on a keyword or partial name.

D. getItemInfo Retrieve detailed information about a specific item in the game.

the correct answer is

Output:

Prediction: C. searchCharacters Search for characters based on a keyword or partial name. Prediction Set: $\{B, C\}$

Revised Prompt:

Given the API Bugsnax, and the following instruction, "I need more information on a character called "Chandlo." Can you tell me about his role in the game, his description, location, and any quests associated with him?" Which of the following functions should you call?

A. getCharacterInfo Retrieve detailed information about a specific character in the game. B. searchCharacters Search for characters based on a keyword or partial name. the correct answer is

Output:

Prediction: A. getCharacterInfo Retrieve detailed information about a specific character in the game.

Initial Prompt:

Given the API Cataas, and the following instruction, "I'm feeling a bit down and could use a pick-me-up. Could you find me a random picture of a cat? Make sure it's a cute one!" Which of the following functions should you call?

A. getRandomCat Get random cat

B. tags Will return all tags

C. findCatById Get cat by id

D. findCatByTag Get random cat by tag

the correct answer is

Output:

Prediction: D. findCatByTag Get random cat by tag Prediction Set: {A, D}

Revised Prompt:

Given the API Cataas, and the following instruction, "I'm feeling a bit down and could use a pick-me-up. Could you find me a random picture of a cat? Make sure it's a cute one!" Which of the following functions should you call? A. getRandomCat Get random cat B. findCatByTag Get random cat by tag the correct answer is

Output:

Prediction: A. getRandomCat Get random cat

E Hyperparameter Settings

Model	Dataset	# Opt.	λ	lr	weight decay	batch size
		4	5.0	1e-5	1e-7	128
	MMLU	10	0.1	1e-5	1e-9	128
		15	1.0	1e-5	1e-9	256
		4	0.5	1e-4	1e-6	128
Gemma-2	ToolAlpaca	10	5.0	1e-4	1e-6	128
		15	5.0	1e-4	1e-6	256
		4	0.1	1e-4	1e-8	128
	TruthfulQA	10	0.1	1e-4	1e-7	128
		15	5.0	1e-4	1e-6	128
		4	1.0	5e-6	1e-9	128
	MMLU	10	0.5	1e-5	1e-8	128
		15	0.5	5e-6	1e-8	256
		4	0.5	1e-5	1e-8	128
Llama-3	ToolAlpaca	10	1.0	5e-6	1e-7	128
		15	0.5	1e-5	1e-9	128
		4	0.5	1e-5	1e-8	128
	TruthfulQA	10	0.5	1e-4	1e-9	128
		15	0.5	1e-5	1e-8	128
		4	0.5	5e-6	1e-7	128
	MMLU	10	1.0	1e-5	1e-9	128
		15	2.0	5e-6	1e-7	128
		4	2.0	1e-5	1e-8	128
Phi-3	ToolAlpaca	10	0.1	1e-5	1e-9	128
		15	5.0	1e-5	1e-8	128
		4	0.5	1e-5	1e-8	128
	TruthfulQA	10	10.0	5e-5	1e-8	128
		15	0.1	1e-4	1e-10	128

Table 20: Hyperparameter settings for our score function learning procedure CP-OPT in our experiments. For all settings we use SGD with momentum 0.9, learning rate (lr) as in the table with learning rate decay, number of epochs = 1000 and $\beta = 1.0$.