

The Prompt Alchemist: Automated LLM-Tailored Prompt Optimization for Test Case Generation

Shuzheng Gao¹, Chaozheng Wang¹, Cuiyun Gao^{2*}, Xiaoqian Jiao², Chun Yong Chong³,
Shan Gao⁴, Michael R. Lyu¹

¹ The Chinese University of Hong Kong, Hong Kong, China

² Harbin Institute of Technology, Shenzhen, China

³ School of Information Technology, Monash University Malaysia, Malaysia

⁴ Independent Researcher, China

szgao23@cse.cuhk.edu.hk, adf111178@gmail.com, gaocuiyun@hit.edu.cn, 210110210@stu.hit.edu.cn,
chong.chunyong@monash.edu, gaoshan_cs@outlook.com, lyu@cse.cuhk.edu.hk

Abstract—Test cases are essential for validating the reliability and quality of software applications. Recent studies have demonstrated the capability of Large Language Models (LLMs) to generate useful test cases for given source code. However, the existing work primarily relies on human-written plain prompts, which often leads to suboptimal results since the performance of LLMs can be highly influenced by the prompts. Moreover, these approaches use the same prompt for all LLMs, overlooking the fact that different LLMs might be best suited to different prompts. Given the wide variety of possible prompt formulations, automatically discovering the optimal prompt for each LLM presents a significant challenge. Although there are methods on automated prompt optimization in the natural language processing field, they are hard to produce effective prompts for the test case generation task. First, the methods iteratively optimize prompts by simply combining and mutating existing ones without proper guidance, resulting in prompts that lack diversity and tend to repeat the same errors in the generated test cases. Second, the prompts are generally lack of domain contextual knowledge, limiting LLMs’ performance in the task.

In this paper, we introduce MAPS, an LLM-tAilored Prompt generation method for teSt case generation. MAPS comprises three main modules: Diversity-guided Prompt Generation, Failure-driven Rule Induction, and Domain Contextual Knowledge Extraction. Specifically, in the *Diversity-Guided Prompt Generation* module, MAPS creates varied prompts by exploring diverse modification paths during the optimization process. It prevents the optimization process from converging to local optima. The *Failure-driven Rule Induction* module aims at identifying promising optimization direction by reflecting common failures in generated test cases, in which the reflection outputs are softly integrated into prompts based on a rule transformation method. The *Domain Contextual Knowledge Extraction* module aims at enriching the prompts with related domain knowledge by incorporating both in-file and cross-file context information. To evaluate the effectiveness of MAPS, we compare it with four state-of-the-art prompt optimization methods across three popular LLMs. The experimental results demonstrate that our method outperforms baseline methods by a large margin, achieving a 6.19% higher line coverage rate and a 5.03% higher branch coverage rate on average. Moreover, experiments on different LLMs show that our method can effectively find the most suitable prompt for each LLM.

Index Terms—Software testing and debugging, Test Case

* Corresponding author. The author is also affiliated with Peng Cheng Laboratory.

Generation, Large Language Models.

I. INTRODUCTION

Test cases play a crucial role in validating the reliability and quality of software applications [1], [2]. By allowing developers to identify and rectify bugs and defects at the early development stage, it remarkably enhances the overall stability of the software [3]. However, manually writing test cases is a challenging and time-consuming task. Consequently, the task of test case generation, which aims at creating high-quality test cases automatically, has attracted both developers’ and researchers’ attention in recent years [4]–[6].

Traditional test case generation methods such as EvoSuite [7] and Randoop [4] mainly employ search-based and constraint-based techniques to craft test suites. Recent advancements in deep learning have introduced many learning-based test generation approaches. For instance, AthenaTest [5] fine-tunes BART [8] on a dataset designed for test generation. A3Test [9] further incorporates assertion knowledge and a test signature verification mechanism for achieving better results. These models aim at leveraging general programming knowledge acquired from extensive developer-written code corpora to generate more comprehensive and meaningful tests. Recently, Large Language Models (LLMs), such as ChatGPT [10], have gained widespread adoption in various Software Engineering (SE) tasks, including test case generation, and show promising results. Due to their powerful zero-shot capabilities, LLMs can be directly deployed for downstream tasks through prompt engineering without requiring fine-tuning [11]. For example, ChatUniTest [12] harnesses the capabilities of LLMs and employs a generation-validation-repair mechanism to rectify errors in generated test cases. Yuan et al. [13] evaluate ChatGPT’s performance in test case generation and enhance it through an iterative test refinement process.

However, the existing LLM-based work primarily relies on human-written plain prompts, which often leads to suboptimal results since the performance of LLMs can be highly influenced by the prompts [14], [15]. Additionally, different LLMs

TABLE I: Comparison of test case generation prompts and their line coverage rates across different LLMs using the Defects4J [16] benchmark.

Prompt	ChatGPT	Llama-3.1
Write unit tests for the provided Java classes to test the methods and functionalities of each class.	21.92%	26.45%
Write unit tests for the given Java classes to ensure proper functionality of the methods.	24.46%	24.07%
Write test cases for the given Java class to ensure the correct behavior of its methods.	22.90%	25.80%

may be best suited to different prompts. For instance, as shown in Table I, our preliminary experiments of three prompts on a subset of Defects4J [16] reveals varying performance across different LLMs. Specifically, the best prompt on ChatGPT achieves a 24.46% line coverage rate, while the worst one achieves only 21.92%, indicating that prompt choice can greatly influence the performance of LLMs for test case generation and plain prompts may not yield satisfactory results. Furthermore, our analysis reveals that the prompt performing best with ChatGPT actually performs worst when applied to Llama-3.1 [17]. Therefore, given the considerable time required for manual prompt design, the automated generation of tailored prompts for different LLMs is worth studying but has not received adequate attention.

To achieve LLM-tailored prompts, one potential approach is to leverage prompt optimization methods from the Natural Language Processing (NLP) field [18], [19]. These methods typically use LLMs and evolutionary algorithm [20], [21] to iteratively search the discrete natural language space for effective prompts through a generate-and-validate approach. However, when applied to test case generation, these methods fall short of achieving promising results due to three main limitations: (1) *Low diversity in generated prompts*. These methods optimize prompts by simply combining and mutating existing ones using LLMs, while ignoring the diversity in generated prompts, which potentially leads to insufficient exploration of the vast natural language search space. Consequently, the optimization process may converge prematurely to local optima, hindering the discovery of the most suitable prompt. (2) *Lack of proper guidance on avoiding common errors*. Existing methods generate new prompts based solely on existing ones without considering the recurring errors. As a result, test cases produced by optimized prompts often exhibit the same issues as those generated by unoptimized prompts. Therefore, it is important to effectively guide the optimization process with directed improvement and prevent LLMs from making recurring errors. (3) *Absence of domain contextual knowledge*. Existing LLM-based test case generation approaches [13], [22] typically utilize only the focal method or limited in-file context information. They lack necessary domain contextual knowledge such as subclass inheritance and class invocation information, which is crucial for generating accurate test cases. Given the complex inheritance and invocation relationships between classes and functions in real-world projects, it is difficult for LLMs to infer such information.

In this paper, we propose MAPS, the first LLM-tailored Prompt generation method for test case generation. MAPS effectively and automatically generates suitable prompts for

different LLMs through three key modules: diversity-guided prompt generation, failure-driven rule induction, and domain contextual knowledge extraction. The *diversity-guided prompt generation* module creates varied prompts by exploring diverse modification paths during prompt optimization. This approach prevents premature convergence to local optima, ensuring a more comprehensive exploration of the prompt space. The *failure-driven rule induction* module aims at identifying promising optimization direction by reflecting common errors in generated test cases and guide the optimization process by transforming the reflection results into rules. These rules are then incorporated into the prompt to prevent recurring errors. Furthermore, the *domain contextual knowledge extraction* module provides LLMs with both in-file and cross-file context information, such as inheritance relationship information, to help them generate accurate test cases. The optimized prompt, induced rules, and extracted context information are then integrated together to form the final prompt for test case generation. To evaluate the effectiveness of MAPS, we conduct experiments on a popular benchmark Defects4J [16]. We apply MAPS to three popular LLMs including ChatGPT [10], Llama-3.1 [17], and Qwen2 [23] and compare it with four state-of-the-art prompt optimization approaches. The experimental results demonstrate that MAPS outperforms baseline methods by a large margin, achieving a 6.19% higher line coverage rate and a 5.03% higher branch coverage rate on average. Besides, experiments on different LLMs reveal that MAPS can effectively generate the most suitable prompt for each LLMs, surpassing manually designed prompts.

Contributions. In summary, the main contributions of this work are as follows:

- 1) To the best of our knowledge, this paper presents the first study on automatically producing LLM-tailored prompt for test case generation.
- 2) We propose a novel method MAPS that effectively improves the prompt optimization process by integrating diversity-guided prompt generation, failure-driven rule induction and domain contextual knowledge extraction.
- 3) Extensive experiments on three popular LLMs demonstrate that our method substantially outperforms baseline approaches and effectively generate tailored prompts for different LLMs.

Organization. The rest of this paper is organized as follows. Section II describes the background and shows our motivating examples. Section III details the three components in the proposed MAPS, including the domain contextual knowledge extraction, diversity-guided prompt generation and failure-driven rule induction. Section IV describes the evaluation methods, including the research questions, datasets, baselines, and implementation details. Section V presents the experimental results. Section VI discusses some cases and threats to validity. Section VIII concludes the paper.

II. BACKGROUND AND MOTIVATING EXAMPLE

A. Background

In this work, we concentrate on black-box LLM-based Automatic Prompt Optimization (APO) [18], [24], given the

TABLE II: Examples of prompts generated by OPRO [25] in the optimization process. The underlined part represents the similar pattern among the prompts.

Prompt
1. <u>Create unit tests to</u> verify the correctness of method implementations in the provided Java classes.
2. <u>Create unit tests to</u> validate the functionality of specific methods within the provided Java classes.
3. <u>Create unit tests to</u> ensure <u>that the methods</u> in the supplied Java classes behave as expected.
4. <u>Create unit tests to</u> confirm <u>that the methods</u> behave as expected and produce the correct results.

widespread adoption and powerful capabilities of black-box LLMs. APO utilizes LLMs to optimize prompts by iteratively searching for the most effective ones within the discrete space of natural language. Formally, for a task, we work with a black-box model M , a small development set D_{dev} , a test set D_{test} , and a scoring function $s(\cdot)$. APO aims at discovering an advanced prompt p based on D_{dev} from the natural language space that maximizes the performance of M on the test set D_{test} . The prompt p is expected to guide the model directly generate high-quality responses instead of time-consuming multi-iteration generation during test time. A typical APO framework operates as follows. First, it begins with a set of seed prompts which can be obtained either manually or through automatic techniques. Then the seed prompts are used to generate responses for D_{dev} via M and the responses are evaluated using the scoring function $s(\cdot)$, such as the line coverage rate in test case generation. Prompts that perform well are retained, while those that do not are discarded. Using the retained prompts, the APO methods query M to generate new prompts. For example, a representative method OPRO [25] generates new prompts by prompting LLMs with the prompt “Generate an instruction that is different from all the instructions and has a higher score than all the instructions above”. The newly generated prompts will be integrated with the retained prompts for next iteration optimization. After several iterations, the best prompt on D_{dev} will be used as the final optimized prompt for D_{test} .

B. Motivating Examples

We first conduct a preliminary study by applying existing APO methods to real-world test case generation on Defects4J and find that it struggles to produce well-performing prompts. By analyzing its optimized prompts and generated test cases, we identify three main problems of current APO methods.

Observation 1 [Low Diversity of Prompts Generated during Optimization Process]: First, upon inspection of the prompts generated during the optimization process, we find that they tend to exhibit similar phrases and lack diversity. Table II presents some examples of prompts generated by OPRO [25] which contain similar phrases such as “*Create unit tests to*” and “*the provided Java classes*”. The low diversity constrains the optimization process to a small portion of the discrete natural language search space, limiting exploration of potentially more effective alternative phrases. This makes the search process susceptible to convergence at local optima and yielding suboptimal performance. Therefore, to deal with this problem, the first key idea of our method is to improve the diversity of generated prompts by enforcing them to use different modification methods in the optimization process.

```
// Focal method:
public class TimeSeries extends Series implements
Cloneable, Serializable{
    public TimeSeries createCopy(int start, int end)
throws CloneNotSupportedException {
    if(start < 0){throw new IllegalArgumentException
("Requires start >= 0.");}
    if(end < start){throw new
IllegalArgumentException("Requires start <= end.
");}
    ...
// Test case generated by seed prompt:
public void testCreateCopy_empty() {
    TimeSeries timeSeries = new TimeSeries("Test");
    TimeSeries copy = timeSeries.createCopy(0,
timeSeries.getItemCount()-1);
    ...
// Test case generated by optimized prompt:
public void testCreateCopy_empty() {
    TimeSeries timeSeries = new TimeSeries("EmptyTest"
);
    TimeSeries copy = timeSeries.createCopy(0,
timeSeries.getItemCount()-1);
    ...
```

Listing 1: One example showing recurring errors made by the seed prompt and optimized prompt. The error lines are highlighted in red.

Observation 2 [Recurring Common Errors Across Iterations]: Additionally, by analyzing the generated test cases on D_{dev} in different iterations, we find that the test cases generated by optimized prompts tend to exhibit the same errors as the unoptimized ones. For example, as shown in Listing 1, both the test cases generated by the seed prompt and the optimized prompt lack exception handling statements and encounter the same runtime errors. Existing prompt optimization methods rely solely on current prompts without proper guidance, making it difficult to achieve directed improvements and address the errors made by current prompts. To tackle these challenges, we propose to leverage failed test cases to identify shortcomings in current prompts. Specifically, we make LLMs reflect common errors in generated test cases and softly incorporate the reflection outputs into prompts as concise rules to help LLMs avoid making recurring errors.

```
// Focal method:
public abstract class AbstractCategoryItemRenderer
extends AbstractRenderer implements
CategoryItemRenderer,
Cloneable, PublicCloneable, Serializable {
    public CategoryItemLabelGenerator
getItemLabelGenerator
    ...
// Test case:
public void testFindRangeBoundsValidDataset() {
    AbstractCategoryItemRenderer renderer =
new AbstractCategoryItemRenderer();
```

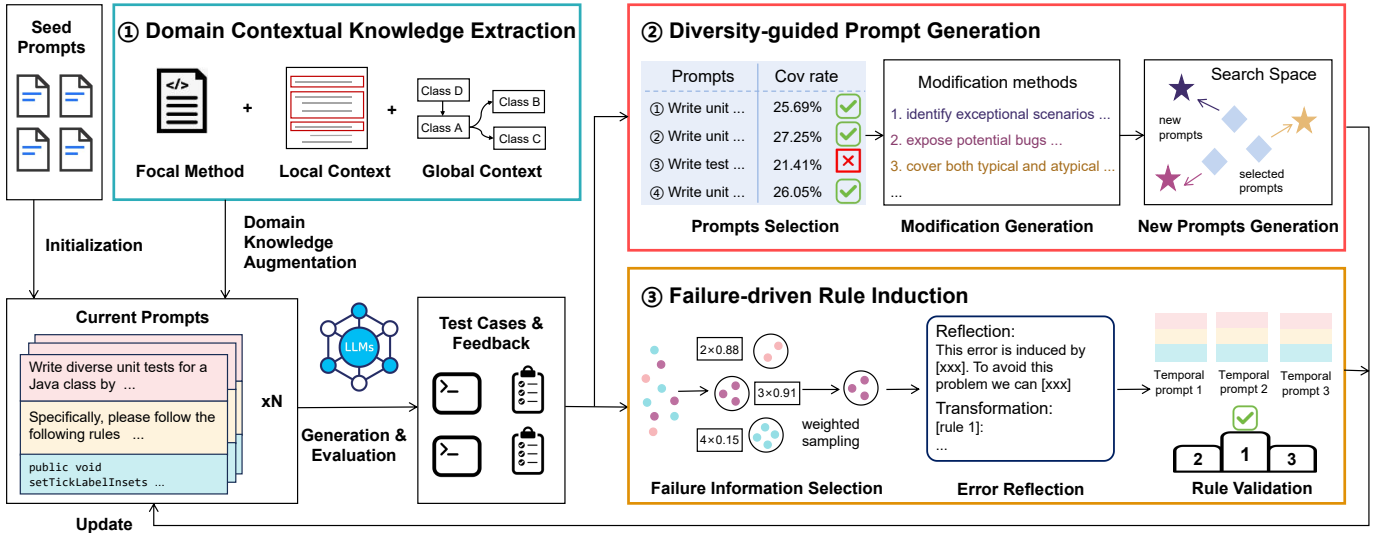


Fig. 1: Overview of MAPS's workflow.

...

Listing 2: One example illustrating the issue of lacking domain context information. The error lines are highlighted in red.

Observation 3 [Lack of Domain Contextual Knowledge]: Finally, we thoroughly analyzed the focal methods where all prompts and LLMs failed to generate correct test cases. The primary issue identified is the lack of domain contextual knowledge. As illustrated in Listing 2, the given focal method is from an abstract class “AbstractCategoryItemRenderer”. The generated test case directly initialize with an abstract class which leads to the error: “*AbstractCategoryItemRenderer is abstract; cannot be instantiated*”. Without knowledge of its subclasses, LLMs cannot generate test cases that correctly initialize this class and invoke the method. Therefore, another key idea of MAPS is to extract the relevant domain contextual information and provide it to the LLMs for capturing contextual knowledge.

III. PROPOSED APPROACH

A. Overview

We provide an overview of MAPS’s workflow in Fig. 1. MAPS starts with a set of seed prompts and augments the focal methods with both in-file and cross-file context information through the ① *domain contextual knowledge extraction* module. In each iteration, MAPS first evaluates the performance of the current prompts on the small development set. The ② *diversity-guided prompt generation* module then selects the top-performing prompts and infers diverse modification methods, which are used to help generate creates varied prompts. In the ③ *failure-driven rule induction* module, MAPS aggregates and selects representative failure information from failed test cases and induces concise rules to avoid such failures using a reflection-validation method. As shown in Algorithm 1, this iterative optimization process continues until reaching the maximum iteration number I .

Algorithm 1 Algorithm of MAPS

Input: Iteration number I , Seed prompt P , Domain contextual knowledge C , LLM M
Output: Final prompt

- 1: $R \leftarrow \emptyset, H \leftarrow \emptyset$ \triangleright Initialize the set of rules R and handled failures H in previous iteration
- 2: **for** each i in I **do**
- 3: Evaluate $\text{FORMAT}(P, R, C)$ on the sampled development set
- 4: $P, NR, NH = \text{PROMPTIMPROVEMENT}(P, R, H, M, C)$
- 5: $R \leftarrow R \cup NR, H \leftarrow H \cup NH$
- 6: $p \leftarrow \text{SELECTTOP}(P, 1)$ \triangleright Select the best prompt from P
- 7: **return** $\text{FORMAT}(p, R, C)$ \triangleright Formalize the final prompt

Finally, the best-optimized instruction from *diversity-guided prompt generation*, induced rules, and extracted context information are integrated to construct the final prompt for test case generation. Fig. 2 illustrates the format of the final prompt. In the following sections, we will introduce these three modules in details.

B. Domain Contextual Knowledge Extraction

The domain contextual knowledge extraction module aims to provide LLMs with related project-level context information, enabling them to generate accurate test cases. As illustrated in Fig. 2, the contextual knowledge is divided into two categories: *in-file contextual knowledge* and *cross-file contextual knowledge*.

- **In-file Contextual Knowledge** contains the class signature, focal method, and the signatures of member methods. The class signature includes the type and name of the class containing the focal method, which could help LLMs avoid direct initialization of abstract or private classes. The focal method is the specific method to generate test cases. Following previous research [5], [9], we

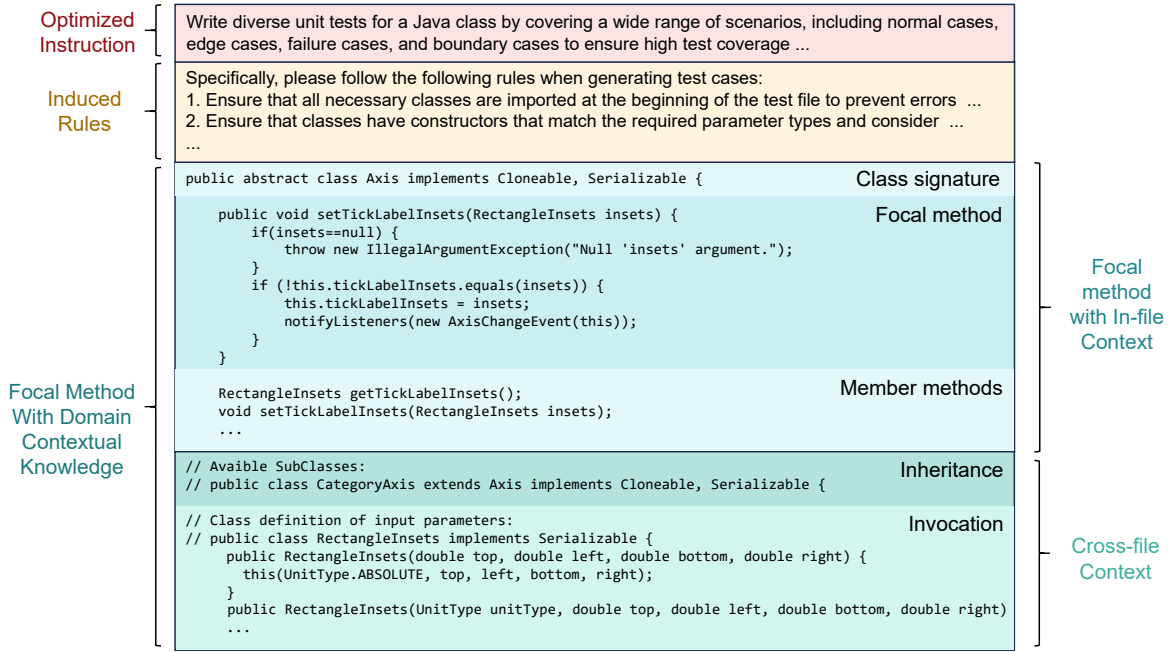


Fig. 2: An illustration of the format of final prompt and extracted context information.

also incorporate the function signatures of other member methods within the class, as the focal method may invoke them, and these signatures can guide the correct usage of these functions.

- **Cross-file Contextual Knowledge** refers to the context information from other files within the project. We propose to extract two types of cross-file information that are critical for test case generation but ignored in previous work, namely *class inheritance information* and *class invocation information*. For focal methods from abstract or private classes, we scan the entire project to locate their subclasses and extract the class signatures. This subclass information enables LLMs to properly instantiate the class within the test case. Furthermore, for the class invocation information, we identify the types of arguments in the focal method, trace the definitions of user-defined types, and extract their signatures and constructors. This invocation information aids LLMs in using correct input arguments for the focal method.

C. Diversity-guided Prompt Generation

The diversity-guided prompt generation module aims at producing diverse prompts to foster a more comprehensive exploration of the prompt space by enforcing them to use different modification methods. As illustrated in Fig. 1 ② and Algorithm 2, after evaluating the performance of current prompts on the evaluation set, MAPS selects the top- K prompts with the highest average line coverage and branch coverage. Using these selected samples, MAPS first leverages the LLM M to generate N distinct modification methods for the current prompts based on a modification prompt template shown in Fig. 3 (a) (Lines 4), where $N = \text{SIZE}(P) - K$ and $\text{SIZE}(P)$ indicates the number of seed prompts, to maintain a

constant prompt number following previous work [18]. These modification methods serve as diverse exploration directions within the discrete natural language search space. MAPS then leverages LLM M to generate new prompts based on each modification method sequentially (Lines 5-7). Finally, the selected prompts and the newly generated prompts are combined to serve as the new prompts for the next iteration of optimization.

D. Failure-driven Rule Induction

The failure-driven rule induction module aims at identifying promising optimization direction by avoiding LLMs to make recurring errors. It leverages common failures in generated test cases to identify the parts where existing prompts most need improvement and induces rules to optimize the prompt using a reflection-validation method. As shown in Fig. 1 ③, this process contains three phases: failure information selection, error reflection, and rule validation. The details are illustrated in Algorithm 2.

1) *Failure Information Selection*: To identify shortcomings in current prompts, we propose to delve into the failed test cases generated by current prompts and select their common errors. Specifically, MAPS first collects the failed test cases generated by the selected prompts SP associated with the corresponding focal method and error messages. Then, MAPS aggregates those failure information F based on the typical DBSCAN [26] clustering algorithm (Lines 8). To determine which failures to address in each iteration, we employ a weighted sampling method. The weight of each cluster is based on two factors: its size and the similarity of its failure information to handled failures H in previous iterations. A larger cluster size indicates a higher probability of the failure type, so we assign a larger weight to it. As for the similarity

Algorithm 2 PROMPTIMPROVEMENT

Input: Prompts P , Existing rules ER , Handled failures H , LLM M , Domain contextual knowledge C , New prompts number N

Output: Optimized prompts OP , New induced rules NR , New handled failures NH

- 1: $OP \leftarrow \emptyset, NR \leftarrow \emptyset$
// Diversity-guided Prompt Generation
- 2: $SP \leftarrow \text{SELECTTOP}(P, \text{SIZE}(P) - N)$ ▷ Select the top K prompts from P
- 3: $D \leftarrow$ generate N different modification methods using M
- 4: **for** each d in D **do**
- 5: $p \leftarrow$ generate new prompt using M based on SP and d
- 6: $OP.\text{insert}(p)$
- 7: $OP \leftarrow OP \cup SP$
// Failure-driven Rule Induction
- 8: $F \leftarrow \text{CLUSTERFAILUREINFO}(SP)$ ▷ Clustering by DBSCAN
- 9: $F_i \leftarrow \text{SAMPLEREPRESENTATIVECLUSTER}(H, F)$ ▷ Sample by Eq. 2
- 10: $(E, S) \leftarrow \text{REFLECTION}(F_i)$ ▷ Prompt M to get explanations and solutions
- 11: $R \leftarrow \text{SUMMARIZE}(E, S)$ ▷ Prompt M to transform them into rules
- 12: **for** each r in R **do**
- 13: **if** $\text{FORMAT}(\text{SELECTTOP}(P, 1), ER \cup r, C) > \text{FORMAT}(\text{SELECTTOP}(P, 1), ER, C)$ **then**
- 14: $NR.\text{insert}(r)$
- 15: $NR \leftarrow \text{SELECTTOP}(NR, 1), NH \leftarrow F_i$ ▷ Select the best rule from NR if NR is not empty
- 16: **return** OP, NR, NH

with H , to prevent the model from getting stuck on the same difficult-to-solve issues, MAPS measures the similarity between the failures in each cluster and those in H , and assigns a lower weight to clusters with higher similarity. Specifically, the weight is calculated as follows:

$$\text{sim}_i = 1 - \max_{h \in H} \left(\frac{ED(f_i, h)}{\max(\text{len}(f_i), \text{len}(h))} \right) \quad (1)$$

$$\text{weight}_i = \frac{\text{size}(f_i) \cdot \text{sim}_i}{\sum_{j=1}^n \text{size}(f_j) \cdot \text{sim}_j} \quad (2)$$

where $ED(\cdot)$ denotes edit distance, and $\text{size}(\cdot)$ denotes the corresponding cluster size. f_i and T denote the failure information of the i^{th} cluster's center sample and handled failures H in previous iterations, respectively.

2) *Error Reflection:* With the selected failure information F_i , this part aims to enhance prompts by incorporating effective mitigation strategies to prevent LLMs from repeating the same errors. First, MAPS chooses a few test cases whose failure information exhibits the lowest Euclidean Distance to the cluster center of F_i to construct the reflection prompt as depicted in Fig. 3 (b). The reflection prompt is then used to instruct the LLM M to provide detailed explanations and solutions for the failure information (Lines 10). Additionally, to ensure that the solutions can be applied to more examples and not just the given ones, the reflection prompt also requires the model to remove example-specific information and make the solutions applicable to other similar cases. To avoid potential performance degradation brought by lengthy prompts [27], [28], we propose a soft incorporation of reflection outputs by converting them into concise rules. Specifically, MAPS tasks LLM M with transforming the explanations and solutions into structured rules R based on the transformation prompt template as shown in Fig. 3 (c) (Lines 11).

3) *Rule Validation:* To maintain the quality of the induced rules, this part aims at retaining only the most effective ones by validating each newly generated rule and incorporating the best one into the prompt. To this end, as shown in Lines 12 to 14 of Algorithm 2, MAPS first constructs temporary prompts for each newly generated rule. The optimized instruction part of the temporary prompts is from the best-performing one in P , and the induced rules part of the temporary prompts includes both the existing rules ER and each newly generated rule r . MAPS then evaluates the performance of the temporary prompts on the sampled development set and incorporates the rule corresponding to the temporary prompt that achieves the highest performance into the final prompt (Lines 15).

IV. EXPERIMENTAL SETUP

A. Research Questions

In the evaluation, we focus on the following four research questions:

- RQ1:** How effective is MAPS compared with existing prompt optimization methods?
- RQ2:** Is MAPS able to generate tailored prompts for different LLMs?
- RQ3:** What is the impact of each module on the performance of MAPS?
- RQ4:** How does MAPS's performance vary under different experimental settings?

To study RQ1, we conduct a comprehensive evaluation of MAPS by comparing it with four representative prompt optimization methods on three popular LLMs. For RQ2, we assess MAPS's ability to generate LLM-tailored prompts for different LLMs by evaluating the performance of optimized prompts produced by MAPS and manually designed prompts

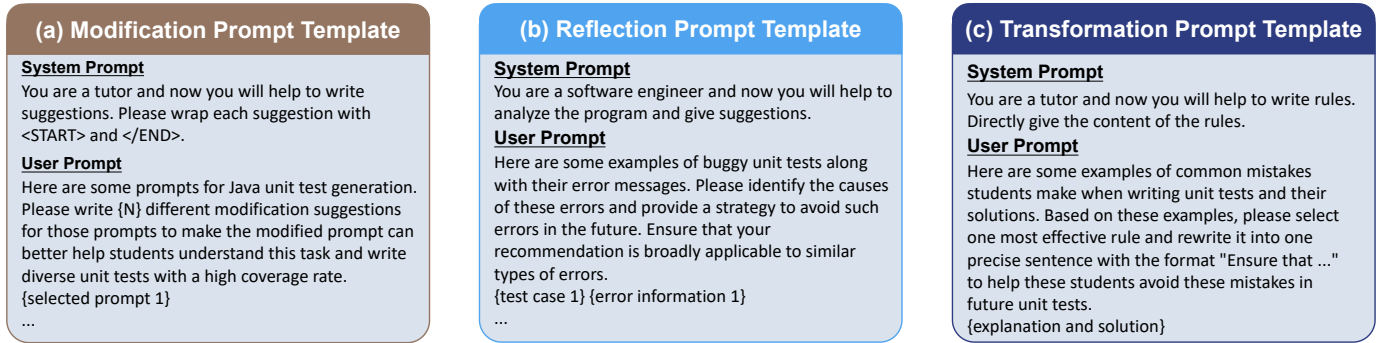


Fig. 3: The prompt templates of MAPS. The complete ones can be found in our replication package [29].

TABLE III: Statistics of the Defects4J benchmark.

Project	Abbr.	Bug number	Focal class	Focal method
Commons-Cli	Cli	29	13	645
Commons-Csv	Csv	15	5	373
Gson	Gson	17	15	220
Jfreechart	Chart	26	24	1,318
Commons-Lang	Lang	60	28	2,712
All		147	85	5,278

on different LLMs. For RQ3, we remove different modules of MAPS to evaluate their individual contributions. For RQ4, we investigate MAPS’s performance under different experimental settings, including the number of seed prompts, the number of generated prompts per iteration N , and the maximum iteration number I .

B. Datasets and Metrics

We evaluate MAPS on the widely-used Defects4J [16] dataset. Following previous studies [5], [9], we use five commonly used Java projects from this dataset including Apache Commons CLI, Apache Commons CSV, Google Gson, JFreeChart, and Apache Commons Lang. For each project, we use the fixed versions used by existing work [9] for evaluation. These projects span diverse domains, including command-line interface, data processing, serialization, visualization, and utility libraries, respectively. Table III presents the overall information on the dataset and the detailed information such as specific versions and commit hashes can be found in our replication package [29]. As for evaluation metrics, we follow previous work [22], [30] and adopt two most popular metrics to evaluate the performance of MAPS and the baseline approaches:

- **Line coverage (%)** measures the percentage of code lines executed during testing. It checks whether each line of the source code is executed at least once, i.e., $\text{Line Coverage}(\%) = \frac{\text{Number of executed lines}}{\text{Total number of lines}} \times 100$. Only the lines covered by passed test cases are used for calculation.
- **Branch coverage (%)** measures the percentage of branches executed during testing. It checks whether each branch in control structures is executed, i.e., $\text{Branch Coverage}(\%) = \frac{\text{Number of executed branches}}{\text{Total number of branches}} \times 100$. Only the branches covered by passed test cases are used for calculation.

C. Baselines

To provide a comprehensive evaluation, we experiment on three popular LLMs and compare MAPS with four representative prompt optimization methods, with details as below.

For LLMs, we select the following powerful LLMs in code-related tasks for evaluation:

- **ChatGPT** [10] is a popular model known for its versatile capabilities across various fields such as code generation. It is a closed-source model developed by OpenAI and we use the latest version gpt-3.5-turbo-0125 in our experiments.
- **Llama-3.1** [17] is a family of state-of-the-art open-source LLMs that have different sizes including 7B, 70B, and 405B. In this paper, we use the instruction-tuned Llama-3.1-70B-Instruct for experiments.
- **Qwen2** [23] is an open-source large language model that achieves promising in a variety of code intelligence tasks. It has a 128k context length to deal with project-level long code. Specifically, we choose Qwen2-72B-Instruct in this paper.

As for prompt optimization methods, we compare MAPS with the basic prompt and four state-of-the-art prompt optimization methods:

- **Basic** denotes the performance of the best seed prompt. It is used to measure how much improvements could prompt optimization methods to achieve.
- **APE** [19] is a typical prompt optimization method that directly asks LLMs to generate variants for current prompts that can keep their semantic meanings in each iteration.
- **OPRO** [25] further incorporates the performance information and lets the LLM generate new prompts that can enhance the test accuracy based on existing prompts and their performance.
- **EVOPROMPT** [18] is the state-of-the-art prompt optimization method that generates new prompts based on evolutionary operators. It has two versions: EVOPROMPT (GA) and EVOPROMPT (DE), which use the Genetic Algorithm, and Differential Evolution, respectively.

D. Implementation

In our experiments, the number of seed prompts, the number of generated prompts per iteration N , and the maximum

TABLE IV: Comparison with prompt optimization methods on ChatGPT. The number in “()” denotes the standard deviation.

Projects	Chart	Cli	Csv	Gson	Lang	Average
Line Coverage						
Basic	47.41	36.76	37.49	22.42	57.58	45.56
APE	43.34	39.43	39.32	23.42	54.92	44.58
OPRO	44.52	42.49	38.96	25.71	53.70	45.13
EVO PROMPT (GA)	48.47	45.71	38.59	21.82	56.34	46.63
EVO PROMPT (DE)	49.60	42.88	39.87	24.17	53.39	45.89
MAPS	51.56 (0.66)	58.88 (1.14)	50.05 (1.02)	25.17 (0.60)	61.35 (0.42)	53.80 (0.04)
Branch Coverage						
Basic	33.07	23.27	32.39	14.21	46.19	34.24
APE	33.72	24.30	34.32	15.53	44.59	34.25
OPRO	33.86	28.26	32.78	16.94	42.46	34.28
EVO PROMPT (GA)	34.36	31.64	34.18	14.53	45.07	35.88
EVO PROMPT (DE)	35.70	29.32	34.24	16.04	43.27	35.11
MAPS	38.68 (0.25)	41.54 (1.58)	39.53 (1.75)	16.20 (0.40)	51.11 (0.40)	41.84 (0.26)

iteration number I are set to 5, 2, and 5, respectively. The impact of different experimental settings is discussed in Section V-D. We repeat MAPS three times and report its average results and variance to eliminate the influence of sampling and fluctuations in LLM. During the prompt optimization stage, we randomly sample ten bugs from the Defects4J benchmark as our development set D_{dev} and use all bugs as test set D_{test} . We present the sampled development set D_{dev} in our replication package [29]. To save manual efforts, we obtain the seed prompts automatically by ChatGPT and the existing Automatic Prompt Engineer method [19]. To ensure a fair comparison, we use the same development set and seed prompts for our tool and all baseline methods. The seed prompts, and all prompt templates used in our work can be found in our replication package [29]. We conduct all experiments on an Ubuntu 20.04 server with a 112-core Intel Xeon Platinum CPU.

V. EXPERIMENTAL RESULTS

A. *RQ1: Performance Evaluation*

To evaluate the effectiveness of MAPS in test case generation, we compare it with four representative prompt optimization methods across three popular LLMs. Tables IV-VI present the performance of MAPS along with baseline methods on Defects4J. For each method, we provide the average performance across all bugs, as well as detailed average results for each project. Based on these results, we derive the following findings.

Existing prompt optimization methods struggle to produce effective prompts for test case generation. By comparing the performance of the basic prompt and four baseline methods, we can observe that existing methods struggle to produce effective prompts for test case generation. Specifically, as shown in Table IV, the best-performing baseline, EVO PROMPT (GA), can only achieve 1.07% and 1.64% improvements over the basic prompt in line coverage and branch coverage, respectively. Moreover, methods like APE and OPRO even perform worse than the basic prompt in terms of line coverage, with decreases of 0.98% and 0.43%, respectively. This suggests that

simply combining and mutating existing prompts is difficult to produce effective prompts for test case generation.

MAPS achieves substantial improvement over baseline methods. As can be seen in Table IV-VI, MAPS considerably outperforms the baseline methods across all LLMs. For example, compared with the strongest baseline method, EVO PROMPT (GA), MAPS achieves an average improvement of 6.19% and 5.03% in line coverage and branch coverage, respectively. These results demonstrate the effectiveness of MAPS in finding effective prompts within the vast search space.

The performance of different LLMs on different projects varies. By comparing the performance on different projects across different LLMs, we further observe that different LLMs tend to perform well on different projects. For instance, as shown in Table IV-VI, although the overall performance of ChatGPT and Llama-3.1 with basic prompts are similar, their performance on individual projects exhibits large differences. Specifically, on the *Lang* project, ChatGPT outperforms Llama-3.1 and Qwen2 by 4.69% and 15.47% in terms of line coverage, respectively; while on the *Csv* project, the performance of ChatGPT is much worse than Llama-3.1 and Qwen2, with a decrease of 5.70% and 3.24% in terms of line coverage, respectively. This indicates that different LLMs tend to excel in different domains and also demonstrates the importance of building tailored prompts for different LLMs.

MAPS could achieve higher improvements on the projects that the seed prompts do not perform well. At last, as shown in Table IV-VI, we find that the improvements achieved by MAPS on different projects also vary across different LLMs. For instance, in the *Lang* project, the relative improvement on ChatGPT and Qwen2 are 6.55% and 14.98%, respectively; whereas in the *Csv* project, the improvement on ChatGPT and Qwen2 are 33.50% and 22.27%, respectively. These results demonstrate that MAPS can achieve a higher increase on projects where LLMs do not excel, and it can provide directed improvements tailored to different LLMs.

TABLE V: Comparison with prompt optimization methods on Llama-3.1. The number in “()” denotes the standard deviation.

Projects	Chart	Cli	Csv	Gson	Lang	Average
Line Coverage						
Basic	46.52	45.99	43.19	22.81	52.89	45.93
APE	45.05	46.26	42.17	21.56	50.98	44.70
OPRO	45.45	44.39	42.81	23.39	54.09	45.95
EVO PROMPT (GA)	45.95	45.82	42.70	24.70	54.24	46.52
EVO PROMPT (DE)	45.70	44.96	43.24	22.77	52.29	45.34
MAPS	49.68 (0.21)	51.83 (1.54)	44.05 (0.19)	26.38 (0.96)	58.56 (1.49)	50.59 (0.56)
Branch Coverage						
Basic	35.46	28.55	36.92	16.83	42.73	35.06
APE	34.54	28.49	35.52	16.37	41.58	34.22
OPRO	34.85	26.61	37.25	16.86	43.20	34.80
EVO PROMPT (GA)	34.71	29.28	35.51	16.74	43.01	35.03
EVO PROMPT (DE)	34.82	29.28	36.95	17.00	42.62	35.07
MAPS	37.73 (0.68)	35.06 (0.27)	39.02 (1.14)	19.36 (0.65)	48.24 (1.69)	39.50 (0.68)

TABLE VI: Comparison with prompt optimization methods on Qwen2. The number in “()” denotes the standard deviation.

Projects	Chart	Cli	Csv	Gson	Lang	Average
Line Coverage						
Basic	39.75	36.80	40.73	26.51	42.11	38.70
APE	39.52	34.76	45.73	23.83	44.44	39.41
OPRO	40.84	38.51	38.94	26.41	33.41	35.49
EVO PROMPT (GA)	39.08	36.49	37.50	21.23	43.56	38.17
EVO PROMPT (DE)	39.08	36.49	37.50	21.23	43.56	38.17
MAPS	44.37 (3.56)	47.56 (0.40)	49.80 (3.48)	29.75 (1.29)	48.42 (2.16)	45.51 (1.28)
Branch Coverage						
Basic	30.88	23.79	32.55	18.18	30.55	28.05
APE	31.07	21.35	36.22	16.79	33.27	28.92
OPRO	32.47	26.76	29.58	19.92	25.26	26.66
EVO PROMPT (GA)	30.81	22.16	29.71	13.84	33.14	27.98
EVO PROMPT (DE)	30.81	22.16	29.71	13.84	33.14	27.98
MAPS	30.58 (3.26)	31.73 (1.44)	36.30 (2.83)	18.98 (2.01)	37.11 (1.51)	32.71 (1.43)

TABLE VII: Evaluation of MAPS in generating tailored prompts for different LLMs.

Approach	ChatGPT	Llama-3.1	Qwen2	ChatGPT	Llama-3.1	Qwen2
Line Coverage						
ChatGPT’s final prompt	53.80	41.92	35.98	41.84	32.31	26.87
Llama-3.1’s final prompt	51.35	50.59	44.94	40.05	39.50	34.43
Qwen2’s final prompt	51.14	43.98	45.51	38.39	32.97	32.71
Manually-designed prompt	48.55	48.46	42.85	37.55	37.60	31.88
Branch Coverage						

Answer to RQ1: MAPS effectively enhances prompts for test case generation. It consistently outperforms all baseline methods across various LLMs, achieving a 6.19% higher line coverage rate and a 5.03% higher branch coverage rate compared to the strongest baseline.

B. RQ2: LLM-Tailored Prompt Generation Evaluation

In this RQ, we study whether MAPS could generate tailored prompts for different LLMs. To achieve this, we evaluate the performance of the three final prompts obtained by three models on each model. Additionally, we also compare the prompt used in [13] to validate whether the prompt built by MAPS could outperform the manually-designed prompt. The experimental results are depicted in Table VII. The detailed results on each project can be found in our replication

package [29]. Based on the results, we have the following observations:

The performance of different prompts varies a lot. By comparing the performance of each final prompt on different models. We can find that the performance of different prompts on the same LLM varies a lot. Specifically, the line coverage rate and branch coverage rate of Llama-3.1 on different final prompts range from 41.92%-50.59% and 32.31%-39.50%, respectively, which further demonstrates the importance of automated generating tailored prompts for different LLMs.

MAPS effectively produces tailored prompts for different LLMs. As in Table VII, we can observe that each model tends to achieve the best performance on their own final prompt. For example, the performance of ChatGPT’s final prompt outperforms the final prompt obtained by Llama-3.1

TABLE VIII: Ablation Study of MAPS.

Approach		Line Coverage	Branch Coverage
ChatGPT	MAPS	53.80	41.84
	w/o Domain contextual knowledge extraction	44.16	33.31
	w/o Diversity-guided prompt generation	45.59	34.04
	w/o Failure-driven rule induction	46.86	37.08
	Only domain contextual knowledge extraction	48.03	35.76
Llama-3.1	MAPS	50.59	39.50
	w/o Domain contextual knowledge extraction	45.37	34.73
	w/o Diversity-guided prompt generation	49.68	38.35
	w/o Failure-driven rule induction	49.73	38.88
	Only domain contextual knowledge extraction	49.48	37.95
Qwen2	MAPS	45.51	32.71
	w/o Domain contextual knowledge extraction	42.12	29.73
	w/o Diversity-guided prompt generation	43.81	32.10
	w/o Failure-driven rule induction	43.92	31.58
	Only domain contextual knowledge extraction	40.56	30.21

and Qwen2 by 2.45% and 2.66% in terms of line coverage on ChatGPT. This indicates that MAPS could effectively produce tailored prompts for each LLM.

Prompts optimized by MAPS outperform manually-designed prompts. Additionally, the prompt obtained by MAPS also outperforms the line coverage of manually-designed prompt by 5.25%, 2.13%, and 2.66% on ChatGPT, Llama-3.1, and Qwen2, respectively. These results demonstrate MAPS’s efficacy in automatically crafting effective, LLM-tailored prompts.

Answer to RQ2: The performance of different prompts varies a lot and MAPS could effectively produce tailored prompts for different LLMs.

C. RQ3: Ablation Study

We conduct ablation studies to validate the effectiveness of each module in our method, i.e. domain contextual knowledge extraction, diversity-guided prompt generation, and failure-driven rule induction. The average results for each method are presented in Table VIII, with detailed results for each project available in our replication package [29].

Domain contextual knowledge extraction. We conduct this experiment by removing the cross-file context information in the final prompt. As can be seen in Table VIII, excluding the cross-file context information dramatically degrades performance across all LLMs. Specifically, the branch coverage rate drops by 8.53%, 4.77%, and 2.98% on ChatGPT, Llama-3.1, and Qwen2, respectively. These results demonstrate the effectiveness of integrating project context information to help LLMs generate accurate test cases.

Diversity-guided prompt generation. To validate the effectiveness of diversity-guided prompt generation, we experiment by replacing the optimized instruction part of the final prompt with the one produced by the best baseline method. As shown in Table VIII, removing the diversity-guided prompt generation leads to a consistent drop in all tasks and metrics. For example, the line coverage rate decreases by 8.21%, 1.01%, and 1.70% on ChatGPT, Llama-3.1, and Qwen2, respectively,

which demonstrates the importance of prompt diversity in the search space exploration process.

Failure-driven rule induction. We conduct this experiment by removing the induced rules in the final prompt. From Table VIII, we can observe that without failure-driven rule induction, the performance of MAPS drops a lot across all LLMs. Specifically, in ChatGPT, the line coverage decreases by 6.94% and branch coverage by 4.76%, respectively. This indicates the benefits of using LLM-induced rules to guide the optimization process and avoid LLMs making recurring errors. We further show some cases in Section VI-A for illustration.

Only domain contextual knowledge extraction. As the domain contextual knowledge extraction module provides the most significant performance gains, we further evaluate how much could this module only bring to the basic prompt to ensure fairness in comparison. We conduct this experiment by removing both the diversity-guided prompt generation module and the failure-driven rule induction module. As shown in Table VIII, removing both these two parts lead to substantial performance to MAPS. Specifically, solely involving the domain contextual knowledge extraction can only bring limited improvement over the basic prompt, i.e., improving the line coverage and branch coverage for Qwen2 by 1.86% and 2.16%, respectively. Its performance still falls behind MAPS by a large margin, which indicates that simply combining basic prompt and the context information without further optimization can not achieve satisfactory performance.

Answer to RQ3: All modules in MAPS contribute to the performance. Removing the domain contextual knowledge extraction part leads to the largest performance decreases.

D. RQ4: Parameter Analysis

In this section, we study how different experimental settings affect the performance of MAPS and baseline methods, including the number of seed prompts, the number of generated prompts N , and the maximum iteration number I . As these parameters primarily influence the prompt optimization process, we report their performance on the development set in this section. In each study, we vary only the parameter under

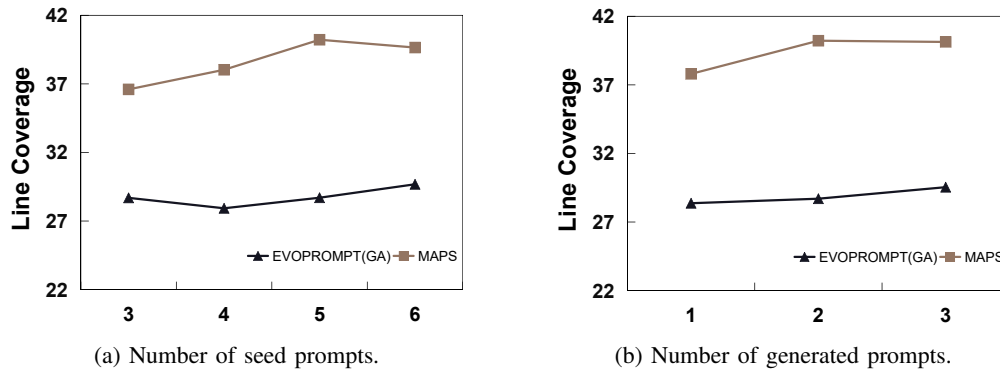


Fig. 4: Parameter analysis of number of seed prompts and generated prompts on ChatGPT.

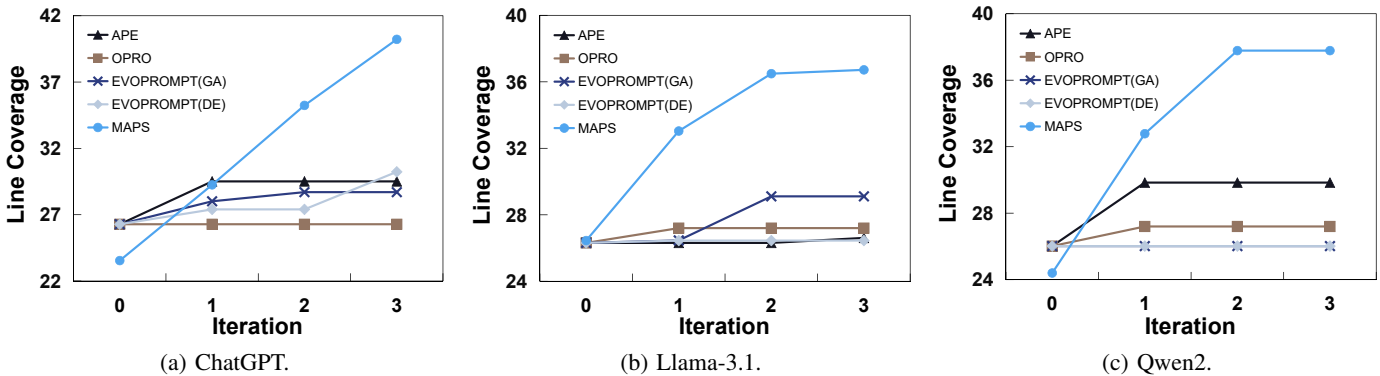


Fig. 5: Parameter analysis of the Iteration number.

analysis and keep others constant. For the analysis on number of seed prompts and generated prompts, we only present the results on ChatGPT; the complete results are available in our replicate package [29].

Number of seed prompt. We conduct experiments to evaluate how MAPS and baseline methods perform under different numbers of seed prompts. Specifically, we use the best-performing baseline EVOPROMPT (GA) and set the number of seed prompts to 3, 4, 5, and 6 respectively. From Fig. 4 (a), we can observe that MAPS consistently achieves better performance across different numbers of seed prompts. Additionally, by comparing the performance under different numbers of seed prompts, we can find that MAPS and EVOPROMPT (GA) tend to achieve better performance with a larger number of seed prompts, and the improvements over five seed prompts are marginal. Therefore, we set the number of seed prompts to five in this paper.

Number of generated prompt. We also study the effect of a number of generated prompts by varying it from 1 to 3. As shown in Fig. 4 (b), MAPS consistently achieves better performance across different numbers of generated prompts. While a larger number of generated prompts can lead to better performance, it also increases costs. Therefore, we set the number of generated prompts to two in this experiment.

Maximum iteration number. In this study, we vary the number of maximum iteration number from 1 to 3 and investigate the performance of prompts in each iteration. We present the results of the best prompt generated by MAPS and each baseline method on the development set. Iteration 0 represents

the performance of the basic prompt without optimization by MAPS. As shown in Fig. 5, MAPS achieves the best performance in most cases. Specifically, MAPS outperforms baseline methods by at least 7.94% in line coverage when the maximum iteration number is set to three. Additionally, due to low prompt diversity, baseline methods tend to converge to local optima in the first iteration and fail to achieve further improvement. In contrast, MAPS continually enhances performance with each iteration.

Answer to RQ4: MAPS consistently achieves the best performance across different parameter settings. Our hyper-parameter settings, with the number of seed prompts set to 5, N to 2, and I to 5, achieve effective results.

VI. DISCUSSION

A. Case study

To better understand how MAPS improves test case generation, we present two examples of the final prompts created by MAPS and the resulting test cases from these final prompts. First, Fig 6 (a) shows the final prompt for Llama-3.1, along with the generated test case based on the focal method in Listing 1. We can find that by following the second induced rule, Llama-3.1 correctly generates a test case that uses the “try {...} catch (IllegalArgumentException e)” in the test method. Second, Fig 6 (b) illustrates another example using ChatGPT, where the focal method is taken from Listing 2. Compared to the incorrect test case generated by the baseline

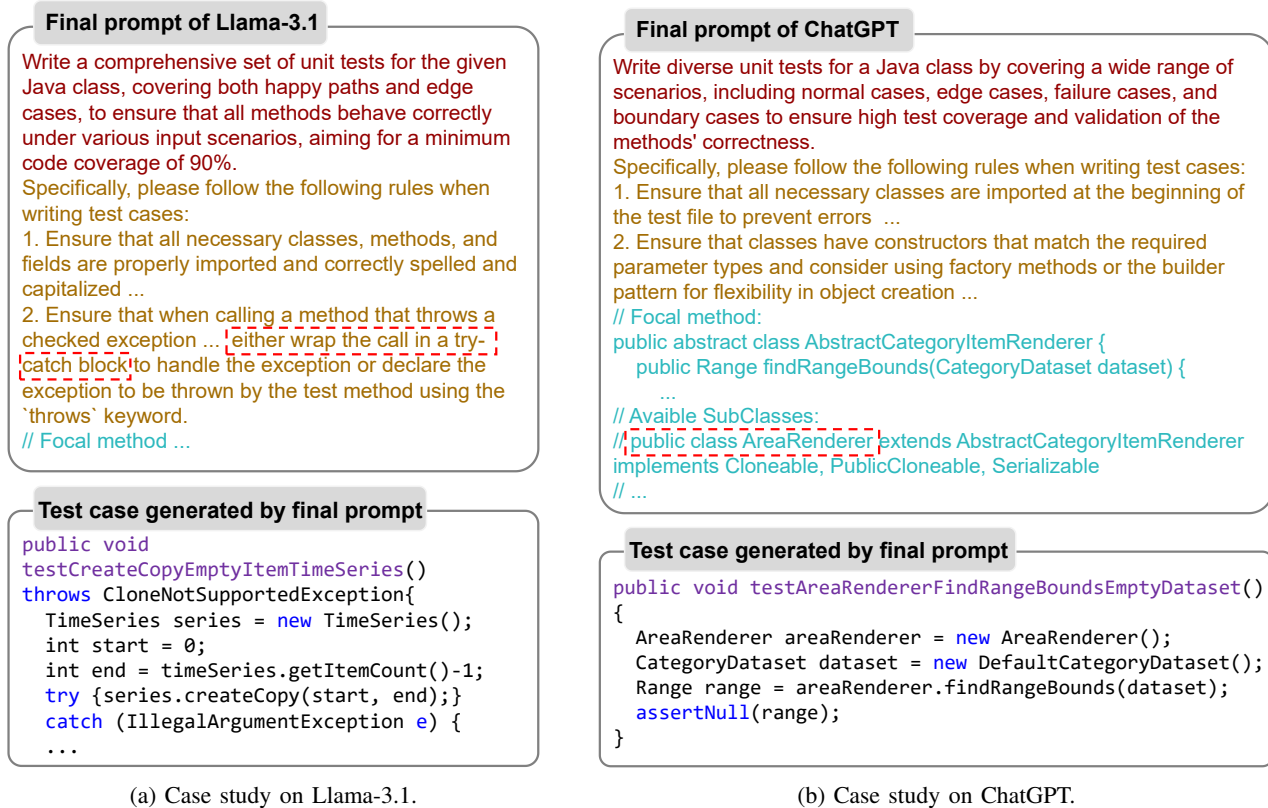


Fig. 6: Two cases showing the difference of optimized prompts from different models and how the optimized prompt help generate correct test case.

prompt in Listing 2, the cross-file contextual knowledge in the optimized prompt allows the model to correctly initialize the “AbstractCategoryItemRenderer” class. Additionally, by comparing two final prompts obtained by MAPS, we observe that the induced rules for Llama-3.1 and ChatGPT are different. The first rules of these two methods are similar, but Llama-3.1’s second rule focuses on exception handling, whereas ChatGPT’s concerns method parameters. This indicates that these models tend to make different types of errors, and MAPS can effectively introduce tailored rules for different LLMs.

Moreover, by calculating the average edit distance of prompts obtained in each optimization iteration by MAPS, we find that it generates more diverse prompts during the optimization process. Specifically, the average edit distance of prompts from MAPS is 27.0, remarkably larger than that of OPRO, which averages only 9.3 edits, as shown in Table II. This further demonstrates MAPS’s effectiveness in generating diverse prompts during the optimization process.

B. Comparison with Other Methods

To comprehensively study the advantages and limitations of LLMs-based test case generation methods compared with traditional approaches and previous deep learning-based approaches, we compare ChatGPT+MAPS with two baseline methods including Randoop [4] and A3Test [9]. Randoop [4] is a widely used automated software testing tool that employs random fuzzing on unit APIs to construct prefixes that lead the

TABLE IX: Comparison of Randoop, A3Test, ChatTESTER, and MAPS.

Projects	Line Coverage	Branch Coverage
Randoop	49.51	34.45
A3Test	34.11	15.72
ChatGPT+Basic	45.56	34.24
ChatGPT+MAPS	53.80	41.84

unit into noteworthy states. A3Test [9] is a state-of-the-art non-LLM-based deep learning model that fine-tunes PLBART [31] for test case generation. For Randoop, we reproduce it based on the “gen_tests.pl” script provided in Defects4J. For A3Test, we reproduce the results based on A3Test’s replicate package [32].

Table IX presents the experimental results in terms of line coverage and branch coverage. Compared to three baseline methods, ChatGPT+MAPS achieves the highest line coverage (i.e., 53.80%) and branch coverage (i.e., 41.84%), outperforming traditional methods by at least 4.29% and 7.39%, respectively. This demonstrates MAPS’s effectiveness in helping LLMs generate test cases with high coverage. Besides, when comparing the performance of Randoop, ChatGPT+basic, and ChatGPT+MAPS, we can find that the performance of ChatGPT+basic is lower than traditional method Randoop, meaning that simply prompting LLMs can not achieve satisfactory results, while MAPS can produce suitable prompts for LLMs and make LLMs outperform traditional methods.

Although these are also other LLM-based methods such as ChatUniTest [13], we do not compare with them because our research is orthogonal to them. MAPS focuses on optimizing tailored prompts for test case generation. It can be further combined with existing methods such as incorporating static information [22] or multi-turn refinement method [13] and achieve better performance.

C. Threats to Validity

We identify two main threats to the validity of our study:

Limited LLMs. Given the rapid development of large language models, some models are not covered in this paper. To mitigate this issue, we select the three most representative and popular LLMs that contain both open-source models and closed-source models. Additionally, MAPS is model-agnostic and does not require access to the model’s parameters. Therefore, we believe MAPS can also achieve improvements on other LLMs.

Limited Programming Languages. In this paper, we conduct experiments using the Defects4J benchmark, which only contains Java projects. This benchmark is popular and widely used in previous work. Furthermore, our method is language-agnostic and can be easily adapted to other programming languages. In the future, we plan to conduct experiments on more datasets including those with languages such as Python.

VII. RELATED WORK

A. Automatic Prompt Optimization

Automatically discovering optimal prompts has emerged as an important challenge in the era of LLMs [19], [33]. Most existing methods follow an iterative prompt optimization process. They start with a set of seed prompts and iteratively synthesize new prompt candidates, evaluating their performance to select the top ones for the next iteration. For example, APE [19] is a typical prompt optimization method that directly asks LLMs to generate variants of current prompts while maintaining their semantic meanings in each iteration. OPRO [25] further incorporates the performance information and lets the LLM generate new prompts that can enhance the test accuracy based on existing prompts and their performance. EVOPROMPT [18] is the state-of-the-art prompt optimization method that generates new prompts based on evolutionary operators. It has two versions: EVOPROMPT (GA) and EVOPROMPT (DE), which use the Genetic Algorithm, and Differential Evolution, respectively. Different from those works, this paper focuses on LLM-tailored prompt optimization for test case generation and investigates improving the exploration of the search process.

B. Test Case Generation

Traditional methods like Randoop [4] utilize random fuzzing on unit APIs to construct prefixes that lead the unit into noteworthy states. Evosuite [7] is a search-based test generation strategy that employs evolutionary algorithms to autonomously craft test suites for Java classes aimed at improving coverage rate. A series of recent studies [5], [34], [35] have employed deep learning techniques by training

models to convert target methods into their corresponding test cases or assertions. A series of recent studies [5], [36] have employed deep learning techniques for test case generation by formulating the test case generation as a neural machine translation task and train models to convert target methods into their corresponding test cases or assertions. For example, AthenaTest [5] fine-tunes BART [8] on a dataset designed for test generation. A3Test [9] further incorporates assertion knowledge and a test signature verification mechanism for achieving better results. Recently, leveraging advancements in LLMs, test case generation approaches based on LLMs have also been proposed and shown promising results. For example, CodaMOSA [37] leverages LLMs to provide example test cases for under-covered functions when search-based testing hits a coverage stall. ChatTESTER [13] incorporates ChatGPT along with an iterative test refiner to generate tests. Different from those works, our method serves as the first LLM-tailored prompt generation method for test case generation and can be further combined with existing methods to enhance their performance. Besides, our method aims at to directly avoid generating low-quality test cases with an optimized prompt instead of time-consuming multi-iteration generation and fixing during test time.

C. LLMs for Software Engineering

Large Language Models have recently been widely adopted for various software engineering tasks due to their impressive performance in both code generation and understanding [38]–[41]. For example, Yuan et al. [13] evaluate the performance of ChatGPT for test case generation and improve it by iterative test refiner. Gao et al. [14] investigate how to set the in-context demonstration for ChatGPT for code summarization and code generation tasks. CHATRepair [42] iteratively evaluates programs on test cases and feeds the error messages to LLMs for further patch generation. Self-edit [43] utilizes compiler error messages to enhance the correctness of code generation. Li et al. [44] investigates the feasibility of slicing commercial black-box LLMs using medium-sized backbone models. SBLLM [45] combines search-based methods and LLMs to iteratively improve code efficiency. DeepSeek-Coder [46] is an open-source Mixture-of-Experts (MoE) code language model that achieves state-of-the-art performance across various code intelligence tasks. StarCoder 2 [47] is an advanced LLM trained in 600+ programming languages. It is trained on the Stack2 [47] dataset and natural language text from Wikipedia, Arxiv, and GitHub issues. Magicoder [48] is a recent model trained on synthetic instruction data enhanced with open-source code snippets. It proposes OSS-INSTRUCT which produces diverse and realistic instruction tuning data from open-source code snippets to address the biases typically found in synthetic data generated by LLMs.

VIII. CONCLUSION

In this paper, we introduced a novel automatic LLM-tailored prompt generation method MAPS for test case generation. During the optimization process, MAPS generates diverse candidate prompts to facilitate the exploration of the prompt

search space and induces rules from failure cases to avoid recurring errors. Additionally, MAPS integrates various domain contextual knowledge for generating correct test cases in practical projects. Extensive experiments on Defects4J show that MAPS outperforms existing prompt optimization methods. The replicate package of this work is publicly available at <https://zenodo.org/records/14287744>.

REFERENCES

- [1] D. M. Rafi, K. R. K. Moses, K. Petersen, and M. Mäntylä, “Benefits and limitations of automated software testing: Systematic literature review and practitioner survey,” in *7th International Workshop on Automation of Software Test, AST 2012, Zurich, Switzerland, June 2-3, 2012*. IEEE Computer Society, 2012, pp. 36–42.
- [2] M. M. Almasi, H. Hemmati, G. Fraser, A. Arcuri, and J. Benefelds, “An industrial evaluation of unit test generation: Finding real faults in a financial application,” in *39th IEEE/ACM International Conference on Software Engineering: Software Engineering in Practice Track, ICSE-SEIP 2017, Buenos Aires, Argentina, May 20-28, 2017*. IEEE Computer Society, 2017, pp. 263–272.
- [3] P. Runeson, “A survey of unit testing practices,” *IEEE Softw.*, vol. 23, no. 4, pp. 22–29, 2006.
- [4] C. Pacheco and M. D. Ernst, “Randoop: feedback-directed random testing for java,” in *Companion to the 22nd Annual ACM SIGPLAN Conference on Object-Oriented Programming, Systems, Languages, and Applications, OOPSLA 2007, October 21-25, 2007, Montreal, Quebec, Canada*. ACM, 2007, pp. 815–816.
- [5] M. Tufano, D. Drain, A. Svyatkovskiy, S. K. Deng, and N. Sundaresan, “Unit test case generation with transformers and focal context,” *arXiv preprint arXiv:2009.05617*, 2020.
- [6] J. Wang, Y. Huang, C. Chen, Z. Liu, S. Wang, and Q. Wang, “Software testing with large language models: Survey, landscape, and vision,” *IEEE Trans. Software Eng.*, vol. 50, no. 4, pp. 911–936, 2024.
- [7] G. Fraser and A. Arcuri, “EvoSuite: automatic test suite generation for object-oriented software,” in *SIGSOFT/FSE’11 19th ACM SIGSOFT Symposium on the Foundations of Software Engineering (FSE-19) and ESEC’11: 13th European Software Engineering Conference (ESEC-13), Szeged, Hungary, September 5-9, 2011*. ACM, 2011, pp. 416–419.
- [8] M. Lewis, Y. Liu, N. Goyal, M. Ghazvininejad, A. Mohamed, O. Levy, V. Stoyanov, and L. Zettlemoyer, “BART: denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension,” in *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics, ACL 2020, Online, July 5-10, 2020*. Association for Computational Linguistics, 2020, pp. 7871–7880.
- [9] S. Alagarsamy, C. Tantithamthavorn, and A. Aleti, “A3test: Assertion-augmented automated test case generation,” *CoRR*, vol. abs/2302.10352, 2023.
- [10] ChatGPT, “Chatgpt,” <https://chat.openai.com/>, 2024.
- [11] T. Kojima, S. S. Gu, M. Reid, Y. Matsuo, and Y. Iwasawa, “Large language models are zero-shot reasoners,” in *Advances in Neural Information Processing Systems 35: Annual Conference on Neural Information Processing Systems 2022, NeurIPS 2022, New Orleans, LA, USA, November 28 - December 9, 2022*.
- [12] Z. Xie, Y. Chen, C. Zhi, S. Deng, and J. Yin, “Chatunitest: a chatgpt-based automated unit test generation tool,” *CoRR*, vol. abs/2305.04764, 2023.
- [13] Z. Yuan, M. Liu, S. Ding, K. Wang, Y. Chen, X. Peng, and Y. Lou, “Evaluating and improving chatgpt for unit test generation,” *Proc. ACM Softw. Eng.*, vol. 1, no. FSE, pp. 1703–1726, 2024.
- [14] S. Gao, X. Wen, C. Gao, W. Wang, H. Zhang, and M. R. Lyu, “What makes good in-context demonstrations for code intelligence tasks with llms?” in *38th IEEE/ACM International Conference on Automated Software Engineering, ASE 2023, Luxembourg, September 11-15, 2023*. IEEE, 2023, pp. 761–773.
- [15] H. Gonen, S. Iyer, T. Blevins, N. A. Smith, and L. Zettlemoyer, “Demystifying prompts in language models via perplexity estimation,” in *Findings of the Association for Computational Linguistics: EMNLP 2023, Singapore, December 6-10, 2023*. Association for Computational Linguistics, 2023, pp. 10 136–10 148.
- [16] R. Just, D. Jalali, and M. D. Ernst, “Defects4j: a database of existing faults to enable controlled testing studies for java programs,” in *International Symposium on Software Testing and Analysis, ISSTA ’14, San Jose, CA, USA - July 21 - 26, 2014*. ACM, 2014, pp. 437–440.
- [17] A. Dubey, A. Jauhri, A. Pandey, A. Kadian, A. Al-Dahle, A. Letman, A. Mathur, A. Schelten, A. Yang, A. Fan, A. Goyal, A. Hartshorn, A. Yang, A. Mitra, A. Srivankumar, A. Korenev, A. Hinsvark, A. Rao, A. Zhang, A. Rodriguez, A. Gregerson, A. Spataru, B. Rozière, B. Biron, B. Tang, B. Chern, C. Caucheteux, C. Nayak, C. Bi, C. Marra, C. McConnell, C. Keller, C. Touret, C. Wu, C. Wong, C. C. Ferrer, C. Nikolaidis, D. Allonsius, D. Song, D. Pintz, D. Livshits, D. Esiobu, D. Choudhary, D. Mahajan, D. Garcia-Olano, D. Perino, D. Hupkes, E. Lakomkin, E. AlBadawy, E. Lobanova, E. Dinan, E. M. Smith, F. Radenovic, F. Zhang, G. Synnaeve, G. Lee, G. L. Anderson, G. Nail, G. Mialon, G. Pang, G. Cucurell, H. Nguyen, H. Korevaar, H. Xu, H. Touvron, I. Zarov, I. A. Ibarra, I. M. Kloumann, I. Misra, I. Evtimov, J. Copet, J. Lee, J. Geffert, J. Vranes, J. Park, J. Mahadeokar, J. Shah, J. van der Linde, J. Billock, J. Hong, J. Lee, J. Fu, J. Chi, J. Huang, J. Liu, J. Wang, J. Yu, J. Bitton, J. Spisak, J. Park, J. Rocca, J. Johnston, J. Saxe, J. Jia, K. V. Alwala, K. Upasani, K. Plawiak, K. Li, K. Heafield, and K. Stone, “The llama 3 herd of models,” *CoRR*, vol. abs/2407.21783, 2024.
- [18] Q. Guo, R. Wang, J. Guo, B. Li, K. Song, X. Tan, G. Liu, J. Bian, and Y. Yang, “Connecting large language models with evolutionary algorithms yields powerful prompt optimizers,” in *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net, 2024.
- [19] Y. Zhou, A. I. Muresanu, Z. Han, K. Paster, S. Pitis, H. Chan, and J. Ba, “Large language models are human-level prompt engineers,” in *The Eleventh International Conference on Learning Representations, ICLR 2023, Kigali, Rwanda, May 1-5, 2023*. OpenReview.net, 2023.
- [20] J. H. Holland, *Adaptation in natural and artificial systems: an introductory analysis with applications to biology, control, and artificial intelligence*. MIT press, 1992.
- [21] R. Storn and K. Price, “Differential evolution—a simple and efficient heuristic for global optimization over continuous spaces,” *Journal of global optimization*, vol. 11, pp. 341–359, 1997.
- [22] G. Ryan, S. Jain, M. Shang, S. Wang, X. Ma, M. K. Ramanathan, and B. Ray, “Code-aware prompting: A study of coverage-guided test generation in regression setting using LLM,” *Proc. ACM Softw. Eng.*, vol. 1, no. FSE, pp. 951–971, 2024.
- [23] A. Yang, B. Yang, B. Hui, B. Zheng, B. Yu, C. Zhou, C. Li, C. Li, D. Liu, F. Huang, G. Dong, H. Wei, H. Lin, J. Tang, J. Wang, J. Yang, J. Tu, J. Zhang, J. Ma, J. Yang, J. Xu, J. Zhou, J. Bai, J. He, J. Lin, K. Dang, K. Lu, K. Chen, K. Yang, M. Li, M. Xue, N. Ni, P. Zhang, P. Wang, R. Peng, R. Men, R. Gao, R. Lin, S. Wang, S. Bai, S. Tan, T. Zhu, T. Li, T. Liu, W. Ge, X. Deng, X. Zhou, X. Ren, X. Zhang, X. Wei, X. Ren, X. Liu, Y. Fan, Y. Yao, Y. Zhang, Y. Wan, Y. Chu, Y. Liu, Z. Cui, Z. Zhang, Z. Guo, and Z. Fan, “Qwen2 technical report,” *CoRR*, vol. abs/2407.10671, 2024.
- [24] R. Ma, X. Wang, X. Zhou, J. Li, N. Du, T. Gui, Q. Zhang, and X. Huang, “Are large language models good prompt optimizers?” *CoRR*, vol. abs/2402.02101, 2024.
- [25] C. Yang, X. Wang, Y. Lu, H. Liu, Q. V. Le, D. Zhou, and X. Chen, “Large language models as optimizers,” in *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net, 2024.
- [26] M. Ester, H. Kriegel, J. Sander, and X. Xu, “A density-based algorithm for discovering clusters in large spatial databases with noise,” in *Proceedings of the Second International Conference on Knowledge Discovery and Data Mining (KDD-96), Portland, Oregon, USA*. AAAI Press, 1996, pp. 226–231.
- [27] N. F. Liu, K. Lin, J. Hewitt, A. Paranjape, M. Bevilacqua, F. Petroni, and P. Liang, “Lost in the middle: How language models use long contexts,” *Trans. Assoc. Comput. Linguistics*, vol. 12, pp. 157–173, 2024.
- [28] G. Kamradt, “Needle in a haystack - pressure testing llms,” https://github.com/gkamradt/LLMTest_NeedleInAHaystack, 2024.
- [29] MAPS, “Replication package,” <https://zenodo.org/records/14287744>, 2024.
- [30] M. Ivankovic, G. Petrovic, R. Just, and G. Fraser, “Code coverage at google,” in *Proceedings of the ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering, ESEC/SIGSOFT FSE 2019, Tallinn, Estonia, August 26-30, 2019*. ACM, 2019, pp. 955–963.
- [31] W. U. Ahmad, S. Chakraborty, B. Ray, and K. Chang, “Unified pre-training for program understanding and generation,” in *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2021, Online, June 6-11, 2021*. Association for Computational Linguistics, 2021, pp. 2655–2668.

- [32] A3Test, “A3test replication package,” https://github.com/aws-sm-research/A3Test_ShowCase, 2023.
- [33] R. Pryzant, D. Iter, J. Li, Y. T. Lee, C. Zhu, and M. Zeng, “Automatic prompt optimization with “gradient descent” and beam search,” in *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, EMNLP 2023, Singapore, December 6-10, 2023*. Association for Computational Linguistics, 2023, pp. 7957–7968.
- [34] H. Yu, Y. Lou, K. Sun, D. Ran, T. Xie, D. Hao, Y. Li, G. Li, and Q. Wang, “Automated assertion generation via information retrieval and its integration with deep learning,” in *44th IEEE/ACM 44th International Conference on Software Engineering, ICSE 2022, Pittsburgh, PA, USA, May 25-27, 2022*. ACM, 2022, pp. 163–174.
- [35] W. Sun, H. Li, M. Yan, Y. Lei, and H. Zhang, “Revisiting and improving retrieval-augmented deep assertion generation,” in *38th IEEE/ACM International Conference on Automated Software Engineering, ASE 2023, Luxembourg, September 11-15, 2023*. IEEE, 2023, pp. 1123–1135.
- [36] S. Gao, W. Mao, C. Gao, L. Li, X. Hu, X. Xia, and M. R. Lyu, “Learning in the wild: Towards leveraging unlabeled data for effectively tuning pre-trained code models,” in *Proceedings of the 46th IEEE/ACM International Conference on Software Engineering, ICSE 2024, Lisbon, Portugal, April 14-20, 2024*. ACM, 2024, pp. 80:1–80:13.
- [37] C. Lemieux, J. P. Inala, S. K. Lahiri, and S. Sen, “Codamosa: Escaping coverage plateaus in test generation with pre-trained large language models,” in *45th IEEE/ACM International Conference on Software Engineering, ICSE 2023, Melbourne, Australia, May 14-20, 2023*. IEEE, 2023, pp. 919–931.
- [38] S. Gao, H. Zhang, C. Gao, and C. Wang, “Keeping pace with ever-increasing data: Towards continual learning of code intelligence models,” in *45th IEEE/ACM International Conference on Software Engineering, ICSE 2023, Melbourne, Australia, May 14-20, 2023*. IEEE, 2023, pp. 30–42.
- [39] Z. Yang, F. Liu, Z. Yu, J. W. Keung, J. Li, S. Liu, Y. Hong, X. Ma, Z. Jin, and G. Li, “Exploring and unleashing the power of large language models in automated code translation,” *Proc. ACM Softw. Eng.*, vol. 1, no. FSE, pp. 1585–1608, 2024.
- [40] S. Gao, C. Gao, Y. He, J. Zeng, L. Nie, X. Xia, and M. R. Lyu, “Code structure-guided transformer for source code summarization,” *ACM Trans. Softw. Eng. Methodol.*, vol. 32, no. 1, pp. 23:1–23:32, 2023.
- [41] Z. Li, C. Wang, S. Wang, and C. Gao, “Protecting intellectual property of large language model-based code generation apis via watermarks,” in *Proceedings of the 2023 ACM SIGSAC Conference on Computer and Communications Security, CCS 2023, Copenhagen, Denmark, November 26-30, 2023*. ACM, 2023, pp. 2336–2350.
- [42] C. S. Xia and L. Zhang, “Keep the conversation going: Fixing 162 out of 337 bugs for \$0.42 each using chatgpt,” *CoRR*, vol. abs/2304.00385, 2023.
- [43] K. Zhang, Z. Li, J. Li, G. Li, and Z. Jin, “Self-edit: Fault-aware code editor for code generation,” in *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2023, Toronto, Canada, July 9-14, 2023*. Association for Computational Linguistics, 2023, pp. 769–787.
- [44] Z. Li, C. Wang, P. Ma, C. Liu, S. Wang, D. Wu, C. Gao, and Y. Liu, “On extracting specialized code abilities from large language models: A feasibility study,” in *Proceedings of the 46th IEEE/ACM International Conference on Software Engineering, ICSE 2024, Lisbon, Portugal, April 14-20, 2024*. ACM, 2024, pp. 74:1–74:13.
- [45] S. Gao, C. Gao, W. Gu, and M. Lyu, “Search-based llms for code optimization,” in *2025 IEEE/ACM 47th International Conference on Software Engineering (ICSE)*. IEEE Computer Society, 2024, pp. 254–266.
- [46] D. Guo, Q. Zhu, D. Yang, Z. Xie, K. Dong, W. Zhang, G. Chen, X. Bi, Y. Wu, Y. K. Li, F. Luo, Y. Xiong, and W. Liang, “Deepseek-coder: When the large language model meets programming - the rise of code intelligence,” *CoRR*, vol. abs/2401.14196, 2024.
- [47] A. Lozhkov, R. Li, L. B. Allal, F. Cassano, J. Lamy-Poirier, N. Tazi, A. Tang, D. Pykhtar, J. Liu, Y. Wei, T. Liu, M. Tian, D. Kocetkov, A. Zucker, Y. Belkada, Z. Wang, Q. Liu, D. Abulkhanov, I. Paul, Z. Li, W. Li, M. Risdal, J. Li, J. Zhu, T. Y. Zhuo, E. Zheltonozhskii, N. O. O. Dade, W. Yu, L. Krauß, N. Jain, Y. Su, X. He, M. Dey, E. Abati, Y. Chai, N. Muennighoff, X. Tang, M. Oblokulov, C. Akiki, M. Marone, C. Mou, M. Mishra, A. Gu, B. Hui, T. Dao, A. Zebaze, O. Dehaene, N. Patry, C. Xu, J. J. McAuley, H. Hu, T. Scholak, S. Paquet, J. Robinson, C. J. Anderson, N. Chapados, and et al., “StarCoder 2 and the stack v2: The next generation,” *CoRR*, vol. abs/2402.19173, 2024.
- [48] Y. Wei, Z. Wang, J. Liu, Y. Ding, and L. Zhang, “Magicoder: Source code is all you need,” *CoRR*, vol. abs/2312.02120, 2023.