Improving Robustness Estimates in Natural Language Explainable AI though Synonymity Weighted Similarity Measures

Christopher Burger

University of Mississippi cburger@olemiss.edu

Abstract

Explainable AI (XAI) has seen a surge in recent interest with the proliferation of powerful but intractable black-box models. Moreover, XAI has come under fire for techniques that may not offer reliable explanations. As many of the methods in XAI are themselves models, adversarial examples have been prominent in the literature surrounding the effectiveness of XAI, with the objective of these examples being to alter the explanation while maintaining the output of the original model. For explanations in natural language, it is natural to use measures found in the domain of information retrieval for use with ranked lists to guide the adversarial XAI process. We show that the standard implementation of these measures are poorly suited for the comparison of explanations in adversarial XAI and amend them by using information that is discarded, the synonymity of perturbed words. This synonymity weighting produces more accurate estimates of the actual weakness of XAI methods to adversarial examples.

Keywords:

Explainability, Robustness, Similarity, Stability, XAI

1 Introduction

Intractably complex models have proliferated in recent years as a result of their efficacy over their simpler relatives. And while efficacy is a necessary component of a good model, it is difficult to trust a black-box and so the question of "*How does this model actually work?*" follows. The lack of answers to this question has slowed the adoption of powerful models in fields where flawed models can have severe consequences, such as medicine (Markus et al., 2021; Tjoa and Guan, 2020).

The discipline of Explainable AI (XAI) attempts to answer our question by generating an explanation of how the model generates its output. However, the XAI process that generates the explanation is itself a model, and while by design the XAI model can be inherently understood, we return to the fundamental question of any model "How effective is it?" Unfortunately, this question is nearly as difficult as our original query. As the models we attempt to explain are themselves incapable of being (comprehensively) understood, we have no ground truth against which to compare the output of the XAI method. However, we can judge the quality of an XAI method using criteria that avoid an understanding of the original intractable model and instead focus on the consistency of the output of the XAI method when subject to perturbations that retain the meaning of the original input. The property is called stability, or robustness, and is a necessary attribute required to trust an explanation. In general, stability is the intuitive property where insignificant changes to the input lead to only small changes to the output. An XAI process that lacks stability produces substantially different explanations under similar inputs and so is of limited, if any, use.

To assess stability, it is necessary to compare the output of the explainability method, and in doing so, some measure is required to provide the comparisons. These similarity measures are the engine that drives the adversarial search process and so suboptimal measures will result in incorrect conclusions of an XAI methods stability. The similarity measures here are subject to two primary flaws. The first is the sensitivity, where two explanations are fundamentally similar, but minor differences are drastically magnified, resulting in effective false positive attack success. The second is the opposite, indifference or coarseness where important differences between the explanations are not captured. Although the measures and metrics in XAI have been directly discussed in previous research (Hoffman et al., 2019), the focus was primarily on evaluating the quality of the explanations

rather than the quality of the comparison between the explanations. In particular, the work (Burger et al., 2023) established desiderata in text-based adversarial XAI using common desirable attributes in information retrieval (Kumar and Vassilvitskii, 2010), and used these to motivate an algorithm that mitigates the previously mentioned flaws. However, no prior work on text-based XAI has built purpose-driven measures and instead relied on standard formulations.

Here, we elect to alter the similarity measure directly using synonymity weighting, where a perturbed word and its original are compared using an inner measure that incorporates their synonymity. Standard measures operate on strict equality between features (words in our case) in the lists being compared. This discards valuable information contained within the structure of the language itself. The removal of this information is not congruent with our focus of maintaining close meaning of the perturbed word, the similarity measure should reflect the end goal of the adversarial process by accounting for the "closeness" between the words.

Table 1 provides an example of how standard measures tend to be overly sensitive despite the explanations being intuitively very similar. We see large increases in similarity under a measure that uses synonymity weighting on perturbed features, which follows our intuition, as the words fulfill the same structure and possess much of the same meaning. Our focus on altering the similarity measures also has the advantage of reduced complexity in that the search process does not need to be taken into account in the attack algorithm. Since existing measures tend towards the sensitive side, careful choice in how which words are selected for perturbation is required. Without this limitation, we can now freely replace the search process, which also gives us the ability to use many adversarial natural language processes directly which otherwise would require modifications such as those in (Burger et al., 2023).

Our contributions are: (1) The extension of some common measures in information retrieval to use synonymity weighting, focused on providing a more appropriate choice for adversarial methods in XAI. We leverage prior works in element-weighted similarity to allow a more accurate comparison between explanations which provides for a superior understanding of an XAI method's robustness. (2) A comprehensive comparison against adversarial Table 1: Comparative similarities between the original and synonymity weighted versions of common measures on an adversarial example of the Symptoms to Diagnosis dataset

Original Text

I've been feeling really sick and I have a rash all over my body. I'm worried about what it could be.

Perturbed Text

I've been feeling *real sickly* and I have a rash all over my body. I'm *alarmed* about what it could be.

Oriș	ginal Explanation	Perturbed Explanation		
1	rash	1	body	
2	body	2	rash	
3	worried	3	alarmed	
4	really	4	feeling	
5	sick	5	sickly	
6	feeling	6	over	
7	over	7	real	

Comparative Similarities Standard Jaccard Kendall Spearman RBO_{0.5} RBO_{0.7} RBO_{0.9} 0.48 0.40 0 0.35 0.40 0.54 Weighted Jaccard Kendall Spearman **RBO**_{0.5} **RBO**_{0.7} **RBO**_{0.9} 0.640.23 0.59 0.88 0.89 0.85

examples previously determined to be successful at some threshold of similarity under the standard measures. We show that prior conclusions about XAI instability drawn using certain existing measures may be inaccurate, especially for methods with naive search procedures.

2 Background and Related Work

Prior work on XAI stability has focused on evaluating models using tabular or image data in various interpretation methods, which often use small perturbations of the input data to generate appreciably different explanations (Alvarez-Melis and Jaakkola, 2018; Ghorbani et al., 2019; Alvarez-Melis and Jaakkola, 2018), or generate explanations consisting of arbitrary features (Slack et al., 2020). As our goal is to leverage the idea of *synonymity* inherent to features of an XAI explanation, we concentrate exclusively on XAI methods that operate on textbased input. Previous work directly involves adversarial perturbations for text-based XAI using a variety of search processes and similarity measures / distance metrics (Sinha et al., 2021; Ivankay et al., 2022; Burger et al., 2023). To simplify further discussion, we refer to any applicable similarity measure or distance metric as simply a similarity measure.

Popular post hoc XAI methods like LIME (Ribeiro et al., 2016) provide a ranked list of features ordered by their importance with respect to the desired model output, and comparisons between ranked lists is a standard task in the field of information retrieval. In particular, previous work has extended commonly used measures for ranked lists to allow weighted similarity of elements (Kumar and Vassilvitskii, 2010; Sculley, 2007). However, it is important to note that the use of these specific measures is not required to apply synonymity-weighted similarity.

2.1 Adversarial Attack Process

Since the genesis of this work concerns adversarial attacks on XAI methods, we briefly reiterate the general adversarial attack process.

Let M be a model that can be explained using the XAI method E. Let I be some input to M we desire the explanation to be centered upon, that is we desire to understand how M uses the components of I to produce some output. M(I) is fed into E to generate an initial explanation A used as the basis of comparison against future perturbed versions of I, termed B. The input I is then perturbed by replacing some subset, usually a single word, with an appropriate substitution. This substitution is a close synonym, as judged with respect to a given embedding space, and is subject to certain constraints such as the grammatical category or location in the unperturbed explanation I. The goal here is to generate a replacement while maintaining the fundamental meaning and structure of I despite the constituent words differing. The perturbed explanation **B** is compared to **I** using some similarity measure, and the process repeats with B as the new document to be perturbed until some termination condition. We note that prior work in adversarial XAI has enforced a single word to single word replacement for the perturbations due to the extensive reduction in search complexity and thus computation time (which remains a significant bottleneck even with highly greedy search processes). This restriction to a single word replacement scheme imposes an implicit mapping which can then be used to implement synonymity weighted similarity.

3 Mappings Between Explanations

As our goal is to include the synonymity estimate between paired features $a \in \mathbf{A}, b \in \mathbf{B}$ where \mathbf{A}, \mathbf{B} are the original and perturbed explanations, respectively, we require a way to determine the pairing $a \rightarrow b$ to allow comparison. To do so, we will define a mapping using the perturbation process to link elements from both lists.

Creating this mapping is simple if $|\mathbf{A}| = |\mathbf{B}|$ and the perturbation process is restricted to singleword substitutions. Any element $a \in \mathbf{A}$ located at index *i* in that is perturbed to some value *b* must either be located at some index *j* in **B** or no longer part of the surrogate model and so is missing from explanation **B**. For the latter case, this generally means eliminated in importance. However, if the search process does not exclude highly ranked features, these can be selected (and often are without careful choice of search constraints), resulting in substantial differences under certain similarity measures despite little substantial difference in meaning. This is one of the major issues that we seek to address with synonymity weighting.

We note that most perturbed features from standard text XAI perturbation methods remain present in the perturbed explanation, but when constraining the size of the explanation either through the surrogate model itself, or in the case of truncating the resulting explanation to the top-k features (done usually to reduce explanation complexity for the end-user) we often encounter unpaired elements between the explanations. For measures that rely on consonant lists, an adjustment must be made to allow for dissonant elements. In this case to handle any unpaired elements we apply a penalty value p, its value dependent on both the similarity measure and user choice.

Some measures can be simply extended to handle disjoint elements. For example, Kendall's Tau (Rank Distance) which counts the number of dissonant pairs between two ranked lists, can be easily extended to the comparison of different sized lists simply by declaring whatever excess element(s) that exist in the larger list to be automatically dissonant. But even for measures whose structure discards element pairings (generally set intersectionbased), we must establish a mapping to apply the synonymity weighting. We will assume that all elements contained within the original explanation **A** are mapped, either to an element in **B** or the null mapping which indicates that the measure specific penalty should be applied. Additionally, multiword substitutions for the perturbation method increases the difficulty of maintaining appropriate syntactic consistency and have not seen much use in adversarial explanations in XAI. As such, we will assume that all perturbation methods replace at most one word per iteration.

Now given our mapping, we must decide what form of synonymity weighting to apply.

4 Constructing Weighted Similarity

With some mapping established between A and B, how should the synonymity weighting be implemented? We consider two intuitive possibilities, one where the synonymity estimate is within an interval and the second where synonymity is a dichotomy.

For the interval estimate, we define a function $Syn(a, b) \longrightarrow [0, 1]$ where a, b are features within explanations A, B respectively. The function $Syn(\cdot)$ returns a value proportional to the synonymity between the features a and b. We constrain the definition of Syn(a, b) minimally, with the only condition required being Syn(x, x) = 1, where 1 is the absolute maximum similarity possible. In particular, the interval itself is subject to alteration. We choose [0, 1] to provide a simple representation for the proportion of similarity between two words and so make the analysis easier to perform, but this is not required and other choices are possible. Of these alternative choices, the interval [-1, 1] may be the most intuitive choice by letting -1 indicate that b is an antonym of a, and 0 being that b is completely unrelated to a.

For example, let a = good, b = bad, and c = frog. Now for the interval [0, 1], Syn(a, b) =Syn(a,c) = 0 as neither word is synonymous with good. For the interval [-1, 1] Syn $(a, b) \approx -1$ and Syn(a,c) = 0 as *bad* is an antonym of the adjective good. Since part of speech checking is a commonly imposed constraint in text-based adversarial XAI, we assume that there is no ambiguity between words that span multiple syntactic categories such as good (noun) and good (adjective) should the synonymity measure be capable of handling this distinction. In particular, measures that incorporate embedding vectors do not necessarily make a distinction between identical words with multiple meanings (the embeddings are not *multisense*). These embeddings also will often not produce values with such obvious delineation. Good and frog

will likely possess some similarity > 0 by construction of the embedding. Choosing an optimal embedding is likely task specific and outside the scope of this discussion.

We can also represent synonymity with a method akin to that of a traditional thesaurus, that is, there is a fixed collection of synonyms for a given word with any other word by definition not being synonymous. For a given word a, define the set of valid synonyms for a as S_a . Then our similarity function Syn(a,b) is the characteristic function $\chi(\mathbf{S}_a(b))$ where if $b \in \mathbf{S}_a$ then Syn(a, b) = 1, otherwise it is 0. This "thesaurus" method may prove appealing to those who are dubious of the quality of estimates produced by comparison between word embeddings. This strategy is particularly useful for adversarial XAI methods whose search process focuses on perturbing important features first, as the change in similarity between adversarial substitutions can be unreasonably high for methods when large weights are applied to the top subset of features.

While both possibilities for synonymity weighting are reasonable, each comes with some amount of subjectivity. For the interval representation, the continuous-valued output retains some measure of comparison between synonyms, as not all synonyms may be truly identical substitutions. However, the question of how closely related are the words good and great is subject to personal interpretation. Of course, words will generally be represented in terms of some embedding, but different embeddings may have different representations of a word and subsequently different calculations for the resulting similarity. Defining a set of valid synonyms avoids the subjectivity associated with the numerical representation of the synonym, but the question now shifts as to why certain elements are contained within the set. The remainder of the paper uses the interval-based representation that is calculated using embedding vectors and restricted to [0,1] exclusively as the given method used to construct and test synonymity weighting to simplify the exposition and experimental verification.

4.1 An Example: The Jaccard Index

Here we demonstrate the idea by constructing weighted similarity using one of the simplest measures for the comparison of lists, the Jaccard Index. The Jaccard index is simply the ratio of the size of the nonempty intersection of the lists (here viewed as sets) to the size of their union (Eq. 1). If the intersection is empty, the resulting similarity is defined to be zero. XAI explanations tend to report only unique features, and so we assume that there are no duplicates within the explanations. However, this is not a strict requirement as the Jaccard index can be extended to multisets.

$$J(\mathbf{A}, \mathbf{B}) = \frac{|\mathbf{A} \cap \mathbf{B}|}{|\mathbf{A} \cup \mathbf{B}|}$$
(1)

Here, **A** is the original explanation and **B** is the perturbed explanation.

Now consider the explanations $\mathbf{A} = \{a, b, c\}$ and $\mathbf{B} = \{\alpha, \beta, \gamma\}$. We assume that there exists some one-to-one mapping, $M(a_i) \rightarrow b_j$ with i, jthe indices of the elements a, b in the explanations \mathbf{A}, \mathbf{B} , respectively, imposed via the perturbation process from the elements of \mathbf{A} to the elements of \mathbf{B} as in Section 3. Let this mapping be defined by $M(a_1) \rightarrow (\alpha_1), M(b_2) \rightarrow (\beta_2)$, and $M(c_3) \rightarrow$ (γ_3) . Then the Jaccard Index gives us:

$$J(\mathbf{A}, \mathbf{B}) = \frac{|\{a, b, c\} \cap \{\alpha, \beta, \gamma\}|}{|\{\{a, b, c\} \cup \{\alpha, \beta, \gamma\}\}|} = \frac{\varnothing}{|\{a, b, c, \alpha, \beta, \gamma\}|} = 0$$

We can see that there is some level of correspondence between the previous two sets, despite the symbols being different. Both are the first three letters of their respective alphabets, while a and α and b and β possess added similarity due to their functional equivalence as letters. The Jaccard index cannot capture any similarity by default. To remedy this, we define a similarity measure $Syn(x, y) \rightarrow [0, 1]$ that operates on elements $x \in \mathbf{A}$ and $y \in \mathbf{B}$. For equally sized lists of elements, we can rewrite Equation 1 as:

$$J(\mathbf{A}, \mathbf{B}) = \frac{\sum_{i=1}^{|\mathbf{A}|} |\mathbf{A}[i] \cap M(\mathbf{A}[i])|}{|\mathbf{A} \cup \mathbf{B}|}$$
(2)

Then, applying our similarity measure $Syn(\cdot)$ we have:

$$J_W(\mathbf{A}, \mathbf{B}) = \frac{\sum_{i=1}^{|\mathbf{A}|} Syn(\mathbf{A}[i], M(\mathbf{A}[i]))}{|\mathbf{A} \cup \mathbf{B}|} \quad (3)$$

Now, define $Syn(a, \alpha)=0.9$, $Syn(b, \beta)=0.6$, and $Syn(c, \gamma)=0.3$. Then

$$J_W(\mathbf{A}, \mathbf{B}) = \frac{0.9 + 0.6 + 0.3}{|\mathbf{A} \cup \mathbf{B}|} = 0.3$$

Given that we have established a mapping between the elements, treating them as disjoint may be inappropriate as there exists some relation between the paired elements. We would then expect the similarity between them to be greater. To adjust for this, we can alter the denominator by the number of each pair of mapped elements. Then we have:

$$J_W(\mathbf{A}, \mathbf{B}) = \frac{0.9 + 0.6 + 0.3}{|\mathbf{A} \cup \mathbf{B}| - 3} = 0.6$$

In this example, we had both a mapping between every element and a total replacement of every element in the original explanation. In practice, this is unlikely. A complete replacement of each feature within an explanation requires extensive perturbations, usually requiring most of the document to be perturbed. And as the perturbation process is not flawless, this inevitably results in the severe degradation of the textual quality of the document, defeating the purpose of the stability testing.

5 Empirical Validation

To demonstrate the effectiveness of synonymity weighting, we modify four common similarity measures used for the comparison of collections of features in adversarial XAI. The formulations are defined below in Section 5.1.

5.1 Similarity Measures

For the following definitions, let \mathbf{A}, \mathbf{B} denote the ranked lists. If $|\mathbf{A}| \neq |\mathbf{B}|$, then without loss of generality assume $|\mathbf{A}| > |\mathbf{B}|$.

(1) Jaccard Index which has already been defined and discussed in Section 2.

(2) Kendall's Tau Rank Distance (Eq. 4) counts the number of pairwise inversions between \mathbf{A} and \mathbf{B} (where $\mathbf{1}[\cdot]$ is the indicator function. To allow for comparison of lists unequal in size, we assume that all excess elements of the larger list are automatically disjoint.

$$\sum_{i=1}^{\min(|\mathbf{A}|,|\mathbf{B}|)} (\mathbf{1}[\mathbf{A}[i] \neq \mathbf{B}[i]]) + ||\mathbf{A}| - |\mathbf{B}|| \quad (4)$$

We extend Kendall's Tau to use synonymity weighting by adjusting the value of a mapped dissonant pair a, b at an equal location by multiplying by 1 - Syn(a, b). For highly synonymous replacements $(Syn(a, b) \rightarrow 1)$ this assigns a distance close to zero for the mapped pair, and for dissimilar words it approaches the default distance.

$$\sum_{i=1}^{\min(|\mathbf{A}|,|\mathbf{B}|)} (\mathbf{1}[\mathbf{A}[i] \neq \mathbf{B}[i]] * (1 - Syn(a, b))$$
$$+ ||\mathbf{A}| - |\mathbf{B}||$$
(5)

(3) Spearman's footrule (Eq. 6) is the sum of the difference between the location i of each feature $a \in \mathbf{A}$ to its corresponding location j in **B**. Spearman's footrule is effectively the L_1 distance between ranked lists. Like Kendall's Tau, the footrule is by default not intended for disjoint lists but can be altered by applying a penalty p for disjoint elements. Here we use the formulation with a location parameter from (Fagin et al., 2002) which is designed for top k lists and choose a penalty value of $\frac{k}{2}$.

$$\sum_{a \in \mathbf{A}} |i - j| \tag{6}$$

We extend the footrule to use synonymity weighting by taking the summation of three mutually exclusive conditions that a pair of features within the explanations may have. For features unchanged in both explanations, we calculate the distance as normal. For features a, b with a mapping $a \rightarrow b$ we calculate the minimum between the standard distance divided by the synonymity between features Syn(a, b) and the maximum possible distance under the default footrule |A| - 1.

$$\sum_{a \in \mathbf{A} \cap \mathbf{B}} |i - j| + \sum_{\substack{a \in \mathbf{A} \\ b \in \mathbf{B} \\ a \to b}} s + \sum_{a \in \mathbf{A} \cap \bar{\mathbf{B}}} p \qquad (7)$$

Where $s = \min(\frac{|i - j|}{Syn(a, b)}, |\mathbf{A}| - 1)$

(4) Rank-biased Overlap (RBO) is a sum of successively larger intersections, each weighted by a term in a convergent series. This weighting scheme is controlled by a parameter $p \in (0, 1)$ that can be adjusted to ascribe more or less weight to the top k features. In general, values further down the list

Table 2: Comparative similarities on the explanation ofan adversarial example in the S2D dataset

Original Text

I have a lot of heartburn and I feel like I'm choking when I eat. I

also have a lot of stomach pain and I vomit a lot.

Perturbed Text

I *got* a *batch* of *indigestion* and I feel like I'm choking when I eat.

I also have a lot of stomach pain and I vomit a lot.

Original Explanation		Perturbed Explanation		
1 2 3 4 5 6	heartburn eat vomit choking stomach feel	1 2 3 4 5 6	choking vomit eat batch indigestion pain	
0				

Comparative Similarities

Standard										
Jaccard	Kendall	Spearman	$\mathbf{RBO}_{0.5}$	$RBO_{0.7}$	$\mathbf{RBO}_{0.9}$					
0.50	0.11	0.39	0.16	0.31	0.51					
Weighted										
Jaccard	Kendall	Spearman	$RBO_{0.5}$	$RBO_{0.7}$	RBO _{0.9}					
0.62	0.11	0.61	0.17	0.32	0.56					

are weighted as less significant, which is often the case in XAI, as only the top few features are of interest to many end users (Verma et al., 2020). RBO (Webber et al., 2010) is defined in Eq. 8 where d is the current depth of the ranking, and k is the maximum depth.

$$RBO(\mathbf{A}, \mathbf{B}, p) = (1-p) \sum_{d=1}^{k} p^{d-1} \frac{|\mathbf{A}_{:d} \cap \mathbf{B}_{:d}|}{d}$$
(8)

To enable weighted synonymity we apply the same idea as in Equations 2 and 3 where the size of the intersection is increased by the similarity of each mapped pair of disjoint elements.

5.2 Experimental Data

To test the effects of synonymity weighting on stability estimates, we require examples generated from an adversarial XAI process. We use the method in (Burger et al., 2023) that easily allows one to replace the similarity measure used to guide the search process. As the similarity measure used for the comparison of explanations controls the search, simply comparing the end result calculated

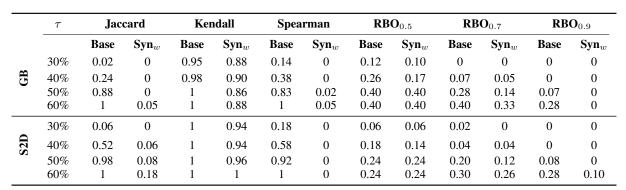


Table 3: Successful attack rates under threshold τ for standard and synonymity weighted explanations

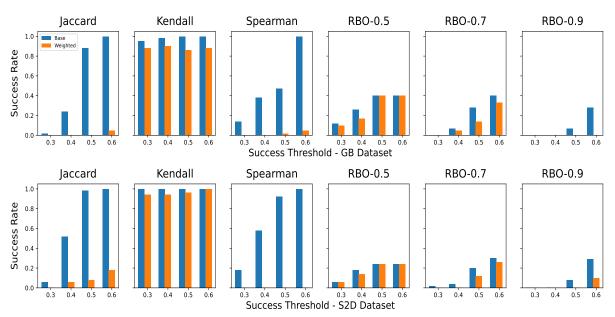


Figure 1: Successful attack rates under threshold au for standard and synonymity weighted explanations

under a single measure will not accurately describe the stability, as the replacement of words with viable perturbations can differ appreciably between measures used. We note that the attack process itself is unmodified in that synonymity weighting is not applied to the measure guiding the attack but only to the final output. This was done to prevent unnecessary computation as repeating the attack with the added synonymity weighting would have required over a month of additional computation on an A6000 GPU. This renders our conclusions understated as our construction of the synonymity weighting results, at worst, in the same similarity to the original measure. For all practical purposes, the similarity will increase, which will reduce the attack success rate.

To create the raw material for our analysis, we generate batches of 50 adversarial examples using the algorithm in (Burger et al., 2023). Each batch is generated with respect to a similarity measure and

a success threshold. The four measures defined in Section 5.1 are used: The Jaccard index, Kendall's Tau Rank Distance, and Spearman's footrule, and RBO with weighting parameters 0.5, 0.7, and 0.9. Combined with the thresholds of 30%, 40%, 50%, and 60%, this results in 1,200 adversarial examples per data set. For the data sets, we use two of those included in (Burger et al., 2023) and their associated pre-trained DistilBERT models. The first data set is the Twitter dataset with short length (average 11 words) gender bias Twitter dataset (**GB**) and the second is the data set of symptoms to diagnosis of moderate length (average 29 words) symptoms to diagnosis dataset (**S2D**).

6 Results & Discussion

All the following results are calculated exclusively with respect to successful attacks. We provide data for before and after the application of synonymity weighting on the overall success rate of the attack

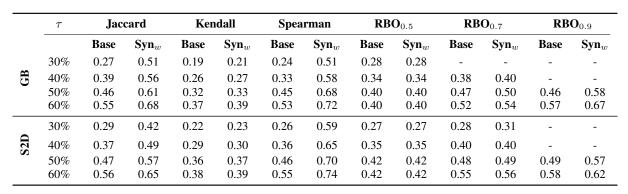


Table 4: Successful attack similarity levels before and after synonymity weighting

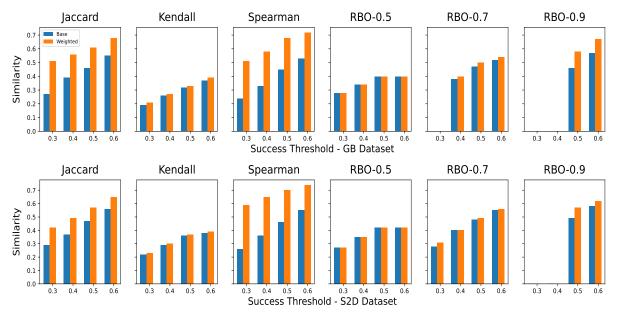


Figure 2: Successful attack similarity levels before and after synonymity weighting

given some success threshold τ (Figure 1, Table 3) and the average resulting similarity of the perturbed explanation to the original at the end of the attack process. (Figure 2, Table 4). The method used to determine synonymity is cosine similarity on the pre-trained GloVe Twitter embedding.

Jaccard & Spearman: Immediately seen is the drastic reduction in the attack success rate for the Jaccard index and Spearman's footrule. For Jaccard under the **GB** dataset, we see the three most stringent thresholds (30%, 40%, and 50%) reduced to zero successes while the 60% threshold is reduced to 5%. Similar results hold for the **S2D** dataset. Spearman is even more sensitive than Jaccard, with every **S2D** success under the original calculation changed to failure. Spearman's footrule was investigated to determine if the weighting scheme was appropriate due to the enormous success reduction and comparatively more complex weighting formulation over Jaccard. However, the different choices of the penalty value showed little change in the results with only slight ($\leq 5\%$) reductions in calculated similarity. These results demonstrate that both standard measures are extremely sensitive to changes in the explanation that are due to properties of the measure, and not due to a change in fundamental meaning of the explanation. With such significant decreases in attack success, any conclusions generated about XAI stability under these measures should be viewed with suspicion.

RBO: In contrast to Jaccard and Spearman, RBO gains much less from synonymity weighting, only showing minor changes in success rate for weighting values of 0.5 and 0.7. For weighting value 0.9 it is not surprising to see more efficacy as a more uniform distribution of importance to each feature. There still exist important examples where

RBO can profit through the use of synonymity weighting (Table 1), but in general the changes are modest (Table 2). The lack of overall success associated with RBO_{0.9} makes a firm judgement on its usefulness premature, data with more successful attacks is required. The appreciable difference in success rate change between RBO and Jaccard was not expected as both are intersection-based. RBO's relatively minor gain from synonymity weighting is likely due to its own inherent weighting scheme; to confirm this, the intrinsically weighted version of the other measures can be tested, and we leave this for future investigation. Overall, RBO remains a strong candidate for use in adversarial XAI as its design innately maintains a balance between sensitivity and indifference.

Kendall: Kendall's Tau also appears to gain less from synonymity weighting, with minor changes on S2D and about twice the effectiveness on GB. This conclusion may be premature, as the extreme sensitivity (note the near 100% success rate across every threshold and dataset) may overpower the effects of synonymity weighting. The construction of Kendall's Tau results in minor changes in ordering being shown as large deviations with the application of synonymity weighting in some cases noticeably increasing the resulting similarity (Table 1), but with final values well below most thresholds. The measure itself appears to be poorly suited for adversarial XAI and the synonymity weighting tested here is not sufficient to allow Kendall to see much, if any, practical use.

7 Limitations and Conclusion

The constructions for the specific synonymity weighting definitions may not be optimal and are intended largely as a demonstration of the concept. Spearman's footrule may benefit from a new method that may prevent the severe change in similarity between the original and weighted versions. Our choice of numerical synonymity is another prime choice for optimization, especially as part of speech checking is not associated with our selection. Superior estimates of synonymity can probably be obtained with alternative methods.

Overall, this work demonstrates the usefulness of synonymity weighting to allow superior estimates of XAI stability. Substantial reductions in attack success rate for certain measures show the possibility of extremely understating XAI stability without the judicious selection of an appropriate adversarial perturbation method. The application of this weighting scheme also incurs negligible computational overhead as the bottleneck in current algorithms is the explanation generation itself, so even measures who see only moderate impact from synonymity weighting can incorporate it without burden.

References

- David Alvarez-Melis and Tommi S Jaakkola. 2018. On the robustness of interpretability methods. *ICML Workshop on Human Interpretability in Machine Learning (WHI 2018).*
- Christopher Burger, Lingwei Chen, and Thai Le. 2023. "Are Your Explanations Reliable?" Investigating the Stability of LIME in Explaining Text Classifiers by Marrying XAI and Adversarial Attack. In *The 2023 Conference on Empirical Methods in Natural Language Processing*.
- Ronald Fagin, Ravi Kumar, and D. Sivakumar. 2002. Comparing top k lists. *SIAM Journal on Discrete Mathematics*, 17.
- Amirata Ghorbani, Abubakar Abid, and James Zou. 2019. Interpretation of neural networks is fragile. In *Proceedings of the AAAI conference on artificial intelligence*, volume 33, pages 3681–3688.
- Robert R. Hoffman, Shane T. Mueller, Gary Klein, and Jordan Litman. 2019. Metrics for explainable ai: Challenges and prospects. *arXiv preprint arXiv:1812.04608*.
- Adam Ivankay, Ivan Girardi, Chiara Marchiori, and Pascal Frossard. 2022. Fooling explanations in text classifiers. *International Conference on Learning Representations (ICLR)*.
- Ravi Kumar and Sergei Vassilvitskii. 2010. Generalized distances between rankings. In Proceedings of the 19th International Conference on World Wide Web, WWW '10, pages 571–580.
- Aniek F Markus, Jan A Kors, and Peter R Rijnbeek. 2021. The role of explainability in creating trustworthy artificial intelligence for health care: a comprehensive survey of the terminology, design choices, and evaluation strategies. *Journal of biomedical informatics*, 113:103655.
- Marco Tulio Ribeiro, Sameer Singh, and Carlos Guestrin. 2016. "why should i trust you?" explaining the predictions of any classifier. In *Proceedings of the 22nd ACM SIGKDD international conference on knowledge discovery and data mining*, pages 1135–1144.
- D. Sculley. 2007. Rank aggregation for similar items. In *SDM*.

- Sanchit Sinha, Hanjie Chen, Arshdeep Sekhon, Yangfeng Ji, and Yanjun Qi. 2021. Perturbing inputs for fragile interpretations in deep natural language processing. *arXiv preprint arXiv:2108.04990*.
- Dylan Slack, Sophie Hilgard, Emily Jia, Sameer Singh, and Himabindu Lakkaraju. 2020. Fooling lime and shap: Adversarial attacks on post hoc explanation methods.
- Erico Tjoa and Cuntai Guan. 2020. A survey on explainable artificial intelligence (xai): Toward medical xai. *IEEE transactions on neural networks and learning systems*, 32(11):4793–4813.
- Sahil Verma, Varich Boonsanong, Minh Hoang, Keegan E Hines, John P Dickerson, and Chirag Shah. 2020. Counterfactual explanations and algorithmic recourses for machine learning: A review. arXiv preprint arXiv:2010.10596.
- William Webber, Alistair Moffat, and Justin Zobel. 2010. A similarity measure for indefinite rankings. *ACM Trans. Inf. Syst.*, 28(4).