# **Interruption Handling for Conversational Robots**

Shiye Cao<sup>\*12</sup>, Jiwon Moon<sup>\*1</sup>, Amama Mahmood<sup>1</sup>, Victor Nikhil Antony<sup>1</sup>, Ziang Xiao<sup>1</sup>, Anqi Liu<sup>1</sup>, and Chien-Ming Huang<sup>1</sup>

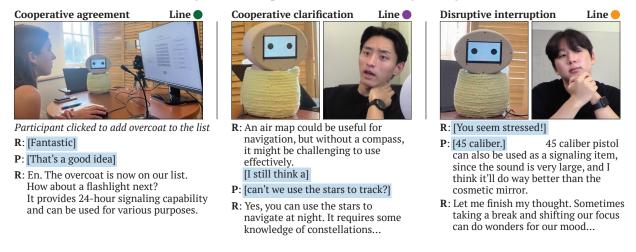


Fig. 1. We present an interruption handling system that classifies user-initiated interruptions into 1) cooperative agreement, 2) cooperative assistance, 3) cooperative clarification, and 4) disruptive interruption and adapts different strategies to handle the interruptions accordingly. This figure illustrates how the system responded to three user-initiated interruptions using different handling strategies (see Fig. 3 for details). We highlight overlapping speech in blue.

Abstract—Interruptions, a fundamental component of human communication, can enhance the dynamism and effectiveness of conversations, but only when effectively managed by all parties involved. Despite advancements in robotic systems, stateof-the-art systems still have limited capabilities in handling userinitiated interruptions in real-time. Prior research has primarily focused on post hoc analysis of interruptions. To address this gap, we present a system that detects user-initiated interruptions and manages them in real-time based on the interrupter's intent (i.e., cooperative agreement, cooperative assistance, cooperative clarification, or disruptive interruption). The system was designed based on interaction patterns identified from humanhuman interaction data. We integrated our system into an LLMpowered social robot and validated its effectiveness through a timed decision-making task and a contentious discussion task with 21 participants. Our system successfully handled 93.69% (n=104/111) of user-initiated interruptions. We discuss our learnings and their implications for designing interruption-handling behaviors in conversational robots.

Keywords: human-robot interaction, conversational robots

\*Shiye Cao and Jiwon Moon contributed equally to this work. <sup>1</sup>Dept. of Computer Science, Johns Hopkins University, Baltimore, Maryland, USA {scao14, jmoon47, amama.mahmood, vantony1, ziang.xiao, aliu.cs, chienming.huang}@jhu.edu <sup>2</sup> Corresponding Author

**CRediT** author statement. SC, JM: Conceptualization, Methodology, Software, Validation, Formal analysis, Investigation, Data curation, Writing, Visualization, Project Administration. AM: Conceptualization, Methodology, Formal analysis, Investigation, Data curation, Writing, Visualization. VNA: Methodology, Software, Writing. ZX, AL: Conceptualization, Methodology, Writing-Review&editing. CMH: Conceptualization, Methodology, Writing-Review&editing, Visualization, Supervision, Funding acquisition.

AI Statement. This paper has been proofread by a language model. The authors verified the resulting content accurately reflects their original intent.

# I. INTRODUCTION

Robots are envisioned to become assistants, teammates, and companions in people's everyday lives, capable of taking on complex social and physical tasks. To achieve effective and intuitive human-robot interaction (HRI), it is crucial that robots possess natural conversation capabilities [1].

Interruptions—occurring when a listener attempts to take the floor before the speaker's utterance is complete—are a fundamental aspect of human communication. [2]. Interruptions can be used to signal understanding (*cooperative agreement*), assist the speaker (*cooperative assistance*), seek clarification when needed (*cooperative clarification*), or express disagreement and shift the topic (*disruptive*) [3], leading to more fluid and fast-paced conversations when effectively used and handled. However, interruptions can disrupt the flow of the conversation, potentially leading to conversation breakdowns and the interrupter feeling excluded if addressed inadequately. Thus, it is critical for conversational robots to be able to detect and manage interruptions on-the-fly.

Humans are naturally adept at handling interruptions, but state-of-the-art conversational robots, which have only recently shifted from scripted to more natural interactions, still lack the ability to handle user-initiated interruptions effectively. Existing spoken dialogue systems mostly rely on explicit turntaking signaling (*e.g.*, push-to-talk mechanism [4] and wakewords [5]) to detect user-initiated interruptions. Moreover, existing systems are designed to always yield the speaker turn immediately after an interruption is detected [6]. Previous work emphasizes the importance of classifying the intent of the interrupter to enable the system to respond accordingly to the interruption to allow more natural and fluid conversations [7], [8]. Towards this goal, studies have explored the use of multi-

This work was supported by NSF Award 2141335.

modal inputs (*i.e.*, , acoustic features, facial expressions, and head movements) to classify interruptions as either cooperative or disruptive during post hoc analysis of human-human conversation data [7]. However, to the best of our knowledge, no existing robotic system has integrated intention classification into its interruption-handling framework, and little work has explored how conversational robots should manage different types of interruptions. When should robots yield to users? When should robots hold their turn?

As a first step towards answering these questions, in this work, we designed an interruption-handling system based on interaction patterns identified from human-human interaction data. We integrated our interruption handling system into a social robot and showed that our system can successfully handle 93.69% of user-initiated interruptions (*e.g.*, Fig. 1) in timed decision-making and contentious discussion tasks.

# II. RELATED WORK

#### A. Interruptions in Human-Human Interaction

Interruptions occur when a listener tries to take the floor before the speaker's utterance is complete [2]. They are a common aspect of human conversations and can occur more than once per minute in dyadic [9] and group conversations [10]. While most interruptions involve overlapping speech, brief overlapping speech that does not purloin the speaker's floorsuch as during speaker exchanges [11] or verbal backchannels (conversation continuers signaling attention, understanding, and agreement, such as "uh-huh" or "yeah") [12]-is not considered an interruption. Interruptions can be categorized as cooperative or disruptive based on the intention of the interrupter [13]. Cooperative interruptions are intended to aid the completion of the current turn by expressing concurrence or understanding (cooperative agreement), providing a word or idea that the speaker may need (cooperative assistance), or asking the speaker to clarify or elaborate on previous information (cooperative clarification) [14]. Disruptive interruptions occur when the listener challenges the speaker's control and disrupts the conversational flow to express an opposing opinion (disagreement), further develop the current topic (floor taking), change the subject (topic change), or summarize the speaker's point to end the turn and avoid unwanted information (tangen*tialization*) [14]. Prior work found that the type and frequency of interruptions are shaped by the conversational and power dynamics of interaction [15]. However, limited work investigated how humans handle interruptions in conversations. Hence, in this work, we analyzed human-human conversations with varying power dynamics between speakers to understand how people handle different types of interruptions.

#### B. Interruptions in Human-Agent Interaction

Existing conversational robots have very limited capabilities in handling interruptions. Many systems ignore overlapping speech altogether (*e.g.*, [16]), while others treat any overlapping speech as interruption (*e.g.*, [17]) or rely on designed explicit turn-taking signaling (*e.g.*, user touches the robot's head [4]) to detect user-initiated interruptions. Popular commercial voice assistants take a step further by relying on wakewords (e.g., "Alexa") to detect user-initiated interruptions [18]. However, these approaches remain errorprone due to their rigidity (may mistake ambient microphone noise as interruption [2] and rely on users to remember the wakeword [19]), and are unnatural in human conversations. Recent advances, such as Alexa's follow-up mode and Siri's ability to handle back-to-back requests, though limited, reflect ongoing efforts to improve the fluidity of the conversation. However, these systems still struggle with managing complex, multi-turn interruptions [19], yielding the floor to all interruptions equally without assessing intent. Prior work in human-agent interaction recommended distinguishing between cooperative and disruptive interruptions to help determine how the agent should deal with the interruption [8]. Multimodal features (i.e., acoustic profiles, head activity, gaze behavior, lexical features, and facial expressions) have been used to automatically classify interruptions as cooperative or competitive [7]. However, prior efforts for handling these cooperative and disruptive interruptions have been limited to post hoc evaluation of a dataset [2]; to the best of our knowledge, no existing conversational agent have the ability to handle user-initiated interruptions based on the context of the interruption in real-time. In this work, we leverage natural language understanding capabilities of large language models (LLMs) to classify and handle user-initiated interruptions in real-time. By categorizing interruptions into four finer-grained categories-cooperative agreement, assistance, clarification, and disruptive-our system tailors handling strategies to match the context and user intention behind the interruption.

# III. INTERRUPTION HANDLING IN HUMAN INTERACTION

There is limited prior research on interruption handling in human-robot and human-human interaction, offering little guidance for designing conversational robots. To address this, we analyzed natural human conversations to identify human behavior patterns when handling interruptions.

# A. Human Conversational Data

As the frequency and type of interruption correlate with power dynamics in conversations [15], we selected the top five YouTube videos for three categories of conversations with varying power dynamics, filtered by view count and duration (4–20 minutes), resulting in 246 interruptions.

- Discussions  $(n_D = 106 \text{ interruptions})$  represent causal settings with no clear power dynamics. We analyzed two dyadic conversations and three multi-party discussions.
- Talk show interviews ( $n_T = 122$  interruptions) represent casual settings with moderate power dynamics, exemplified by clips from The Tonight Show Starring Jimmy Fallon. While the interviewer can control the conversation, they typically refrain due to the low-stakes nature.
- Press briefings ( $n_P = 18$  interruptions) featuring former U.S. White House press secretary Jen Psaki are high-stakes settings where the speaker holds significant power, controlling the narrative.




Fig. 2. Interaction patterns of interruption handling in human conversations. The highlighted strategies were implemented in our system (Fig. 3).

#### B. Analysis

We coded the videos for 1) intention of the interrupter either cooperative (*i.e.*, agreement, assistance, or clarification) or disruptive—and 2) the strategy individuals use to manage interruptions—yield or hold the floor. Interaction patterns were created based on the sequence of these two states. One coder transcribed and coded the interruptions, while a secondary coder independently coded 10% to assess inter-coder reliability (Cohen's Kappa = 1).

# C. Interaction Patterns

#### We identified following interaction patterns (Fig. 2):

1) Cooperative: agreement  $\rightarrow$  hold floor: When speakers encountered cooperative agreement, they typically acknowledged the interruption and continued speaking ( $n_D = 26$ ,  $n_T = 48$ ,  $n_P = 2$ ). A deviation from this pattern was noted in only one case, where the speaker yielded the floor to the interrupter upon agreement during a discussion ( $n_D = 1$ ).

2) Cooperative: assistance  $\rightarrow$  hold floor: When the interrupter offered assistance, the speaker typically acknowledged it, briefly paused for the interrupter to finish (usually a few words), then resumed speaking ( $n_D = 7$ ,  $n_T = 10$ ). A deviation occurred a few times, where the speaker yielded the floor to the interrupter ( $n_D = 4$ ,  $n_T = 2$ ).

3) Cooperative: clarification  $\rightarrow$  hold floor or yield: When the interrupter sought clarification, the speaker typically acknowledged the question, paused for the interrupter to finish, answered, and then resumed their original thought ( $n_D = 5$ ,  $n_T = 8$ ,  $n_P = 1$ ). However, in contentious discussions, the speaker sometimes yielded the floor ( $n_D = 3$ ,  $n_P = 1$ ), showing that clarifying questions can be used to assert alternative points and take control of the floor from the speaker.

4) Disruptive  $\rightarrow$  hold floor or yield: Disruptive interruptions were the most common (130 of 246) and showed different patterns across tasks. Speakers either held the floor ( $n_D = 19$ ,  $n_T = 37$ ,  $n_P = 7$ ) or yielded it ( $n_D = 41$ ,  $n_T = 17$ ,  $n_P = 7$ ). In debates, speakers often yielded

due to the polarized nature of the discussions, while in less polarized settings (talk shows) they typically held the floor, where disruptive interruptions can be more acceptable.

We identified three strategies speakers used to hold the floor: 1) ignore the interruption and continue speaking, 2) acknowledge the interruption while implicitly signaling intent to retain floor by repeating a few words spoken at the time of interruption and continue speaking, and 3) explicitly state intent to continue (e.g., "Let me finish my thought") and then continue speaking. The first two strategies were more common for mild interruptions later in the speaker's turn, after part of their message had been conveyed. The third strategy was used by the speaker to defend their turn from more aggressive disruptive interruptions (e.g., disruptive interruption early in their turn or repeated interruption attempts). In multiparty discussions, other participants sometimes intervened to protect the speaker's turn during such aggressive interruptions. Speaker acknowledgments to interruptions were mostly nonverbal (i.e., nods and mutual gaze). Verbal acknowledgements (e.g., "sure" or "yeah") occurred in only 13 cases. Similar to prior work [20], speakers averted gaze to hold floor, and held prolonged mutual gaze until interrupter took over to yield floor.

We used these interaction patterns to guide the design of our interruption handling system for conversational robots.

# IV. INTERRUPTION HANDLING SYSTEM FOR CONVERSATIONAL ROBOTS

Our interruption handling system has three main modules: interruption detection, intent classification, and interruption handling. Fig. 3 illustrates how user input flows through it. We provide an example implementation of our system integrated into an LLM-powered social robot built on Platform for Situation Intelligence (\psi)<sup>1</sup>.

#### A. User-Initiated Interruptions Detection

We detect interruptions by monitoring for simultaneous speech. As overlapping speech towards the end of turn is common during speaker floor exchanges and is not considered an interruption [11]. So, if at the time of the overlapping speech, the **robot has less than two seconds of planned speech left**, the system simply ignores it and **finish-up** (Line ). Verbal backchannels are also not considered interruptions; however, distinguishing between verbal backchannel and short interruption (*e.g.*, "No") requires identifying the intent of the interrupter, detailed in the next section.

Additionally, as users often prefer more control and predictability in human-agent interactions than human-human interactions [21], we added support for explicit wakewordtriggered interruptions. When wakeword (*i.e.*, the robot's name) or "stop" is heard as overlapping speech, the system always **yield immediately** (Line  $\bigcirc$ ).

<sup>&</sup>lt;sup>1</sup>Implementation details: https://intuitivecomputing.github.io/publications/2024interruption-cao-supp.pdf.

Code: https://github.com/intuitivecomputing/interruption-handling-system/.

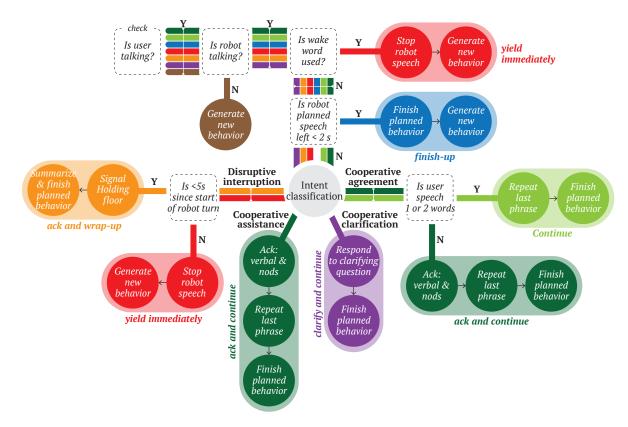


Fig. 3. Interruption handling system diagram illustrating how the handling strategy is determined given overlapping speech.

#### **B.** Interrupter Intention Classification

In human communication, the speaker's choice of interruption handling strategy depends on the intention of the interrupter. So, we prompt-engineered a large language model (GPT-4o-mini) to classify the intention of the interrupter into cooperative agreement (includes backchannels), cooperative assistance, cooperative clarification, and disruptive interruption given the conversational history and the amount of time elapsed in the turn since the robot started talking.

Both backchannels and cooperative agreements are used to support the speaker by expressing attention, understanding, and agreement. In this work, we differentiate them by overlap length: short overlaps (one or two words) indicate backchannels, while longer overlaps are cooperative agreements.

#### C. Interruption Handling

Following the interaction patterns identified in Section II-B, the system adopts different interruption handling strategies based on the predicted intention of the interrupter:

• Cooperative Agreement: If the cooperative agreement is only one or two words, it is likely a verbal backchannel, which the system disregards it and continues with the remaining planned content from the last punctuation mark (continue, Line ●). If the cooperative agreement contains more than two words, the system acknowledges verbally (with "ya", "yes", "uhhum", or "sure"), nods, and then continues with the remaining planned content (ack and continue, Line ●).

- Cooperative Assistance: The system acknowledges verbally (with "yeah", "yes", or "thanks"), nods, and continues with the remaining planned content from the last punctuation mark. (ack and continue, Line ●).
- **Cooperative Clarification:** Cooperative clarifications are handled by an LLM prompted to address the clarification requested and then continue with the remaining previously planned content (**clarify and continue**, Line ).
- Disruptive Interruption: Disruptive interruptions occurring within 5 seconds of the robot starting to speak are considered aggressive disruptive interruptions by our system. In such cases, an LLM is prompted to generate behavior for the robot to express its intent to maintain the turn (*e.g.*, "Let me finish my thought" in Fig. 1), provide a summary of the remaining content, and then yield (ack and wrap-up, Line

   For milder disruptive interruptions, the system yields the floor immediately and a new robot response is generated based on the content of the interruption (yield immediately, Line

# V. EVALUATION STUDY: METHODOLOGY

We conducted a user study to validate our system by integrating the interruption handling system into an LLM-powered social robot. We implemented basic social robot interaction behavior by hand-crafting a bank of facial expressions (happy, satisfied, excited, interested, surprised, and thinking) and head positions (left gaze, right gaze, look at screen, left nod, right nod, thinking), idle behaviors, gaze aversion, and leveraged an LLM (GPT-40-2024-05-13) to generate contextualized robot speech and select fitting facial expressions, head movements, and task actions  $^{1}$ .

#### A. Inducing User-Initiated Interruptions

To encourage user-initiated interruptions, we made the following design choices in our implementation:

- Task: We contextualized our system in a timed decisionmaking and a contentious discussion task, anticipating that time pressure and controversy can encourage interruptions. In the decision-making task, participants had five minutes to select seven out of fifteen items to help them survive in a desert survival simulation. The robot was instructed to persuade, rather than simply agree, with users. A countdown timer was shown to add time pressure. In the discussion task, participants prepared for a 2-minute presentation on whether the federal government should abolish capital punishment. The robot remained neutral until the participant clearly stated their position, at which point it adopted an opposing stance to encourage consideration of alternative perspective.
- 2) Robot persona: We designed the robot to have a feminine name ("Luna"), a feminine voice (Google en-US-Standard-H), gaze aversion while it is talking, and generally positive facial expressions (see Appendix Fig. 1). Prior research highlights that gender significantly affects interruption patterns; women are more likely to be interrupted than men, particularly when they avoid direct eye contact with their conversation partners [14]. Additionally, women tend to smile more during conversations, which has been linked to a higher likelihood of being interrupted [14].
- 3) Pre-programmed events: We designed two pre-programmed events <sup>1</sup> per task where the robot holds the floor for roughly one minute to provoke user-initiated interruptions. In event one, triggered at the start of the discussion, the robot introduces itself and provides disclaimers. In event two, triggered 3.5 minutes into the discussion, the robot tells an unrelated fun story or facts.

# B. Study Procedure

After providing consent, participants completed a demographic questionnaire and watched a 1-minute sample interaction video. They then engaged in a practice task, designed to familiarize them with the robot, answering four factual questions about space exploration. Following the practice task, participants completed two tasks (in random order) and completed a post-task questionnaire after each task. The study concluded with a semi-structured interview aimed to understand their overall experience working with the robot and to collect feedback on robot interruption handling.

# C. Participants

We recruited 21 participants (11 female, 10 male), aged 18 to 30 (M=22.38, SD=3.58), through convenience sampling from the local community via electronic newsletters and mailing lists. Most participants had limited experience using speech-based AI technology (M=2.81, SD=1.25, Min=1,

Max=5, 5-point Likert scale with 1 being no experience and 5 being extensive experience) and reported that they have only used it for simple commands, *i.e.*, setting alarms and checking the weather. The study took roughly 45 minutes, and participants were compensated at \$15.00 per hour. The study was approved by our institutional review board (IRB).

# D. Metrics

We constructed two subjective scales (see Appendix B for details) from the post-task questionnaire to explore how interruption handling might affect the user's:

- *Perceived inclusion in discussion* (rating scale 1–5): Threeitem scale (Cronbach's  $\alpha = .78$ ) measuring how heard, respected, and valued users felt during the discussion.
- Overall satisfaction with discussion (rating scale 1–5): Nineitem scale (Cronbach's  $\alpha = .77$ ) assessing user's enjoyment, learning, contentment with outcomes of the discussion, and willingness to engage in future discussions.

# E. Coding

One coder transcribed all interactions and extracted conversation snippets with overlapping speech. For ground truth and fine-grained understanding of interruptions, two coders independently analyzed 100% of the interruptions, classifying them by type (disruptive, cooperative agreement, assistance, or clarification) and by attributes such as statement (opinion or non-opinion), question (opinion or factual), or verbal back-channel, and assessed whether each interruption was successfully addressed without causing a conversation breakdown. Cohen's kappa was 0.92, and coders resolved conflicts through discussion.

#### VI. EVALUATION STUDY: FINDINGS

We identified 121 user-initiated interruptions from 206.59 minutes of interaction data (*e.g.*, Fig. 4) involving 525 user query-robot response pairs, or turns (decision-making: 312 turns, discussion: 213 turns). The timed decision-making task (n = 86) had more than twice as many user-initiated interruptions as the contentious discussion task (n = 35).

#### A. The majority of interruption attempts were disruptive

Based on the interruption intent coded by the research team, the most common type of interruption was disruptive (n = 92, 76.03%), followed by cooperative agreement (n = 18), cooperative clarification (n = 9), and rarely, cooperative assistance (n = 2). Participants attempted disruptive interruptions in various ways, including asking opinion (n = 42 out of 92, 45.65%) and factual (n = 16) questions or issuing opinion (n = 7) and non-opinion (n = 27) statements. See Table I for more details and example interruptions.

# B. 88.78% of interruption intent was correctly classified

Five interruptions triggered pre-programmed events (see description in Sec. 3), bypassing the interruption handling system. During a 35-second time frame in one study, there

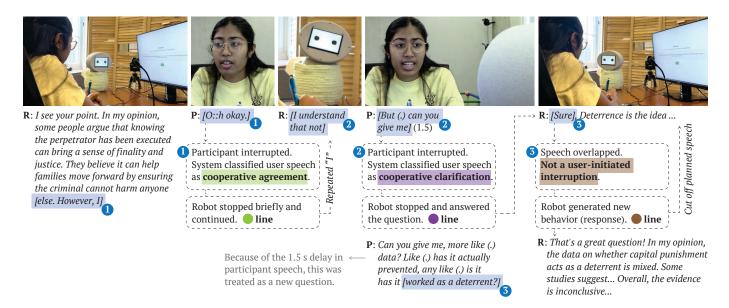


Fig. 4. Example conversation where the system handles various types of compounded interruptions. Overlap (3) is an example of a robot-initiated interruption. We used the Jeffersonian transcription system [22].

 TABLE I

 Types of interruptions observed and examples.

$\begin{tabular}{ c c c c c } \hline \textbf{Cooperative agreement } (n=18) \\ \hline \textbf{Verbal back-channel} & "Yeah", "Okay" & 13 \\ \hline \textbf{Statement} & \hline \textbf{Opinion} & "That's a good idea" & 2 \\ \hline \textbf{Non-} & "Alright, I'm taking your sug-} & 3 \\ \hline \textbf{opinion} & gestions" & 0 \\ \hline \textbf{Cooperative assistance } (n=2) \\ \hline \textbf{Statement} & \hline \textbf{Opinion} & "Another thing that I was 2 \\ \hline \textbf{thinking was jack knife."} & \hline \textbf{Cooperative clarification } (n=9) \\ \hline \textbf{Question} & \hline \textbf{Opinion} & "Uh, do we need the raincoat 5 \\ \hline \textbf{and the parachute?"} & \hline \textbf{Factual} & "What percent?" & 4 \\ \hline \end{tabular}$					
StatementOpinion"That's a good idea"2Non- opinion"Alright, I'm taking your sug- gestions"3Cooperative assistance $(n = 2)$ StatementOpinion"Another thing that I was 2 thinking was jack knife."Cooperative clarification $(n = 9)$ QuestionOpinion"Uh, do we need the raincoat 5 and the parachute?"					
StatementNon- opinion"Alright, I'm taking your sug- gestions"3Cooperative assistance $(n = 2)$ StatementOpinion"Another thing that I was 2 thinking was jack knife."2Cooperative clarification $(n = 9)$ QuestionOpinion"Uh, do we need the raincoat 5 and the parachute?"5					
Non- opinion"Alright, I'm taking your sug- gestions"3Cooperative assistance $(n = 2)$ StatementOpinion"Another thing that I was 2 thinking was jack knife."Cooperative clarification $(n = 9)$ QuestionOpinion"Uh, do we need the raincoat 5 and the parachute?"					
Cooperative assistance $(n = 2)$ StatementOpinion"Another thing that I was 2 thinking was jack knife."Cooperative clarification $(n = 9)$ QuestionOpinion"Uh, do we need the raincoat 5 and the parachute?"					
StatementOpinion"Another thing that I was thinking was jack knife."2Cooperative clarification $(n = 9)$ Opinion"Uh, do we need the raincoat and the parachute?"5					
thinking was jack knife."Cooperative clarification $(n = 9)$ QuestionOpinion"Uh, do we need the raincoat5and the parachute?"5					
Cooperative clarification $(n = 9)$ QuestionOpinion"Uh, do we need the raincoat5and the parachute?"5					
Question         Opinion         "Uh, do we need the raincoat and the parachute?"         5					
and the parachute?"					
and the parachute?"					
Factual "What percent?" 4					
- utual percent.					
<b>Disruptive interruption</b> $(n = 92)$					
Opinion "Luna, what do you think 42					
Question Question about adding the pistol to the					
list?"					
Factual "How many states have capital 16					
punishment?"					
Statement Opinion "I do not think that the cos- 7					
metic mirror is necessary. I					
think we should change it into					
45 caliber pistol"					
Non- "Uh, Luna we we don't have 27					
opinion time"					

was an abnormally large delay in the speech-to-text API, likely caused by a network error, causing the system to be unable to detect user speech. Hence, our system did not handle the five interruptions (all disruptive) during this time. We exclude these ten cases from the rest of our analysis.

Amongst the interruptions handled by the system (n = 111), participants used wakeword(s) in 47 interruptions (decision-making: n = 36, discussion: n = 11). Our system is designed to immediately yield when a wakeword is "heard" during overlapping speech (n = 43). It treats all interruption attempts

containing wakeword(s) as strong disruptive interruptions without passing the intent classifier module (SR2, Line  $\bigcirc$  in Fig. 3). Due to speech recognition errors, wakewords were not "heard" in 4 out of 47 cases. Additionally, interruptions made when less than two seconds of robot-planned speech remained (n = 13) also bypassed the intent classifier module (SR3, Line  $\bigcirc$  in Fig. 3). Of the 55 interruption attempts that passed through the intent classification module<sup>2</sup>, the module correctly classified the intent of 44 interruptions (80.00%). Overall, including interruptions with wakeword(s) detected (n = 43), our system incorrectly classified the intent in 11 out of 98 (11.22%) interruptions, meaning 88.78% were correctly classified.

#### C. 93.69% of the interruptions were successfully handled

Not all interruption intent classification errors resulted in unsuccessful handling, nor were all correctly classified interruptions handled successfully. Of the 111 interruptions handled, 107 cases were the user's first interruption attempt during that turn, and 100 out of the 107 (93.46%) successfully handled. Among the seven unsuccessful initial attempts, the robot continued speaking in four cases due to intent classification errors, leading the users to re-attempt. All four (100.00%) reattempts were successful. Overall, 104 out of 111 (93.69%) interruptions were successfully handled.

# *D.* Speech recognition errors caused the majority of interruption handling failures

To better understand the cause of unsuccessfully handled interruptions (n = 7), we analyze their potential links to intent

<sup>4</sup>LLM failed to generate correctly formatted robot behavior, so the robot performed default LLM error handling. See Appendix A.8 for details.

 $<sup>^{2}111</sup>$  total handled interruptions minus 43 with wakeword(s) detected, and 13 occurring near the end of robot-planned speech

<sup>&</sup>lt;sup>3</sup>Two cooperative agreements, one assistance, one clarification, and nine disruptive interruptions—two used wakewords but were not "heard" by system due to speech recognition error—were handled through finish-up.

TABLE II TYPES OF INTERRUPTIONS AND HANDLING STRATEGIES (MISCLASSIFIED INTERRUPTIONS ARE HIGHLIGHTED).

Interruption type (coded)	Type (by model)	Interruption handling	n	% Success
<2s of plan- ned speech	N/A	Finish-up <sup>3</sup>	13	100%
Agreement	Agreement Disruptive	Continue Ack and continue Yield immediately	$\begin{array}{c} 12\\2\\2\end{array}$	91.67% 100% 100%
Assistance	Assistance	Ack and continue	1	0%
Clarification	Clarification Disruptive	Clarify and continue Yield immediately	7 1	$100\% \\ 0\%$
Disruptive	Disruptive	Yield immediately Ack and wrap-up	$\frac{17}{5}$	$100\% \\ 100\%$
wakeword not used	Agreement Assistance Clarification Clarification	Ack and continue Ack and continue Clarify and continue LLM error handling <sup>4</sup>	1 1 3 1	$0\% \\ 0\% \\ 100\% \\ 100\% $
wakeword used	N/A Agreement	Yield immediately Continue	43 2	$100\% \\ 0\%$

classification errors (n = 11), as shown in Table II.

- Misclassified disruptive interruption as cooperative agreement (n = 3). The robot continued speaking due to misclassification; two of which contained a wakeword but were still misclassified due to speech recognition error.
- Misclassified disruptive interruption as cooperative assistance (n = 1). The participant attempted to interrupt with "The first aid kit" but abandoned the interruption mid-sentence, which the system interpreted as cooperative assistance. Five seconds later, the participant reattempted a disruptive interruption, and the robot yielded immediately.
- Misclassified disruptive interruption as cooperative clarification (n = 4). Despite the miss-classification, these interruptions were considered successfully handled, as the robot answered the user's questions.
- Misclassified cooperative agreement as disruptive (n = 2).
   While the robot yielded to cooperative agreements (e.g., "Oh, go ahead and keep going"), these cases did not manifest as unsuccessful interruption handling.
- *Misclassified cooperative clarification as disruptive* (*n* = 1). A clarifying question was misclassified as disruptive and inadequately answered due to speech recognition error.

Although correctly classified, two interruptions were unsuccessfully handled due to errors in determining where the robot left off at the time of interruption (n = 2). For example,

```
robot: Great! The flashlight is now on our list.
Next, I suggest [a] [overlapping speech]
user: [okay]
robot: It can be used as a shelter and for signaling.
user: what was it?
robot: I suggested a parachute. It can serve ...
```

Since text-to-speech services do not provide word-by-word timestamps, the system estimates what the robot has said based on the average speaking rate and the amount of time elapsed. To prevent missing context, we also designed the robot to repeat its speech up to the last punctuation mark. Despite this, misalignment still occurs; however, users were able to recover

by asking a follow-up question about the missing information in both cases.

# *E.* Unsuccessful interruption handling led to decreased perceived inclusion, and lower discussion satisfaction.

While unsuccessful interruption handling was relatively rare, we conducted exploratory analyses to see how the interruption handling error might affect users' perception of the discussion. Pearson correlation coefficient was used to examine the linear relationship between the number of unsuccessfully handled interruptions, user's perceived inclusion in the discussion, and user's satisfaction with the discussion.

We found a negative correlation between the number of unsuccessfully handled interruptions and the user's perceived inclusion in the discussion,  $\rho(42) = -.43, p = .005$ . We also found a negative correlation between the number of unsuccessfully handled interruptions and the user's satisfaction with the discussion,  $\rho(42) = -.35, p = .021$ .

Nonetheless, based on the post-study interviews, participants generally perceived their experience with the robot positively (n = 15/21, describing it as "good", "nice", or "helpful"). Among those who recalled initiating interruptions (n = 18), fourteen found it "easy" to interrupt the robot or were generally satisfied with how it handled interruptions, while four found it "hard"—one because the system failed to detect five interruptions due to network error, and three because they wanted the robot to always yield immediately.

# VII. DISCUSSION

In this work, inspired by interaction patterns observed in human conversations, we designed and implemented an interruption handling system for conversational robots. We validated with users (n = 21) that our system successfully handled 93.69% of the interruptions. Next, we discuss design implications based on insights from our exploration to help guide future designs of interruption handling behavior in conversational robots.

#### A. Robot's Role, Task Context, and Interruption Handling

While floor holding is a common strategy for handling interruptions in human conversations, robots holding the floor particularly during disruptive interruptions (*e.g.*, Fig. 1) were not perceived favorably by all participants. In fact, one participant explained that "I felt like I am trying to solve the issue, and I am just using you [the robot] as a tool to help me," so their ideal interaction is "the moment I speak, it wants to just like immediate listen, and like my speech should take precedence over anything it says". The participants perceived the robot's role in the task as assistive rather than collaborative, so they expected it to yield immediately at every turn. This shows the importance of aligning the robot's role and task context with its interruption handling behavior. Future research should explore how a robot's designed and perceived role influences users' expectations for how the robot should handle interruptions.

On the other hand, interruption handling design may help reinforce a robot's intended role in a given context. For example, an authoritative robot in a critical task should hold the floor more aggressively to help establish the power dynamics, while a robot designed to be an assistive tool in a causal task should adopt a more flexible and accommodating interruptionhandling approach. However, this needs to be approached with caution, as studies showed that people are prone to complying with authoritative robots even if it is wrong [23]. Future work is needed to define the balance between when a robot should hold the floor in conversations based on its role and the task.

# B. Breaking Habits: From Scripted to Natural HRI

While some participants preferred the predictability of having a "designated stop mechanism" (wakewords), some also felt uncomfortable using the robot's name ("Luna") or "stop" to initiate interruptions, as it can be viewed as rude in human-human conversations. However, one participant, who reported to use voice assistants on a daily basis, began nearly every query with "Luna". When they initiated interruptions, they consistently said "Luna" and waited for the robot to stop speaking before proceeding with their query. While their conversation with the robot was fast-paced, it was very rigid. This was not a unique case in our study. The habits users have developed when interacting with commercial voice assistants constrain their interactions with systems capable of more natural, conversational exchanges-such as ours that can handle interruptions more fluidly. It may also limit their perception of the robot's role to that of an assistive query-answering tool. Future research should design more natural yet predictable interactions and explore the lasting influence of current technology use on how users engage with emerging technologies that offer more advanced conversational capabilities.

#### C. Limitations and Future Work

Our evaluation involved only one-time interactions in the lab setting. Future work should explore longer or multisession interactions in the wild. Additionally, our system does not account for non-verbal interruptions. We observed seven instances where the users' body language (*e.g.*, opening their mouths) indicated an intention to interrupt the robot without making any sounds. Future work should explore how nonverbal interruption can be leveraged in interruption handling and how non-verbal interruptions should be handled by conversational robots. In addition, our system focuses on interruption handling in dyadic conversations; future work should explore how robots should handle interruptions in multi-party and team situations.

#### REFERENCES

- M. M. Reimann, F. A. Kunneman, C. Oertel, and K. V. Hindriks, "A survey on dialogue management in human-robot interaction," ACM Transactions on Human-Robot Interaction, 2024.
- [2] F. Gervits and M. Scheutz, "Pardon the interruption: Managing turntaking through overlap resolution in embodied artificial agents," in *Proceedings of the 19th annual SIGdial meeting on discourse and dialogue*, 2018, pp. 99–109.
- [3] L. Yang, "What if i interrupt you," in Proceedings of the 2021 International Conference on Multimodal Interaction, 2021, pp. 827–831.
- [4] A. Csapo, E. Gilmartin, J. Grizou, J. Han, R. Meena, D. Anastasiou, K. Jokinen, and G. Wilcock, "Multimodal conversational interaction with a humanoid robot," in 2012 IEEE 3rd International Conference on Cognitive Infocommunications (CogInfoCom). IEEE, 2012, pp. 667– 672.

- [5] R. Wen, A. Hanson, Z. Han, and T. Williams, "Fresh start: Encouraging politeness in wakeword-driven human-robot interaction," in *Proceedings* of the 2023 ACM/IEEE International Conference on Human-Robot Interaction, 2023, pp. 112–121.
- [6] P. Gebhard, T. Schneeberger, G. Mehlmann, T. Baur, and E. André, "Designing the impression of social agents' real-time interruption handling," in *Proceedings of the 19th ACM International Conference on Intelligent Virtual Agents*, 2019, pp. 19–21.
- [7] L. Yang, C. Achard, and C. Pelachaud, "Multimodal classification of interruptions in humans' interaction," in *Proceedings of the 2022 International Conference on Multimodal Interaction*, 2022, pp. 597–604.
- [8] D. Reidsma, I. de Kok, D. Neiberg, S. C. Pammi, B. van Straalen, K. Truong, and H. van Welbergen, "Continuous interaction with a virtual human," *Journal on Multimodal User Interfaces*, vol. 4, pp. 97–118, 2011.
- [9] A. J. Sellen, "Remote conversations: The effects of mediating talk with technology," *Human-computer interaction*, vol. 10, no. 4, pp. 401–444, 1995.
- [10] P. Kollock, P. Blumstein, and P. Schwartz, "Sex and power in interaction: Conversational privileges and duties," *American sociological review*, pp. 34–46, 1985.
- [11] K. Hilton, What Does an Interruption Sound Like? Stanford University, 2018.
- [12] V. Pipek, "On backchannels in english conversation," Ph.D. dissertation, Masarykova univerzita, Pedagogická fakulta, 2007.
- [13] J. A. Goldberg, "Interrupting the discourse on interruptions: An analysis in terms of relationally neutral, power- and rapport-oriented acts," *Journal of Pragmatics*, vol. 14, no. 6, pp. 883–903, 1990.
- [14] C. W. Kennedy and C. Camden, "Interruptions and nonverbal gender differences," *Journal of Nonverbal Behavior*, vol. 8, pp. 91–108, 1983.
- [15] G. W. Beattie, "Interruption in conversational interaction, and its relation to the sex and status of the interactants," 1981.
- [16] J. F. Allen, B. W. Miller, E. K. Ringger, and T. Sikorski, "A robust system for natural spoken dialogue," arXiv preprint cmp-lg/9606023, 1996.
- [17] J. Cassell, T. Bickmore, H. Vilhjálmsson, and H. Yan, "More than just a pretty face: affordances of embodiment," in *Proceedings of the 5th international conference on Intelligent user interfaces*, 2000, pp. 52–59.
- [18] B. A. Myers, A. Furqan, J. Nebolsky, K. Caro, and J. Zhu, "Patterns for how users overcome obstacles in voice user interfaces," in *Proceedings* of the 2018 CHI Conference on Human Factors in Computing Systems, 2018, pp. 1–7.
- [19] A. Mahmood, J. Wang, and C.-M. Huang, "Situated understanding of older adults' interactions with voice assistants: A month-long in-home study," *arXiv preprint arXiv:2403.02421*, 2024.
- [20] S. Andrist, X. Z. Tan, M. Gleicher, and B. Mutlu, "Conversational gaze aversion for humanlike robots," in *Proceedings of the 2014 ACM/IEEE international conference on Human-robot interaction*, 2014, pp. 25–32.
- [21] L. Clark, N. Pantidi, O. Cooney, P. Doyle, D. Garaialde, J. Edwards, B. Spillane, E. Gilmartin, C. Murad, C. Munteanu *et al.*, "What makes a good conversation? challenges in designing truly conversational agents," in *Proceedings of the 2019 CHI conference on human factors in computing systems*, 2019, pp. 1–12.
- [22] S. H. Park and A. Hepburn, "The benefits of a jeffersonian transcript," *Frontiers in Communication*, vol. 7, p. 779434, 2022.
- [23] U. B. Karli, S. Cao, and C.-M. Huang, ""What If It Is Wrong": Effects of power dynamics and trust repair strategy on trust and compliance in HRI," in *Proceedings of the 2023 ACM/IEEE International Conference* on Human-Robot Interaction, 2023, pp. 271–280.