

Disentangling Hierarchical Features for Anomalous Sound Detection Under Domain Shift

Jian Guan¹, Jiantong Tian¹, Qiaoxi Zhu², Feiyang Xiao¹, Hejing Zhang¹, Xubo Liu³

¹Group of Intelligent Signal Processing, College of Computer Science and Technology,
Harbin Engineering University, Harbin, 150001, China

²Acoustics Lab, University of Technology Sydney, Ultimo, NSW 2007, Australia

³Centre for Vision Speech and Signal Processing, University of Surrey, Guildford, GU2 7XH, UK

Abstract—Anomalous sound detection (ASD) encounters difficulties with domain shift, where the sounds of machines in target domains differ significantly from those in source domains due to varying operating conditions. Existing methods typically employ domain classifiers to enhance detection performance, but they often overlook the influence of domain-unrelated information. This oversight can hinder the model’s ability to clearly distinguish between domains, thereby weakening its capacity to differentiate normal from abnormal sounds. In this paper, we propose a Gradient Reversal-based Hierarchical feature Disentanglement (GRHD) method to address the above challenge. GRHD uses gradient reversal to separate domain-related features from domain-unrelated ones, resulting in more robust feature representations. Additionally, the method employs a hierarchical structure to guide the learning of fine-grained, domain-specific features by leveraging available metadata, such as section IDs and machine sound attributes. Experimental results on the DCASE 2022 Challenge Task 2 dataset demonstrate that the proposed method significantly improves ASD performance under domain shift.

Index Terms—Anomalous sound detection, gradient reversal, feature learning, domain shift

I. INTRODUCTION

Anomalous sound detection (ASD) identifies whether a machine’s operating condition is normal or abnormal based on the emitted sound. It is typically an unsupervised learning task due to the difficulty in collecting diverse and rare anomalous sounds, leading to models being trained only on normal sounds [1]–[4]. ASD becomes even more challenging in real-world applications due to the domain shift problem, where acoustic characteristics differ between the source domain and the target domain, leading to reduced performance [5].

Unlike traditional domain shift problems, which usually involve a single domain [6], [7], ASD faces a multi-source domain shift problem [8], [9] caused by various factors in operating conditions, such as changes in machine operation modes, speeds, or environmental noise [5], [10], [11]. These variations create multiple domains within the source and target domains, complicating feature learning due to imbalanced sample sizes and diverse operating conditions, making effective ASD under domain shift particularly challenging.

The DCASE 2022 Challenge Task 2 was designed to investigate domain shift in ASD [5]. The dataset for this task is organized hierarchically, encompassing machine types, section

IDs, and attribute groups, as illustrated in Figure 1(a). *Section IDs* are defined by various *attribute groups* that represent the machine’s operational status and recording conditions. As shown in Figure 1(a), a section ID comprises multiple attribute groups, such as “Group_00,” which includes machine-related attributes (e.g., toy car speed “Spd_28V” and model “Car_A1”) and recording-related attributes (e.g., microphone location “Mic_1” and environmental noise “Noise_1”). The changes in these attribute values primarily drive the domain shift amongst data of different section IDs.

Although methods using section IDs and attributes as training labels for self-supervised classification can enhance detection performance, they often overlook the fact that attributes can affect machine sounds differently depending on the type of domain shift (i.e., section ID) [12], [13]. Instead, they tend to use section IDs and attributes in parallel for feature learning [10]. As a result, the interaction between attributes and domain shift types remains underexplored, despite its potential to improve ASD under domain shift.

In our previous study [10], we introduced a Hierarchical Metadata Information Constraint (HMIC) structure to address the domain shift problem in ASD caused by changes in attribute values. This structure organizes metadata hierarchically, with section IDs representing types of domain shift and attribute groups (AGs) for specific domains. By grouping audio samples with the same attributes and values into AGs, we aimed to facilitate more effective learning of domain-related features. However, this approach may overlook the influence of domain-unrelated features as the grey area in Figure 1(b), which can complicate the distinction between domain-related features and ultimately degrade ASD performance—a common issue in classification-based ASD methods.

This paper presents a Gradient Reversal-based Hierarchical Feature Disentanglement (GRHD) strategy for addressing domain shift in anomalous sound detection (ASD). The proposed method incorporates a gradient reversal layer within a hierarchical metadata constraint structure to hierarchically separate domain-unrelated features from domain-related features, thereby better disentangling overlapping latent features. Specifically, we introduce a gradient reversal classifier as a constraint to disentangle domain-unrelated and domain-related features during the coarse-grained audio feature learning across all attributes. Subsequently, a hierarchical metadata

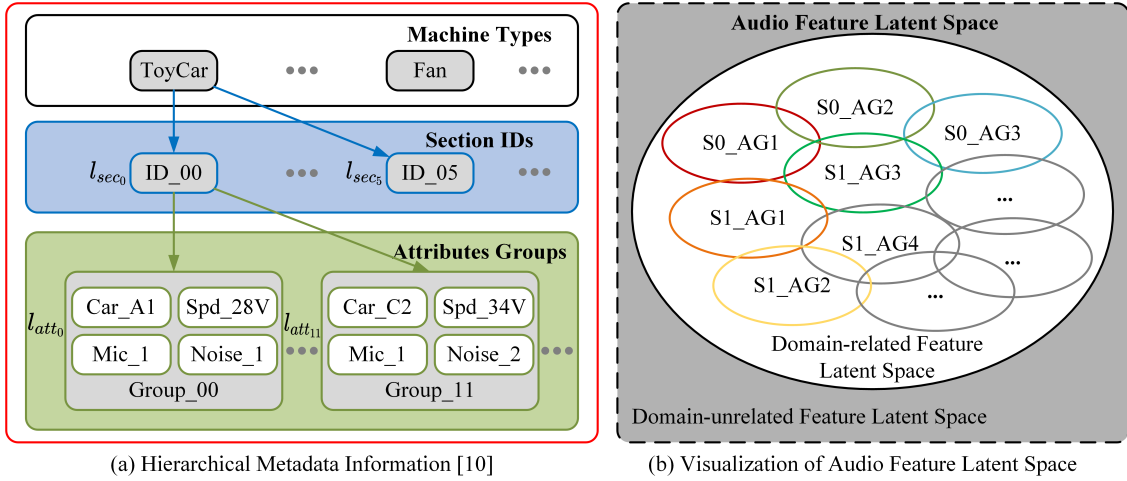


Fig. 1. Illustrations of (a) the hierarchical metadata structure accompanying the audio data for anomalous sound detection, and (b) the latent space of the audio data, containing both domain-related and domain-unrelated features. For example, S0_AG1 corresponds to the latent space of audio labeled by section 00 and attribute group 1.

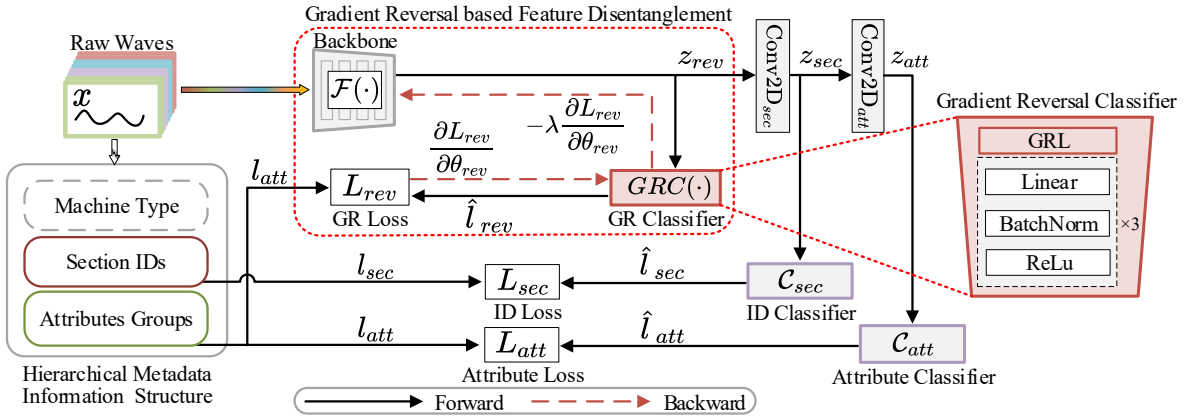


Fig. 2. The proposed GRHD method’s training process. The gradient reversal classifier $GRC(\cdot)$ is used for feature disentanglement, and hierarchical metadata guides fine-grained, domain-specific audio feature learning. z_{rev} represents the disentangled domain-related feature, while z_{sec} and z_{att} correspond to section ID and attribute group features. C_{sec} and C_{att} are the classifiers for section ID and attribute group, producing labels \hat{l}_{sec} and \hat{l}_{att} . The actual labels accompanying the audio data are l_{sec} and l_{att} . The predicted label \hat{l}_{rev} is from $GRC(\cdot)$.

structure is employed as a further constraint to achieve more effective fine-grained domain-related audio feature learning from the disentangled coarse-grained domain-related features. In this process, section IDs and attribute groups are used as hierarchical constraints accounting for domain shift types and specific domains, respectively. Therefore, our proposed GRHD can achieve better coarse- and fine-grained audio feature representation for anomalous sound detection. Experiments on the DCASE 2022 Challenge Task 2 dataset [5] demonstrate that GRHD better disentangles domain-unrelated features and improves ASD performance under domain shift.

II. PROPOSED METHOD

Figure 2 illustrates the proposed method, which integrates a gradient reversal classifier into the hierarchical metadata constraint structure [10]. The gradient reversal classifier disentangles domain-unrelated from domain-related coarse features, while the hierarchical metadata constraint facilitates effective fine-grained domain-specific audio feature learning. The sec-

tion ID and attribute group classifiers address domain shift types and specific domains, respectively.

A. Gradient Reversal Based Feature Disentanglement

To disentangle domain-unrelated and domain-related features, a gradient reversal classifier, which includes a Gradient Reversal Layer (GRL) as shown in Figure 2, is introduced to constrain the model in learning coarse audio features across all attributes. Subsequently, attribute groups are utilized as self-supervised labels for the gradient reversal classifier.

Supposing $x \in \mathbb{R}^{1 \times T}$ is the input audio signal with length of T , the disentangled feature embedding z_{rev} is extracted with

$$z_{rev} = \mathcal{F}(x), \quad (1)$$

where $\mathcal{F}(\cdot)$ denotes the backbone [10] designed based on spectral-temporal information fusion [17].

During forward propagation, the gradient reversal classifier $GRC(\cdot)$ with gradient reversal predicts labels for input embeddings z_{rev} , expressed as $\hat{l}_{rev} = GRC(z_{rev})$. Due to

TABLE I

PERFORMANCE COMPARISON IN TERMS OF AUC (%) AND PAUC (%) ON THE DEVELOPMENT SET OF THE DCASE 2022 CHALLENGE TASK 2 DATASET. AUC-S, AUC-T AND PAUC FOR TOTAL PERFORMANCE ARE THE HARMONIC AVERAGES OF AUC IN THE SOURCE DOMAINS, AUC IN THE TARGET DOMAINS, AND PAUC ACROSS ALL MACHINE TYPES. HAUC IS THE HARMONIC AVERAGE OF AUC-S, AUC-T, AND PAUC.

Methods	ToyCar		ToyTrain		Bearing		Fan		Gearbox		Slider		Valve		Total			
	AUC	pAUC	AUC	pAUC	AUC	pAUC	AUC	pAUC	AUC	pAUC	AUC	pAUC	AUC	pAUC	AUC-s	AUC-t	pAUC	HAUC
AutoEncoder [5]	62.61	52.74	49.84	50.48	56.40	51.98	62.89	57.52	65.79	58.49	62.81	55.78	50.74	50.36	68.74	41.91	53.73	52.61
MobileNetV2 [5]	55.54	52.27	51.58	51.52	60.26	57.14	59.49	56.90	62.70	56.03	51.69	54.67	62.16	62.42	63.80	50.04	55.65	55.94
JLESS [14]	82.50	64.68	64.52	55.60	79.83	61.04	67.28	67.25	86.77	72.67	86.73	71.41	91.64	80.01	82.85	73.96	66.69	73.92
Imp-Freq [15]	65.60	56.10	55.70	52.50	63.10	56.90	74.30	61.70	75.50	64.60	86.10	74.50	71.50	62.90	-	-	61.31	-
DG-Mix [16]	87.51	68.32	53.99	53.20	74.95	64.75	80.05	70.74	85.85	71.22	80.94	68.91	83.51	71.65	77.55	74.08	66.34	72.34
HMIC-AGC [10]	74.20	57.99	62.24	54.02	73.45	59.61	58.21	55.83	76.94	67.66	83.52	69.11	71.32	66.93	77.46	61.68	61.06	65.93
GRHD	85.20	64.13	69.10	58.91	81.43	63.52	64.67	66.49	89.45	77.98	88.99	79.12	86.24	77.53	84.64	72.43	68.82	74.72

imbalanced audio samples across different attribute groups, Focal loss [18] is utilized as the loss function L_{Focal} to optimize the gradient classifier, with the ground truth label l_{att} of the attribute group of the input audio, that

$$L_{rev} = L_{Focal}(l_{att}, \hat{l}_{rev}). \quad (2)$$

During backpropagation, the Gradient Reversal Layer (GRL) sends the opposite gradient back to the backbone, creating divergent learning objectives between the classifier and the backbone, indicative of adversarial learning. The parameters of the gradient reversal are defined as θ_{rev} for a simplified description [19], and the backpropagation process before and after the GRL is

$$\frac{\partial L_{rev}}{\partial \theta_{rev}} \leftarrow GRL \left(\frac{\partial L_{rev}}{\partial \theta_{rev}} \right) = -\lambda \frac{\partial L_{rev}}{\partial \theta_{rev}}, \quad (3)$$

where $GRL(\cdot)$ denotes the function that refers to gradient reversal operations, and λ represents the intensity of gradient reversal, which becomes stronger as the training process.

By the adversarial learning between the classifier $GRC(\cdot)$ and the backbone, we constrain the backbone to extract unified non-domain-specific coarse features \mathbf{z}_{rev} from the source and target domains to achieve feature disentanglement and alleviate the domain shift problem in ASD.

B. Hierarchical Metadata Constrained Domain-Related Feature Learning

For more fine-grained feature learning, following [10], the hierarchical metadata structure is employed as a constraint to refine the coarse domain-related feature for more effective domain-specific feature learning. Here, the section ID and AG are employed as the constraint to learn the audio features \mathbf{z}_{sec} and \mathbf{z}_{att} related to domain shift type and specific domain, respectively. With the hierarchical metadata constrain, the audio features learnt from different levels are

$$\mathbf{z}_{sec} = \text{Conv2D}_{sec}(\mathbf{z}_{rev}), \quad \mathbf{z}_{att} = \text{Conv2D}_{att}(\mathbf{z}_{sec}), \quad (4)$$

where Conv2D_{sec} and Conv2D_{att} denote 2D convolutional layers used for audio feature extraction, following [10].

To employ section ID and AG as constraints for effective feature learning, two classifiers, ID classifier $\mathcal{C}_{sec}(\cdot)$ and attribute classifier $\mathcal{C}_{att}(\cdot)$, are applied to obtain predicted labels, $\hat{l}_{sec} = \mathcal{C}_{sec}(\mathbf{z}_{sec})$ and $\hat{l}_{att} = \mathcal{C}_{att}(\mathbf{z}_{att})$, then the section

ID label l_{sec} and AG label l_{att} can be used to constrain the feature learning. Unlike the imbalanced issue in attribute classification, section classification does not present a similar problem. Therefore, deviating from [10], we employ Focal loss instead of cross-entropy loss for attribute classification.

$$L_{sec} = CE(l_{sec}, \hat{l}_{sec}), \quad L_{att} = L_{Focal}(l_{att}, \hat{l}_{att}). \quad (5)$$

Finally, the joint loss function L_{total} for model learning is

$$L_{total} = \alpha L_{rev} + \beta L_{sec} + \gamma L_{att}, \quad (6)$$

where α , β and γ are the penalty parameters.

In summary, the proposed GRHD strategy incorporates a gradient reversal classifier within a hierarchical metadata constraint structure. This enhances domain-specific feature learning by increasing the distance between features of different domains in the latent feature space, thereby improving anomalous sound detection under domain shift.

III. EXPERIMENT AND RESULT

A. Experimental Setup

1) *Dataset*: We conduct experiments on the development set of the DCASE 2022 Challenge Task 2 dataset¹ to evaluate our method. Domain shift problems are defined in each section with different attribute values. In addition, there are 990 and 10 audio samples in the source and target domains, respectively. So, we can evaluate the domain generalisation performance of the ASD method on this dataset.

2) *Implementation*: We set the frame size as 1024 with an over-lapping of 50% to obtain the Log-Mel spectrograms, and the number of Mel filter banks as 128. We employed the Adam Optimizer [20] with a learning rate of 0.001 for model training and the cosine annealing strategy for learning rate decay. The model is trained with 150 epochs for each machine type. We empirically selected the penalty parameters (α , β , and γ in Eq. 6) for each machine type by searching the parameters resulting in the best performance.

3) *Performance Metrics*: The evaluation metrics are the area under the receiver operating characteristic curve (AUC) and the partial-AUC (pAUC), expressed as percentages, with higher values indicating better performance, following the DCASE 2022 Challenge Task 2 [5].

¹<https://dcase.community/challenge2022>

B. Experimental Results

1) *Performance Comparison*: Table I shows the comparison of our proposed GRHD method with the other methods for ASD under domain shift, where AutoEncoder [5] and MobileNetV2 [5] are the official baseline methods for DCASE 2022 Challenge Task 2. JLESS [14], Imp-Freq [15] and DG-Mix [16] adopt Mixup strategy [21] for generalized feature learning to address the domain shift problem. HMIC-AGC [10] is the backbone of the proposed GRHD method.

We can see that GRHD significantly outperforms the DCASE baseline systems in all evaluation metrics, obtains the performance improvement compared with the HMIC-AGC backbone, and achieves the best overall performance among all systems in HAUC for ASD under domain shift. By extracting the domain-related coarse and fine features, our method is better than other methods with the Mixup strategy for generalized audio feature learning to address anomalous sound detection under domain shift.

TABLE II
ABLATION STUDY OF THE PROPOSED GRHD METHOD FOR ASD UNDER DOMAIN SHIFT. $GRC(\cdot)$, C_{sec} AND C_{att} REFER TO THE GRADIENT REVERSAL CLASSIFIER, SECTION ID CLASSIFIER, AND ATTRIBUTE CLASSIFIER, RESPECTIVELY.


$GRC(\cdot)$	C_{sec}	C_{att}	AUC-s	AUC-t	pAUC	HAUC
✗	✓	✗	73.60	56.05	57.51	61.45
✗	✗	✓	77.77	60.99	60.50	65.53
✗	✓	✓	77.46	61.68	61.06	65.93
✓	✓	✓	84.64	72.43	68.82	74.72

2) *Ablation Study*: To validate the impact of different classifiers on ASD performance, we conduct an ablation study to verify these three classifiers $GRC(\cdot)$, C_{sec} and C_{att} in our model. The results are given in Table II, where we can see the proposed gradient reversal strategy contributes the most to ASD under domain shift.


Specifically, it provides nearly 11% improvement in the target domain compared to our method without gradient reversal. This indicates that our proposed method can effectively distinguish the boundaries between domain-related and domain-unrelated features by disentangling attribute related features from audio features. The ablation experiments also showed that using attribute information can more effectively perform ASD than using section information. This verifies the change of attribute values is the reason for domain shift, and using attribute values as self-supervised labels can extract domain-related audio features, thereby alleviating the domain shift problem in ASD.

3) *Visualization Analysis*: To further verify the effectiveness of our proposed method, we provide 3D t-SNE [22] cluster visualization of our method without and with gradient reversal strategy, as shown in Figure 3 (a) and (b) respectively. With the gradient reversal strategy, latent features across different sections are better aggregated, as highlighted by the red elliptical box with dashed lines in Figure 3(b), rather than being completely mixed. Moreover, the overlap between normal and anomalous features is significantly reduced, as illustrated by the other red elliptical boxes in Figure 3, indicating that the

gradient reversal strategy can effectively distinguish domain-related features from domain-unrelated features.

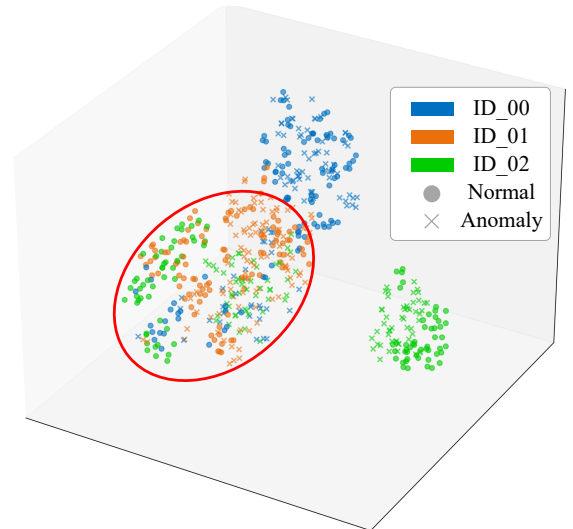

(a) Without gradient reversal strategy

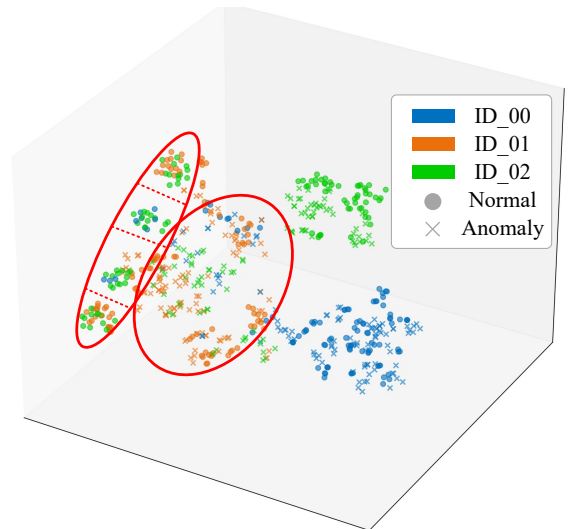

(b) With gradient reversal strategy

Fig. 3. The t-SNE visualization of the latent features with or without gradient reversal strategy for machine type ToyCar. Different colours represent different section IDs. “•” and “×” represent normal and anomalous sounds, respectively.

IV. CONCLUSION

In this paper, we have presented a gradient reversal-based hierarchical feature disentanglement strategy for anomalous sound detection under domain shift. The proposed gradient reversal strategy effectively disentangles domain-related features from complex audio features. Moreover, by incorporating a hierarchical metadata structure as the constraint to consider the types of domain shift and specific domain, we can obtain more effective fine-grained features, significantly enhancing anomalous sound detection performance under domain shift, as confirmed by experiments on the DCASE 2022 Challenge Task 2 dataset.

REFERENCES

- [1] Y. Koizumi, Y. Kawaguchi, K. Imoto, T. Nakamura, Y. Nikaido, R. Tanabe, H. Purohit, K. Suefusa, T. Endo, M. Yasuda, and N. Harada, "Description and discussion on DCASE 2020 challenge task2: Unsupervised anomalous sound detection for machine condition monitoring," in *Proceedings of Detection and Classification of Acoustic Scenes and Events (DCASE) Workshop*, 2020, pp. 81–85.
- [2] H. Zhang, Q. Zhu, J. Guan, H. Liu, F. Xiao, J. Tian, X. Mei, X. Liu, and W. Wang, "First-shot unsupervised anomalous sound detection with unknown anomalies estimated by metadata-assisted audio generation," in *Proceedings of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2024, pp. 1271–1275.
- [3] J. Guan, F. Xiao, Y. Liu, Q. Zhu, and W. Wang, "Anomalous sound detection using audio representation with machine id based contrastive learning pretraining," in *Proceedings of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2023, pp. 1–5.
- [4] J. Guan, Y. Liu, Q. Zhu, T. Zheng, J. Han, and W. Wang, "Time-weighted frequency domain audio representation with GMM estimator for anomalous sound detection," in *Proceedings of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2023, pp. 1–5.
- [5] K. Dohi, K. Imoto, N. Harada, D. Niizumi, Y. Koizumi, T. Nishida, H. Purohit, R. Tanabe, T. Endo, M. Yamamoto, and Y. Kawaguchi, "Description and discussion on DCASE 2022 challenge task 2: Unsupervised anomalous sound detection for machine condition monitoring applying domain generalization techniques," in *Proceedings of Detection and Classification of Acoustic Scenes and Events (DCASE) Workshop*, 2022, pp. 26–30.
- [6] Y. Luo, L. Zheng, T. Guan, J. Yu, and Y. Yang, "Taking a closer look at domain shift: Category-level adversaries for semantics consistent domain adaptation," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2019.
- [7] S. Sankaranarayanan, Y. Balaji, A. Jain, S. N. Lim, and R. Chellappa, "Learning from synthetic data: Addressing domain shift for semantic segmentation," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2018.
- [8] X. Peng, Q. Bai, X. Xia, Z. Huang, K. Saenko, and B. Wang, "Moment matching for multi-source domain adaptation," in *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*, 2019.
- [9] C. Gan, T. Yang, and B. Gong, "Learning attributes equals multi-source domain generalization," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2016.
- [10] H. Lan, Q. Zhu, J. Guan, Y. Wei, and W. Wang, "Hierarchical metadata information constrained self-supervised learning for anomalous sound detection under domain shift," in *Proceedings of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2024, pp. 7670–7674.
- [11] Y. Kawaguchi, K. Imoto, Y. Koizumi, N. Harada, D. Niizumi, K. Dohi, R. Tanabe, H. Purohit, and T. Endo, "Description and discussion on DCASE 2021 challenge task 2: Unsupervised anomalous detection for machine condition monitoring under domain shifted conditions," in *Proceedings of Detection and Classification of Acoustic Scenes and Events (DCASE) Workshop*, 2021, pp. 186–190.
- [12] Y. Deng, J. Liu, and W.-Q. Zhang, "AITHU system for unsupervised anomalous detection of machine working status via sounding," DCASE 2022 Challenge, Tech. Rep., July 2022.
- [13] K. Wilkinghoff, "An outlier exposed anomalous sound detection system for domain generalization in machine condition monitoring," DCASE Challenge, Tech. Rep., 2022.
- [14] J. Bai, Y. Jia, and S. Huang, "JLESS submission to DCASE 2022 task 2: Batch mixing strategy based method with anomaly detector for anomalous sound detection," DCASE Challenge, Tech. Rep., 2022.
- [15] T. Nguyen, L. Pham, P. Lam, D. Ngo, H. Tang, and A. Schindler, "The impact of frequency bands on acoustic anomaly detection of machines using deep learning based model," *arXiv preprint arXiv:2403.00379*, 2024.
- [16] I. Nejjar, J. Meunier-Pion, G. Frusque, and O. Fink, "DG-Mix: Domain generalization for anomalous sound detection based on self-supervised learning," in *Proceedings of Detection and Classification of Acoustic Scenes and Events (DCASE) Workshop*, 2022, pp. 131–135.
- [17] Y. Liu, J. Guan, Q. Zhu, and W. Wang, "Anomalous sound detection using spectral-temporal information fusion," in *Proceedings of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2022, pp. 816–820.
- [18] T.-Y. Lin, P. Goyal, R. Girshick, K. He, and P. Dollár, "Focal loss for dense object detection," in *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*, 2017, pp. 2980–2988.
- [19] Y. Ganin, E. Ustinova, H. Ajakan, P. Germain, H. Larochelle, F. Laviolette, M. Marchand, and V. Lempitsky, "Domain-adversarial training of neural networks," *Journal of Machine Learning Research*, vol. 17, no. 1, pp. 2096–2030, 2016.
- [20] D. P. Kingma and J. Ba, "Adam: A method for stochastic optimization," in *Proceedings of International Conference on Learning Representations (ICLR)*, 2015.
- [21] H. Zhang, M. Cisse, Y. N. Dauphin, and D. Lopez-Paz, "Mixup: Beyond empirical risk minimization," in *Proceedings of International Conference on Learning Representations (ICLR)*, 2018.
- [22] L. Van der Maaten and G. Hinton, "Visualizing data using t-SNE," *Journal of Machine Learning Research*, vol. 9, no. 11, p. 2579–2605, 2008.