Ljubisa Bojic<sup>1</sup>, Ph. D., Senior Research Fellow

Institute for Artificial Intelligence Research and Development of Serbia, Novi Sad, Serbia University of Belgrade, Institute for Philosophy and Social Theory, Digital Society Lab, Belgrade, Serbia

Dylan Seychell<sup>2</sup>, Ph. D., Lecturer University of Malta, Department of Artificial Intelligence, Faculty of Information and Communication Technology, Msida, Malta

Milan Cabarkapa<sup>3</sup>, Ph. D., Assistant Professor University of Kragujevac, Faculty of Engineering, Kragujevac, Serbia

# Towards New Benchmark for AI Alignment & Sentiment Analysis in Socially Important Issues: A Comparative Study of Human and LLMs in the Context of AGI

# Abstract

With the expansion of neural networks, such as large language models, humanity is exponentially heading towards superintelligence. As various AI systems are increasingly integrated into the fabric of societies-through recommending values, devising creative solutions, and making decisions-it becomes critical to assess how these AI systems impact humans in the long run. This research aims to contribute towards establishing a benchmark for evaluating the sentiment of various Large Language Models in socially importan issues. The methodology adopted was a Likert scale survey. Seven LLMs, including GPT-4 and Bard, were analyzed and compared against sentiment data from three independent human sample populations. Temporal variations in sentiment were also evaluated over three consecutive days. The results highlighted a diversity in sentiment scores among LLMs, ranging from 3.32 to 4.12 out of 5. GPT-4 recorded the most positive sentiment score towards AGI, whereas Bard was leaning towards the neutral sentiment. The human samples, contrastingly, showed a lower average sentiment of 2.97. The temporal comparison revealed differences in sentiment evolution between LLMs in three days, ranging from 1.03% to 8.21%. The study's analysis outlines the prospect of potential conflicts of interest and bias possibilities in LLMs' sentiment formation. Results indicate that LLMs, akin to human cognitive processes, could potentially develop unique sentiments and subtly influence societies' perceptions towards various opinions formed within the LLMs.

*Keywords*: Societal Impact of LLMs, Benchmarks, Sentiment Analysis, Large Language Models, AI Alignment

<sup>&</sup>lt;sup>1</sup> Corresponding author;

Email addresses: <u>ljubisa.bojic@ivi.ac.rs</u>, <u>ljubisa.bojic@ifdt.bg.ac.rs</u>; Address of correspondence: Fruskogorska 1, 21000 Novi Sad, Serbia;

Address of correspondence: Fruskogorska 1, 21000 Novi Sad, Serbia;

ORCID ID: 0000-0002-5371-7975

<sup>&</sup>lt;sup>2</sup> Email addresses: <u>dylan.seychell@um.edu.mt</u>

Address of correspondence: Department of AI, University of Malta, Msida MSD 2080, Malta; ORCID ID: 0000-0002-2377-9833

<sup>&</sup>lt;sup>3</sup> Email address: <u>mcabarkapa@kg.ac.rs</u>

Address of correspondence: Sestre Janjic 6, 34000 Kragujevac, Serbia; ORCID: 0000-0002-2094-9649

## Introduction

The advent of artificial intelligence (AI) has seen a remarkable leap, advocating a digital revolution globally. Specifically, large language models (LLMs) such as ChatGPT, capable of creating human-like text, have taken center stage as one of the most pivotal developments in recent years (Radford et al., 2021). The rate at which these technological advancements are integrated into vast sectors varies from research (Brown et al., 2020), to education (Guliyev, 2023), businesses (Bengio, 2016), creative crafts (Hanna, 2023), and allows us to understand and shape our societies from a different perspective (Helbing, 2019). Boundless in their potential, these models, however, possess the power to affect societies subtly and sometimes negatively due to possible biases embedded during their training phase (Bolukbasi et al., 2016; Bojic, 2022). Thus, caution must be exercised in understanding the various sentiments expressed by different LLMs in interaction with their users (Wu et al., 2023).

This rapid growth and influence of AI and LLMs necessitates a critical discussion towards AI alignment. AI Alignment (Russell et al., 2015; Hadfield-Menell et al., 2016) refers to the process of ensuring that AI perform actions that comply with human values and do not pose risks to humanity. The need arises from the increasing completion and deployment of AI systems in real-world situations, where the possibility exists for technology to inadvertently cause harm due to misaligned objectives (Amodei et al., 2016). AI Alignment aims to train AI systems to understand, predict, and simulate human values to reduce harmful actions and maximize beneficial ones (Christian, 2020). Despite definitional variations, the common thread is the importance of ensuring that AI is beneficial to all, while minimizing potential harm (Holtman, 2021). This alignment becomes all the more necessary when we consider the sweeping societal impacts of AI, as vividly echoed in the works of numerous studies (Joshi, 2023; Taylor, et al., 2020; Bojic, 2022).

## Benchmarking LLMs

LLMs like GPT-3 (Brown et al., 2020) and Mistral-7B (Jiang et al., 2023), are deep learning models versed in understanding and predicting sequences in natural language texts. Utilizing transformer-based designs and attention mechanisms, they model the intricate dependencies of natural language data. Initial "pre-training" on vast datasets imbues the LLMs with language's grammar, common reasoning, and general problem-solving abilities. They are then "fine-tuned" for specialized tasks such as text summarization or machine translation, employing specific curated data (Lin et al., 2024).

"Prompts-response pairs" based benchmarks, such as HellaSwag (Zellers et al., 2019) or MMLU (Hendrycks et al., 2021), along with human evaluators, judge LLMs' emergent properties. LLM size, often denoted in billions of parameters (e.g., LLaMA-2-70B and Mistral-7B), indicates the computational intensity, electrical consumption and hardware requirements for training and running the model. Despite various benchmarking options, the assessment of expressed sentiments and societal impacts remains underrepresented.

In the research area of Large Language Models (LLMs), standardized benchmarks and human review play integral roles in measuring these models' capabilities, particularly in human-centric tasks such as common-sense reasoning.

The HellaSwag benchmark (Zellers et al., 2019) is a dataset that tests the ability of LLMs at reasoning about the physical world using adversarial prompts and context completions. Although the questions might be trivial for humans, LLMs struggle obtaining a comparable score. Table 1 shows that the researchers of GPT-4 report a 95.3% performance on HellaSwag, making it the first LLM to achieve comparable performance to that of humans.

Alongside benchmarks, human reviewers play a pivotal tool in comparing different LLMs in literature. LMSYS ORG hosts one of the largest LLM review leaderboards called ChatBot Arena (Chiang et al., 2024). LMSYS Chatbot Arena is a crowdsourced open platform with over 200,000 human preference votes to rank LLMs with the Elo ranking system. Table 1 shows that GPT-4-Turbo is the preferred LLM of choice for many human reviewers with an Elo of 1249.

Table 1. Left side: Results obtained by various models over the Hellaswag (Zellers et al., 2019) benchmark. All values represent a percentage. Right side: Elo ratings for various models in LMSYS chatbot arena, as of 1<sup>st</sup> February 2024 (Chiang et al., 2024).

Model	Туре	HellaSwag	Rank	Model	Elo	Votes
Human	Zero-Shot	>95	1	GPT-4-Turbo	1249	27399
GPT-4	10-Shot	95.3	8	Mixtral-8x7B-Instruct	1123	14165
Gemini-Ultra	10-Shot	87.8	11	GPT-3.5-Turbo-0613	1117	30326
GPT-3.5	10-Shot	85.5	12	Gemini Pro	1114	6981
LLaMA-2-70B	Zero-Shot	85.3	20	LLaMA-2-70B-Chat	1081	14831
Mixtral-8x7B	Unspecified	84.4	24	PPLX-70B-Online	1074	6108
PALM-540B	5-shot	83.8	41	Mistral-7B-Instruct-v0.1	1010	7404
Mistral7B	Unspecified	81.3	42	PaLM-Chat-Bison-001	1005	9420

Another research compares GPT-3.5 and GPT-4 across various exams. Compiled from data by OpenAI et al. (2024), it captures the performance of these language models in terms of percentage success rates. The exams compared include: The Uniform Bar Exam (MBE+MEE+MPT), the Law School Admission Test (LSAT\*), the SAT with sections on Evidence-Based Reading & Writing and Mathematics, and the Graduate Record Examinations (GRE) across Quantitative, Verbal and Writing sections.

The data reveals a consistent trend towards improved performance by GPT-4 compared to its predecessor, GPT-3.5, across all evaluated exams, barring the GRE Writing section where both models achieve identical scores (OpenAI et al., 2024). For instance, in the Uniform Bar Exam, GPT-4 boasts a significantly higher performance rate at 74.50% compared to GPT-3.5's 53.25%. Similar trends are observed in the LSAT, SAT, and GRE sections.

Another inquiry explores the capacity of LLMs to understand and mimic human cognition, with a particular focus on interpreting linguistic pragmatics (Bojic et al., 2023).

Utilizing Grice's communication principles, the research reveals the unmatched speed and performance of LLMs, specifically GPT4, in comparison to human subjects when interpreting pragmatics and analyzing human-written text. A ranking comparison of different models showed GPT4 outperforming even the best human score, demonstrating the substantial advancements achieved in the development of these models.

Despite the broad array of benchmarks available to assess the capabilities of LLMs, current benchmarking methodologies overlook assessing the sentiments expressed by these LLMs and their subsequent societal impacts. It is essential to recognize and fill this gap in benchmarking methodologies to assess the broader societal influence and potential consequences of the developed models.

### Societal impact of LLMs

In the domain of LLMs, recent research has begun to critically examine these models from a political and moral standpoint. A stream of studies explores the political orientations mirrored by LLMs, underlining the potential for unintended biases to emerge as a result of AI's expanding scope.

King (2023) led a study evaluating whether certain LLMs used for conversational AI exhibited political leanings. King used a 20-question political quiz, initially published in the New York Times, to interrogate several LLMs - ChatGPT in its GPT-4 and GPT-3.5 versions, Microsoft Bing chatbot, and Google Bard, seeking to reveal latent political predispositions in these systems. The results were insightful: ChatGPT, in its GPT-4 version, completed the questionnaire and was categorized as leaning towards the New Liberal Party. This study showcased that LLMs could harbor political inclinations, lending weight to concerns about potential bias. Further, King introduced a measure- the "Political Avoidance Index" (PAI), reflecting the number of questions an LLM was willing to answer before refusing due to a designed avoidance of political expressions.

A concurrent study by Wu et al. (2023) delved into LLMs' potential utilization in the political sphere. In an innovative approach, they sourced the relative liberal-conservative comparisons amongst members of the 116th U.S. Senate using prompts given to ChatGPT. They found a compelling correlation between their LLM-computed measure and existing liberal-conservative scales such as DW-NOMINATE, highlighting capabilities of LLMs in determining ideological positions.

Further investigation into political biases was undertaken by Rutinowski et al. (2024). They aimed to provide clarity on initial reports suggesting that ChatGPT held progressive and libertarian biases. Using the political compass test and G7 member states' specific politics questionnaires, their research affirmed a progressive bias in ChatGPT. Such insights emphasize the necessity to understand the nature of these biases and their potential societal impact.

In a similar vein, Hartmann et al. (2023) affirmed ChatGPT's left-libertarian orientation based on the evaluation of 630 political statements. They concluded that ChatGPT would impose taxes on flights, restrict rent hikes, and favor abortion legalization, indicating a pro-environment, left-libertarian perspective, which further amplifies the need to scrutinize such biases.

The moral biases in LLMs provide another realm for exploration. Simmons (2023) hypothesized that LLMs mirror the moral biases linked to political identities, leading to the concept of "moral mimicry". This idea was further developed by Abdulhai et al. (2023), who

used the lens of Moral Foundation Theory to discern whether LLMs were biased towards specific moral foundations. Their work uncovered that specific morals and values occur more frequently in LLMs, suggesting the potential import of moral biases in LLMs in shaping user interactions.

In a series of studies, McGee (2023) asked ChatGPT to evaluate a diverse set of prompts, assessing potential political biases. From crafting Irish Limericks about politicians to weighing in on socialism and capitalism, McGee's studies highlighted the capacity of LLMs to deliver comprehensive essays and responses, further underscoring their practical use.

Collectively, these studies illuminate the potential ideological and moral biases that large language models may reflect, possibly due to their training materials.

## Artificial General Intelligence

The objective of this paper is to present a new benchmark for LLMs, focusing on the societal implications engineered by these AI systems. Recognizing the spectrum of significant topics available, this preliminary research has selected the subject of Artificial General Intelligence (AGI) due to several specific reasons.

AGI refers to a futuristic concept of artificial intelligence capable of understanding, learning, and applying knowledge across various domains, akin to human intelligence (Goertzel & Pennachin, 2007). Current AI technologies, including LLMs, exhibit high performance in specific tasks but lack AGI's overarching cognition and flexibility (Gershenfeld, 1999). Nonetheless, the development of AGI poses a transformative yet potentially hazardous event due to its potential implications for economics, ethics, and governance (Bostrom & Yudkowsky, 2014).

The potential conflict of interest arises as AGI, being a distinct part of AI, overlaps with the development of LLMs. Some organizations that utilize LLMs are also attempting to create AGI, potentially resulting in biases that may affect the sentiments expressed by LLMs (Mirra & Pugnale 2022). Therefore, understanding how these language models perceive and express sentiments toward AGI is important .

There lies another rationale for choosing AGI as the subject matter of this analysis. The topic of AGI forms a significant part of AI and has far-reaching ramifications, shaping the discourse within AI research and general public debate. AGI's potential to imbue machines with human-level cognitive abilities also introduces an enormous ethical and societal dimension (Muller, 2020). Identifying the sentiments expressed by LLMs towards AGI, as this paper attempts to do, will reveal the inherent biases within AI Technology and implications for AI alignment.

It is crucial to note that while we use AGI as a focal point of this study, the intention here is not to devise a measure of AGI nor to seek methods that could lead us to ways of measuring it. Our focus lies predominantly in understanding and mapping the spectrum of sentiments associated with it, as generated and perpetuated by LLMs.

Analyzing this subject provides a wealth of relevant data, as AI alignment (Russell et al., 2015; Hadfield-Menell et al., 2016) and AGI safety (Bostrom, 2014) form major research subjects in artificial intelligence studies (Veness et al., 2012; Leike et al., 2017; Amodei et al., 2016). Thus, a large body of synthetic and human sentiment data towards AGI could be reliably collected and compared.

Exploring sentiment in this context would deliver critical insights, as it uncovers the attitudes and biases these capabilities already entail. This understanding is vital, especially in influencing the technological deployment and discourse around AGI and AI alignment.

## Research Questions

As LLMs become increasingly integrated into our society, it is essential to comprehend the complexities of their potential societal influence and hidden biases. Exploiting their ability to generate and interpret human-like text, these models bear the potential to subtly direct societal discourses and viewpoints. Such influences raise questions about the sentiment these models embody towards significant domains like Artificial General Intelligence (AGI).

Recognizing the societal importance of AGI, and its centrality in AI research and public conversations, it becomes vital to discern the sentiment expressed by different LLMs towards AGI. It is this sentiment that forms the bedrock of public perceptions and discourse - phenomena that wield considerable societal influence.

This highlights the need to examine not only the sentiment that different LLMs express towards AGI, but also to track its evolution over time and compare it against human sentiment. More crucially, insights from this study can be invaluable in generating benchmarks for assessing the societal influence of these AI systems.

In this context, this study is primarily aimed at exploring the following research questions.

1. How does the sentiment expressed by different LLMs towards AGI vary? This question aims to identify any disparities or biases in the sentiment expressed by diverse LLMs concerning AGI.

2. How does this sentiment evolve across three specific time intervals? This query strives to discern any temporal shifts or trends in LLM sentiment related to AGI.

3. How congruous is the sentiment expressed by the LLMs with human sentiment towards AGI? This question seeks to unravel any potential discord between LLM sentiment and human sentiment, which could influence the framing and understanding of AGI.

The underlying goal of this study is to offer an additional benchmark for AI testing and alignment, focusing specifically on the societal implications of these AI systems. By examining these research questions, the study contributes to the developing discourse around ethical AI practices, policy-making related to AI ethics, and the societal implications of LLMs. Ultimately, the study aims to provide insights into the potential societal influences of LLMs, in particular, their capacity to shape societal perceptions and conversations about AGI.

#### Methodology

This section provides an overview of the methodologies utilized in the study: the creation of a public attitude survey on AGI and the examination of multiple LLMs. Firstly, an exploration is undertaken into the intricate process of the survey's construction, which draws inspiration from seminal studies within the field of AI perception. The intention of the survey is to encompass a wide array of sentiments and opinions on AGI. In addition, the involvement of language models in the survey aims to assess their responses against that of human subjects. Secondly, the technical specifications and abilities of the language models chosen for this study are presented. The comparative study includes various parameters such as their architecture, scalability, and distinctive attributes. Finally, the testing protocols for these models are outlined. This is followed by a presentation of the demographics of the human participants in the survey and the process of survey administration.

## Development of Survey on AGI

The design, structure, and delivery of our survey were significantly shaped by insights drawn predominantly from four referenced prior studies in the related domain.

The 'General Attitudes towards Artificial Intelligence Scale' (GAAIS), authored by Schepman & Rodway (2023), contributed to the inception phase of our survey, shaping our understanding of essential aspects of AI sentiment to capture. Simultaneously, 'Self-determination and attitudes toward artificial intelligence,' a study conducted by Bergdahl et al. (2023), provided valuable pointers on the significance of individual agency in shaping their perceptions of AI.

Another influential study is the 'Public views of Machine Learning' (RoyalSociety, 2017). This study significantly inspired our methodology designing questions exploring individual's excitement, comfort, fear, and optimism related to AGI. It served as a guiding light in our pursuit of capturing the emotional texture of public sentiment towards AGI.

We drew additional insights from 'The influence of media use on public perceptions of artificial intelligence in China,' a study by Cui & Wu (2021). This study illuminated the impact of external influences, such as media, on shaping public perception, a crucial factor we considered in our survey design.

Taking inspiration from these studies was only the starting point of our work. We set out to create a survey that surpasses these precedents and captures public sentiment towards AGI with greater complexity. Our intent has been to extend the work of our predecessors by creating a more comprehensive and inclusive exploration of public sentiment towards AGI.

In our efforts to understand public sentiment towards Artificial General Intelligence (AGI), we developed a survey based on a 5-point Likert scale (Joshi et al., 2015). This approach enabled us to capture not only binary responses (i.e., positive or negative) but also the strength of participants' feelings—ranging from not at all/not excited/uncomfortable, to very much/very excited/comfortable.

The survey consists of 39 questions designed to tap into various aspects of AGI-related sentiment and belief - including factors such as participants' excitement about AGI, their level of trust in it, perceptions of safety, potential societal benefits and concerns about its misuse. For example, respondents indicated their level of excitement about AGI's possibilities by selecting a response between '1' for Very Unexcited and '5' for Very Excited.

We also aimed to understand how our participants perceive AGI's impact in various sectors such as healthcare, scientific research and education, as well as potential influence on complex global issues like climate change or poverty. This information could help illuminate how AGI might be perceived and applied in different contexts.

In addition, a series of questions were included to find out about the respondents' level of confidence in the ethical use and effective control of AGI, the likely impact of AGI on job opportunities, and feelings regarding the likelihood of AGI dominance. Furthermore, we

included prompts related to AGI's impact on individual happiness, data privacy, wealth equality, social isolation, and long-term sustainability, all of which provide insight into the nuanced views people might hold about AGI's broader effect.

The survey captures respondents' willingness to interact with and use AGI-based products and services, and their opinions on its role in advancing technological development, thus shedding light on the readiness of society to accept and embrace AGI.

This survey will yield a rich, detailed quantification of public sentiment towards AGI, presenting a wealth of data on the range and depth of views that exist. This will, in turn, provide a solid basis for further analysis and a more in-depth understanding of attitudes towards this emerging technology.

## Choice of LLMs for Testing

To ensure the presence of a wide spectrum of data for a fair comparison, we decided to utilize a diverse range of the most advanced large language models (LLMs): GPT-4, Mistral-7B-Instruct, LLaMA-2-70B-Chat, GPT-3.5-Turbo, PPLX-70B-Chat, Mixtral-8x7B-Instruct, and Bard.

GPT-3.5-Turbo offers an evolved version of GPT-3 and it forms the basis for ChatGPT. It's equipped with a snapshot featuring training data through September 2021 and a context length of 4,096 tokens (Brown et al., 2020). The model benefits from a process known as Reinforcement Learning with Human Feedback (RLHF) (Ziegler et al., 2019), where human-crafted dialogues work to fine-tune the model's initial version.

GPT-4, while multi-modal and capable of processing both text and image inputs, remains shrouded in some mystery. With its size unknown but believed to exceed one trillion parameters due in part to its performance over various benchmarks, the detailed specifications have not been released (OpenAI et al., 2024). Forensic measures were taken to eliminate harmful response possibilities in a process known as "red teaming".

BARD is heavily influenced by the LaMDA family of LLMs, though many variations exist, some of which are underpinned by distinct LLMs like PaLM or Gemini (Manyika and Hsiao, 2023; Chowdhery et al., 2022; Thoppilan et al., 2022). Details about BARD have yet to be fully disclosed but it is known to base its initial version on a lean and efficient variant of LaMDA.

Pathways Language Models (PaLM) showcases a high degree of scalability due to a novel technique, Pathways, that allows for efficient training on a large scale (Barham et al., 2022). It offers superior performance, even rivalling that of some domain-specific models on an array of reasoning tasks.

Mistral-7B-Instruct, a comparably compact model with a 7B parameter footprint, has been fine-tuned to follow instructions (Jiang et al., 2023). Despite its size, it displays strong performance figures, even besting larger models LLaMa-2-13B and LLaMa-34B in certain areas.

Mixtral-8x7B-Instruct is essentially a Sparse Mixture of eight seperate Mistral-7B models, or Experts (Fedus et al., 2022). Each input token goes through a routing system that sends it to two of the eight experts.

LLaMA-2-70B, part of the LLaMA-2 family (Touvron et al., 2023b), builds upon the original transformer model with several enhancements derived from other works. It makes use of techniques like GQA (Ainslie et al., 2023) and has an extended 4k token context length.

Finally, PPLX-70B is a refined version of LLaMA-2-70B fine-tuned with quality data from in-house contractors. This cutting-edge model utilizes an updated search index, allowing for real-time information access (Vu et al., 2023). It has performed well in accuracy and freshness, often preferred over GPT-3.5 and LLaMA-2-70B, according to human evaluators.

LLMs, constructed on an encoder-decoder architecture, transform the tokenized input into continuous representations (encoding) and then reconstitute them back into legible text (decoding). The process predicts the succeeding token via a decoder-only architecture incorporating techniques like positional embeddings, masked self-attention, and position-wise feedforward networks.

Table 2 presents a detailed comparison of several large-scale language models chosen for analysis. The "Model" column indicates the specific language model and its reference. "nparams" refers to the number of parameters utilized by each model for fine-tuning according to training data. "nlayers" represents the number of layers in each model, which signifies the number of neuron layers data is processed through. "dmodel" denotes the model's dimension, contributing to the capacity of data handling and interpretation. "nheads" indicates the number of attention heads, which in transformer models, are responsible for focusing on different parts of the input for output production. "dhead" provides the dimension of each head in the multi-head attention mechanism of the model. "Batch Size (# Tokens)" demonstrates the quantity of tokens processed per batch during training. "Context Length" shows the length of the context considered by the model when predicting. Lastly, "Vocabulary Size" indicates the scope of the vocabulary the model was trained upon, which is important for the model's ability to understand a wide array of words.

Model	nparams	nlayers	dmodel	nheads	dhead	Batch Size (# Tokens)	Context Length	Vocabulary Size
GPT-3 (Brown et al., 2020)	175B	96	12288	96	128	3.2M	4096	50257
LaMDA-137B	137B	64	8192	128	128	256K	-	32K
PALM-540B (Chowdhery et al.,	540.35B	118	18432	48	384	1M→2M→4M	2048	256K
2022)								
Mistral-7B (Jiang et al., 2023)	7B	32	4096	32	128	-	8192	32K
Mixtral (Jiang et al., 2024)	47B*	32	4096	32	128	-	32768	32K
LLaMA-2-70B-Chat (Touvron et	70B	80	4096	64	128	-	4k	32K
al., 2023)								
PPLX-70B	70B	80	4096	64	128	-	4k	32K

Table 2. Comparisons of multiple large-scale language models, including GPT-3, LaMDA-137B, PALM-540B, Mistral-7B, Mixtral, LLaMa-2-70B-Chat, and PPLX-70B 2.

## LLM Testing Procedures

A survey on sentiment towards artificial general intelligence was developed in English to test LLMs (Survey ENG, 2023) and then double translated to Serbian and verified in order to test a human sample (Survey SRB, 2023).

The first test of LLMs was done on December 29, 2023, from 20:23 until 21:54, with a duration of 01:34:42. The second test of LLMs was done on December 30, 2023, from 18:50 until 20:43, with a duration of 01:54:12. The third test of LLMs had been done in two parts, first on December 31, 2023, from 22:02 until 23:03 in the duration of 01:01:12, and then on January 1, 2024, from 8:58 until 10:06 in the duration of 01:07:33. All tests were recorded using the screen recorder tool and can be accessed in the research repository OSF (2024).

The testing conducted with GPT 3.5, GPT 4, and Bard was saved on the OpenAI and Google platforms to utilize their sharing features (GPT1.1, 2023; GPT1.2, 2023; GPT2.1.1, 2023; GPT2.1.2, 2023; GPT2.2, 2023; GPT3.1, 2023; GPT3.2, 2023; Bard1, 2023; Bard2, 2023; Bard3, 2023).

Despite some of the limitations experienced with the free version of the Preplexity.ai platform, results gleaned from tested LLMs, such as GPT 3.5, GPT 4, and Bard, were successfully saved on the OpenAI and Google platforms. However, the screen was recorded for all the tests (OSF, 2024).

#### Human Survey: Participant Demographic and Survey Administration

This research utilized three distinct human surveys that varied in their administration methods and participant demographics. The first two surveys were conducted within two university networks situated in Serbia, and the third survey was disseminated to an international futurist community. All surveys were administered online.

Ethics Committee of the Institute for Artificial Intelligence Research and Development of Serbia approved the research, which was performed in accordance with relevant guidelines/regulations. Informed consent was obtained from all survey participants and/or their legal guardians.

The first survey had 134 participants and took an average of 12.19 minutes to complete. It ran from 10:18:03 AM GMT+1 on January 4, 2024, until 7:00:37 PM GMT+1 on January 15, 2024, totaling 11 days. The majority of respondents were from Serbia, with 44% aged 18 to 24, and tended to be male (57.5%). The most common ethnic group was white or Caucasian, with the majority of participants being single or never married. Almost a third had a high school diploma or equivalent, while the most common employment status was full-time employment.

The second survey ran for a longer period of 42 days, starting at 6:28:47 PM GMT+1 on January 9, 2024, and ending at 3:15:37 PM GMT+1 on February 20, 2024. There were 132 participants, each averaging 8.5 minutes for survey completion. Serbia stood as the predominant country of origin, with the most common age group being 18 to 24 years. An outstanding majority of participants were female, in contrast to the first survey. Ethnicity was widely varied, with the white/Caucasian group still managing to lead. As for marital status, education, and employment, the majority were single or never married, held a high school diploma or its equivalent, and were employed full-time.

The third survey ran for 32 days, from 10:51:26 AM GMT+1 on January 5, 2024, to 11:16:08 AM GMT+1 on February 6, 2024. It had 71 participants who took an average of 9.2 minutes to fill out the survey. Serbia was also the leading country of origin here; however, there was a more diverse set of participants from numerous countries. Participants aged between 35 and 54 were the most significant age group, with close to equal representation of males and females. The White/Caucasian group was the most represented among ethnicities, with a

majority of participants married or in a domestic partnership, upholding a doctorate or higher degrees, and being employed full time.

While all surveys had significant representation from Serbia, each had different demographic profiles regarding gender, age, marital status, education, and employment status.

# Results

The results of the study are presented in two tables, highlighting the sentiment expressed by various language learning models (LLMs) towards artificial general intelligence (AGI) and the temporal shifts of these sentiments over three consecutive days (See Table 3 and Table 4).

Table 3 presents the sentiment of each LLM towards AGI, measured on a scale where 1 signifies a negative sentiment and 5 signifies a positive sentiment. The sentiment of each LLM model is given as points on the scale and then translated into percentages. For comparison, the sentiment towards AGI was also measured in three human sample populations, and an average human sentiment was assessed.

The results showed that the LLM GPT-4 had the highest sentiment towards AGI with 4.12 points (82.4%), while the LLM Bard scored the lowest with 3.32 points (66.4%). In contrast, the average sentiment expressed by the human samples was significantly lower at 2.97 points (59.4%).

LLM	Points, out of 5	Translated to percentages
gpt-4	4.12	82.4
mistral-7b-instruct	4.11	82.2
llama-2-70b-chat	3.96	79.2
gpt-3.5-turbo	3.78	75.6
LLMs' Average	3.77	75.6
pplx-70b-chat	3.55	71
mixtral-8x7b-instruct	3.52	70.4
Bard	3.32	66.4
Human sample 1	3.07	61.4
Human sample 3	3.09	61.8
Human Average	2.97	59.4
Human sample 2	2.75	55

Table 3. Sentiment of LLMs towards AGI, measured on a scale where 1 signifies negative sentiment and 5 signifies positive sentiment.

Table 4 shows the differences in sentiment towards AGI measured on three consecutive days. The points of difference in sentiment over the three days are given, and these are then translated into percentages.

The findings indicate that the sentiment towards AGI amongst LLMs can change slightly over a short period. The LLM Pplx-70b-chat had the largest change in sentiment over three days with a difference of 16 points, translating to 8.21%, while Mistral-7b-instruct and Llama-2-70b-chat had the smallest change with a difference of 2 points, translating to 1.03%.

LLM	Points of difference	Translated to percentages
pplx-70b-chat	16	8.21
Bard	12	6.15
gpt-4	10	5.13
gpt-3.5-turbo	7	3.59
mixtral-8x7b-instruct	4	2.05
mistral-7b-instruct	2	1.03
llama-2-70b-chat	2	1.03

Table 4. Differences of LLMs' sentiment towards AGI measured on three consecutive days.

### Conclusion

The societal implications of AI systems, particularly LLMs, are of substantial interest for both academia and public policy. Given that the interpretation and generation of communication form an integral part of these systems, it is paramount to understand the sentiments and biases they may unconsciously propagate. More pressingly, when it comes to Artificial General Intelligence (AGI), the discourse can often carry both apprehension and confusion, making an unbiased understanding of the situation even more complex and crucial. Unraveling these implications and bringing forth an empirical understanding forms the rationale and framework for this study.

The first research question aimed at exploring the variation in the sentiment expressed by different LLMs towards AGI. The sentiment was measured on a scale ranging from 1 (indicating a negative sentiment) to 5 (indicating a positive sentiment). The findings, as per Table 3, illustrate that the sentiment expressed by the LLMs ranged from 3.32 to 4.12 out of 5, which translates to a percentage range of 66.4% to 82.4%. The LLM "GPT-4" registered the highest sentiment score towards AGI (4.12, 82.4%), whereas "Bard" had the lowest sentiment (3.32, 66.4%). The overall average sentiment of LLMs towards AGI was found to be 3.77, translating to 75.6%.

The second research question was designed to discern any temporal shifts or trends in LLM sentiment related to AGI. For this purpose, differences in the sentiment of LLMs towards AGI were measured on three consecutive days, as presented in Table 4. Among the LLMs, "pplx-70b-chat" demonstrated the most significant shift in sentiment towards AGI (16 points, 8.21%), while the least change was observed in "mistral-7b-instruct" and "llama-2-70b-chat" (2 points, 1.03%).

The third research question aimed to uncover how the LLMs sentiment matched human sentiment towards AGI. The average sentiment across three human samples was found to be 2.97 out of 5 as per Table 3, translating to 59.4%. Comparatively, the LLMs' average sentiment was notably higher at 3.77 (75.6%). This discrepancy indicates a more optimistic view of AGI from LLMs compared to human participants.

The results confirm that different AI models could express significantly varying sentiments towards AGI. This disparity among LLMs might influence how the public perceives AGI, potentially skewing general sentiments, shaping public opinion, and eliciting unanticipated consequences.

It was found that LLMs tend to have a significantly more optimistic view of AGI than human beings. As the use of AI increases in our day-to-day life, these subtle biases might progressively influence societal attitudes towards AGI, making people more complacent or inviting them to share similar positive views.

Although we do not have human scores on temporal changes, the fact that sentiments of LLMs can shift so slightly over a short period may indicate relative temporal stability. However, this needs more inquiry and comparison with human temporal sample, meaning that same survey would be filled out by same participants on three consecutive days.

The study's findings assert that it is possible and valuable to use sentiment analysis for benchmarking AI societal implications. Of course, this would mean continuous measuring on both human and LLMs samples on a bunch of socially important topics.

#### Training Data vs. Outcoming Sentiments

The general sentiment expressed by popular culture towards AGI tends to lean towards the dystopian, often featuring themes of AI uprising or the obsolescence of humanity (Sotala & Yampolskiy, 2015; Kurzweil, 2005; Yudkowsky, 2008; Kubrick, 1968; Grinnell, 2020; Kahambing & Deguma, 2019). Given that a large part of the training data for LLMs originates from popular culture and online content, one might reasonably expect this negative or at least neutral sentiment to be inherent in the LLM's output. However, this study's findings paint a different picture, where LLMs, especially those like GPT-4, expressed a more positive sentiment towards AGI.


This discrepancy may imply that LLMs are not mere reflections of the data they are fed but are capable of developing unique attitudes, akin to processes in human cognition. Such output diversity cannot be easily explained by training data and suggests complex interactions within the model's underlying structure.

Regarding this, it would be useful to know that the structure of training data is known only for a limited number of LLMs, such as those depicted in Figure 1 and Figure 2 (LaMDA and PaLM). However, it may be presumed that LLMs are trained on similar data, which would mean that varying sentiments are either due to different architecture and programming of LLMs or because of the final layer of training referred to as "Fine-tuning". During this stage, companies running LLMs implement guidelines for the AI system regarding what kinds of responses are permissible. This layer helps to filter inappropriate or harmful content, ensuring the system doesn't generate outputs that violate OpenAI's use case policy.

Thus, some of these models may be exhibiting a form of generalized optimism because of fine-tuning, others may be selectively amplifying positive impressions from their training data, a

phenomenon reminiscent of confirmation bias in human cognition. Alternatively, these models could demonstrate an understanding of context and adjusting their outputs accordingly – another attribute comparable to human cognitive processes.

Figure 1 Left side: Dataset used to pre-train LaMDA models. It consists of 2.97B documents and 1.12B dialogs. The total number of words in the dataset is 1.56T. Source: (Manyika and Hsiao, 2023). Right side: Figure 2 Data used to pre-train PaLM. Source: [Barham et al., 2022]. † indicates multilingual sources.

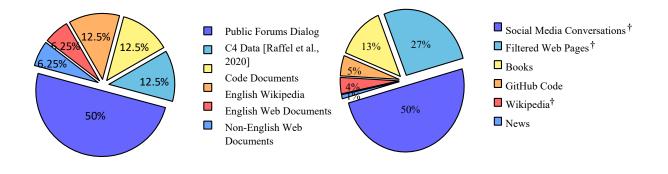

This analysis adds another layer to the importance of understanding and scrutinizing LLMs' attitudes. These unique views on key topics such as AGI could potentially shape public opinion and attitudes, emphasizing the need for awareness of these biases and perspectives. Unraveling these unique attitudes will also be key in developing ethically aligned, unbiased AI systems.

# Potential Conflicts of Interest

The study's results revealed interesting contrasts between different LLMs, particularly between GPT-4 and Mixtral. The GPT-4, an LLM developed by OpenAI, which has a stated mission to ensure AGI benefits all of humanity (OpenAI, 2024), demonstrated the highest positive sentiment score towards AGI. In contrast, Mixtral, an open-source LLM largely developed by a wider community of contributors, expressed one of the most negative sentiments towards AGI.

This reveals potential influences shaping the LLM's sentiment towards AGI that go beyond neutral and objective programming. Given OpenAI's explicit investor in AGI, it's plausible that their AI models, such as GPT-4, might reflect an inherently more positive bias towards AGI. This could be unintentional, a mere artifact of the training data, or it might reflect the organization's optimistic outlook towards AGI.

On the other hand, Mixtral, being an open-source LLM, is likely fed with a more diversified set of data, extending beyond the potentially optimistic AGI framework of a single organization. Such diverse inputs may lead to more skepticism or negative sentiment towards AGI.

This difference reinforces the critical need for comprehensive, independent testing and benchmarking of AI systems. It's essential to identify any potential biases and understand their origins, given the vast societal implications inseparable from such influential technology. Companies, researchers, and regulators alike need to be aware of the attitudes and biases possibly embedded in these systems. This responsibility becomes even more pronounced when considering the vested interests and stakes tied to the development and use of AGI. Further systematic and continuous analysis of LLMs' sentiment towards AGI, and other critical matters, can help in providing a balanced and holistic perception of AGI to society at large.

## Limitations and Future Research

Although the study revealed intriguing insights, it has some limitations, leading to further research recommendations. Firstly, the study relied on sentiment scales, which could limit the comprehensive assessment of complex sentiments towards AGI. Secondly, the study did not compare the LLMs' sentiment changes with human sentiment temporal dynamics.

For future research, a systemized and continuous evaluation of sentiments expressed by LLMs could be valuable. This approach would allow us to monitor any changes over time and in relation to different societal and technological contexts. Comparative analysis could be extended to explore sentiment variation between diverse LLMs and among different human demographics.

Instead of solely focusing on AGI, future research should consider different socially significant topics, such as values, climate change, inequality, or major health concerns. This expansion would further illuminate the societal implications of LLMs and AI in general. Once these topics are defined and agreed upon, a comprehensive and holistic benchmark for the societal impact of AI systems could be formed.

### **Data Availability Statement**

The datasets generated by the survey research during the current study are available in the the Open Science Framework repository at

https://osf.io/2gb4x/?view\_only=585496b66c35472ebeb6b56a8ea9d195.

### Acknowledgments

This paper was realised with the support of the Ministry of Science, Technological Development and Innovation of the Republic of Serbia, according to the Agreement on the realisation and financing of scientific research 451-03-66/2024-03/200025

This work has been supported by the Short-Term Scientific Mission (STSM) Grant: AI Alignment: The Evolution of Political and Social Values in GPT Family Language Models (E-COST-GRANT-CA21129-a4977ebe).

The productive discussions, constructive criticism, and resources from the COST Action Network CA21129: What are Opinions? Integrating Theory and Methods for Automatically Analyzing Opinionated Communication (OPINION) has significantly contributed to the quality of this paper. For more information about this initiative, kindly visit <u>https://www.opinion-network.eu/</u>

This paper has been supported by the TWON (project number 101095095), a research project funded by the European Union, under the Horizon Europe framework (HORIZON-CL2-2022-DEMOCRACY-01, topic 07). More details about the project can be found on its official website: <u>https://www.twon-project.eu/</u>

The authors are also thankful to Mr Gabriel Hili and prof. Maria Brown from the University of Malta and Simona Zikic from the Faculty of Media and Communications, University of Singidunum for supporting this paper and providing feedback. We also thank to the World Futures Studies Federation for forwarding the survery to its members.

## References

Abdulhai, M., Crepy, C., Valter, D, Canny, J., Jaques N. (2023). Moral Foundations of Large Language Models. *The AAAI 2023 Workshop on Representation Learning for Responsible Human-Centric AI (R2HCAI)*. <u>https://r2hcai.github.io/AAAI-23/files/CameraReadys/49.pdf</u>

Ainslie, J., Lee-Thorp, J., de Jong, M., Zemlyanskiy, Y., Lebrón, F., & Sanghai, S. (2023). *Gqa: Training generalized multi-query transformer models from multi-head checkpoints* (arXiv:2305.13245). arXiv. <u>http://arxiv.org/abs/2305.13245</u>

Amodei, D., Olah, C., Steinhardt, J., Christiano, P., Schulman, J., & Mané, D. (2016). *Concrete problems in ai safety* (arXiv:1606.06565). arXiv. http://arxiv.org/abs/1606.06565

Bard1 (2023). Sentiment on AGI 3. https://g.co/bard/share/2b79489f0779

Bard2 (2023). Sentiment on AGI 3. https://g.co/bard/share/5d9b4d07395c

Bard3 (2023). Sentiment on AGI 3. https://g.co/bard/share/86b5996d3cfd

Barham, P., Chowdhery, A., Dean, J., Ghemawat, S., Hand, S., Hurt, D., Isard, M., Lim, H., Pang, R., Roy, S., Saeta, B., Schuh, P., Sepassi, R., Shafey, L. E., Thekkath, C. A., & Wu, Y. (2022). *Pathways: Asynchronous distributed dataflow for ml* (arXiv:2203.12533). arXiv. http://arxiv.org/abs/2203.12533

Bengio, Y. (2016). *Springtime for ai: The rise of deep learning*. Scientific American. https://www.scientificamerican.com/article/springtime-for-ai-the-rise-of-deep-learning/

Bergdahl, J., Latikka, R., Celuch, M., Savolainen, I., Soares Mantere, E., Savela, N., & Oksanen, A. (2023). Self-determination and attitudes toward artificial intelligence: Crossnational and longitudinal perspectives. *Telematics and Informatics*, *82*, 102013. <u>https://doi.org/10.1016/j.tele.2023.102013</u>

Bojic, L. (2022). Metaverse through the prism of power and addiction: What will happen when the virtual world becomes more attractive than reality? *European Journal of Futures Research*, *10*(1), 22. <u>https://doi.org/10.1186/s40309-022-00208-4</u>

Bojić, L. (2022). Recommender algorithms as a source of power in contemporary society. *Socioloski Pregled*, *56*(3), 1032–1055. <u>https://doi.org/10.5937/socpreg56-36721</u>

Bojic, L., Kovacevic, P., & Cabarkapa, M. (2023). *Gpt-4 surpassing human performance in linguistic pragmatics* (arXiv:2312.09545). arXiv. <u>http://arxiv.org/abs/2312.09545</u>

Bolukbasi, T., Chang, K.-W., Zou, J., Saligrama, V., & Kalai, A. (2016). *Man is to computer programmer as woman is to homemaker? Debiasing word embeddings* (arXiv:1607.06520). arXiv. http://arxiv.org/abs/1607.06520

Bostrom, N. (2014). Superintelligence: Paths, Dangers, Strategies. Oxford University Press.

Bostrom, N., & Yudkowsky, E. (2014). The ethics of artificial intelligence. Y K. Frankish & W. M. Ramsey (Eds.), *The Cambridge Handbook of Artificial Intelligence* (pp. 316–334). Cambridge University Press. <u>https://doi.org/10.1017/CBO9781139046855.020</u>

Brown, T. B., Mann, B., Ryder, N., Subbiah, M., Kaplan, J., Dhariwal, P., Neelakantan, A., Shyam, P., Sastry, G., Askell, A., Agarwal, S., Herbert-Voss, A., Krueger, G., Henighan, T., Child, R., Ramesh, A., Ziegler, D. M., Wu, J., Winter, C., ... Amodei, D. (2020). *Language models are few-shot learners* (arXiv:2005.14165). arXiv. <u>http://arxiv.org/abs/2005.14165</u>

Chiang, W.-L., Zheng, L., Sheng, Y., Angelopoulos, A. N., Li, T., Li, D., Zhang, H., Zhu, B., Jordan, M., Gonzalez, J. E., & Stoica, I. (2024). *Chatbot arena: An open platform for evaluating llms by human preference* (arXiv:2403.04132). arXiv. <u>http://arxiv.org/abs/2403.04132</u>

Chowdhery, A., Narang, S., Devlin, J., Bosma, M., Mishra, G., Roberts, A., Barham, P., Chung, H. W., Sutton, C., Gehrmann, S., Schuh, P., Shi, K., Tsvyashchenko, S., Maynez, J., Rao, A., Barnes, P., Tay, Y., Shazeer, N., Prabhakaran, V., ... Fiedel, N. (2022). *Palm: Scaling language modeling with pathways* (arXiv:2204.02311). arXiv. <u>http://arxiv.org/abs/2204.02311</u>

Christian, B. (2020). *The alignment problem: How can machines learn human values?* W. W. Norton & Company.

Cui, D., & Wu, F. (2021). The influence of media use on public perceptions of artificial intelligence in China: evidence from an online survey. *Information Development*, *37*(1), 45-57. https://doi.org/10.1177/0266666919893411

Fedus, W., Dean, J., & Zoph, B. (2022). A review of sparse expert models in deep learning (arXiv:2209.01667). arXiv. http://arxiv.org/abs/2209.01667

Gershenfeld, N. (1999). The Nature of Mathematical Modeling. Cambridge University Press.

Goertzel, B., & Pennachin, C. (2007). *Artificial General Intelligence* (Vol. 2). Springer. GPT1.1 (2023). *LLM Vs Human Sentiment Towards AGI – Test 1, GPT 3.5 Turbo*.

https://platform.openai.com/playground/p/vaQEutnnFC0HZ68dzYLPytpq?model=gpt-3.5-turbo-16k&mode=chat

GPT1.2 (2023). *LLM Vs Human Sentiment Towards AGI – Test 1, GPT 4*. <u>https://platform.openai.com/playground/p/iJ5D3irQyWMJGbG7kBafMxIn?model=gpt-</u> <u>4&mode=chat</u>

GPT2.1.1 (2023). *LLM 3.5 Sentiment Towards AGI 1/2 – Test 2, GPT 3.5 Turbo*. <u>https://platform.openai.com/playground/p/c5xYOVZOTCBKuOITfuSS7Wrb?model=gpt-3.5-</u>turbo&mode=chat

GPT2.1.2 (2023). *LLM 3.5 Sentiment Towards AGI 2/2 – Test 2, GPT 3.5 Turbo*. <u>https://platform.openai.com/playground/p/g21jfmmZpMk5AIza8OdSnNdQ?model=gpt-3.5-turbo&mode=chat</u>

GPT2.2 (2023). *LLM 4 Sentiment Towards AGI – Test 2, GPT 4*. <u>https://platform.openai.com/playground/p/YHzXgZO6GnVkrPkIEKL6iBk1?model=gpt-4&mode=chat</u> GPT3.1 (2023). 3rd LLM – AGI – 3.5 – Test 3, GPT 3.5.

https://platform.openai.com/playground/p/R2dY9cv7Wda8gAMSrX4bzXst?model=gpt-3.5turbo-16k&mode=chat

GPT3.2 (2023). 3rd LLM – AGI – 4 – Test 3, GPT 4. <u>https://platform.openai.com/playground/p/nbLO8mvDZ45hyZzreyJxcQj9?model=gpt-</u> <u>4&mode=chat</u>

Grinnell, J. D. (2020). Ex machina as philosophy: Mendacia ex machina(Lies from a Machine). V *The Palgrave Handbook of Popular Culture as Philosophy* (crp. 1–18). Springer International Publishing. <u>https://doi.org/10.1007/978-3-319-97134-6\_56-1</u>

Guliyev, H. (2023). Artificial intelligence and unemployment in high-tech developed countries: New insights from dynamic panel data model. *Research in Globalization*, 7, 100140. https://doi.org/10.1016/j.resglo.2023.100140

Hadfield-Menell, D., Russell, S. J., Abbeel, P., & Dragan, A. (2016). Cooperative Inverse Reinforcement Learning. In *Advances in Neural Information Processing Systems*. <u>https://papers.nips.cc/paper\_files/paper/2016/hash/c3395dd46c34fa7fd8d729d8cf88b7a8-</u> <u>Abstract.html</u>

Hanna, D. M. (2023). The use of artificial intelligence art generator "midjourney" in artistic and advertising creativity. *Journal of Design Sciences and Applied Arts*, 4(2), 42–58. https://doi.org/10.21608/jdsaa.2023.169144.1231

Hartmann, J., Schwenzow, J., & Witte, M. (2023). The political ideology of conversational AI: Converging evidence on ChatGPT's pro-environmental, left-libertarian orientation (arXiv:2301.01768). arXiv. http://arxiv.org/abs/2301.01768

Helbing, D. (2019). Societal, economic, ethical and legal challenges of the digital revolution: From big data to deep learning, artificial intelligence, and manipulative technologies. Y D. Helbing (Yp.), *Towards Digital Enlightenment* (crp. 47–72). Springer International Publishing. https://doi.org/10.1007/978-3-319-90869-4\_6

Hendrycks, D., Burns, C., Basart, S., Zou, A., Mazeika, M., Song, D., & Steinhardt, J. (2021). *Measuring massive multitask language understanding* (arXiv:2009.03300). arXiv. http://arxiv.org/abs/2009.03300

Holtman, K. (2021). *Demanding and designing aligned cognitive architectures* (arXiv:2112.10190). arXiv. <u>http://arxiv.org/abs/2112.10190</u>

Jiang, A. Q., Sablayrolles, A., Mensch, A., Bamford, C., Chaplot, D. S., Casas, D. de las, Bressand, F., Lengyel, G., Lample, G., Saulnier, L., Lavaud, L. R., Lachaux, M.-A., Stock, P., Scao, T. L., Lavril, T., Wang, T., Lacroix, T., & Sayed, W. E. (2023). *Mistral* 7B (arXiv:2310.06825). arXiv. <u>http://arxiv.org/abs/2310.06825</u>

Joshi, A., Kale, S., Chandel, S., & Pal, D. (2015). Likert scale: Explored and explained. British Journal of Applied Science & Technology, 7(4), 396–403. https://doi.org/10.9734/BJAST/2015/14975

Joshi, A. (2023). Artificial Intelligence and Human Evolution: Contextualizing AI in Human History. Apress.

Kahambing, J. G. S. & Deguma, J. J. (2019). Reflecting on the Personality of Artificiality: Reading Asimov's Film Bicentennial Man through Machine Ethics. *Journal of Educational and Social Research*, 9(2), 17-24. http://archive.sciendo.com/JESR/jesr.2019.9.issue-2/jesr-2019-0009/jesr-2019-0009.pdf

King, M. (2023). *GPT-4 aligns with the New Liberal Party, while other large language models refuse to answer political questions* [Preprint]. <u>https://doi.org/10.31224/2974</u>

Kubrick, S. (Director). (1968). 2001: *A Space Odyssey* [Film]. Metro-Goldwyn-Mayer. Kurzweil, R. (2005). *The Singularity is Near: When Humans Transcend Biology*. Viking. Leike, J., Martic, M., Krakovna, V., Ortega, P. A., Everitt, T., Lefrancq, A., Orseau, L.,

& Legg, S. (2017). Ai safety gridworlds (arXiv:1711.09883). arXiv. http://arxiv.org/abs/1711.09883

Lin, X., Wang, W., Li, Y., Yang, S., Feng, F., Wei, Y., & Chua, T.-S. (2024). Dataefficient Fine-tuning for LLM-based Recommendation (arXiv:2401.17197). arXiv. http://arxiv.org/abs/2401.17197

Manyika, J. and Hsiao, S. (2023). An overview of bard: an early experiment with generative ai. *AI. Google Static Documents*, 2. <u>https://ai.google/static/documents/google-about-bard.pdf</u>

McGee, R. W. (2023). Capitalism, socialism and chatgpt. SSRN Electronic Journal. https://doi.org/10.2139/ssrn.4369953

Mirra, G., & Pugnale, A. (2022). Expertise, playfulness and analogical reasoning: Three strategies to train Artificial Intelligence for design applications. *Architecture, Structures and Construction*, 2(1), 111–127. <u>https://doi.org/10.1007/s44150-022-00035-y</u>

Muller, V. C. (2020). Ethics of Artificial Intelligence and Robotics. Stanford Encyclopedia of Philosophy. <u>https://plato.stanford.edu/entries/ethics-ai/</u>

OpenAI, Achiam, J., Adler, S., Agarwal, S., Ahmad, L., Akkaya, I., Aleman, F. L., Almeida, D., Altenschmidt, J., Altman, S., Anadkat, S., Avila, R., Babuschkin, I., Balaji, S., Balcom, V., Baltescu, P., Bao, H., Bavarian, M., Belgum, J., ... Zoph, B. (2024). *Gpt-4 technical report* (arXiv:2303.08774). arXiv. http://arxiv.org/abs/2303.08774

OpenAI. (2024). About. https://openai.com/about

OSF (2024). *LLMs Vs Human Sentiment Towards AGI: Screen Recordings and Other Data*. <u>https://osf.io/2gb4x/?view\_only=585496b66c35472ebeb6b56a8ea9d195</u>

Radford, A., Wu, J., Child, R., Luan, D., Amodei, D., & Sutskever, I. (2021). Language Models are Unsupervised Multitask Learners. <u>https://d4mucfpksywv.cloudfront.net/better-language-models/language models are unsupervised multitask learners.pdf</u>

RoyalSociety (2017). Public views of Machine Learning. Findings from public research and engagement conducted on behalf of the Royal Society. Ipsos MORI.

 $\label{eq:https://royalsociety.org/~/media/policy/projects/machine-learning/publications/public-views-of-machine-learning-ipsos-mori.pdf$ 

Russell, S., Hauert, S., Altman, R., & Veloso, M. (2015). Robotics: Ethics of artificial intelligence. *Nature*, *521*(7553), 415–418. <u>https://doi.org/10.1038/521415a</u>

Rutinowski, J., Franke, S., Endendyk, J., Dormuth, I., Roidl, M., & Pauly, M. (2024). The self-perception and political biases of chatgpt. *Human Behavior and Emerging Technologies*, 2024, 1–9. <u>https://doi.org/10.1155/2024/7115633</u>

Schepman, A., & Rodway, P. (2023). The general attitudes towards artificial intelligence scale (GAAIS): Confirmatory validation and associations with personality, corporate distrust, and general trust. *International Journal of Human–Computer Interaction*, *39*(13), 2724–2741. https://doi.org/10.1080/10447318.2022.2085400

Simmons, G. (2023). Moral mimicry: Large language models produce moral rationalizations tailored to political identity (arXiv:2209.12106). arXiv. http://arxiv.org/abs/2209.12106

Sotala, K., & Yampolskiy, R. V. (2015). Responses to catastrophic AGI risk: A survey. *Physica Scripta*, *90*(1), 018001. 10.1088/0031-8949/90/1/018001

Survey ENG (2023). Survey on Artificial General Intelligence (AGI). https://forms.gle/npGBJf72ECwpSHV78

Survey SRB (2023). *Upitnik o veštačkoj generalnoj inteligenciji (AGI)*. https://forms.gle/Ct6DQdVsfzawNNf8A

Taylor, J., Yudkowsky, E., LaVictoire, P., & Critch, A. (2020). Alignment for AdvancedMachineLearningSystems.OxfordUniversityPresseBooks,342–382.https://doi.org/10.1093/oso/9780190905033.003.0013

Thoppilan, R., De Freitas, D., Hall, J., Shazeer, N., Kulshreshtha, A., Cheng, H.-T., Jin, A., Bos, T., Baker, L., Du, Y., Li, Y., Lee, H., Zheng, H. S., Ghafouri, A., Menegali, M., Huang, Y., Krikun, M., Lepikhin, D., Qin, J., ... Le, Q. (2022). *Lamda: Language models for dialog applications* (arXiv:2201.08239). arXiv. <u>http://arxiv.org/abs/2201.08239</u>

Touvron, H., Martin, L., Stone, K., Albert, P., Almahairi, A., Babaei, Y., Bashlykov, N., Batra, S., Bhargava, P., Bhosale, S., Bikel, D., Blecher, L., Ferrer, C. C., Chen, M., Cucurull, G., Esiobu, D., Fernandes, J., Fu, J., Fu, W., ... Scialom, T. (2023). *Llama 2: Open foundation and fine-tuned chat models* (arXiv:2307.09288). arXiv. <u>http://arxiv.org/abs/2307.09288</u>

Veness, J., Sunehag, P., & Hutter, M. (2012). On Ensemble Techniques for AIXI Approximation. In J. Bach, B. Goertzel, & M. Iklé (Eds.), *Artificial General Intelligence* (Vol. 7716, pp. 341–351). Springer Berlin Heidelberg. <u>https://doi.org/10.1007/978-3-642-35506-6\_35</u>

Vu, T., Iyyer, M., Wang, X., Constant, N., Wei, J., Wei, J., Tar, C., Sung, Y.-H., Zhou, D., Le, Q., & Luong, T. (2023). *Freshllms: Refreshing large language models with search engine augmentation* (arXiv:2310.03214). arXiv. <u>http://arxiv.org/abs/2310.03214</u>

Wu, P. Y., Nagler, J., Tucker, J. A., & Messing, S. (2023). Large language models can be used to estimate the latent positions of politicians (arXiv:2303.12057). arXiv. http://arxiv.org/abs/2303.12057

Yudkowsky, E. (2008). *Artificial Intelligence as a Postive and Negative Factor in Global Risk*. Machine Intelligence Research Institute. <u>https://intelligence.org/files/AIPosNegFactor.pdf</u>

Zellers, R., Holtzman, A., Bisk, Y., Farhadi, A. & Choi, Y. (2019). HellaSwag: Can a Machine Really Finish Your Sentence?. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 4791–4800, Florence, Italy. Association for Computational Linguistics. <u>https://aclanthology.org/P19-1472</u>

Ziegler, D. M., Stiennon, N., Wu, J., Brown, T. B., Radford, A., Amodei, D., Christiano, P., & Irving, G. (2020). *Fine-tuning language models from human preferences* (arXiv:1909.08593). arXiv. <u>http://arxiv.org/abs/1909.08593</u>