

# OpenTable data with multi-criteria ratings

Yong Zheng

Department of Information Technology & Management  
Illinois Institute of Technology, Chicago, IL 60661, USA  
yzheng66@iit.edu

**Abstract.** With the development of recommender systems (RSs), several promising systems have emerged, such as context-aware RS, multi-criteria RS, and group RS. Multi-criteria recommender systems (MCRSs) are designed to provide personalized recommendations by considering user preferences in multiple attributes or criteria simultaneously. Unlike traditional RSs that typically focus on a single rating, these systems help users make more informed decisions by considering their diverse preferences and needs across various dimensions. In this article, we release the OpenTable data set which was crawled from OpenTable.com. The data set can be considered as a benchmark data set for multi-criteria recommendations.

**Keywords:** recommender system · data set · multi-criteria · OpenTable

## 1 Introduction

Recommender systems (RSs) are advanced algorithms that help users discover products or services that align with their preferences by analyzing historical data and user behavior. Multi-criteria recommender systems (MCRSs) [1,4] can further take user preferences in multiple aspects of the items (i.e., criteria) into consideration. For instance, in the context of ratings from OpenTable.com, as shown by Figure 1, MCRSs can consider user preferences across various criteria, such as food quality, service, ambience, and value, to generate personalized restaurant recommendations. By considering these multiple factors, MCRSs enhance user satisfaction and decision-making, providing tailored suggestions that reflect the diverse needs of diners.

Accordingly, the rating data on OpenTable.com can be shown by Table 1. We may want to predict how user  $U_3$  give ratings to the item  $T_1$ . In this example the column “rating” refers to a user’s overall rating on the item. The values in the last three columns represent a user’s ratings on an item from the perspective of multiple criteria, including food quality, satisfaction of services and ambience.

In the area of MCRSs, there are several well-known data sets, such as the ratings from TripAdvisor.com where we have ratings on hotels from the perspective of room size, room cleanliness, location, check-in experiences and business services, and the rating data from Yahoo!Movies where we have users’ ratings on movies in view of visual pictures, quality of story, music effects, and

## Shawn, how was your experience at Sushi Hai

Rate your dining experience (required)

Reservation made on 12/12/2019

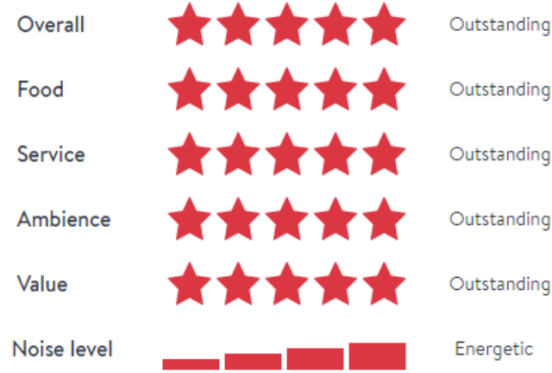


Fig. 1. Example of Ratings on OpenTable.com

User	Item	Rating	Food	Service	Ambience
$U_1$	$T_3$	4	4	3	4
$U_2$	$T_2$	3	3	3	3
$U_3$	$T_1$	?	?	?	?

Table 1. Example of Multi-Criteria Rating Data

so forth. Though OpenTable.com is another example of real-world applications with multi-criteria ratings, there are no open data sets available for research.

## 2 The OpenTable Data Set


### 2.1 Data Collections

We utilized Web crawling to acquire restaurant ratings from OpenTable.com, where both the overall rating and multi-criteria ratings are included. The major challenge in the process of data collection is identifying users. There are several anonymous ratings given by users. Namely, we are not able to identify a specific user or UserID from the Webpages. As a result, it is difficult to acquire dense ratings.

## 2.2 Data Description and Statistics

The OpenTable data set has been released on Kaggle.com<sup>1</sup> and IEEE DataPort<sup>2</sup>. There are 19,536 ratings given by 1,309 users on 91 restaurants. In addition to the overall ratings, we have users' ratings on the restaurants from 4 criteria, including *food* quality, satisfaction of *service* and *ambience*, and the overall *value* of the picks. The ratings were given in the scale of 1 to 5.

In terms of the rating distributions on these columns related to user preferences, we present the distribution by using Figure 2.

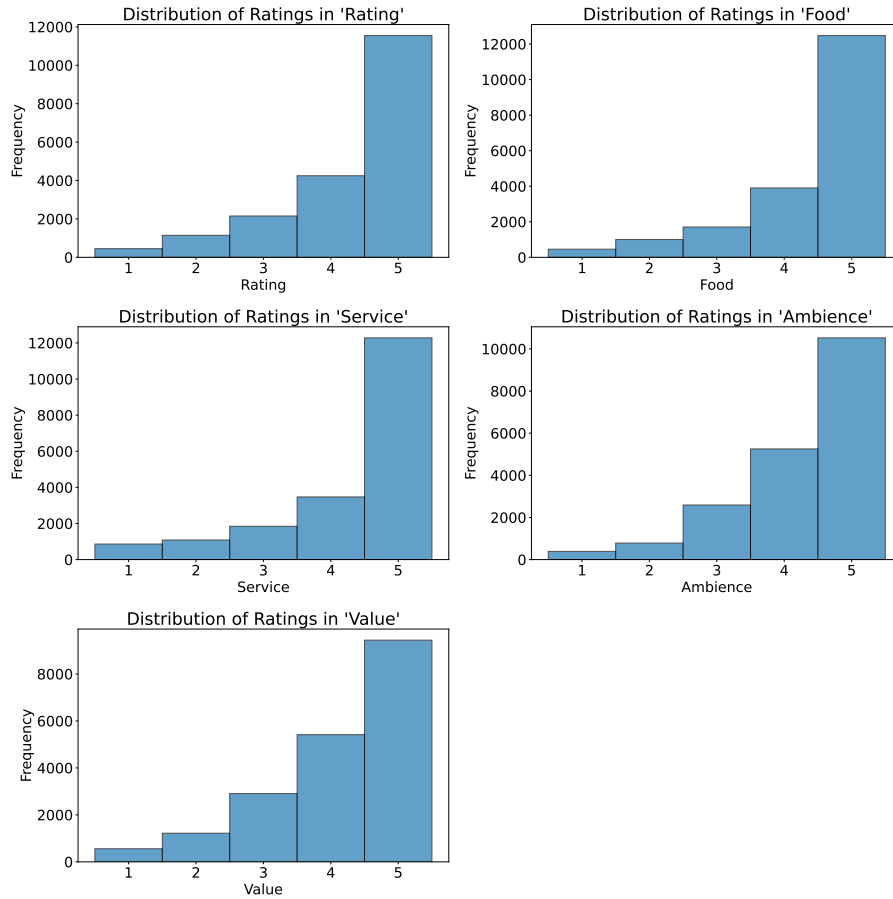

**Fig. 2.** Rating Distributions

<sup>1</sup> <https://www.kaggle.com/datasets/irecsys/opentable-data-with-multi-criteria-ratings>

<sup>2</sup> <https://ieee-dataport.org/documents/opentable-data-multi-criteria-ratings>

The rating sparsity is 83.6%. In terms of the number of ratings per user, the average number is 14.9 and median is 3. Regarding the number of ratings per restaurant, the average and median values are 214 and 250, respectively.

### 2.3 Data Usage

This data set can be used for traditional recommendations by utilizing the overall rating only. It can serve as a benchmark data set for MCRSs by using both the overall rating and the multi-criteria ratings. We have examined different MCRSs algorithms over this data set in our previous work [2,4,3] by using the MCreckit library [5].

## References

1. Adomavicius, G., Manouselis, N., Kwon, Y.: Multi-criteria recommender systems. In: Recommender systems handbook, pp. 769–803. Springer (2010)
2. Zheng, Y., Wang, D.: Multi-criteria ranking: Next generation of multi-criteria recommendation framework. *IEEE Access* **10**, 90715–90725 (2022)
3. Zheng, Y., Wang, D.X.: Hybrid multi-criteria preference ranking by subsorting. arXiv preprint arXiv:2306.11233 (2023)
4. Zheng, Y., Wang, D.X.: Multi-criteria ranking by using relaxed pareto ranking methods. In: Adjunct Proceedings of the 31st ACM Conference on User Modeling, Adaptation and Personalization. pp. 81–85 (2023)
5. Zheng, Y., Wang, D.X., Ruan, Q.: MCreckit: An open-source library for multi-criteria recommendations. In: 2024 IEEE/WIC International Conference on Web Intelligence and Intelligent Agent Technology (WI-IAT) (2024)