Deep Learning for Pathological Speech: A Survey

Shakeel A. Sheikh, Md. Sahidullah and Ina Kodrasi, Senior Member, IEEE

Abstract—Advancements in spoken language technologies for neurodegenerative speech disorders are crucial for meeting both clinical and technological needs. This overview paper is vital for advancing the field, as it presents a comprehensive review of state-of-the-art methods in pathological speech detection, automatic speech recognition, pathological speech intelligibility enhancement, intelligibility and severity assessment, and data augmentation approaches for pathological speech. It also highlights key challenges, such as ensuring robustness, privacy, and interpretability. The paper concludes by exploring promising future directions, including the adoption of multimodal approaches and the integration of graph neural networks and large language models to further advance speech technology for neurodegenerative speech disorders.

Index Terms—Pathological speech, neurodegenerative speech disorders, speech processing, deep learning.

I. INTRODUCTION

C PEECH production is a complex mechanism involving cognitive planning, coordinated muscle activity, and sound creation [1]. The process starts in the brain with the conceptualization of a message, followed by the organization of phonetic and prosodic plans such as rhythm and style. The motor cortex then orchestrates the activation of approximately 100 muscles, enabling the articulatory organs such as the tongue, lips, and jaw, to shape the vocal tract and produce specific sounds. The initial sound is generated in the larvnx, where air from the lungs causes the vocal folds to vibrate. These phonatory structures adjust voice quality and prosody, while the articulatory organs further refine the sound by altering the shape of the vocal tract. Finally, the resulting speech is emitted through the oral and nasal cavities. Given the intricate coordination required for this process, any disruption to these finely tuned mechanisms can severely impair communication.

Neurodegenerative disorders such as Parksinson's disease (PD), Amyotrophic Lateral Sclerosis (ALS), or Alzheimer's disease are leading causes of such disruptions [2]–[4]. These disorders impair the brain regions and motor systems responsible for initiating, planning, and controlling the movements needed for speech production, resulting in a variety of speech disorders such as dysarthria, aphasia, apraxia of speech, dysphonia, or stuttering [4]–[9]. Dysarthria and apraxia of speech, commonly seen in PD and ALS, are characterized by articulation deficiencies, vowel distortions, reduced loudness variation, hypernasality, or syllabification [4], [5]. Dysphonia, also frequent in PD and ALS, is marked by abnormal voice quality such as hoarseness and breathiness [6]. In contrast, aphasia typically presents as difficulties with word-finding,

sentence construction, and understanding spoken or written language, and is most commonly associated with Alzheimer's disease or other forms of dementia [8]. Lastly, stuttering, characterized by disruptions in the flow of speech such as repetitions or prolongations can also arise in neurodegenerative disorders like Parkinson's disease [9].

Because of increasing population numbers and aging, the prevalence of neurological disorders, and hence, of these various speech disorders, is also rapidly increasing. In 2019, the World Health Organization estimated that over 8.5 million people worldwide were living with PD [10], up from 6.1 million in 2016 [11] and 2.5 million in 1990 [11]. By 2040, this figure is projected to surpass 17 million [11]. Similarly, dementia affected more than 46 million people globally in 2015 and this figure is expected to rise to 131.5 million by 2050 [12]. The prevalence of ALS is also growing significantly, with cases anticipated to increase by nearly 70% between 2015 and 2040 [13]. This increasing prevalence of neurological disorders, and consequently of the associated speech disorders, underscores the need to prioritize speech disorders both in the context of clinical practice as well as in the context of speech-based technologies.

In clinical practice, diagnosing the presence of a speech disorder (i.e., discriminating between neurotypical and impaired speech) is crucial, since the presence of a disorder can be one of the earliest signs of neurodegenerative disorders [14]–[16]. Further, an accurate differential diagnosis of the speech disorder (e.g., discriminating between dysarthria and apraxia of speech) is also important, since it can provide clues about the underlying neuropathology [17], [18]. Additionally, monitoring speech characteristics such as severitys and intelligibility after diagnosis is essential for tracking disease progression and assessing the effectiveness of speech therapy interventions over time [2], [19]. Traditionally, clinicians conduct such evaluations through costly and time-consuming auditoryperceptual assessments as depicted in Fig. 1. However, because of the difficulty of detecting clinical-perceptual characteristics by ear (particularly in the presence of mild impairments) and because the clinical-perceptual characteristics of several speech disorders (e.g., of dysarthria and apraxia of speech) overlap, diagnosing the presence of a disorder and discriminating between various disorders is hard for non-expert clinicians and even expert inter-rater agreement can be low [20], [21]. In the context of speech-based technologies, patients with speech disorders often struggle to access and effectively use various virtual assistant tools like Cortana, Alexa, and Siri [22]. As speech disorders become more prevalent with neurodegenerative conditions, it is critical to prioritize both the diagnosis and treatment of these disorders in clinical practice, while also ensuring that patients with such impairments have equitable access to speech-based technologies. Addressing

Shakeel A. Sheikh and Ina Kodrasi are with Idiap Research Institute, Switzerland (e-mail: {shakeel.sheikh, ina.odrasi}@idiap.ch).

Md Sahidullah is with TCG CREST, Kolkata, India (e-mail: md.sahidullah@tcgcrest.org).

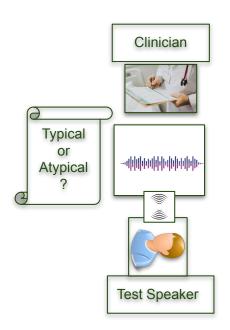


Fig. 1. Traditional auditory-perceptual assessment in clinical practice. The clinician listens to the (potential) patient speaker and assesses by ear the various characteristics of the speech.

these barriers could lessen the burden on the health care system and significantly improve the patients' quality of life and their ability to engage with everyday digital tools.

Aiming to assist the clinical diagnosis and treatment of patients suffering from neurodegenerative disorders, there has been a growing interest in the research community to develop automated and objective methods for pathological speech analysis as shown in Figure 2. These advanced technologies are designed to minimize bias, enhance diagnostic accuracy, and streamline the assessment process, ensuring greater efficiency and consistency. Clinicians can then use insights provided by the automatic models to organize therapeutic sessions accordingly, ensuring that the treatment addresses the specific impairments identified. Further, clinicians may perform additional manual acoustic analysis to gain further insights into the patient's speech patterns and impairments, providing complementary information to the automatic model's decision for a comprehensive therapeutic approach. Besides the clinical domain, efforts have been directed towards developing various speech-based technological applications aimed at pathological speakers, such as automatic speech recognition systems (ASRs) [23], speech synthesis systems [24]-[27] or intelligibility enhancement solutions [28]-[31]. To the best of our knowledge, there is currently no comprehensive survey paper discussing the research directions and challenges of this area both from a clinical as well as a technological perspective. Although there have been related works such as [32], they primarily provide an overview of acoustic-articulatory features in neurodegenerative disorders. Other studies such as [33]-[37] mainly focus on the discrimination between neurotypical

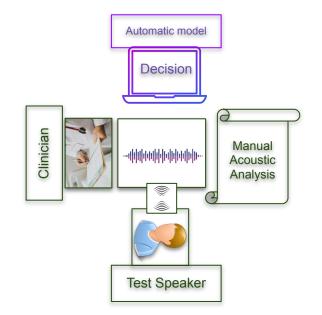


Fig. 2. Automatic pathological speech analysis system. The automatic model is trained to detect and analyze speech impairments. Clinicians may use the insights provided by the automatic model to organize therapeutic sessions accordingly. Additionally, they may perform manual acoustic analysis to gain further insights into the patient's speech patterns and impairments, providing complementary information to the automatic model's decision.

and impaired speech. In 2016, [38] discussed some of the wider challenges faced in the pathological speech domain. However, this work addresses only a limited set of challenges and is now somewhat outdated, given the rapid advancements in the field over the past decade. In contrast, as depicted in Figure 3, our work aims to fill this gap by providing an extensive review of the field encompassing pathological speech from various clinical and technological perspectives, such as automatic discrimination between neurotypical speech and speech disorders, ASR systems for pathological target speakers, enhancement systems aiming to enhance the intelligibility of pathological speech, severity and intelligibility assessment and data augmentation approaches.

The remainder of the paper is organized as follows. Section II provides a high level overview of the handcrafted acoustic features used in pathological speech analysis. Section III describes various accessible and non accessible pathological datasets employed in the literature. Section IV describes the different approaches to automatic pathological speech detection. Section V examines pathological speech in the context of ASR systems. Section VI discusses speech enhancement techniques aimed at improving pathological speech intelligibility. Section VII describes approaches for automatically estimating the severity and intelligibility of pathological speakers. Section VIII summarizes the various data augmentation methods used in automatic pathological speech systems. The robustness issues arising in this field are discussed in Section IX-A. Finally, Section X explores the interpretability of pathological speech models. In summary, our contributions are the following:

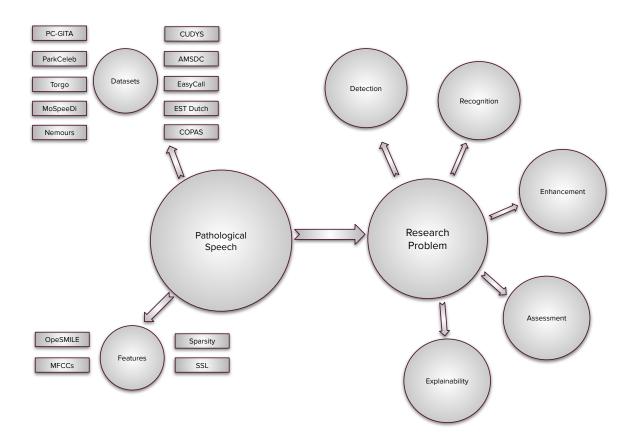


Fig. 3. Overview of Deep Learning for Pathological Speech: This framework leverages various input features and datasets processed through deep learning models for tasks including detection, recognition, enhancement, assessment and explainaibility of pathological speech. It employs a range of metrics to evaluate model performance, providing a comprehensive approach to improving speech impairment detection and treatment.

- We present the first comprehensive survey of automatic approaches for pathological speech from a clinical and technological perspectives ranging from detection, recognition, enhancement, assessment and interpretability.
- 2) We highlight current limitations in the field and propose several promising future directions for research in pathological speech processing.

II. PATHOLOGICAL SPEECH: ACOUSTIC CHARACTERISTICS AND REPRESENTATION

Pathological speech exhibits a range of acoustic anomalies, including deviations in pitch, loudness, vowel space reduction, and articulation [39], [40]. Additionally, it can lead to asymmetrical tension in the vocal folds, resulting in irregular vibrations and, consequently, an abnormal fundamental frequency. Excessively high or low fundamental frequency, combined with excessive vocal intensity, can exacerbate the severity of pathological voice conditions, producing characteristics such as shrillness, screechiness, hoarseness, or huskiness [41]. Moreover, patients (such as those diagnosed with PD) can also show inconsistent rhythmic structures in comparison to control groups under various auditory feedback conditions [42]

To capture such abnormalities as biomarkers for automatic pathological speech detection, researchers have employed various handcrafted acoustic features such as OpenSMILE [43], Mel-frequency cepstral coefficients (MFCCs) [44], or spectro-temporal sparsity features [45]. Further, various timefrequency representations such as the short-time Fourier transform (STFT) or the Mel spectrogram have also been directly exploited in combination with deep learning approaches to directly learn pathology-discriminant cues [46]. More recently, latent embeddings derived from self-supervised models have been used as more powerful representations of speech patterns and the various impairments [43], [47], [48]. It is important to note that a significantly larger set of features and representations have been employed to characterize disorders across various pathologies than the ones outlined above. However, here we focus on highlighting the most commonly utilized ones, which will be further elaborated upon in the following.

A. Handcrafted Acoustic Features

OpenSMILE: Among the various features used in pathological speech detection, OpenSMILE features have been widely explored in the literature in conjunction with traditional machine learning algorithms [31], [49]–[61]. The OpenSMILE feature set includes a 6552-dimensional feature vector that primarily consists of low-level audio features such as CHROMA, CENS, loudness, MFCCs, and other spectral features. In the context of pathological speech, these features can capture the subtle anomalies in speech patterns that are indicative of disorders. OpenSMILE's comprehensive feature

set allows for the analysis of prosodic elements like pitch, jitter, shimmer, and formant frequencies, which are crucial for identifying and differentiating various speech pathologies. However, OpenSMILE features are very general features that have been used for a variety of speech applications such as emotion recognition [62], speech recognition [63] and they are not specifically handcrafted to capture pathological cues, thus may not be the most suitable features for pathological speech analysis.

MFCCs: MFCCs have garnered significant attention in pathological speech detection due to their potential to characterize articulation deficiencies [64]–[72]. While MFCCs have demonstrated promising results, they exhibit high sensitivity to background noise and present challenges in real-time applications due to their complex nature and lack of interpretability.

Spectro-temporal sparsity: Since pathological speech can be breathy, semi-whispery, and is characterized by abnormal pauses and imprecise articulation, it can be expected that its spectro-temporal sparsity differs from the spectrotemporal sparsity of neurotypical speech. To characterize spectro-temporal sparsity, various sparsity-based features have been introduced in [45], [73]. Although such features have been shown to be discriminative of various speech disorders [45], [61], [73], [74], they are highly sensitive to environmental artefacts such as noise and reverberation.

B. Time-Frequency Representations

Input representations such as the STFT and its variants allow for the analysis of speech signals in both time and frequency domains, providing valuable insights into speech characteristics such as pitch, formant shifts, and spectral irregularities. The STFT is often employed due to its ability to capture dynamic changes in the signal over time, which is critical for identifying variations in speech patterns linked to speech disorders [25], [75]–[86]. Furthermore, wavelet transforms and the Continuous Wavelet Transform offer better time-frequency localization, which is especially beneficial for analyzing transient and non-stationary features of pathological speech [87].

C. Self Supervised Embeddings

Even though handcrafted acoustic features and timefrequency input representations have achieved promising results in the analysis of pathological speech, their performance remains limited. The current state-of-the-art input representations for pathological speech primarily consist of latent embeddings derived from self-supervised models such as wav2vec 2.0 (w2v2) [47], [61], [88]–[111]. These advanced models have proven to be more effective in capturing complex speech patterns and nuances, leading to improved performance in tasks like detection and recognition [48], [112], However, there is still ongoing research to further refine these embeddings and explore additional models to enhance their robustness and generalization across diverse pathological speech conditions [113]–[115].

III. PATHOLOGICAL SPEECH DATASETS

Datasets for pathological speech research remain scarce due to several inherent challenges in data collection. One of the primary difficulties is the sensitive nature of the population involved. Recruiting participants suffering from neurological disorders requires careful consideration of ethical and privacy concerns, as well as navigating the potential stigma associated with such disorders. Additionally, the physical and cognitive challenges faced by these individuals can complicate the process of obtaining high-quality speech recordings. Another key challenge is the variability in pathological speech patterns. Speech impairments can manifest in numerous ways and may vary widely across individuals, even within the same diagnostic category. This variability makes it difficult to create standardized protocols for data collection that ensure consistency and relevance across samples. Moreover, speech impairments may fluctuate over time, further complicating the process of capturing representative speech samples. When collecting datasets for pathological speech research, it is essential to prioritize inclusivity, ensuring a diverse representation of different speech disorders, age groups, and demographics. Additionally, data collection protocols should consider the comfort and cooperation of participants. Ethical considerations must also be at the forefront, ensuring informed consent and the protection of participant privacy. Lastly, it is important to design flexible and scalable collection methods that can capture a range of speech characteristics while maintaining consistent quality across diverse individuals and conditions. In the remainder of this section, we briefly review pathological datasets commonly used in the literature. Please note that due to restricted access to most of the pathological neurodegenrative datasets, we are unable to provide detailed information such as duration, number of male and female speakers, etc., for all of them. A summary of these datasets and their characteristics is presented in Table I.

TORGO [116]. The TORGO dataset contains speech recordings from English speaking subjects (controls and patients) and the corresponding three dimensional articulatory features. The patients suffer from ALS or Cerebral Palsy (CP). The dataset consists of seven (three females, four males) controls and eight (three females, five males) dysarthric speakers respectively.

PC-GITA [117]. The PC-GITA dataset is a Spanish dataset containing speech recordings from 50 controls and 50 patients suffering from PD. The two groups of speakers are age- and gender-matched, with 25 female and 25 male speakers in each group.

MoSpeeDi [118]. The MoSpeeDi dataset is a French dataset containing speech recordings from 466 controls and 138 patients suffering from various types of motor speech disorders such as dysarthria or apraxia of speech. While subgroups of age- and gender-matched controls and patients can be found within the database, the overall dataset is not age- and gender-matched.

Nemours [119]. The Nemours dataset is an English dataset containing speech recordings from 11 male speakers with varying degrees of dysarthria severity. This dataset includes

a total of 74 sentences and 814 short nonsense sentences.

CUDYS [120]. The Cantonese Dysarthric Speech Corpus (CUDYS) contains speech recordings from 5 controls and 11 dysarthric patients. The control group consists of 2 female and 3 male speakers whereas the dysarthric group consists of 5 female and 6 male speakers. The dataset has a total duration of 10 hours, with the speakers' ages ranging between 25 and 67 years.

AMSDC [121]. The Atlanta Motor Speech Disorders Corpus (AMSDC) is an English dataset containing speech recordings from 99 (62 males and 37 females) patients diagnosed with neurogenic disorders. This dataset is essential for studying motor speech disorders, though access to the full dataset might be restricted.

EST [122]. The EST dataset is a Dutch dataset containing speech recordings from 16 dysarthric patients (16 males). The dataset has a total duration of \approx 6 hours and the speakers' ages range between 34 and 75 years.

EasyCall [123]. The EasyCall dataset is an Italian dataset containing speech recordings from 24 controls and 31 patients diagnosed with PD, Huntington's disease, ALS, and peripheral neuropathy. The control group consists of 10 female and 14 male speakers whereas the patient group consists of 11 female and 20 male speakers. The corpus includes a total of 21,386 speech commands, with 10,077 recordings from healthy subjects and 11,309 from dysarthric patients.

COPAS [124]. The Corpus of Pathological and Normal Speech (COPAS) contains speech recordings from Dutch speakers with 197 pathological speakers and 122 normal speakers. The database comprised of 8 distinct pathological categories.

ParkCeleb [125]. The previously reviewed datasets are not longitudinal and do not allow tracking the progression of the speech disorder within the same patient along time. To address this gap, the English ParkCeleb dataset was recently introduced in [125]. This dataset contains speech recordings from 40 controls and 40 patients suffering from PD.

Summary of datasets. As outlined in Table I, many of the pathological speech datasets used in the literature are private and not openly accessible, limiting their availability for broader research and replication. Furthermore, datasets such as TORGO, although publicly available, have been shown to contain detrimental recording artefacts [43], which limits their suitability for studying pathological speech characteristics or for developing automatic pathological speech detection approaches [43], [113]. This lack of accessible, high-quality data creates a substantial barrier for developing and validating effective algorithms and tools. Consequently, the advancement in understanding and treating pathological speech conditions is slowed, limiting the potential for innovative solutions and breakthroughs in this critical area of healthcare. Ensuring the availability of clean, reliable, and comprehensive datasets is essential to foster meaningful research and development. Additionally, many existing pathological speech datasets are predominantly in English, restricting their applicability to non-English-speaking populations and limiting cross-linguistic comparisons. This linguistic bias creates challenges when attempting to develop universal speech models or tools that

can be applied globally. Furthermore, most of these datasets are relatively small, often comprising only a limited number of participants, which hinders the development of robust, generalizable models. The small size of these datasets also makes it difficult to account for the variability in speech disorders across different populations and conditions. Another important limitation is the imbalance in demographic representation in terms of gender. Many datasets suffer from a skewed representation, often over-representing one gender, which can lead to biases in speech models. Additionally, some datasets may not include a sufficient variety of age groups or pathological conditions, further restricting their generalizability. These factors collectively underscore the need for high quality, larger, more diverse, and well-balanced pathological speech datasets that reflect the complexity and diversity of real-world populations.

IV. AUTOMATIC PATHOLOGICAL SPEECH DETECTION

Neurodegenerative diseases such as PD and ALS can significantly impact various sensorimotor and articulatory processes, leading to pathological speech impairments such as dysarthria, apraxia of speech, aphasia, dysphonia. As discussed in Section I, clinicians traditionally rely on laborious and time-consuming auditory-perceptual measures to diagnose these speech impairments accurately. To address the various challenges associated with auditory-perceptual assessments, there has been a growing interest in the research community to develop automatic approaches for diagnosing pathological speech. The goal of these approaches is to enhance the detection accuracy to match or surpass human accuracy, thereby ensuring more consistent and reliable diagnoses. Automated systems leverage advanced technologies such as classical machine learning and deep learning models with input representations as discussed in Section II to analyze speech patterns and identify anomalies indicative of these neurodegenerative conditions. In the following, we briefly summarize various classical machine learning-based and deep learning-based approaches. Additionally, insights on the speech modes used for pathological speech detection are provided.

A. Classical Machine Learning-based Approaches

[126], [127] employed random forests and support vector machines (SVM), reporting promising results on a small pool of speakers. Similarly, [128] demonstrated good performance in detecting pathological dysarthric speech in an Indian Tamil language dataset using Gaussian mixture model and hidden Markov model classifiers. [129] found that the use of articulatory features on a small set of 24 Czech speakers showed very good performance, but might not generalize well to larger sets of speakers. Despite the promising results from these methods using various spectral/cepstral features, it remains unclear which features are most discriminative in capturing pathological cues. [130] showed that the cepstral coefficients are more robust and achieved the highest performance on a Spanish dataset when used as input to the SVMs for detection of pathological speech. [131] exploits 6373 acoustic, 3600 articulatory, and 4 sensory features for the detection




Fig. 4. Automatic Pathological Speech Detection Pipeline: The process begins with recording the patient's speech, which is then processed to extract features that are meaningful and suitable for an AI classifier. These features are transformed into a feature space, where a neural network model analyzes them to make a diagnostic decision. This pipeline streamlines the detection process, enabling efficient and accurate identification of pathological speech patterns.

TABLE I

OVERVIEW OF PATHOLOGICAL SPEECH DATABASES. (PD: PARKINSON'S DISEASE, CVA: CEREBROVASCULAR ACCIDENT, TBI: TRAUMATIC BRAIN INJURIES, ALS: AMYOTROPHIC LATERAL SCLEROSIS, HUNTINGTON'S DISEASE, 3D: ARTICULATORY (3D), L: LONGITUDINAL DATA, ACCESSIBLE: ACCESSIBLE THROUGH A LICENSE FOR RESEARCH PURPOSES)

Database	Number of Speakers		Type of Impairment	Language	Modality	Accessibility
	Control	Pathological				
PC-GITA	50	50	PD	Spanish	Speech	Accessible
TORGO	07	08	ALS/CP	English	Speech $+$ (3D)	Public
MoSpeeDi	466	138	Dysarthira/Apraxia	French	Speech	Not Accessible
Nemours	-	11	Dysarthira	English	Speech	Not Accessible
CUDYS	05	11	Spino-cerebellar ataxia	Cantonese	Speech	Not Accessible
AMSDC	62	37	ĈVA, PD	English	Speech	Not Accessible
Dutch EST	-	16	Dysarthria, TBI	Dutch	Speech	Not Accessible
EasyCall	24	31	PD, HD, ALS	Italian	Speech	Public
COPAS	197	122	Dysarthira and others	Dutch	Speech	Accessible
ParkCeleb	40	40	PD	English	Speech (L)	Accessible

of ALS using deep neural networks and showed state-ofthe-art detection performance on a dataset consisting of 11 patients and 11 healthy speakers. In a similar fashion, [132] employed SVM with openSMILE features on a dataset of 123 Hebrew speakers. Additionally, [133] utilized glottal features and demonstrated that combining glottal features with openS-MILE features enhances the performance of dysarthric speech detection. [45] introduced spectro-temporal sparsity features combined with SVMs, showing these features to be more effective discriminators for dysarthric speech compared to temporal sparsity features. [134] applied Grassmann discriminant analysis on spectro-temporal subspaces, using singular value decomposition based on clinical evidence of spectrotemporal distortions. Their models were evaluated on datasets-PC-GITA and MoSpeeDi.

The major limitation of such works is their focus on small speaker sets and bias towards factors such as gender, recording conditions, age, class, or language, leading to poor generalization in clinical scenarios. To investigate the impact of the distribution shift, [135] employed cross-database models for dysarthric pathological speech detection. They demonstrated that an SVM model trained on the UA-Speech dataset showed a significant performance drop when tested on the AMSDC dataset. This highlights the need for future work to develop models robust enough to handle distribution shifts, including variations in recording conditions and other factors. Furthermore, classical machine learning-based methods primarily rely on hand-crafted features, which may not effectively capture all abstract pathological cues. Finally, these methods also tend to overlook valuable metadata such as speaker identity, gender, and language.

B. Deep Learning-based Approaches

[30], [136], [137] utilized convolutional neural networks (CNN) for dysarthric speech detection on a dataset consisting of 26 speakers, including 13 patients diagnosed with ALS and their gender-matched counterparts respectively. Although this method demonstrated promising results, there is significant variation in pathological detection at the individual speaker level. [46] employed phase spectra such as modified group delay and instantaneous frequency spectra, demonstrating that using these phase spectra as complementary features to magnitude spectra improves the performance of CNN models in detecting dysarthric speech. Similarly, [56] employed temporal envelope features with CNN for dysarthric classification. [138] used SVM and deep neural networks for the detection of pathological speech on a dataset of speakers diagnosed with ALS. While most proposed approaches are single-task approaches aiming at achieving only pathological speech detection, [139] introduced the first ever multi-task system where they trained jointly pathological classification (primary task) and other 11 articulatory deficit tasks. The representations learned during joint training are constrained by various speech tasks and shows better generalization in pathological speech detection across speakers on a Spanish dataset.

Most studies to date have not exploited the temporal nature of audio frames. [51], [140], [141] addressed this issue by introducing a long short-term memory (LSTM) temporal network for dysarthric speech classification. [140] evaluated LSTM on a Mandarin dataset comprising of 69 speakers, 31 diagnosed with dysarthria and the remaining as normal speakers, while [51] evaluated an LSTM-based model on the TORGO dataset. Although the methodology in [140] showed promising results, the model has been evaluated only on the syllables making it harder to generalize across spontaneous speech.

Despite the promising results achieved by the proposed methods using handcrafted acoustic features and timefrequency representations, their detection capabilities still fall short of human-level performance and remain inadequate for clinical applications. Instead of handcrafted acoustic features or time-frequency representations, researchers endeavored to leverage raw speech data and applied self-supervised learning models like w2v2 to derive meaningful contextual representations, with the goal of improving the detection performance of pathological speech [43], [60], [142]. To the best of our knowledge, such models have become the state-of-the-art models in pathological speech detection, outperforming other automatic approaches based on handcrafted acoustic features or time-frequency input representations. However, although advantageous, these models currently lack interpretability insights that might be useful for a clinician. Moreover, the models developed thus far are largely language-dependent, as the linguistic context plays a critical role in pathological speech. Developing language-agnostic pathological detection methods would be highly beneficial, allowing for universal application across patients worldwide [143].

C. Impact of Speech Mode on Pathological Speech Detection

The large majority of the previously reviewed automatic pathological speech detection approaches have been proposed and validated on controlled speech tasks.

Controlled speech, also known as non-spontaneous speech, involves utterances produced within a structured context. In this mode, neurotypical speakers and patients are given a phonetically balanced, carefully crafted text and asked to repeat it. The goal is to elicit pathological biomarkers and cues through these controlled utterances, which can offer insights into motor planning and execution. Tasks in this mode may include reading from a text and repeating specific words.

In contrast to controlled speech, non-controlled or spontaneous speech consists of unplanned utterances that mirror realworld communication. This type of speech requires greater cognitive effort for planning, motor execution, and articulation, making it more likely to reveal natural pathological biomarkers. Examples include storytelling, recounting incidents, or engaging in everyday conversations. The reliance on controlled speech, with its structured and phonetically balanced content, may not always capture the full spectrum of pathological cues. Incorporating spontaneous speech could provide a more comprehensive understanding of pathological speech patterns. It seems plausible that developing pathological speech detection methods for spontaneous speech could be highly beneficial, given its ease of collection [61]. Research in this area could make such methods more practical and effective, as spontaneous speech naturally reflects real-world communication and may offer a richer set of pathological cues.

V. PATHOLOGICAL SPEECH RECOGNITION

Automatic speech recognition (ASR) systems have significantly advanced over the years, demonstrating impressive results in converting raw speech signals into their corresponding textual form. This has resulted in the widespread use of various interactive devices, including smartphones and voice assistants. However, they often fail to recognize low resource pathological speech, including speech from patients suffering from various neurodegenerative conditions such as PD or ALS [22].

To alleviate this problem, several attempts have been made in improving the performance of ASR systems for low resource pathological speech. For example, [144] proposed a two-step speaker adaptation method. Initially, a model trained on extensive neurotypical speech data is fine-tuned for dysarthric ASR. Subsequently, this fine-tuned model undergoes further adaptation to the specific dysarthric speaker. Additionally, [145] proposed the additive angular margin loss to address intra-class variation among dysarthric speakers, demonstrating promising results with Japanese speakers. [146] also showed that personalized ASR systems fine-tuned on pathological speech exhibit better recognition performance compared to speaker-independent ASR systems. However, the reliance on specific speakers in personalized ASR systems poses challenges for generalization settings. [147] utilize lattice-free maximum mutual information to mitigate insertion errors, which are otherwise prevalent due to the slow speaking rates of individuals with dysarthria. Due to the limited amount of available pathological speech data, the progress of ASR for pathological speech remains restricted. In a different approach, [148] utilized transfer learning and found that speaker-based data selection leads to negative transfer. They recommended using utterance-based data selection with an entropy distribution to enhance recognition. [149] further implemented a multi-task learning (MTL) framework through auto-encoder joint learning, utilizing bottleneck features on out-of-domain data. Employing MTL in pathological ASR showed a lower word error rate compared to its single-task counterpart. [150] demonstrated that state-of-the-art ASR systems for pathological speech are significantly impacted by phoneme inaccuracies. To address this, they proposed Speech Vision-a transfer learning paradigm that converts word utterances into visual feature representations, aiming to recognize the shape of the word rather than relying on phonemes. A comprehensive overview of ASR systems for pathological speakers in terms of progress and challenges is provided in [23].

Due to the large number of parameters in state-of-theart ASR models, fine-tuning them on low-resource pathological speech data is highly expensive. However, leveraging fine-tuning techniques such as LoRA (Low-Rank Adaptation) [151], [152] offers a more efficient alternative, reducing computational costs and making training more feasible. Additionally, LoRA's modular approach might possibly make it easier to adapt the fine-tuned models to new speakers, providing flexibility in real-world applications or clinical scenarios.

VI. INTELLIGIBILITY ENHANCEMENT OF PATHOLOGICAL SPEECH

In pathological speech, enhancement refers to the process of improving the quality and intelligibility of speech samples affected by various impairments. The benefits of pathological speech enhancement are manifold. Firstly, the improved quality of pathological speech can be integrated into ASR systems, potentially enhancing the recognition accuracy of such speech, thereby increasing the usability of these systems for individuals with speech impairments. Secondly, these approaches can serve as data augmentation methods (r.f. VIII) for multiple applications such as pathological speech detection and automatic speech recognition.

Progress in pathological speech enhancement is limited, however, several attempts have been made by various researchers as described in the following. [24] restructured the trajectory of formants to more closely align with the desired sound targets, thereby enhancing the accuracy of the acoustic representation. This refined formant trajectory was subsequently utilized to generate more intelligible speech, significantly improving the clarity and quality of the unintelligible pathological speech. [153] utilized a technique where the phase of the source signal was varied across six microphone arrays to synthesize pathological speech utterances. This approach effectively increased the data samples, which were later used for data augmentation in dysarthric ASR. [25] implemented a pause insertion model along with a severity level coefficient in a neural multi-task text-to-speech system, effectively replicating and synthesizing dysarthric speech. The synthesized speech was then utilized as data augmentation for improving dysarthric speech recognition. [154] enhanced the intelligibility of dysarthric speech by applying a methodology that includes pronunciation correction, insertion of missing sounds, devoicing of unvoiced phonemes, tempo and spectral adjustment, and removal of unwanted disfluencies. [155] demonstrated that modifying the short-term spectral content on a frame-by-frame basis can significantly improve the word-level intelligibility for patients with dysarthria. However, despite the substantial intelligibility improvements, the method's speaker dependency poses challenges for generalizing across different speakers. In a similar speaker-dependent study, [156] employed a Kepstrum-based approach. [157] utilized multiple pronunciation patterns along with genetic algorithms and hidden Markov models [26], [27] to enhance dysarthric speech. [158] implemented a two-stage framework in which dysarthric speech was initially recognized using an hidden Markov-based network. Subsequently, a synthesis system adapted to the dysarthric speaker was employed to produce a new speech output by correcting the mispronounced words, thereby enhancing the intelligibility of the dysarthric speech. [159] used dynamic time warping with CNNs to improve the speech intelligibility. [160], [161] utilized linear predictive coding mapping in conjunction with dynamic time warping between dysarthric speech and neurotypical speech to enhance dysarthric speech intelligibility in an auditory feedback mechanism. [162] employed feature space mapping through constrained maximum likelihood linear regression, aligning acoustic features from dysarthric speakers to those of neurotypical speakers. This approach demonstrated improved intelligibility of dysarthric speech, as evidenced by the perceptual evaluation of speech quality test. A similar study was conducted by [76], where dysarthric speech features

were enhanced using time-delay neural network denoising autoencoders in a speaker-independent fashion. However, only a small subset of speakers were used in the evaluation, which may not generalize well to a larger pool of speakers. Motivated by the human auditory perception system, [163] introduced perceptually enhanced single frequency cepstral coefficients to improve the intelligibility of speech in dysarthric patients using i-vectors and a Gaussian mixture model with a universal background model. [30] examined the spectro-temporal representation and showed it can be useful in improving the intelligibility of speech. [31] argued that prior methods for speech intelligibility enhancement primarily focus on speakerdependent systems, and they introduced speech posterior feature sets designed to capture dysarthric attributes while ignoring speaker-specific characteristics. However, this assertion is not entirely accurate, as recent research has demonstrated that dysarthric speech is closely intertwined with speaker attributes [75].

In a different approach, [164] integrated Transformer-TTS, CycleVAE-VC, and LPCNet to synthesize intelligible and robust dysarthric speech, although the resulting speech lacked naturalness. [28] formulated pathological speech enhancement as a style transfer problem and proposed a generative adversarial network (GAN)-based method for dysarthric speech enhancement. Similarly, [29] used CycleGAN for converting dysarthric speech to a more intelligible speech. [165] introduced DiscoGAN to improve the speech intelligibility of dysarthric patients. This method converts pathological speech to neurotypical speech through feature mapping learned during DiscoGAN training with an adversarial and construction losses [165]. The approach showed promising results, though further validation with a larger and more diverse patient group is necessary to ensure generalizability across various pathological conditions. [166] explored a related approach and found that time-stretching techniques for dysarthric speech outperform existing state-of-the-art generative models. Their study concluded that using time-stretching with MaskCycle-GAN achieves significantly better performance in dysarthric speech enhancement. However, they noted that despite these improvements, the method is not yet suitable for practical applications.

Dysarthric speech datasets typically have a limited vocabulary, but using a conversion model can expand the set of out-of-vocabulary words, which can then be used for data augmentation. [167] presented the first end-to-end voice conversion system that trains dysarthric speech along with its corresponding textual form using a knowledge distillation approach. This method enables the replication of speech from dysarthric speakers with improved pronunciation and more precise articulation. To expand out-of-vocabulary word set, [78] utilized a voice conversion model to transform natural speech into synthetic dysarthric speech utterances. A detailed study of pathological voice conversion can be found in [168].

Neural encoder-decoder models have been shown to significantly outperform GAN-based systems in enhancing the intelligibility of dysarthric speech. However, their reliance on multi-step modules often results in inefficient and suboptimal perceptual quality. To address this issue, [169] proposed Unit-DSR, a self-supervised learning approach for dysarthric speech synthesis. It has been shown that the adversarial training framework is highly sensitive to training parameters, often leading to instability and model divergence [170], [171]. In contrast, diffusion models [172] show significant promise for applications in pathological speech enhancement, synthesis, and voice conversion. On a similar lines, [173] employed the Glow-TTS diffusion model for generating dysarthric speech and used that as data augmentation for training a dysarthric ASR system.

VII. INTELLIGIBILITY AND SEVERITY ASSESSMENT OF PATHOLOGICAL SPEECH

Intelligibility. Intelligibility of pathological speech is a critical indicator for evaluating the effectiveness of speech therapy and tracking the progression of various disorders. To reduce the burden of evaluating pathological speech intelligibility in clinical practice, automatic approaches have been proposed in the literature. Automatic pathological speech intelligibility assessment methods are typically categorized into two main approaches, i.e., blind and non-blind approaches [75]. In blind approaches, the objective is to assess the intelligibility of impaired speech without exploiting reference neurotypical speech data [174]–[180]. These approaches primarily focus on extracting acoustic features such as jitter, fundamental frequency, shimmer, formant frequencies, etc., that are believed to be closely correlated with speech intelligibility. These features are then used in regression models to estimate the intelligibility of pathological speech. Non-blind approaches, by contrast, rely on intelligible speech from neurotypical speakers as a basis for estimating the intelligibility of pathological speech [181]-[190]. Such approaches typically use features extracted from ASR systems - which have been trained on large amounts of neurotypical speech - to train regression models to estimate the intelligibility of pathological speech. To avoid the burden of collecting and transcribing a large amount of neurotypical speech data required for such systems, [191] proposed the pathological short-time objective intelligibility measure (P-STOI) adapted from the speech enhancement domain. The P-STOI measure first calculates an utterance-dependent fully intelligible representation from a small set of neurotypical speakers. The intelligibility of the pathological utterance is then evaluated by quantifying its divergence from this reference representation in terms of the short-time spectral correlation. While advantageous, P-STOI requires recordings of the same utterance from intelligible neurotypical speakers, which may not always be available. To mitigate this issue, [192] developed a method to generate synthetic reference speech for assessing pathological speech intelligibility. Likewise, [193] introduced a method for invariant reference speaker pair selection to evaluate speech intelligibility. This approach leverages the Speech-Split framework, using dynamic time warping to measure the divergence between latent representations of healthy and pathological speech utterances. In a different approach, [194] introduced sub-space based intelligibility measures based on the premise that dominant spectral patterns in pathological

speech deviate significantly from those of intelligible speech. Although such measures result in a lower performance than measures exploiting neurotypical intelligible speech, they can be directly used in practical scenarios where such speech material in not available or easy to generate.

Severity. Besides intelligibility assessment, severity assessment is another important research area where developing tools for this purpose could greatly assist in automatizing the tedious process of screening patients and categorizing them into different subgroups based on the severity level. The methods developed in the literature for this purpose can be categorized into two categories, i.e., traditional machine learning-based approaches using the Mahalanobis distance classifier [174], SVMs [195], GMMs [196], or decision trees [197], and deep learning-based approaches [59], [141], [198]–[204]. [163], [205] showed that i-vectors are effective in predicting the severity of pathological speech. Motivated by the human ear, [163] introduced perceptually enhanced single frequency cepstral coefficients for pathological speech intelligibility measure. Pathological speakers often exhibit irregular rhythm patterns in their speech. To leverage this characteristic, [206], [207] explored rhythm-based features for severity assessment, utilizing SVMs and MLP classifiers. Their study highlighted the potential of rhythm as a key indicator of pathological speech impairment severity, though challenges remain in capturing the full complexity of rhythm variations across different speakers and integrating these features into more advanced machine learning models. Furthermore, patients with various pathological conditions often display distinct facial expressions. To harness these visual features, [208] introduced the first audio-visual pathological severity classification system using convolutional neural networks. [200] introduced a novel training framework, demonstrating that incorporating weak speech supervision can offer significant advantages in pathological speech severity classification. To leverage metadata information such as age, gender, and type of pathological condition, [209] proposed a multi-head attentionbased multi-task framework. This approach jointly optimizes severity, type, gender, and age classifications for pathological speech, thereby enhancing the robustness of latent features across these additional factors. Recently, there has been a shift towards leveraging self-supervised speech embeddings, such as Whisper and wav2vec2, in pathological speech severity measurement. This approach is gaining popularity due to the limited availability of pathological data and the ability to utilize unlabeled and metadata from other datasets, making it a promising direction for improving severity assessment in resource-constrained scenarios [47], [77].

VIII. DATA AUGMENTATION FOR PATHOLOGICAL SPEECH APPLICATIONS

To mitigate overfitting in deep learning models dealing with the low resource pathological speech data, data augmentation techniques have been applied for various tasks. Existing approaches to data augmentation in pathological speech can be broadly classified into the following categories: traditional augmentation, voice conversion, text-tospeech (TTS) synthesis, and generative models. Drawing inspiration from the temporal and speed differences between pathological and neurotypical speech, [84], [210], [211] proposed a data augmentation technique that involves adjusting the temporal and speed characteristics of neurotypical speech to simulate pathological speech. Similarly, [212] introduced a data augmentation technique that adjusts the phonetic-level tempo of healthy speech to resemble atypical speech, and vice versa. Their findings demonstrated that the former approach is more effective for pathological ASR. [213] employed a strategy that involved combining diverse pathological speech data from multiple languages to increase the number of data samples. Their results indicated that this approach offers certain advantages in pathological ASR. Additionally, they demonstrated that integrating data from various sources can improve model performance by providing a richer and more varied dataset for training. Generative models like GANs and variational autoencoders are also commonly employed to generate pathological speech samples from healthy speech [28], [173]. These synthetic samples serve dual purposes: they can be used for speech enhancement, improving the clarity and quality of pathological speech, and for expanding the dataset, thereby enhancing the diversity of training data. By increasing the variety of pathological speech examples, these models help in mitigating overfitting and improving the performance of deep learning models in tasks such as pathological speech detection and pathological ASR [28], [173], [214], [215]. Dysarthric speech datasets typically have a limited vocabulary, but using a conversion model can expand the set of out-of-vocabulary words, which can then be used for data augmentation. To this end, [78] utilized a voice conversion model to transform natural speech into synthetic pathological speech utterances. [83] proposed a method incorporating temporal and spectral masking combined with time warping within a contrastive learning framework to develop robust speech representations for pathological ASR. [216] employed a TTS framework to generate synthetic dysarthric speech samples as an augmentation for pathological ASR. Although this approach showed some advantages, it faced challenges in generalizing to unseen speakers. This difficulty arose from the limited variability in pathological speech data, which was insufficient to fully capture the diverse characteristics of pathological speech. [107] investigated different data augmentation techniques in pathological ASR and demonstrated that GAN-based perturbation methods are more effective than other augmentation approaches. However, a comprehensive investigation of data augmentation methods in pathological speech detection has not yet been conducted. It would be particularly important to explore various data augmentation techniques on clean datasets such as PC-GITA, rather than on the noisy datasets such as TORGO, which has been the case for the previously reviewed literature.

IX. OTHER CHALLENGES AND RESEARCH DIRECTIONS IN PATHOLOGICAL SPEECH PROCESSING

This section describes the various challenges and possible research directions for pathological speech analysis.

A. Robustness in Pathological Speech Detection

The methods developed so far have typically been designed and tested under specific environmental conditions and for a particular language. Each dataset used for pathological speech detection has its own unique variabilities in terms of both interspeaker and intra-speaker differences. Additionally, different age groups exhibit distinct speaker attributes, adding complexity to pathological speech analysis. Language is another important factor; separate models have been independently developed for different languages. However, there is a need for a more robust model that is language-agnostic (to a possible degree given that pathological cues might be different in different languages), age-agnostic, accent-agnostic, and gender-agnostic to enhance overall effectiveness. Additionally, datasets such as Torgo are contaminated with noise. Researchers have shown that models trained on these datasets tend to learn environmental factors rather than focusing on genuine pathological cues [43]. To the best of our knowledge, the PC-GITA database is currently the only clean pathological dataset available under a research license. The development of pathological speech detection models robust to environmental distortions has been very limited, with only a few small studies addressing this area [113], [114], [217]. For example, [114] employed a testtime adaptation method to fine-tune pre-trained models on a validation set augmented with the test noise extracted from the test utterance. This method improves the robustness of stateof-the-art pathological speech detection methods, offering a promising solution to deploying such applications in realistic clinical settings. Similarly, [115] proposed an approach to resolve the noise disparity between the two groups of speakers in the TORGO database, such that models developed on this database learn pathology-discriminant cues instead of noisediscriminant ones. Besides robustness to environmental distortions, adversarial robustness of pathological speech detection models is another important topic and research direction. [115] explored the impact of acoustically imperceptible adversarial perturbations on deep learning-based pathological speech detection models. Results revealed a high vulnerability of such models to adversarial perturbations, with adversarial training ineffective in enhancing robustness.

B. Graph Neural Networks for Pathological Speech Detection

While many automatic pathological speech detection methods have demonstrated remarkable performance, the exploitation of common attributes such as pathological cues, speaker characteristics, age, and gender across different speakers remains limited. A promising direction would be to approach the pathological speech detection problem as a semi-supervised node graph classification task via graph neural networks (GNNs). This could involve constructing an inter-speaker graph from the utterances of various speakers, where the graph connectivity would help form speaker clusters based on the presence or absence of pathological cues. This structural information can then be leveraged through various graph message-passing mechanisms to improve detection accuracy and provide deeper insights into pathological speech patterns. Initial work in this direction has been done in [218], where

11

a graph convolutional neural networks has been proposed for Parkinson's disease detection method by framing the task as a node classification problem. In this approach, a graph is constructed using w2v2 speech embeddings across different speech segments from various patients as nodes, with the edges capturing the relationships between these segments. We believe that in this context, a promising research direction is to explore the incorporation of domain knowledge, such as establishing edges based on factors like gender, age, and severity scale of the patients.

C. Privacy

In pathological speech-based applications such as detection models or ASR systems, privacy-preserving solutions are crucial for safeguarding sensitive patient data. Since these systems process speech that reveals sensitive medical information, ensuring data security and confidentiality is of paramount importance. By employing privacy-preserving techniques such as federated learning, differential privacy, and encryption - providers can ensure that individuals' speech data is anonymized and never exposed to unauthorized parties. This not only fosters trust among patients but also complies with stringent data protection regulations, thereby mitigating the risk of breaches. Developing privacy-preserving pathological speech processing systems where one must balance two conflicting goals, i.e., increasing the utility of the models while preserving the privacy of the users, remains an important challenging research directions.

D. Multimodal Pathological Speech Analysis

Most existing systems primarily focus on leveraging speech cues for detecting pathological speech. However, complementary cues may also exist in visual forms, such as facial expressions or lip movements, which can provide additional insights. To effectively utilize these visual cues, multimodal frameworks like AV-HuBERT could prove advantageous, as they integrate both audio and visual information, potentially enhancing the accuracy and robustness of pathological speech detection models. Furthermore, combining other modalities, such as electroencephalogram (EEG) brain signals and textual data (transcripts), could offer a more complete characterization of disorders. These multimodal systems may help in capturing underlying neural, visual or linguistic patterns associated with speech pathology, improving detection and diagnosis across diverse patient groups.

X. EXPLAINABILITY AND INTERPRETIBILITY

In the domain of pathological speech detection, explainability and interpretability are crucial due to their clinical significance. Although these terms are often used interchangeably because of their close overlap, it's important to distinguish between them. As defined by [219], interpretable models are designed to be inherently understandable, whereas explainable models provide post-hoc explanations for the decisions made by existing "black box" systems that are otherwise incomprehensible to humans. [220] further clarified the distinction by defining interpretability as "How does the model work" and explainability as "What else can the model tell me." Keeping these distinctions in mind, particularly in the context of pathological speech detection, there has been very limited, if any, attention given to this aspect of research [221]-[224]. Most existing studies focus on improving model accuracy and performance, often overlooking the importance of making these models interpretable and explainable. This gap is critical, as the ability to understand and explain the decision-making process in pathological speech detection models can provide valuable insights for clinicians and support more trustworthy and reliable use of artificial intelligence in healthcare applications. To address this issue, [221] attempted to map high-dimensional acoustic features to sound pattern of English binary phonological features, recognizing that these highdimensional acoustic features are challenging to interpret in clinical practice. The problem with this approach is that it may be biased toward English sounds, making it susceptible to errors when applied to different phonetic environments. Further, [224] applied the SHAP algorithm to identify the most influential features in their model and discovered that constantvowel transitions were the key features in reversing the model's decisions in pathological speech detection. Recently, [225] demonstrated using canonical correlation analysis that the human frequency range (0-210 Hz) plays a critical role in influencing model decisions for pathological speech detection. Although some research has been conducted, substantially more research is needed to address this under-explored but very important area.

XI. LARGE LANGUAGE MODELS FOR PATHOLOGICAL SPEECH

Given the recent advancements in large language models (LLMs), which have demonstrated significant progress across a wide range of applications [226], [227], exploring their potential for pathological speech analysis appears to be an inevitable and promising direction. LLMs could be leveraged for tasks such as detecting speech impairments based on specific phrase cues, improving the automatic classification of speech disorders, and enhancing the reconstruction of unintelligible or difficult speech. Additionally, LLMs' ability to capture complex linguistic patterns may lead to more accurate models for personalized therapy, rehabilitation, and assistive communication tools for individuals with speech impairments. This exploration could bridge the gap between traditional speech processing techniques and state-of-the-art language models, opening up new avenues for more effective and adaptive speech rehabilitation systems.

XII. CONCLUSION

This paper provides a comprehensive overview of deep learning applications for pathological speech, encompassing detection, recognition, intelligibility assessment and enhancement. Additionally, it compiles a thorough list of both accessible and non accessible pathological speech datasets, which will serve as valuable resources for future research and accelerate progress in the field. To the best of our knowledge, this is the first review to offer an in-depth survey of pathological speech from the perspectives of detection, recognition, enhancement, explainibility and data augmentation. Furthermore, it outlines potential future research directions, particularly in the context of robust and interpretable models that can be deployed in clinical practice.

ACKNOWLEDGMENT

This work was supported by the Swiss National Science Foundation project CRSII5_202228 on "Characterisation of motor speech disorders and processes".

REFERENCES

- K. Simonyan, H. Ackermann, E. F. Chang, and J. D. Greenlee, "New developments in understanding the complexity of human speech production," *Journal of Neuroscience*, vol. 36, no. 45, Nov. 2016.
- [2] J. S. Damico, N. Müller, and M. J. Ball, *The Handbook of Language and Speech Disorders*. Wiley Online Library, 2010.
- [3] X. Huang, A. Acero, H.-W. Hon, and R. Reddy, Spoken Language Processing: A Guide to Theory, Algorithm, and System Development, 1st ed. USA: Prentice Hall PTR, 2001.
- [4] J. R. Duffy, *Motor speech disorders*. Missouri, USA: Elsevier Mosby, 1995.
- [5] J. Ogar, H. Slama, N. Dronkers, S. Amici, and M. L. Gorno-Tempini, "a," *Neurocase*, vol. 11, no. 6, pp. 427–459, 2005.
- [6] G. K. Sewall, J. Jiang, and C. N. Ford, "Clinical evaluation of parkinson's-related dysphonia," *Laryngoscope*, vol. 116, no. 10, pp. 1740–1744, Oct. 2024.
- [7] E. A. Strand, J. R. Duffy, H. M. Clark, and K. Josephs, "The apraxia of speech rating scale : a tool for diagnosis and description of apraxia of speech," *Journal of Communication Disorders*, vol. 51, pp. 43–50, Sep. 2014.
- [8] J. L. Cummings, F. Benson, M. A. Hill, and S. Read, "Aphasia in dementia of the alzheimer type," *Neurology*, vol. 35, no. 3, pp. 394– 401, Mar. 1985.
- [9] F. S. Juste, F. C. Sassi, J. B. Costa, and C. R. F. de Andrade, "Frequency of speech disruptions in parkinson's disease and developmental stuttering: A comparison among speech tasks," *PLoS One*, vol. 13, no. 6, June 2018.
- [10] W. H. Organization, https://www.who.int/news-room/fact-sheets/detail/ parkinson-disease#:~:text=Global%20estimates%20in%202019% 20showed,of%20over%20100%25%20since%202000., 2023, [Online; accessed 23.12.2024].
- [11] GBD 2016 Parkinson's Disease Collaborators, "Global, regional, and national burden of parkinson's disease, 1990–2016: a systematic analysis for the global burden of disease study 2016," *The Lancet Neurology*, vol. 17, no. 11, Nov. 2016.
- [12] A. Wimo, G.-C. Ali, M. Guerchet, M. Prince, M. Prina, and Y.-T. Wu, "World alzheimer report 2015," Alzheimer's Disease International, Tech. Rep., 2015.
- [13] K. C. Arthur, A. Calvo, T. R. Price, J. Geiger, A. Chip, and B. J. Traynor, "Projected increase in Amyotrophic Lateral Sclerosis from 2015 to 2040," *Nature Communications*, vol. 7, no. 12408, Aug. 2016.
- [14] J. Rusz, R. Cmejla, T. Tykalova, H. Ruzickova, J. Klempir, V. Majerova, J. Picmausova, J. Roth, and E. Ruzicka, "Imprecise vowel articulation as a potential early marker of Parkinson's disease: Effect of speaking task," vol. 134, no. 3, pp. 2171–2181, Sep. 2013.
- [15] P. Rong, Y. Yunusova, J. Wang, and J. Green, "Predicting early bulbar decline in Amyotrophic Lateral Sclerosis: A speech subsystem approach," *Behavioural Neurology*, vol. 2015, pp. 1–11, Jul. 2015.
- [16] J. M. Tracy, Y. Özkanca, D. C. Atkins, and R. H. Ghomi, "Investigating voice as a biomarker: Deep phenotyping methods for early detection of Parkinson's disease," *Journal of Biomedical Informatics*, vol. 104, April 2020.
- [17] J. R. Duffy, R. K. Peach, and E. A. Strand, "Progressive Apraxia of Speech as a sign of motor neuron disease," *American Journal of Speech-Language Pathology*, vol. 16, no. 3, pp. 198–208, Aug. 2007.
- [18] J. R. Duffy, Parkinson's disease and movement disorders: diagnosis and treatment guidelines for the practicing physician. New Jersey, USA: Humana Press, 2000, ch. Motor speech disorders: Clues to neurologic diagnosis, pp. 35–53.

- [19] J. Tröger, F. Dörr, L. Schwed, N. Linz, A. König, T. Thies, J. R. Orozco-Arroyave, and J. Rusz, "An automatic measure for speech intelligibility in dysarthrias—validation across multiple languages and neurological disorders," *Frontiers in Digital Health*, vol. 6, p. 1440986, 2024.
- [20] K. Bunton, R. Kent, J. R. Duffy, J. Rosenbek, and J. Kent, "Listener agreement for auditory-perceptual ratings of dysarthria," *Journal of Speech, Language, and Hearing Research*, vol. 50, no. 6, pp. 1481– 1495, Jan. 2008.
- [21] S. Fonville, H. B. van der Worp, P. Maat, M. Aldenhoven, A. Algra, and J. van Gijn, "Accuracy and inter-observer variation in the classification of dysarthria from speech recordings," *IEEE Transactions on Speech* and Audio Processing, vol. 255, no. 10, pp. 1545–1548, Oct. 2008.
- [22] L. De Russis and F. Corno, "On the impact of dysarthric speech on contemporary ASR cloud platforms," *Journal of Reliable Intelligent Environments*, vol. 5, pp. 163–172, 2019.
- [23] S. Liu, M. Geng, S. Hu, X. Xie, M. Cui, J. Yu, X. Liu, and H. Meng, "Recent progress in the CUHK dysarthric speech recognition system," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 29, pp. 2267–2281, 2021.
- [24] A. Kain, X. Niu, J.-P. Hosom, Q. Miao, and J. P. H. van Santen, "Formant re-synthesis of dysarthric speech," in *Proc. 5th ISCA Workshop* on Speech Synthesis (SSW 5), Pittsburgh, PA, USA, July 2004, pp. 25–30.
- [25] M. Soleymanpour, M. T. Johnson, R. Soleymanpour, and J. Berry, "Synthesizing dysarthric speech using multi-speaker TTS for dysarthric speech recognition," in *Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, Singapore, May 2022, pp. 7382–7386.
- [26] C. Veaux, J. Yamagishi, and S. King, "Using HMM-based speech synthesis to reconstruct the voice of individuals with degenerative speech disorders," in *Proc. of Annual Conference of the International Speech Communication*, Portland, OR, USA, Sept. 2012, pp. 967–970.
- [27] M. Dhanalakshmi, T. A. Mariya Celin, T. Nagarajan, and P. Vijayalakshmi, "Speech-input speech-output communication for dysarthric speakers using HMM-based speech recognition and adaptive synthesis system," *Circuits, Systems, and Signal Processing*, vol. 37, no. 2, pp. 674–703, Feb. 2018.
- [28] S. H. Yang and M. Chung, "Improving dysarthric speech intelligibility using cycle-consistent adversarial training," in *Proc. of International Conference on Bio-inspired Systems and Signal Processing*, Valletta, Malta, Feb. 2020.
- [29] B. M. Halpern, J. Fritsch, E. Hermann, R. van Son, O. Scharenborg, and M. Magimai-Doss, "An objective evaluation framework for pathological speech synthesis," in *Proc. of Speech Communication*; 14th ITG Conference, Kiel, Germany, Sep. 2021, pp. 1–5.
- [30] H. M. Chandrashekar, V. Karjigi, and N. Sreedevi, "Spectro-temporal representation of speech for intelligibility assessment of dysarthria," *IEEE Journal of Selected Topics in Signal Processing*, vol. 14, no. 2, pp. 390–399, Feb. 2020.
- [31] A. Tripathi, S. Bhosale, and S. K. Kopparapu, "Improved speaker independent dysarthria intelligibility classification using deepspeech posteriors," in *Proc. of International Conference on Acoustics, Speech* and Signal Processing (ICASSP), Virtual Barcelona, Spain, May 2020, pp. 6114–6118.
- [32] H. P. Rowe, S. Shellikeri, Y. Yunusova, K. V. Chenausky, and J. R. Green, "Quantifying articulatory impairments in neurodegenerative motor diseases: A scoping review and meta-analysis of interpretable acoustic features," *International Journal of Speech-Language Pathology*, vol. 25, no. 4, pp. 486–499, 2023.
- [33] L. van Gelderen and C. Tejedor-García, "Innovative speech-based deep learning approaches for Parkinson's disease classification: A systematic review," arXiv preprint arXiv:2407.17844, 2024.
- [34] C. Cordella, M. J. Marte, H. Liu, and S. Kiran, "An introduction to machine learning for speech-language pathologists: Concepts, terminology, and emerging applications," *Perspectives of the ASHA Special Interest Groups*, pp. 1–19, 2024.
- [35] Z. Brahmi, M. Mahyoob, M. Al-Sarem, J. Algaraady, K. Bousselmi, and A. Alblwi, "Exploring the role of machine learning in diagnosing and treating speech disorders: A systematic literature review," *Psychol*ogy *Research and Behavior Management*, pp. 2205–2232, 2024.
- [36] R. Gupta, D. R. Gunjawate, D. D. Nguyen, C. Jin, and C. Madill, "Voice disorder recognition using machine learning: A scoping review protocol," *BMJ open*, vol. 14, no. 2, p. e076998, 2024.
- [37] M. U. Rehman, A. Shafique, S. S. Jamal, Y. Gheraibia, A. B. Usman *et al.*, "Voice disorder detection using machine learning algorithms: An

application in speech and language pathology," Engineering Applications of Artificial Intelligence, vol. 133, p. 108047, 2024.

- [38] R. Gupta, T. Chaspari, J. Kim, N. Kumar, D. Bone, and S. Narayanan, "Pathological speech processing: State-of-the-art, current challenges, and future directions," in *Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, Shanghai, China, March 2016, pp. 6470–6474.
- [39] K. L. Lansford and J. M. Liss, "Vowel acoustics in dysarthria: Speech disorder diagnosis and classification," *Journal of Speech, Language, and Hearing Research*, vol. 57, pp. 57–67, 2014.
- [40] J. R. Duffy, Motor Speech Disorders: Substrates, Differential Diagnosis, and Management. Elsevier Health Sciences, 2019.
- [41] S. B. Davis, "Acoustic characteristics of normal and pathological voices," in *Speech and Language*. Elsevier, 1979, vol. 1, pp. 271–335.
- [42] Á. Piña Méndez, A. Taitz, O. Palacios Rodríguez, I. Rodríguez Leyva, and M. F. Assaneo, "Speech's syllabic rhythm and articulatory features produced under different auditory feedback conditions identify Parkinsonism," *Scientific Reports*, vol. 14, no. 1, p. 15787, 2024.
- [43] G. Schu, P. Janbakhshi, and I. Kodrasi, "On using the UA-Speech and Torgo databases to validate automatic dysarthric speech classification approaches," in *Proc. International Conference on Acoustics, Speech,* and Signal Processing, Rhodes Island, Greece, June 2023, pp. 1–5.
- [44] J. R. Orozco-Arroyave, F. Hönig, J. D. Arias-Londoño, J. F. Vargas-Bonilla, S. Skodda, J. Rusz, and E. Nöth, "Voiced/unvoiced transitions in speech as a potential bio-marker to detect Parkinson's disease," in *Proc. of Annual Conference of the International Speech Communication Association*, Dresden, Germany, Sept. 2015.
- [45] I. Kodrasi and H. Bourlard, "Spectro-temporal sparsity characterization for dysarthric speech detection," *IEEE/ACM Transactions on Audio*, *Speech, and Language Processing*, vol. 28, pp. 1210–1222.
- [46] P. Janbakhshi and I. Kodrasi, "Experimental investigation on STFT phase representations for deep learning-based dysarthric speech detection," in *Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, Singapore, May 2022, pp. 6477–6481.
- [47] F. Javanmardi, S. Tirronen, M. Kodali, S. R. Kadiri, and P. Alku, "Wav2vec-based detection and severity level classification of dysarthria from speech," in *Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, Rhodes Island, Greece, June 2023, pp. 1–5.
- [48] L. P. Violeta, W. C. Huang, and T. Toda, "Investigating self-supervised pretraining frameworks for pathological speech recognition," in *Proc.* of Annual Conference of the International Speech Communication, Incheon, Korea, Sept. 2022, pp. 41–45.
- [49] F. Eyben, M. Wöllmer, and B. Schuller, "OpenSmile: The Munich versatile and fast open-source audio feature extractor," in *Proc. of ACM International Conference on Multimedia*, Feirenze, Italy, Oct. 2010, pp. 1459–1462.
- [50] N. N P and P. Alku, "Dysarthric speech classification using glottal features computed from non-words, words and sentences," in *Proc.* of Annual Conference of the International Speech Communication, Hyderabad, India, Sep. 2018, pp. 3403–3407.
- [51] J. Millet and N. Zeghidour, "Learning to detect dysarthria from raw speech," in Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP), Brighton, UK, May 2019, pp. 5831–5835.
- [52] N. P. Narendra and P. Alku, "Dysarthric speech classification from coded telephone speech using glottal features," *Speech Communication*, vol. 110, pp. 47–55, Jul. 2019.
- [53] L. Alhinti, S. Cunningham, and H. Christensen, "Recognising emotions in dysarthric speech using typical speech data," in *Proc. Annual Conference of the International Speech Communication*, Shanghai, China, Oct. 2020.
- [54] M. L. Ina Kodrasi, Michaela Pernon and H. Bourlard, "Automatic discrimination of apraxia of speech and dysarthria using a minimalistic set of handcrafted features," in *Proc. of Annual Conference of the International Speech Communication*, Shanghai, China, Oct. 2020, pp. 4991–4995.
- [55] N. P. Narendra and P. Alku, "Automatic assessment of intelligibility in speakers with dysarthria from coded telephone speech using glottal features," *Computer Speech & Language*, vol. 65, p. 101117, Jan. 2021.
- [56] I. Kodrasi, M. Pernon, M. Laganaro, and H. Bourlard, "Automatic and perceptual discrimination between dysarthria, apraxia of speech, and neurotypical speech," in *Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, Toronto, Canada, June 2021, pp. 7308–7312.
- [57] A. Tripathi, S. Bhosale, and S. K. Kopparapu, "Automatic speaker independent dysarthric speech intelligibility assessment system," *Computer Speech & Language*, vol. 69, p. 101213, Sep. 2021.

- [58] G. Schu, P. Janbakhshi, and I. Kodrasi, "On using the UA-Speech and TORGO databases to validate automatic dysarthric speech classification approaches," in *Proc. of International Conference on Acoustics, Speech* and Signal Processing (ICASSP), Rhodes Island, Greece, June 2023.
- [59] A. A. Joshy and R. Rajan, "Automated dysarthria severity classification: A study on acoustic features and deep learning techniques," *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, vol. 30, pp. 1147–1157, 2022.
- [60] F. Javanmardi, S. R. Kadiri, and P. Alku, "Pre-trained models for detection and severity level classification of dysarthria from speech," *Speech Communication*, vol. 158, p. 103047, Mar. 2024.
- [61] S. Shakeel, A. and K. Ina, "Impact of speech mode in automatic pathological speech detection," in *Proc. European Signal Processing Conference*, Lyon, France, Aug. 2024.
- [62] T. Liu and X. Yuan, "Paralinguistic and spectral feature extraction for speech emotion classification using machine learning techniques," *EURASIP Journal on Audio, Speech, and Music Processing*, vol. 2023, no. 1, p. 23, 2023.
- [63] S. Toyama, D. Saito, and N. Minematsu, "Use of global and acoustic features associated with contextual factors to adapt language models for spontaneous speech recognition." in *Proc. of Annual Conference of the International Speech Communication*, Stockholm, Sweden, Aug. 2017, pp. 543–547.
- [64] S. R. Shahamiri and S. S. Binti Salim, "Artificial neural networks as speech recognisers for dysarthric speech: Identifying the best-performing set of MFCC parameters and studying a speakerindependent approach," Advanced Engineering Informatics, vol. 28, no. 1, pp. 102–110, Jan. 2014.
- [65] C. Bhat, B. Vachhani, and S. Kopparapu, "Recognition of dysarthric speech using voice parameters for speaker adaptation and multi-taper spectral estimation," in *Proc. of Annual Conference of the International Speech Communication*, San Francisco, USA, Sept. 2016, pp. 228–232.
- [66] G. Vyas, M. K. Dutta, J. Prinosil, and P. Harár, "An automatic diagnosis and assessment of dysarthric speech using speech disorder specific prosodic features," in *Proc. of International Conference on Telecommunications and Signal Processing (TSP)*, Vienna, Austria, June 2016, pp. 515–518.
- [67] B.-F. Zaidi, M. Boudraa, S.-A. Selouani, D. Addou, and M. S. Yakoub, "Automatic recognition system for dysarthric speech based on MFCC's, PNCC's, jitter and shimmer coefficients," in *Proc. of Advances in Computer Vision*, Cham, April 2020, pp. 500–510.
- [68] B. A. Al-Qatab and M. B. Mustafa, "Classification of dysarthric speech according to the severity of impairment: An analysis of acoustic features," *IEEE Access*, vol. 9, pp. 18183–18194, 2021.
- [69] B. F. Zaidi, S. A. Selouani, M. Boudraa, and M. Sidi Yakoub, "Deep neural network architectures for dysarthric speech analysis and recognition," *Neural Computing and Applications*, vol. 33, no. 15, pp. 9089–9108, 2021.
- [70] P. Sahane, S. Pangaonkar, and S. Khandekar, "Dysarthric speech recognition using multi-taper mel frequency cepstrum coefficients," in *Proc. of International Conference on Computing, Communication and Green Engineering (CCGE)*, Pune, India, Sept. 2021, pp. 1–4.
- [71] L. P. Sahu and G. Pradhan, "Analysis of short-time magnitude spectra for improving intelligibility assessment of dysarthric speech," *Circuits, Systems, and Signal Processing*, vol. 41, no. 10, pp. 5676–5698, Oct. 2022.
- [72] J. Jothieswari, T. Manicka Sundara Valli, and S. Suguna, "Enhancing dysarthria detection: harnessing ensemble models and MFCC," in *Proc.* of Smart Trends in Computing and Communications. Singapore: Springer Nature, 2024, pp. 135–147.
- [73] I. Kodrasi and H. Bourlard, "Statistical modeling of speech spectral coefficients in patients with parkinson's disease," in *Proc. of Speech Communication; 13th ITG-Symposium*, Oldenburg, Germany, Oct. 2018, pp. 1–5.
- [74] I. Kodrasi *et al.*, "Automatic discrimination of apraxia of speech and dysarthria using a minimalistic set of handcrafted features." in *Proc. Annual Conference of the International Speech Communication*, 2020, pp. 4991–4995.
- [75] P. Janbakhshi, "Automatic pathological speech assessment," Ph.D. dissertation, EPFL, 2022.
- [76] C. Bhat, B. Das, B. Vachhani, and S. K. Kopparapu, "Dysarthric speech recognition using time-delay neural network based denoising autoencoder," in *Proc. of Annual Conference of the International Speech Communication*, Hyderabad, India, 2018, pp. 451–455.
- [77] S. Rathod, M. Charola, A. Vora, Y. Jogi, and H. A. Patil, "Whisper features for dysarthric severity level classification," in *Proc. of Annual*

Conference of the International Speech Communication, Dublin, India, Aug. 2023, pp. 1523–1527.

- [78] J. Harvill, D. Issa, M. Hasegawa-Johnson, and C. Yoo, "Synthesis of new words for improved dysarthric speech recognition on an expanded vocabulary," in *Proc. of International Conference on Acoustics, Speech* and Signal Processing (ICASSP), Tornonto, Canada, June 2021, pp. 6428–6432.
- [79] S. A. Naeini, L. Simmatis, D. Jafari, Y. Yunusova, and B. Taati, "Improving dysarthric speech segmentation with emulated and synthetic augmentation," *IEEE Journal of Translational Engineering in Health and Medicine*, vol. 12, pp. 382–389, 2024.
- [80] K. Vattis, B. Oubre, A. C. Luddy, J. S. Ouillon, N. M. Eklund, C. D. Stephen, J. D. Schmahmann, A. S. Nunes, and A. S. Gupta, "Sensitive quantification of cerebellar speech abnormalities using deep learning models," *IEEE Access*, vol. 12, pp. 62 328–62 340, 2024.
- [81] Z. Yue, E. Loweimi, H. Christensen, J. Barker, and Z. Cvetkovic, "Acoustic modelling from raw source and filter components for dysarthric speech recognition," *IEEE/ACM Transactions on Audio*, *Speech, and Language Processing*, vol. 30, pp. 2968–2980, 2022.
- [82] Y. Zhao, M. Song, Y. Yue, and M. Kuruvilla-Dugdale, "Personalizing tts voices for progressive dysarthria," in *Proc. of IEEE EMBS International Conference on Biomedical and Health Informatics (BHI)*, Virtual, July 2021, pp. 1–4.
- [83] L. Wu, D. Zong, S. Sun, and J. Zhao, "A sequential contrastive learning framework for robust dysarthric speech recognition," in *Proc. of International Conference on Acoustics, Speech and Signal Processing* (ICASSP), Toronto, Canada, June 2021, pp. 7303–7307.
- [84] Z. Yue, E. Loweimi, and Z. Cvetkovic, "Raw source and filter modelling for dysarthric speech recognition," in *Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, Singapore, May 2022, pp. 7377–7381.
- [85] M. Geng, X. Xie, Z. Ye, T. Wang, G. Li, S. Hu, X. Liu, and H. Meng, "Speaker Adaptation Using Spectro-Temporal Deep Features for Dysarthric and Elderly Speech Recognition," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 30, pp. 2597– 2611, 2022.
- [86] K. Vora, D. Padalia, D. Mehta, and D. Sharma, "Hybrid CNN-LSTM network to detect dysarthria using Mel-frequency cepstral coefficients," in *Proc. of International Conference on Advances in Science and Technology (ICAST)*, Mumbai, India, Dec. 2022, pp. 615–621.
- [87] J. C. Vásquez-Correa et al., "Convolutional neural network to model articulation impairments in patients with Parkinson's disease." in Proc. Annual Conference of the International Speech Communication, Stockholm, Sweden, Aug. 2017, pp. 314–318.
- [88] Y. Jiang, T. Wang, X. Xie, J. Liu, W. Sun, N. Yan, H. Chen, L. Wang, X. Liu, and F. Tian, "Perceiver-prompt: Flexible speaker adaptation in whisper for Chinese disordered speech recognition," in *Proc. of Annual Conference of the International Speech Communication*, Kos, Greece, Sept. 2024.
- [89] S. R. Kadiri, F. Javanmardi, and P. Alku, "Investigation of selfsupervised pre-trained models for classification of voice quality from speech and neck surface accelerometer signals," *Computer Speech & Language*, vol. 83, p. 101550, Jan. 2024.
- [90] S. Tirronen, S. R. Kadiri, and P. Alku, "Hierarchical multi-class classification of voice disorders using self-supervised models and glottal features," *IEEE Open Journal of Signal Processing*, vol. 4, pp. 80–88, 2023.
- [91] H. Kheddar, Y. Himeur, S. Al-Maadeed, A. Amira, and F. Bensaali, "Deep transfer learning for automatic speech recognition: Towards better generalization," *Knowledge-Based Systems*, vol. 277, p. 110851, Oct. 2023.
- [92] J. D. Fritsch, "Novel methods for detection and analysis of atypical aspects in speech," Ph.D. dissertation, EPFL, Lausanne, 2023.
- [93] D. Ribas, M. A. Pastor, A. Miguel, D. Martínez, A. Ortega, and E. Lleida, "Automatic voice disorder detection using self-supervised representations," *IEEE Access*, vol. 11, pp. 14915–14927, 2023.
- [94] M. Geng, X. Xie, R. Su, J. Yu, Z. Jin, T. Wang, S. Hu, Z. Ye, H. Meng, and X. Liu, "On-the-fly feature based rapid speaker adaptation for dysarthric and elderly speech recognition," in *Proc. of Annual Conference of the International Speech Communication*, Dublin, Ireland, Aug. 2022.
- [95] D. Mujtaba, N. R. Mahapatra, M. Arney, J. S. Yaruss, C. Herring, and J. Bin, "Inclusive ASR for disfluent speech: Cascaded large-scale selfsupervised learning with targeted fine-tuning and data augmentation," in *Proc. of Annual Conference of the International Speech Communication*, Kos, Greece, Sept. 2024.

- [96] K. Soky, S. Li, C. Chu, and T. Kawahara, "Domain and language adaptation using heterogeneous datasets for Wav2vec2.0-based speech recognition of low-resource language," in *Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, Rhodes Island, Greece, June 2023, pp. 1–5.
- [97] M. Maisonneuve, C. Fredouille, M. Lalain, A. Ghio, and V. Woisard, "Towards objective and interpretable speech disorder assessment: a comparative analysis of CNN and transformer-based models," in *Proc.* of Annual Conference of the International Speech Communication, Kos, Greece, Sept. 2024.
- [98] T. Weise, A. Maier, K. C. Demir, P. A. Pérez-Toro, T. Arias-Vergara, B. Heismann, E. Nöth, M. Schuster, and S. H. Yang, "Impact of Including pathological speech in pre-training on pathology detection," in *Proc. of Text, Speech, and Dialogue*, Pilsen, Czech Republic, Sept. 2023, pp. 141–153.
- [99] X. Liu, X. Du, J. Liu, R. Su, M. L. Ng, Y. Zhang, Y. Yang, S. Zhao, L. Wang, and N. Yan, "Automatic assessment of dysarthria using audio-visual vowel graph attention network," *arXiv preprint* arXiv:2405.03254, 2024.
- [100] M. Kheirkhahzadeh, "Speech classification using acoustic embedding and large language models applied on Alzheimer's disease prediction task," Ph.D. dissertation, KTH, Sweden, 2024.
- [101] M. K. Baskar, T. Herzig, D. Nguyen, M. Diez, T. Polzehl, L. Burget, and J. H. Černocký, "Speaker adaptation for Wav2vec2 based dysarthric ASR," in *Proc. of Annual Conference of the International Speech Communication*, Incheon, South Korea, Sept. 2022.
- [102] S. Cullen, "Improving dysarthric speech recognition by enriching training datasets," Ph.D. dissertation, TU Dublin, Ireland, 2022.
- [103] T. Nguyen, C. Fredouille, A. Ghio, M. Balaguer, and V. Woisard, "Exploring pathological speech quality assessment with ASR-powered Wav2Vec2 in data-scarce context," in *Proc. of Joint International Conference on Computational Linguistics, Language Resources and Evaluation*, Torino, Italy, May 2024, pp. 6935–6944.
- [104] Y. Lin, L. Wang, Y. Yang, and J. Dang, "CFDRN: A cognition-inspired feature decomposition and recombination network for dysarthric speech recognition," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 31, pp. 3824–3836.
- [105] P. Wang and H. Van hamme, "Benefits of pre-trained mono- and crosslingual speech representations for spoken language understanding of Dutch dysarthric speech," *EURASIP Journal on Audio, Speech, and Music Processing*, vol. 2023, no. 1, p. 15, Apr. 2023.
- [106] S. Hu, X. Xie, Z. Jin, M. Geng, Y. Wang, M. Cui, J. Deng, X. Liu, and H. Meng, "Exploring self-supervised pre-trained ASR models for dysarthric and elderly speech recognition," in *Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, June 2023, pp. 1–5.
- [107] H. Wang, Z. Jin, M. Geng, S. Hu, G. Li, T. Wang, H. Xu, and X. Liu, "Enhancing pre-trained asr system fine-tuning for dysarthric speech recognition using adversarial data augmentation," in *Proc. of International Conference on Acoustics, Speech, and Signal Processing* (ICASSP), Seoul, Korea, April 2024.
- [108] A. Hernandez, P. A. Pérez-Toro, E. Nöth, J. R. Orozco-Arroyave, A. Maier, and S. H. Yang, "Cross-lingual self-supervised speech representations for improved dysarthric speech recognition," in *Proc.* of Annual Conference of the International Speech Communication, Incheon, Korea, Sept. 2022, pp. 51–55.
- [109] M. Spijkerman, "Using voice conversion and time-stretching to enhance the quality of dysarthric speech for automatic speech recognition," Ph.D. dissertation, University of Groningen, Netherlands, 2022.
- [110] J. Shor and S. Venugopalan, "TRILLsson: Distilled Universal Paralinguistic Speech Representations," in *Proc. of Annual Conference of the International Speech Communication*, Incheon, Korea, Sep. 2022, pp. 356–360.
- [111] A. Favaro, Y.-T. Tsai, A. Butala, T. Thebaud, J. Villalba, N. Dehak, and L. Moro-Velázquez, "Interpretable speech features vs. DNN embeddings: What to use in the automatic assessment of Parkinson's disease in multi-lingual scenarios," *Computers in Biology and Medicine*, vol. 166, p. 107559, Nov. 2023.
- [112] A. Baevski, Y. Zhou, A. Mohamed, and M. Auli, "wav2vec 2.0: A framework for self-supervised learning of speech representations," in *Proc. Annual Conference on Neural Information Processing Systems*, vol. 33, Virtual Online, Dec. 2020, pp. 12449–12460.
- [113] M. Amiri and I. Kodrasi, "Suppressing noise disparity in training data for automatic pathological speech detection," in *Proc. of International Workshop on Acoustic Signal Enhancement*, Aalborg, Denmark, Sept. 2024.

- [114] ——, "Test-time adaptation for automatic pathological speech detection in noisy environments," in *Proc. of Europenan Signal Porcessing Conference*, Lyon, France, Aug. 2024.
- [115] ——, "Adversarial robustness analysis in automatic pathological speech detection approaches," in *Proc. Annual Conference of the International Speech Communication*, Rhodes Islands, Greece, Sept. 2024, pp. 1415– 1419.
- [116] F. Rudzicz, A. K. Namasivayam, and T. Wolff, "The TORGO database of acoustic and articulatory speech from speakers with dysarthria," *Language Resources and Evaluation*, vol. 46, no. 4, pp. 523–541, Dec. 2012.
- [117] J. R. Orozco-Arroyave, J. D. Arias-Londoño, J. F. Vargas-Bonilla, M. C. González-Rátiva, and E. Nöth, "New Spanish speech corpus database for the analysis of people suffering from Parkinson's disease," in *Proc. of International Conference on Language Resources and Evaluation (LREC'14)*, Reykjavik, Iceland, May 2014, pp. 342–347.
- [118] "MoSpeeDi-ChaSpeePro dataset," https://www.unige.ch/fapse/ mospeedi/mospeedi-dataset, database available within the MoSpeeDi-ChaSpeePro project consortium.
- [119] X. Menendez-Pidal, J. Polikoff, S. Peters, J. Leonzio, and H. Bunnell, "The Nemours database of dysarthric speech," in *Proc. of International Conference on Spoken Language Processing. ICSLP '96*, vol. 3, Philadelphia, USA, oct. 1996, pp. 1962–1965 vol.3.
- [120] K. H. Wong, Y. T. Yeung, E. H. Y. Chan, P. C. M. Wong, G.-A. Levow, and H. Meng, "Development of a Cantonese dysarthric speech corpus," in *Proc. of Annual Conference of the International Speech Communication Association*, Sept. 2015, pp. 329–333.
- [121] J. Laures-Gore, S. Russell, R. Patel, and M. Frankel, "The Atlanta Motor Speech Disorders Corpus: Motivation, Development, and Utility," *Folia Phoniatrica et Logopaedica: International Association of Logopedics and Phoniatrics (IALP)*, vol. 68, no. 2, pp. 99–105, 2016.
- [122] E. Yilmaz, M. Ganzeboom, L. Beijer, C. Cucchiarini, and H. Strik, "A Dutch dysarthric speech database for individualized speech therapy research," in *Proc. of International Conference on Language Resources* and Evaluation (LREC'16), Portorož, Slovenia, May 2016, pp. 792– 795.
- [123] R. Turrisi, A. Braccia, M. Emanuele, S. Giulietti, M. Pugliatti, M. Sensi, L. Fadiga, and L. Badino, "EasyCall corpus: A dysarthric speech dataset," in *Proc. of Annual Conference of the International Speech Communication*, Brno, Czechia, Sept. 2021, pp. 41–45.
- [124] G. Van Nuffelen, M. De Bodt, C. Middag, and J.-P. Martens, "Dutch corpus of pathological and normal speech (COPAS)," Antwerp University Hospital and Ghent University, Tech. Rep., 2009.
- [125] A. Favaro, A. Butala, T. Thebaud, J. Villalba, N. Dehak, and L. Moro-Velázquez, "Unveiling early signs of parkinson's disease via a longitudinal analysis of celebrity speech recordings," *NPJ Parkinson's Disease*, vol. 10, no. 1, p. 207, 2024.
- [126] A. Tsanas, M. A. Little, P. E. McSharry, J. Spielman, and L. O. Ramig, "Novel speech signal processing algorithms for high-accuracy classification of Parkinson's disease," *IEEE Transactions on Biomedical Engineering*, vol. 59, no. 5, pp. 1264–1271, May 2012.
- [127] E. Vaiciukynas, A. Verikas, A. Gelzinis, and M. Bacauskiene, "Detecting Parkinson's disease from sustained phonation and speech signals," *PLoS One*, vol. 12, no. 10, p. e0185613, 2017.
- [128] S. Jothilakshmi, "Automatic system to detect the type of voice pathology," *Applied Soft Computing*, vol. 21, pp. 244–249, Aug. 2014.
- [129] M. Novotný, J. Rusz, R. Čmejla, and E. Růžička, "Automatic evaluation of articulatory disorders in Parkinson's disease," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 22, no. 9, pp. 1366–1378, 2014.
- [130] J. R. Orozco-Arroyave, F. Hönig, J. D. Arias-Londoño, J. F. Vargas-Bonilla, and E. Nöth, "Spectral and cepstral analyses for Parkinson's disease detection in Spanish vowels and words," *Expert Systems*, vol. 32, no. 6, pp. 688–697, Dec. 2015.
- [131] J. Wang, P. V. Kothalkar, B. Cao, and D. Heitzman, "Towards automatic detection of amyotrophic lateral sclerosis from speech acoustic and articulatory samples," San Francisco, USA, Sept. 2016, pp. 1195–1199.
- [132] R. Norel, M. Pietrowicz, C. Agurto, S. Rishoni, and G. Cecchi, "Detection of Amyotrophic lateral sclerosis (ALS) via acoustic analysis," in *Proc. of Annual Conference of the International Speech Communication*,, Hyderabad, India, Sept. 2018, pp. 377–381.
- [133] N. N. Prabhakera and P. Alku, "Dysarthric speech classification using glottal features computed from non-words, words and sentences," in *Proc. of Annual Conference of the International Speech Communication*, Hyderabad, India, Sept. 2018, pp. 3403–3407.

- [134] P. Janbakhshi, I. Kodrasi, and H. Bourlard, "Subspace-based learning for automatic dysarthric speech detection," *IEEE Signal Processing Letters*, vol. 28, pp. 96–100, 2021.
- [135] S. Gillespie, Y.-Y. Logan, E. Moore, J. Laures-Gore, S. Russell, and R. Patel, "Cross-database models for the classification of dysarthria presence," in *Proc. of Annual Conference of the International Speech Communication*, Stockholm, Sweden, Aug. 2017, pp. 3127–3131.
- [136] K. An, M. Kim, K. Teplansky, J. Green, T. Campbell, Y. Yunusova, D. Heitzman, and J. Wang, "Automatic early detection of Amyotrophic lateral sclerosis from intelligible speech using convolutional neural networks," in *Proc. of Annual Conference of the International Speech Communication*, Hyderabad, India, Sept. 2018, pp. 1913–1917.
- [137] S. R. Mani Sekhar, G. Kashyap, A. Bhansali, A. A. A., and K. Singh, "Dysarthric-speech detection using transfer learning with convolutional neural networks," *Information & Communications Technology Express*, vol. 8, no. 1, pp. 61–64.
- [138] A. Illa, D. Patel *et al.*, "Comparison of speech tasks for automatic classification of patients with Amyotrophic lateral sclerosis and healthy subjects," in *Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, Alberta, Canada, Apr. 2018, pp. 6014–6018.
- [139] J. C. Vásquez Correa, T. Arias, J. R. Orozco-Arroyave, and E. Nöth, "A multitask learning approach to assess the dysarthria severity in patients with Parkinson's disease," in *Proc. of Annual Conference of the International Speech Communication*, Hyderabad, India, Sept. 2018, pp. 456–460.
- [140] A. Mayle et al., "Diagnosing dysarthria with long short-term memory networks." in Proc. Annual Conference of the International Speech Communication, Graz, Austria, Sept. 2019, pp. 4514–4518.
- [141] C. Bhat and H. Strik, "Automatic assessment of sentence-level dysarthria intelligibility using BLSTM," *IEEE Journal of Selected Topics in Signal Processing*, vol. 14, no. 2, pp. 322–330, Feb. 2020.
- [142] F. Javanmardi, S. R. Kadiri, and P. Alku, "Exploring the impact of fine-tuning the wav2vec2 model in database-independent detection of dysarthric speech," *IEEE Journal of Biomedical and Health Informatics*, pp. 1–12, 2024.
- [143] D. Kovac, J. Mekyska, V. Aharonson, P. Harar, Z. Galaz, S. Rapcsak, J. R. Orozco-Arroyave, L. Brabenec, and I. Rektorova, "Exploring digital speech biomarkers of hypokinetic dysarthria in a multilingual cohort," *Biomedical Signal Processing and Control*, vol. 88, p. 105667, Feb. 2024.
- [144] R. Takashima, T. Takiguchi, and Y. Ariki, "Two-step acoustic model adaptation for dysarthric speech recognition," in *Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, Virtual Barcelona, Spain, May 2020, pp. 6104–6108.
- [145] Y. Takashima, R. Takashima, T. Takiguchi, and Y. Ariki, "Dysarthric speech recognition based on deep metric learning," in *Proc. Annual Conference of the International Speech Communication*, Shanghai, China, Oct. 2020, pp. 4796–4800.
- [146] J. R. Green, R. L. MacDonald *et al.*, "Automatic speech recognition of disordered speech: Personalized models outperforming human listeners on short phrases," in *Proc. of Annual Conference of the International Speech Communication*, Brno, Czechia, Sept. 2021, pp. 4778–4782.
- [147] E. Hermann and M. Magimai.-Doss, "Dysarthric speech recognition with lattice-free MMI," in *Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, Virtual Barcelona, Spain, May 2020, pp. 6109–6113.
- [148] F. Xiong, J. Barker, Z. Yue, and H. Christensen, "Source domain data selection for improved transfer learning targeting dysarthric speech recognition," in *Proc. of International Conference on Acoustics, Speech* and Signal Processing (ICASSP), Virtual Barcelona, Spain, May 2020, pp. 7424–7428.
- [149] Z. Yue, H. Christensen, and J. Barker, "Autoencoder bottleneck features with multi-task optimisation for improved continuous dysarthric speech recognition," in *Proc. of Annual Conference of the International Speech Communication*, Shanghai, China, Oct. 2020, pp. 4581–4585.
- [150] S. R. Shahamiri, "Speech vision: An end-to-end deep learning-based dysarthric automatic speech recognition system," *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, vol. 29, pp. 852–861, 2021.
- [151] E. J. Hu, yelong shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, and W. Chen, "LoRA: Low-rank adaptation of large language models," in *Proc. of International Conference on Learning Representations*, Virtual, Apr. 2022.
- [152] Z. Song, J. Zhuo, Y. Yang, Z. Ma, S. Zhang, and X. Chen, "LoRAwhisper: Parameter-efficient and extensible multilingual ASR," in *Proc.*

of Annual Conference of the International Speech Communication, Kos, Greece, Sept. 2024, pp. 3934–3938.

- [153] T. A. M. Celin, T. Nagarajan, and P. Vijayalakshmi, "Data augmentation using virtual microphone array synthesis and multi-resolution feature extraction for isolated word dysarthric speech recognition," *IEEE Journal of Selected Topics in Signal Processing*, vol. 14, no. 2, pp. 346–354, Feb. 2020.
- [154] F. Rudzicz, "Adjusting dysarthric speech signals to be more intelligible," *Computer Speech & Language*, vol. 27, no. 6, pp. 1163–1177, Sep. 2013.
- [155] J.-P. Hosom, A. Kain, T. Mishra, J. van Santen, M. Fried-Oken, and J. Staehely, "Intelligibility of modifications to dysarthric speech," in *Proc. of International Conference on Acoustics, Speech, and Signal Processing, (ICASSP*, vol. 1, Hong Kong, China, Apr. 2003, pp. I–I.
- [156] V. Lalitha, P. Prema, and L. Mathew, "A Kepstrum based approach for enhancement of dysarthric speech," in *Proc. of International Congress* on *Image and Signal Processing*, vol. 7, Yantai, China, Oct. 2010, pp. 3474–3478.
- [157] S.-O. Caballero-Morales and F. Trujillo-Romero, "Evolutionary approach for integration of multiple pronunciation patterns for enhancement of dysarthric speech recognition," *Expert Systems with Applications*, vol. 41, no. 3, pp. 841–852, Feb. 2014.
- [158] M. Dhanalakshmi and P. Vijayalakshmi, "Intelligibility modification of dysarthric speech using HMM-based adaptive synthesis system," in *Proc. of International Conference on Biomedical Engineering (ICoBE)*, Penang, Malaysia, Mar. 2015, pp. 1–5.
- [159] S. Wang, Y. Tsao, W. Zheng, H. Yeh, P. Li, S. Fang, and Y. Lai, "Dysarthric speech enhancement based on convolution neural network," in *Proc. of Annual International Conference of the IEEE Engineering in Medicine & Biology Society (EMBC)*, Glasgow, Scotland, UK, July 2022, pp. 60–64.
- [160] S. A. Kumar and C. S. Kumar, "Improving the intelligibility of dysarthric speech towards enhancing the effectiveness of speech therapy," in *Proc. of International Conference on Advances in Computing, Communications and Informatics (ICACCI)*, Jaipur, India, Sep. 2016, pp. 1000–1005.
- [161] A. Roy, L. Thakur, G. Vyas, and G. Raj, "Towards improving the intelligibility of dysarthric speech," in *Proc. of International Conference* on Soft Computing and Signal Processing, J. Wang, G. R. M. Reddy, V. K. Prasad, and V. S. Reddy, Eds., Singapore, 2019, pp. 547–559.
- [162] S. Sivaram, C. S. Kumar, and A. A. Kumar, "Enhancement of dysarthric speech for developing an effective speech therapy tool," in *Proc. of International Conference on Wireless Communications, Signal Processing and Networking (WiSPNET)*, Chennai, India, Mar 2017, pp. 2548–2551.
- [163] K. Gurugubelli and A. K. Vuppala, "Perceptually enhanced single frequency filtering for dysarthric speech detection and intelligibility assessment," in *Proc. of International Conference on Acoustics, Speech* and Signal Processing (ICASSP), Brighton, UK, May 2019, pp. 6410– 6414.
- [164] K. Matsubara, T. Okamoto, R. Takashima, T. Takiguchi, T. Toda, Y. Shiga, and H. Kawai, "High-intelligibility speech synthesis for dysarthric speakers with LPCNet-based TTS and CycleVAE-based VC," in *Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, Toronto, Canada, June 2021, pp. 7058– 7062.
- [165] M. Purohit, M. Patel, H. Malaviya *et al.*, "Intelligibility improvement of dysarthric speech using MMSE DiscoGAN," in *Proc. of International Conference on Signal Processing and Communications (SPCOM)*, Bangalore, India, July 2020, pp. 1–5.
- [166] L. Prananta, B. M. Halpern, S. Feng, and O. Scharenborg, "The effectiveness of time stretching for enhancing dysarthric speech for improved dysarthric speech recognition," in *Proc. of Annual Conference* of the International Speech Communication, Incheon, Korea 2022, pp. 36–40.
- [167] D. Wang, J. Yu et al., "End-to-end voice conversion via cross-modal knowledge distillation for dysarthric speech reconstruction," in Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP), Virtual, Barcelona, Spain, May. 2020, pp. 7744–7748.
- [168] M. Illa Bello, "Dysarthric speech synthesis via non-parallel voice conversion," Master's thesis, Universitat Politècnica de Catalunya, Spain, July 2021.
- [169] Y. Wang, X. Wu, D. Wang, L. Meng, and H. Meng, "UNIT-DSR: Dysarthric speech reconstruction system using speech unit normalization," in *Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, Seoul, Korea, Apr. 2024, pp. 12306– 12310.

- [170] L. Sha and T. Lukasiewicz, "Multi-type disentanglement without adversarial training," in *Proc. of AAAI Conference on Artificial Intelligence*, vol. 35, no. 11, Virtual, Feb. 2021, pp. 9515–9523.
- [171] P. Janbakhshi and I. Kodrasi, "Adversarial-free speaker identityinvariant representation learning for automatic dysarthric speech classification," in *Proc. Annual Conference of the International Speech Communication*, Incheon, Korea, Sept. 2022, pp. 2138–2142.
- [172] C. Zhang, C. Zhang *et al.*, "A survey on audio diffusion models: Text to speech synthesis and enhancement in generative AI," *arXiv preprint arXiv:2303.13336*, 2023.
- [173] W.-Z. Leung, M. Cross, A. Ragni, and S. Goetze, "Training data augmentation for dysarthric automatic speech recognition by text-todysarthric-speech synthesis," in *Proc. of Annual Conference of the International Speech Communication*, Kos, Greece, June 2024, pp. 2494–2498.
- [174] M. S. Paja and T. H. Falk, "Automated dysarthria severity classification for improved objective intelligibility assessment of spastic dysarthric speech," in *Proc. of Proc. of Annual Conference of the International Speech Communication*, Portland, OR, USA, Sept. 2012, pp. 62–65.
- [175] D. Martínez, P. Green, and H. Christensen, "Dysarthria intelligibility assessment in a factor analysis total variability space," in *Proc. of Annual Conference of the International Speech Communication Association*, Lyon, France, Aug. 2013, pp. 2133–2137.
- [176] J. C. Kim, H. Rao, and M. A. Clements, "Speech intelligibility estimation using multi-resolution spectral features for speakers undergoing cancer treatment," *The Journal of the Acoustical Society of America*, vol. 136, no. 4, pp. 315–321, 2014.
- [177] R. Hummel, W.-Y. Chan, and T. H. Falk, "Spectral features for automatic blind intelligibility estimation of spastic dysarthric speech," in *Proc. of Annual Conference of the International Speech Communication Association*, Florence, Italy, Aug. 2011, pp. 3017–3020.
- [178] T. H. Falk, W.-Y. Chan, and F. Shein, "Characterization of atypical vocal source excitation, temporal dynamics and prosody for objective measurement of dysarthric word intelligibility," *Speech Communication*, vol. 54, no. 5, pp. 622–631, 2012.
- [179] T. Haderlein and A. o. Schützenberger, "Robust automatic evaluation of intelligibility in voice rehabilitation using prosodic analysis," in *Proc.* of International Conference on Text, Speech, and Dialogue, Prague, Czech Republic, 2017, pp. 11–19.
- [180] A. R. Fletcher, A. A. Wisler, M. J. McAuliffe, K. L. Lansford, and J. M. Liss, "Predicting intelligibility gains in dysarthria through automated speech feature analysis," *Journal of Speech, Language, and Hearing Research*, vol. 60, no. 11, pp. 3058–3068, 2017.
- [181] T. Haderlein, S. Steidl, E. Nöth, F. Rosanowski, and M. Schuster, "Automatic recognition and evaluation of tracheoesophageal speech," in *Proc. of International Conference on Text, Speech and Dialogue*, Brno, Czech Republic, 2004, pp. 331–338.
- [182] C. Middag, G. Van Nuffelen, J. P. Martens, and M. De Bodt, "Objective intelligibility assessment of pathological speakers," in *Proc. of Annual Conference of the International Speech Communication Association*, Brisbane, Australia, Sept. 2008, pp. 1745–1748.
- [183] C. Middag, J.-P. Martens, G. V. Nuffelen, and M. De Bodt, "Automated intelligibility assessment of pathological speech using phonological features," *EURASIP Journal on Advances in Signal Processing*, vol. 2009, no. 1, pp. 1–9, 2009.
- [184] C. Middag, Y. Saeys, and J.-P. Martens, "Towards an asr-free objective analysis of pathological speech," in *Proc. of Annual Conference of the International Speech Communication Association*, Makuhari, Chiba, Japan, Sept. 2010, pp. 294–297.
- [185] A. Maier, T. Haderlein, U. Eysholdt, F. Rosanowski, A. Batliner, M. Schuster, and E. Nöth, "PEAKS - A system for the automatic evaluation of voice and speech disorders," *Speech Communication*, vol. 51, no. 5, pp. 425–437, 2009.
- [186] G. V. Nuffelen, C. Middag, M. De Bodt, and J.-P. Martens, "Speech technology-based assessment of phoneme intelligibility in dysarthria," *International Journal of Language & Communication Disorders*, vol. 44, no. 5, pp. 716–730, 2009.
- [187] T. Bocklet, K. Riedhammer, U. Eysholdt, and T. Haderlein, "Automatic intelligibility assessment of speakers after laryngeal cancer by means of acoustic modeling," *Journal of Voice*, vol. 26, no. 3, pp. 390–397, 2012.
- [188] D. Martínez, E. Lleida, P. Green, H. Christensen, A. Ortega, and A. Miguel, "Intelligibility assessment and speech recognizer word accuracy rate prediction for dysarthric speakers in a factor analysis subspace," ACM Transactions on Accessible Computing, vol. 6, no. 3, pp. 1–21, 2015.

- [189] L. Imed, B. K. Waad, F. Corinne, and M. Christine, "Automatic prediction of speech evaluation metrics for dysarthric speech," in *Proc.* of Annual Conference of the International Speech Communication Association, Stockholm, Sweden, 2017, pp. 1834–1838.
- [190] S. Kalita, S. R. Mahadeva Prasanna, and S. Dandapat, "Intelligibility assessment of cleft lip and palate speech using gaussian posteriograms based on joint spectro-temporal features," *Journal of the Acoustical Society of America*, vol. 144, no. 4, pp. 2413–2423, 2018.
- [191] P. Janbakhshi, I. Kodrasi, and H. Bourlard, "Pathological speech intelligibility assessment based on the short-time objective intelligibility measure," in *Proc. of International Conference on Acoustics, Speech* and Signal Processing (ICASSP), Brighton, UK, May 2019, pp. 6405– 6409.
- [192] —, "Synthetic speech references for automatic pathological speech intelligibility assessment," in *Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, Virtual Barcelona, Spain, 2020, pp. 6099–6103.
- [193] T. Weise, P. Klumpp, A. Maier, E. Nöth, B. Heismann, M. Schuster, and S. H. Yang, "Disentangled latent speech representation for automatic pathological intelligibility assessment," in *Proc. of Annual Conference* of the International Speech Communication Association, Incheon, Korea, Sept. 2022, pp. 4815–4819.
- [194] P. Janbakhshi, I. Kodrasi, and H. Bourlard, "Automatic pathological speech intelligibility assessment exploiting subspace-based analyses," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 28, pp. 1717–1728, 2020.
- [195] E. J. Yeo, S. Kim, and M. Chung, "Automatic severity classification of Korean dysarthric speech using phoneme-level pronunciation features," in *Proc. of Annual Conference of the International Speech Communication*,, Brno, Czechia, Sept. 2021, pp. 4838–4842.
- [196] K. L. Kadi, S. A. Selouani, B. Boudraa, and M. Boudraa, "Fully automated speaker identification and intelligibility assessment in dysarthria disease using auditory knowledge," *Biocybernetics and Biomedical Engineering*, vol. 36, no. 1, pp. 233–247, Jan. 2016.
- [197] R. Dubbioso, M. Spisto, L. Verde, V. V. Iuzzolino, G. Senerchia, G. De Pietro, I. De Falco, and G. Sannino, "Precision medicine in ALS: Identification of new acoustic markers for dysarthria severity assessment," *Biomedical Signal Processing and Control*, vol. 89, p. 105706, Mar. 2024.
- [198] A. Tripathi, S. Bhosale, and S. K. Kopparapu, "A novel approach for intelligibility assessment in dysarthric subjects," in *Proc. of International Conference on Acoustics, Speech and Signal Processing* (*ICASSP*), Virtual Barcelona, Spain, May 2020, pp. 6779–6783.
- [199] M. Soleymanpour, M. T. Johnson, and J. Berry, "Increasing the precision of dysarthric speech intelligibility and severity level estimate," *Lecture Notes in Computer Science*, vol. 12997, pp. 670–679, 2021.
- [200] A. A. Joshy and R. Rajan, "Automated dysarthria severity classification using deep learning frameworks," in *Proc. of European Signal Processing Conference (EUSIPCO)*, Amsterdam, Netherlands, Aug. 2021, pp. 116–120.
- [201] S. Gupta, A. T. Patil, M. Purohit, M. Parmar, M. Patel, H. A. Patil, and R. C. Guido, "Residual Neural Network precisely quantifies dysarthria severity-level based on short-duration speech segments," *Neural Networks*, vol. 139, pp. 105–117, Jul. 2021.
- [202] A. A. Joshy and R. Rajan, "Dysarthria severity assessment using squeeze-and-excitation networks," *Biomedical Signal Processing and Control*, vol. 82, p. 104606, Apr. 2023.
- [203] K. Radha, M. Bansal, and V. R. Dulipalla, "Variable STFT layered cnn model for automated dysarthria detection and severity assessment using raw speech," *Circuits, Systems, and Signal Processing*, vol. 43, no. 5, pp. 3261–3278, May 2024.
- [204] S. Sajiha, K. Radha, D. Venkata Rao, N. Sneha, S. Gunnam, and D. P. Bavirisetti, "Automatic dysarthria detection and severity level assessment using CWT-layered CNN model," vol. 2024, no. 1, p. 33.
- [205] J. C. Vásquez-Correa, J. R. Orozco-Arroyave, T. Bocklet, and E. Nöth, "Towards an automatic evaluation of the dysarthria level of patients with parkinson's disease," *Journal of Communication Disorders*, vol. 76, pp. 21–36, Nov. 2018.
- [206] A. Hernandez, E. J. Yeo, S. Kim, and M. Chung, "Dysarthria detection and severity assessment using rhythm-based metrics," in *Proc. of Annual Conference of the International Speech Communication*, Shanghai, China, Oct. 2020, pp. 2897–2901.
- [207] A. Hernandez, S. Kim, and M. Chung, "Prosody-based measures for automatic severity assessment of dysarthric speech," *Applied Sciences*, vol. 10, no. 19, p. 6999, Jan. 2020.
- [208] H. Tong, H. Sharifzadeh, and I. McLoughlin, "Automatic assessment of dysarthric severity level using audio-video cross-modal approach

in deep learning," in Proc. of Annual Conference of the International Speech Communication, Shanghai, China, Oct. 2020, pp. 4786–4790.

- [209] A. A. Joshy and R. Rajan, "Dysarthria severity classification using multi-head attention and multi-task learning," *Speech Communication*, vol. 147, pp. 1–11, Feb. 2023.
- [210] B. Vachhani, C. Bhat, and S. K. Kopparapu, "Data augmentation using healthy speech for dysarthric speech recognition," in *Proc. of Annual Conference of the International Speech Communication*, Hyderabad, India, Sept. 2018, pp. 471–475.
- [211] M. Geng, X. Xie, S. Liu, J. Yu, S. Hu, X. Liu, and H. Meng, "Investigation of data augmentation techniques for disordered speech recognition," in *Proc. of Annual Conference of the International Speech Communication*, Shanghai, China, Oct 2020, pp. 696–700.
- [212] F. Xiong, J. Barker, and H. Christensen, "Phonetic analysis of dysarthric speech tempo and applications to robust personalised dysarthric speech recognition," in *Proc. of International Conference* on Acoustics, Speech and Signal Processing (ICASSP), Brighton, UK, May. 2019, pp. 5836–5840.
- [213] Y. Takashima, T. Takiguchi, and Y. Ariki, "End-to-end dysarthric speech recognition using multiple databases," in *Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, Brighton, UK, May 2019, pp. 6395–6399.
- [214] Z. Jin, M. Geng, X. Xie, J. Yu, S. Liu, X. Liu, and H. Meng, "Adversarial data augmentation for disordered speech recognition," in *Proc. of Annual Conference of the International Speech Communication*,, Brno, Czechia, Sept. 2021, pp. 4803–4807.
- [215] Z. Jin, M. Geng, J. Deng, T. Wang, S. Hu, G. Li, and X. Liu, "Personalized Adversarial Data Augmentation for Dysarthric and Elderly Speech Recognition," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 32, pp. 413–429, 2024.
- [216] E. Hermann and M. Magimai. Doss, "Few-shot dysarthric speech recognition with text-to-speech data augmentation," in *Proc. of Annual Conference of the International Speech Communication*, Dublin, Ireland, Aug. 2023, pp. 156–160.
- [217] A. Wisler, V. Berisha, A. Spanias, and J. Liss, "Noise robust dysarthric speech classification using domain adaptation," in *Proc. of Digital Media Industry & Academic Forum (DMIAF)*, Santorini, Greece, July 2016, pp. 135–138.
- [218] S. A. Sheikh, Y. Kaloga, and I. Kodrasi, "Graph neural networks for Parkinsons disease detection," arXiv preprint arXiv:2409.07884, 2024.
- [219] C. Rudin, "Stop explaining black box machine learning models for high stakes decisions and use interpretable models instead," *Nature Machine Intelligence*, vol. 1, no. 5, pp. 206–215, May 2019.
- [220] Z. C. Lipton, "The mythos of model interpretability: In machine learning, the concept of interpretability is both important and slippery." *Queue*, vol. 16, no. 3, pp. 31–57, June 2018.
- [221] Y. Jiao, V. Berisha, and J. Liss, "Interpretable phonological features for clinical applications," in *Proc. of International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, New Orleans, LA, USA, Mar. 2017, pp. 5045–5049.
- [222] H. P. Rowe, S. E. Gutz, M. F. Maffei, and J. R. Green, "Acoustic-based articulatory phenotypes of amyotrophic lateral sclerosis and Parkinson's disease: Towards an interpretable, hypothesis-driven framework of motor control," in *n Proc. of Annual Conference of the International Speech Communication*, Shanghai, China, Oct. 2020, pp. 4816–4820.
- [223] R. Turrisi and L. Badino, "Interpretable dysarthric speaker adaptation based on optimal-transport," in *Proc. of Annual Conference of the International Speech Communication*, Incheon, Korea, Sep. 2022, pp. 26–30.
- [224] L. Xu, J. Liss, and V. Berisha, "Dysarthria detection based on a deep learning model with a clinically-interpretable layer," JASA Express Letters, vol. 3, no. 1, p. 015201, Jan. 2023.
- [225] Y. Kaloga, S. A. Sheikh, and I. Kodrasi, "Multiview canonical correlation analysis for automatic pathological speech detection," *arXiv* preprint arXiv:2409.17276, 2024.
- [226] M. U. Hadi, Q. A. Tashi, A. Shah, R. Qureshi, A. Muneer, M. Irfan, A. Zafar, M. B. Shaikh, N. Akhtar, J. Wu, S. Mirjalili, and M. Shah, "Large language models: a comprehensive survey of its applications, challenges, limitations, and future prospects," *Authorea Preprints*, Aug. 2024.
- [227] D. Wagner, S. P. Bayerl, I. Baumann, K. Riedhammer, E. Nöth, and T. Bocklet, "Large language models for dysfluency detection in stuttered speech," in *Proc. of Annual Conference of the International Speech Communication*, Kos, Greece, Sept. 2024, pp. 5118–5122.