

---

# MACHINE LEARNING APPLICATIONS IN ARCHAEOLOGICAL PRACTICES: A REVIEW

---

A PREPRINT

 **Mathias. Bellat\***

Collaborative Research Center 1070 “ResourceCultures”  
University of Tübingen, Tübingen, 72074, Germany  
Department of Geosciences, Working Group Soil Science and Geomorphology  
University of Tübingen, Tübingen, 72074, Germany  
mathias.bellat@uni-tuebingen.de

 **Jordy D. Orellana Figueroa\***

Department of Geosciences, Working Group Early Prehistory and Quaternary Ecology  
University of Tübingen, Tübingen, 72074, Germany  
High Performance and Cloud Computing Group  
University of Tübingen, Tübingen, 72074, Germany  
ext-contact@jorellanaf.com

 **Jonathan S. Reeves**

Department of Geosciences, Working Group Early Prehistory and Quaternary Ecology  
University of Tübingen, Tübingen, 72074, Germany  
Technological Primates Research Group  
Max Planck Institute for Evolutionary Anthropology, Leipzig, 04103, Germany

 **Ruhollah Taghizadeh-Mehrjardi**

Faculty of Agriculture and Natural Resources  
Ardakan University, Ardakan, Iran

 **Claudio Tennie†**

Department of Geosciences, Working Group Early Prehistory and Quaternary Ecology  
University of Tübingen, Tübingen, 72070, Germany

 **Thomas Scholten †.**

Collaborative Research Center 1070 “ResourceCultures”  
University of Tübingen, Tübingen, 72074, Germany  
Department of Geosciences, Working Group Soil Science and Geomorphology  
University of Tübingen, Tübingen, 72074, Germany  
DFG Cluster of Excellence “Machine Learning: New Perspectives for Science”  
University of Tübingen, Tübingen, 72076, Germany

January 8, 2025

---

\*Shared first authorship.

†Shared senior authorship.

## ABSTRACT

Artificial intelligence and machine learning applications in archaeology have increased significantly in recent years, and these now span all subfields, geographical regions, and time periods from prehistory to modern times. The prevalence and success of these applications have remained largely unexamined, as recent reviews on the use of machine learning in archaeology have only focused on specific subfields of archaeology. Our review examined an exhaustive corpus of 135 articles published between 1997 and 2022. We observed a significant increase in the number of relevant publications from 2019 onwards, mainly concentrated in a few journals and in majority published in open access format. Automatic structure detection and artefact classification were the most represented tasks in the articles reviewed, followed by taphonomy, archaeological predictive modelling, and architectural classification or reconstruction. From the corpus of articles analysed, clustering and unsupervised methods were underrepresented compared to supervised models. Artificial neural networks and ensemble learning account for two thirds of the total number of models used. However, if machine learning models are gaining in popularity they remain subject to misunderstanding. We observed, in some cases, poorly defined requirements and caveats of the machine learning methods used. Furthermore, the goals and the needs of machine learning applications for archaeological purposes are in some cases unclear or poorly expressed. To address this, we propose here a workflow guide for archaeologists to develop coherent and consistent methodologies adapted to their research questions, project scale and available data. As in many areas of modern life, machine learning is rapidly becoming an important tool in archaeological research and practice, particularly useful for the analyses of large and highly multivariate data, although not without limitations. This review highlights the importance of well-defined and well-reported structured methodologies and collaborative practices to maximise the potential of applications of machine learning methods in archaeological research.

**Keywords** archaeological sciences · computing sciences · state of art · artificial intelligence · machine learning

## 1 Introduction

A study by Binford and Binford [1966] on the characterisation and classification of Mousterian assemblages was one of the first steps into multivariate statistical analysis in archaeological research, and opened a window for further, more developed applications. Other major developments in statistical and computing analyses soon followed [Djindjian, 2015, p.66], dealing with classification and clustering problems [Hodson, 1970], predictive archaeology [Judge and Lynne, 1988], or various quantitative techniques to fully bring together data structures, quantitative analyses and theoretical interpretations [Carr, 1989, Voorrips, 1990]. The first traces of machine learning applications in archaeology already date back to the 1970s [Kowalski et al., 1972], and their extensive use has grown with advancements in computing technology [Cacciari and Pocobelli, 2022].

Unlike traditional statistical modelling, machine learning methods seek to use the data itself to create a model able to accurately evaluate new, unseen data. It is defined by Alpaydin as “*programming computers to optimize a performance criterion using example data or past experience*” [Alpaydin, 2014, p.3]. Machine learning methods can, but not necessarily, produce results in a fraction of the time, cost, and sometimes even personnel required by traditional methods, and perhaps even to a greater extent than conventional statistics. This benefit can make machine learning an appealing solution to certain scientific questions [Verhagen 2007, Hansen and Nebel 2020, Calder et al. 2022, Brandsen and Koole 2022, Orellana Figueroa et al., in press].

In archaeology, machine learning includes a variety of applications such as the classification of zooarchaeological remains [Boon et al., 2009, Anichini et al., 2021, Anglisano et al., 2022], spatial pattern and mobility analyses [Stott et al., 2019, Orengo et al., 2020], cultural heritage reconstruction and preservation [Toler-Franklin et al., 2010, Grilli and Remondino, 2019, Castiello, 2022, Parsons, 2023], the study of settlement dynamics [Miera et al., 2022], taphonomic classification [Byeon et al., 2019] and on-site analysis of the origin and function of sediments and the spatial distribution of artefacts [Orengo and Garcia-Molsosa, 2019, Ginau et al., 2020, Reese, 2021, Agapiou et al., 2021].

The frequency, extent, and success of machine learning applications across archaeology remain largely unknown and their implications and ethical considerations are under debate [Bickler, 2021, Tenzer et al., 2024]. Previous reviews of machine learning applications in archaeology mainly focused on remote sensing [Jamil et al., 2022, Argyrou and Agapiou, 2022], text analysis [Gonzalez-Perez et al., 2023] or only on a small set of study cases [Mantovan and Nanni, 2020]. On the other hand, while Cacciari and Pocobelli [2022] have assessed machine learning applications across the entire field of archaeological research, they principally provide a prose-only analysis rather than a quantitative analysis as presented here, as is also the case for the overview published by Calder et al. [2022]. Palacios [2023] provided

an innovative introduction on the status of machine learning in archaeology, although mainly focused on Bayesian approaches, and with a limited selection of reviewed papers mainly on archaeological predictive models.

The inherent importance of the fieldwork component that generates the data for machine learning approaches, as well as the variety of methods and practices existing in archaeology [Kelly and Thomas, 2017, Renfrew and Bahn, 2020] all provide some difficulties in delimiting the scope of the field. Statistical analyses of artefact morphology and their typological classification, the process of site prospection using satellite imagery, the quantitative analysis of animal bones at a human-created site, and the analysis of the soil and geological composition of a site are all part of archaeological research.

Moreover, machine learning refers to a large set of different statistical methods and algorithms, from those based on Bayesian statistics, to evolutionary algorithms that seek to emulate the process of natural selection [Hastie et al., 2009, Kubat, 2017]. Recent developments in artificial neural networks have had an impact far beyond the limits of academic research [Pangti et al., 2021, Bachute and Subhedar, 2021, Kawamleh, 2024], not to mention the emergence of so-called generative artificial intelligence, which is trained to create text, images, audio, or even video based on simple text prompts [Zhang et al., 2016, Vaswani et al., 2017, Liu et al., 2023]. Such advances in machine learning methods and their successful application to a specific question in one area often lead to experimentation in other, sometimes completely unrelated, areas. The breadth of methods and practices used in archaeology thus provides many opportunities for new advances in machine learning to be applied.

Therefore, if we wish to obtain a comprehensive view of how machine learning methods have impacted the field of archaeology, we must look broadly across the various different machine learning architectures, as well as the many subfields and chronological focuses of archaeological research, from the survey phase to post-excavation analysis and interpretation. Furthermore, to determine the frequency of machine learning applications and whether the recent high-profile advances in artificial intelligence have increased interest in its use in archaeological research, we must undertake a quantitative and chronological analysis of the published literature.

With this review article, we aim to provide a comprehensive analysis of previous applications of machine learning methods in the field of archaeology, highlighting problems and methodological pitfalls, as well as their potential solutions and possible future trends. We analysed a corpus of academic publications across a comprehensive set of categories of both machine learning method families and archaeological subfields, presenting a chronological overview of machine learning applications in archaeological research, as well as a discussion of our analysis of the reviewed articles, the methods applied, the results obtained, and the provided conclusions.

## 2 Methods

A rapid systematic review protocol was conducted [Petticrew and Roberts, 2006, Grant and Booth, 2009, Jesson et al., 2012, Peters et al., 2015, Page et al., 2021] to obtain a representative dataset for a broad overview of machine learning applications in archaeological research. Although there is no consensus on the specific methodology of a rapid review, we followed the Preferred Reporting Items for Systematic Reviews and Meta-Analyses 2020 guideline (PRISMA, Page et al. 2021) and made our methodology as transparent as possible, as suggested by Haby et al. [2016].

### 2.1 Search strategy

The search strategy comprised two different and independent protocols: one performed for the automatic screening protocol, consisting of multiple searches, and one performed for the manual screening protocol, consisting of a single search [Table 1, Fig. 1]. The searches for the automatic protocol were performed by M.B. and consisted of twelve queries, each containing a combination of keywords [Box 1]. The searches were performed in five online portals. All searches were conducted in English, except for the German National Library, where the search was conducted in German with only six of the queries [Box 1]. These searches covered all records published before 1 January 2023. In total, 1460 records were retrieved from the automated search protocol, of which 558 were unique.

The manual protocol search extracted results from *Google Scholar* without any constraints on years of publication, but was done on 6 January 2023 to ensure results only from 2022 and earlier. It was performed by J.D.O.F. and consisted of a single query of keyword combinations performed using a script written in Python 3.9.16 [Python software foundation, 2022] with the `habanero`, `pandas`, and `scholarly` libraries [Chamberlain 2022, Cholewiak et al. 2022 Pandas development team, 2022], along with `geckodriver` [Mozilla, 2023] that obtained the top 300 results as ranked by Google Scholar, automatically parsing the metadata of these results *Orellana Figueroa 2020*. This search query and its keywords included the term “machine learning” and various forms of the term “archaeology” [Box 2] and retrieved a total of 285 unique records.

*Query 1* = “archaeology machine learning” (“archäologie maschinelles lernen”)
   
*Query 2* = “archeology machine learning”
   
*Query 3* = “archaeological machine learning” (“archäologisch maschinelles lernen”)
   
*Query 4* = “archeological machine learning”
   
*Query 5* = “archaeology deep learning” (“archäologie deep learning”)
   
*Query 6* = “archeology deep learning”
   
*Query 7* = “archaeological deep learning” (“archäologisch deep lernen”)
   
*Query 8* = “archeological deep learning”
   
*Query 9* = “archaeology artificial intelligence” (“archäologie künstliche intelligenz”)
   
*Query 10* = “archeology artificial intelligence”
   
*Query 11* = “archaeological artificial intelligence” (“archäologisch künstliche intelligenz”)
   
*Query 12* = “archeological artificial intelligence”

Box 1: Search queries used for the automatic protocol search. The German version of the queries used for the German National Library (DNB) portals are specified in parentheses where applicable (due to some queries being only different in the use of a spelling variant in English for “archaeology”, which is not relevant in German).

*Topic* = “machine learning” | “archaeological” | “archeological” | “archaeology” | “archeology” | “archaeo” | “archeo”

Box 2: Search query used for the manual protocol search.

Bibliographical database	Keywords matches
Automatic screening	
Web of Science	969
PubMed	413
Tübingen Universitätsbibliothek	51
German Archaeological Institute	24
German National Library	3
Total unique	558
Manual screening	
Google Scholar	300
Total unique	285
Total	1760
<b>Sum of unique totals</b>	<b>730</b>

Table 1: Summary of results of both automatic and manual protocol searches on the six online portals. Note that the “Sum of unique totals” refers only to the sum of the number of non-duplicate results from each search; however, there were many publications present in both searches (see below), which would further reduce the sum total of unique items.

## 2.2 Screening

Following the automatic and manual protocol searches, two independent screening procedures were performed on the retrieved records [Fig. 1]. For the automatic protocol, after excluding publications not written in English and records not published in scientific journals, the screening was performed with a script written in R 4.4.1 [R Core team, 2024] with the corpus and tm packages [Huang et al., 2021, Feinerer and Hornik, 2023] divided in two filters. The first screening step retrieved all documents whose full text contained one of the archaeology or machine learning keywords we defined for this filtering step [Supplementary file]. The second screening step was performed in the same manner with the same keywords, but using only the abstract and title of the results of the first screening step that were found to contain the keywords in the full text. A total of 135 records were included from the automatic search and screening protocol.

The manual screening protocol consisted of additional steps. First, a preliminary exclusion was performed, which checked whether the publications were inaccessible, whether they were preprints that were not yet in print, and whether

the record was for an entire book, amongst other criteria [Fig. 1, Supplementary file]. Further screening was then performed based on the exclusion and inclusion criteria [Supplementary file], firstly by examining the publication title alone. If after this, an article could not be securely excluded or included, a second screening step followed, now examining the abstract as well. If this was yet still insufficient for a secure inclusion or exclusion, the full-text was examined. A total of 93 records were included from the manual protocol search and screening protocol.

Both screening strategies used the same inclusion and exclusion criteria [Fig. 1, Supplementary file], though the automatic screening script, by necessity, used only a simplified version that only involved the use of keywords, while the manual protocol search was done through the human-based analysis of text.

However, to further verify the level of agreement between the two different screening strategies, the same automatic screening was performed on the 285 collected records from the manual protocol search. The results of this screening are reported below [cf. 3.1].

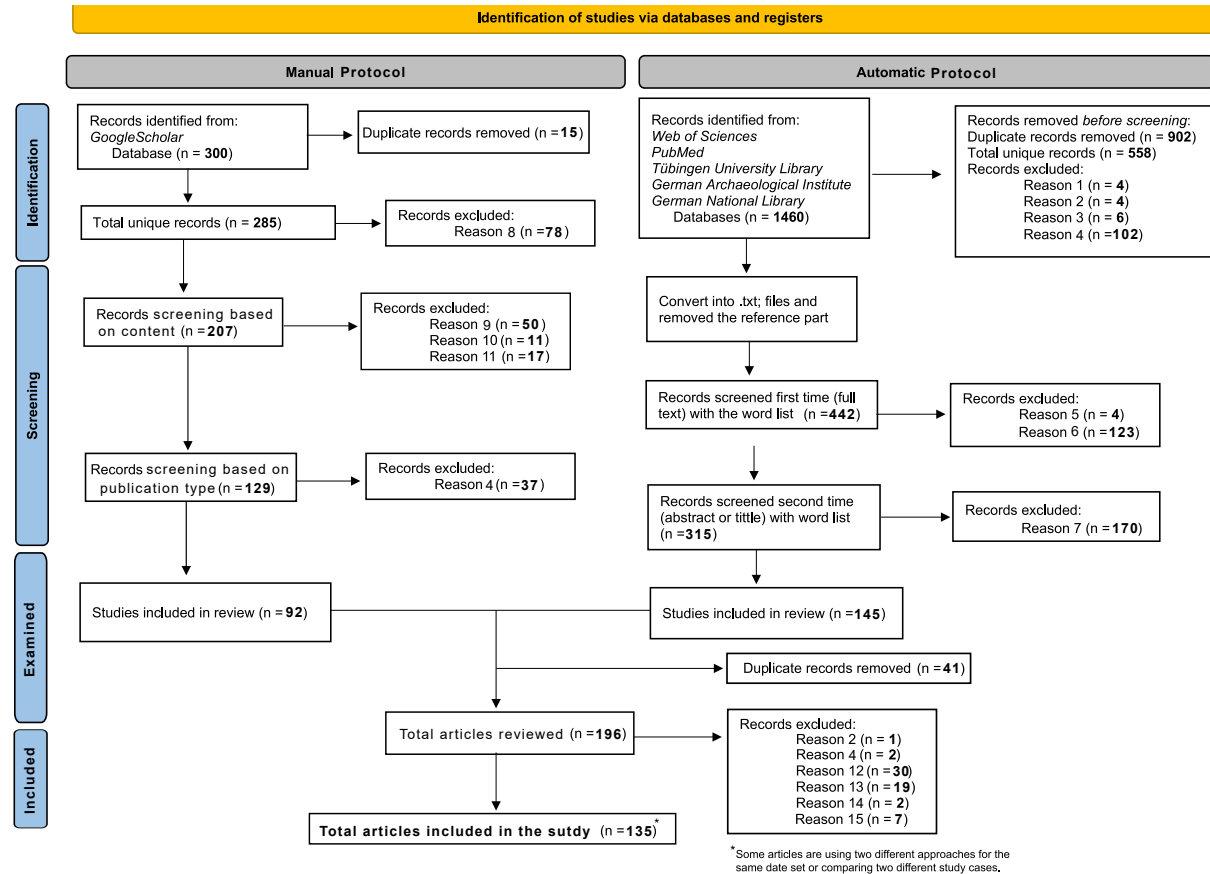


Figure 1: Review process from source selection to analysis. Inspired by the PRISMA 2020 flow diagram [Page et al., 2021]. Reason 1 = Ineligible with automation tool; Reason 2 = Non-English record; Reason 3 = Full text not accessible; Reason 4 = Non-journal-based publications; Reason 5 = Absence of abstract; Reason 6 = Archaeology and machine learning keywords from the list not present in the text; Reason 7 = Archaeology and machine learning keywords from the list are not present in the abstract or in the title; Reason 8 = Preliminary exclusion (*i.e.* no access to publication, publications or contribution by current authors, entire books, non-academic reports, preprints, potentially predatory journal); Reason 9 = Excluded based on the title; Reason 10 = Excluded based on abstract; Reason 11 = Excluded based on the full text first reading; Reason 12 = Full text does not involve archaeological research; Reason 13 = Full text does not involve machine learning methods as defined in our protocol; Reason 14 = Conflicts of interest (publication by the authors of this review or in which the authors contributed); Reason 15 = Theory or review paper.

### 2.3 Data extraction

We systematically divided each of the included articles into one or more study cases if different applications (*e.g.* using different data, or seeking different goals) were attested in the publication. Therefore, we obtained a total number of

study cases (n=147) superior to the sum of all included articles (n=135). From all these study cases, we systematically recorded a total of nine features composed of different categories [Table 2]. These features were based on the authors' *ad hoc* evaluation of possible features of interest in the evaluation of the study cases. No inter-rater reliability was calculated for the selection of these features. However, only four of these were needed to gain a clear overview of the practice of machine learning in archaeology: the architecture of the machine learning model used as well as its evaluation process (see below), the archaeological subfields where these methods were applied, and the type of task it was applied to [Fig. 2]. Though important, the other groups of features did not allow us to identify common patterns in the application of machine learning in archaeology. Thus, we included them only sporadically in our discussion. Furthermore, we extracted metadata related to the publication for our quantitative analysis. These metadata included the year of publication, the list of authors, the country of affiliation of the first author, the name of the journal, and whether the article was published through an open access modality.

Based on the model architecture, we divided machine learning methods into nine broad categories based on the family of algorithms they belonged to (*e.g.* artificial neural networks) [Fig. 2, Supplementary file]. We granularly recorded the different types of models used, which were then classified into the relevant architecture category, but we also recorded the frequency of their use. Each model was classified into only one architecture category, even in cases where multiple categories may have been warranted. For example, random forest is an ensemble of decision trees, fitting into both "ensemble learning" and "decision trees", but was classified into "ensemble learning" only, as that was the more relevant aspect of the algorithm.

Furthermore, according to the goals of the model application, we grouped the evaluation into three broad categories: classification, regression, and clustering [Fig. 2; Alpaydin 2014, pp. 5-13].

Features	Number of categories
Model	70
Best model	17
Family	9
Subfield	15
Input data	11
Evaluation	3
Task	19
Result	5
Pre-training	4

Table 2: The nine features collected systematically from the review.

Due to the wide range of subjects, we divided the field of archaeology into fifteen subfields [Fig. 2] based on Kelly and Thomas [2017]. The assignment of a study case to a specific subfield was based on the authors' own evaluation [Supplementary file]. No inter-rater reliability calculation was performed for the assignment. A single publication could be classified into several subfields based on their research questions or objectives, and therefore, the sum total entries in the subfield feature does not equal the total number of study cases included in the review.

Finally, we classified every article's application into nineteen *a posteriori* categories based on the broader task (*e.g.* automatic structure detection) for which the machine learning methods were applied [Fig. 2]. These task categories were *ad hoc* and based on the authors' evaluation of the corpus. No inter-rater reliability calculation was performed for the creation of these tasks categories. These task categories were one of the most important characteristics to analyse, as these classes helped us understand not only the goals of the authors, but also the possible models that were more well-suited for the desired outcomes, based especially on previous applications.

### 3 Results

#### 3.1 Screening results

Since the two screening protocols were performed independently, we will report them as such, even if the records obtained after both screenings were merged into a single set of publications [Fig. 1]. Out of the 558 unique records obtained from the automatic protocol, four could not be screened with our script (0.72%, reason 1), another four were excluded, as they were not written in English (0.72%, reason 2), and an additional six were also excluded as the full text was inaccessible (1.08%, reason 3). Furthermore, 102 records were excluded, as they were not academic periodical journal articles (18.28%, reason 4).

From the remaining 442 records, an additional four were excluded, as they did not have any abstract available (0.72%,



Figure 2: The fourth field of information recorded in the review presents significant characteristics to explain variation in machine learning applications in archaeology and their related classes/categories. One study case might have been attributed to several subfields or architecture categories.

reason 5). Furthermore, a screening based on the presence or absence of keywords [**Supplementary file**] in the full-text was performed, and from this we excluded 123 records that did not include any of our defined keywords (27.83%, reason 6).

After the previous screening step, we performed a second filter on the 315 records which were left, based on the same set of keywords as previously but performed on the title and abstract only. A total of 170 (30.05%, reason 7) additional records were then excluded, obtaining a total of 145 records for the final list of included publications from our automatic screening.

With the 285 unique records from the manual query, we performed a preliminary exclusion and removed 78 records (27.37%, reason 8). With the remaining 207 articles, we performed our title-based screening and excluded 50 records (17.54%, reason 9), as well as our abstract-based screening, excluding an additional 11 records (3.86%, reason 10). The final content-based screening, based on the full-text of the publications, led to the exclusion of 17 records (5.96%, reason 11).

After these screening steps we were left with 129 records. We then removed any articles that were not published in academic periodical journals, leading to the exclusion of 37 records (12.98%, reason 4). We thus obtained the final list of included publications from our manual screening, containing a total of 92 items.

To verify the level of agreement between the two protocols, we performed the automatic screening protocol on the 285

unique records found through our manual protocol search. Of the 92 records included through the manual screening, 39 records were also included through automatic screening of the manual protocol search results, while 54 were included through manual screening but not through the automatic screening protocol. In addition, a further 25 records that were not included through manual screening were flagged positive through the automatic screening protocol, though these 25 were not part of the dataset of reviewed articles.

In total we obtained 196 unique items when both results from manual and automatic screening were merged. 42 articles were included through both screening processes, while 51 articles were unique to the manual protocol, and 103 were unique to the automatic one. Additional records were excluded *a posteriori* during the reviewing of the articles for a wide variety of reasons [Fig. 1, reasons 12, 13, 14 and 15], though this was mostly relevant for those articles that were screened automatically, since the automatic screening script was not exact. In total, 61 records (31.12% of 196) were excluded. The articles that were removed to avoid reviewing articles that the authors contributed to [Fig. 1, reason 14] were McPherron and Archer [2022] and Orellana Figueroa et al. [2021]. The final list of articles reviewed contained a total of 135 records.

Finally, to perform a simple diachronic analysis of the number of publications from recent years, we performed the same automatic screening and search protocol, but searching only for articles published between 1 January 2023 and 31 September 2024. The results are described below.

### 3.2 Metadata analysis

Through a chronological analysis of our reviewed articles [Fig. 3], we could distinguish a visible increase in recent years, with over 80% articles reviewed published after 2018. From our quick search for publications between January 2023 and September 2024, which laid outside some of inclusion criteria, and thus we did not review, we obtained a total of 278 unique records. This number is slightly higher (by 12%) than the number of records from 2021 to 2022 from the results of our automatic protocol search ( $n=248$ ). In comparison, the number of articles found that were published in 2021 and 2022 found from our automatic protocol search showed an increase of 82% compared to those published in 2019 and 2020 ( $n=136$ ). A total of 76 records from the 278 obtained from our 2023 and 2024 search passed the automatic screening protocol. Although publications from the last trimester of 2024 were not included, our results suggest a stabilisation in terms of publication numbers in contrast to the large increase after 2020.

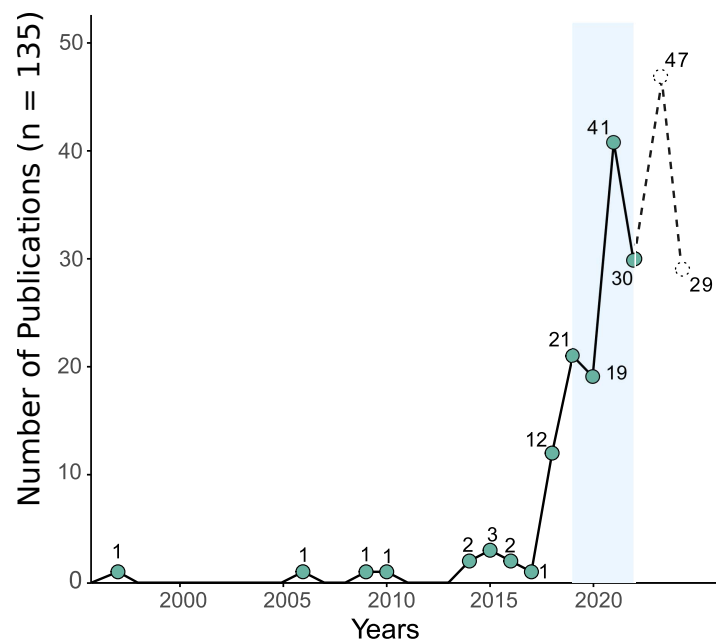


Figure 3: Number of publications per year between 1997 and 2022, in light blue the articles published after 2018 concentrated more than 80% of the publications. The dashed line represents publications from 1 January 2023 to 31 September 2024.



Focusing now only on the 135 publications reviewed, we observed that 10 journals had published nearly half of them (67 records, 49.63%), from a total of 68 different journals observed. Out of these, 6 journals had published nearly a quarter of all articles reviewed [23.70%, **Table 3**]. The journal *Remote Sensing* had the most publications, followed by the *Journal of Archaeological Science*. However, if we use the journal’s impact factor, as well as the journal-wide *h*-index, multiplying them by the number of publications, we obtain two rudimentary research impact metrics across all the publications reviewed. From this analysis, *PloS One* obtained the highest combined score for the *h*-index-based metric and second for the impact factor–based metric (IF). An analysis of the publication policies revealed that a total of 95 articles (70.37%) were published with an open access modality (including gold, silver, or bronze open access) or were otherwise freely accessible.

Journal	Num. of Articles	<i>h</i> -index	n - <i>h</i> -index	IF	n - IF
Remote Sensing	15	193	2895	4.2	63
Journal of Archaeological Science	14	152	2128	2.6	36.4
PloS One	10	435	4350	3.75	37.5
Scientific Reports	6	315	1890	3.8	22.8
Journal of Computer Applications in Archaeology	5	15	75	N/A	N/A
Archaeological Prospections	4	46	184	2.1	8.4
Journal on Computing and Cultural Heritage	3	35	105	2.7	8.1
Archaeological and Anthropological Sciences	3	42	126	2.14	6.42
Palaeogeography Palaeoclimatology Palaeoecology	3	177	531	2.6	7.8
Virtual Archaeology Review	3	17	51	1.6	4.8

Table 3: The ten most represented journals and their *h*-index and Impact factor (IF) score and total score by the number of articles, n = 135. Metrics were consulted on 14/07/2024 on the paper website for the impact factor or on SJR for the *h*-index [**Supplementary file**].

The geographical distribution of the main institutions of the first authors from our set of reviewed articles shows that European and Anglosphere countries, sometimes referred to as the “Global North”, are over-represented [**Fig. 4**], already observed by Davis [2020]. Although one could also draw a line between the northern and southern hemispheres to divide the geographical distribution of the analysed publications, this division is not as clear, as countries such as New Zealand and Australia, as well as to some extent Argentina, which is part of the “Global South”, challenge this notion.

### 3.3 Review findings

#### 3.3.1 Statistical overview

Among the different subfields of archaeology present in our review, surveying (and site prospection), conservation and cataloguing, as well as classification and typology, are the most represented in our dataset and together account for 49% of all study cases [**Fig. 5A**]. Landscape archaeology and geoarchaeology are also both well represented with 20 and 17 attributed study cases respectively. The oldest applications (1997 - 2016) of machine learning in archaeology are linked with the subfields of classification and typology as well as conservation and cataloguing. In recent years, there has been a general increase in all topics with no clear trend visible, except for the subfields of surveying as well as conservation and cataloguing, which have considerably increased since 2021 [**Fig. 5A**]. Only the subfields of zooarchaeology, archaeobotany, and archaeological excavation remain nearly constant through time.

Examining the different architecture of machine learning methods used, we observed that artificial neural networks (ANNs) are the most frequently used with 110 occurrences across all study cases, followed by ensemble learning with 70 occurrences, together representing 62% of all machine learning applications study cases in our review [**Figs. 2 and 5B**]. Linear classifiers, decision trees, rule induction, and nearest neighbour classifiers were also well-represented, accounting for 25% of total applications. An increase of the use of ANNs in our list of reviewed articles from 2021 onwards could be observed, with the number of applications multiplying four-fold compared to the number of applications in the years 2019 and 2020 [**Fig. 5B**]. At a more granular scale, we found a total of 70 machine learning models [**Supplementary file**]. In addition, we found a particularly high diversity in the unsupervised learning and clustering category of model families, with a unique model for each of the twelve recorded applications for the category [**Supplementary file**]. If ANNs are the most represented model family, the most common *model* was random forest, with 54 study cases counted. We found that across all articles reviewed, the mean number of models used per study case was 2.12, with a high disparity across different publications, with some applying only one model, while articles such as Bataille et al. [2018] and Courtenay et al. [2019] tested six different models at once. Classification was the most common form of data

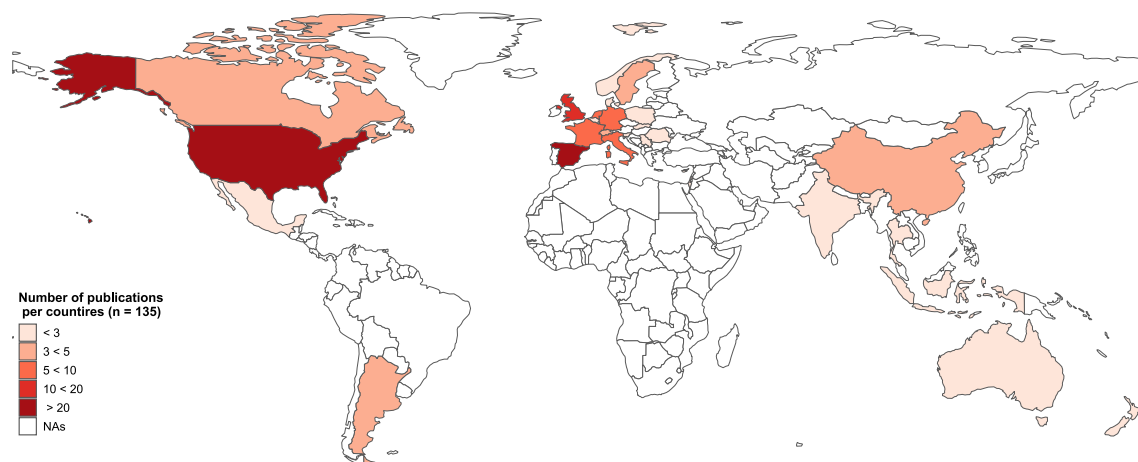


Figure 4: Number of articles published per country based on the country of the first author’s affiliation.

evaluation, applied in more than 75% of study cases (n=112). On the other hand, only 19% (n=29) were regression models, and clustering was only represented with six uses [6%, **Figs. 2 and 7 to 9**].

It was more difficult to observe patterns for the other features we collected, as the attribution to one or several categories for an article was more subjective to the person reviewing. Two of the *a posteriori* study tasks are highly prominent: automatic structure detection and artefact classification. These two tasks account for 45% (n=67) of all study case tasks [**Fig. 2**]. Tasks such as taphonomic classification, archaeological predictive models, and architectural element classification are well represented with 5 to 13 study cases each, whilst nine task categories (*e.g.* sourcing, species classification, movement recognition) were only relevant for around 5 study cases. No clear pattern could be distinguished diachronically for how the desired scientific goal of machine learning applications have evolved over time. For the different types of input data observed in all study cases we reviewed, remote sensing images were the most represented, with around 40% (n=58) of the total. Four other input types (small-scale images, artefact measurements, spectra, and 3D models) were also well represented [**Fig. 6A**], being present in between 6 and 16% of all study cases reviewed. The remaining nine input types were poorly represented, being present in only 14% of all study cases.

Finally, according to the assessment of article authors or (if not discussed) the results metrics, we could observe that the majority of applications (79) had reported “successful” outcomes [**Fig. 6B**], with an additional 40 mixed results (27.2%). Only 15 applications (10.2%) were reported to have been “unsuccessful”, whilst we noted 9 (6.1%) study cases whose application had important methodological issues, and classified them as such even if the authors reported a successful outcome. Finally, four (2.7%) study cases did not have a defined outcome. These results, however, could be affected by the well-reported issue of publication bias against the reporting of negative results [Song et al., 2013], as well as the related file-drawer-effect [Rosenthal, 1979, Sparks, 2009], which can strongly affect the perception and production of scientific results [Song et al., 2010].

### 3.3.2 Aggregated information

Through the aggregation of the data annotated for the study tasks, method families, archaeological subfields, and input types we obtained an overview of the relationship between the objectives of the study cases and the means used to access them.

Correlations between tasks and model families are highly heterogeneous [**Fig. 7**]. Whilst the highest correspondence

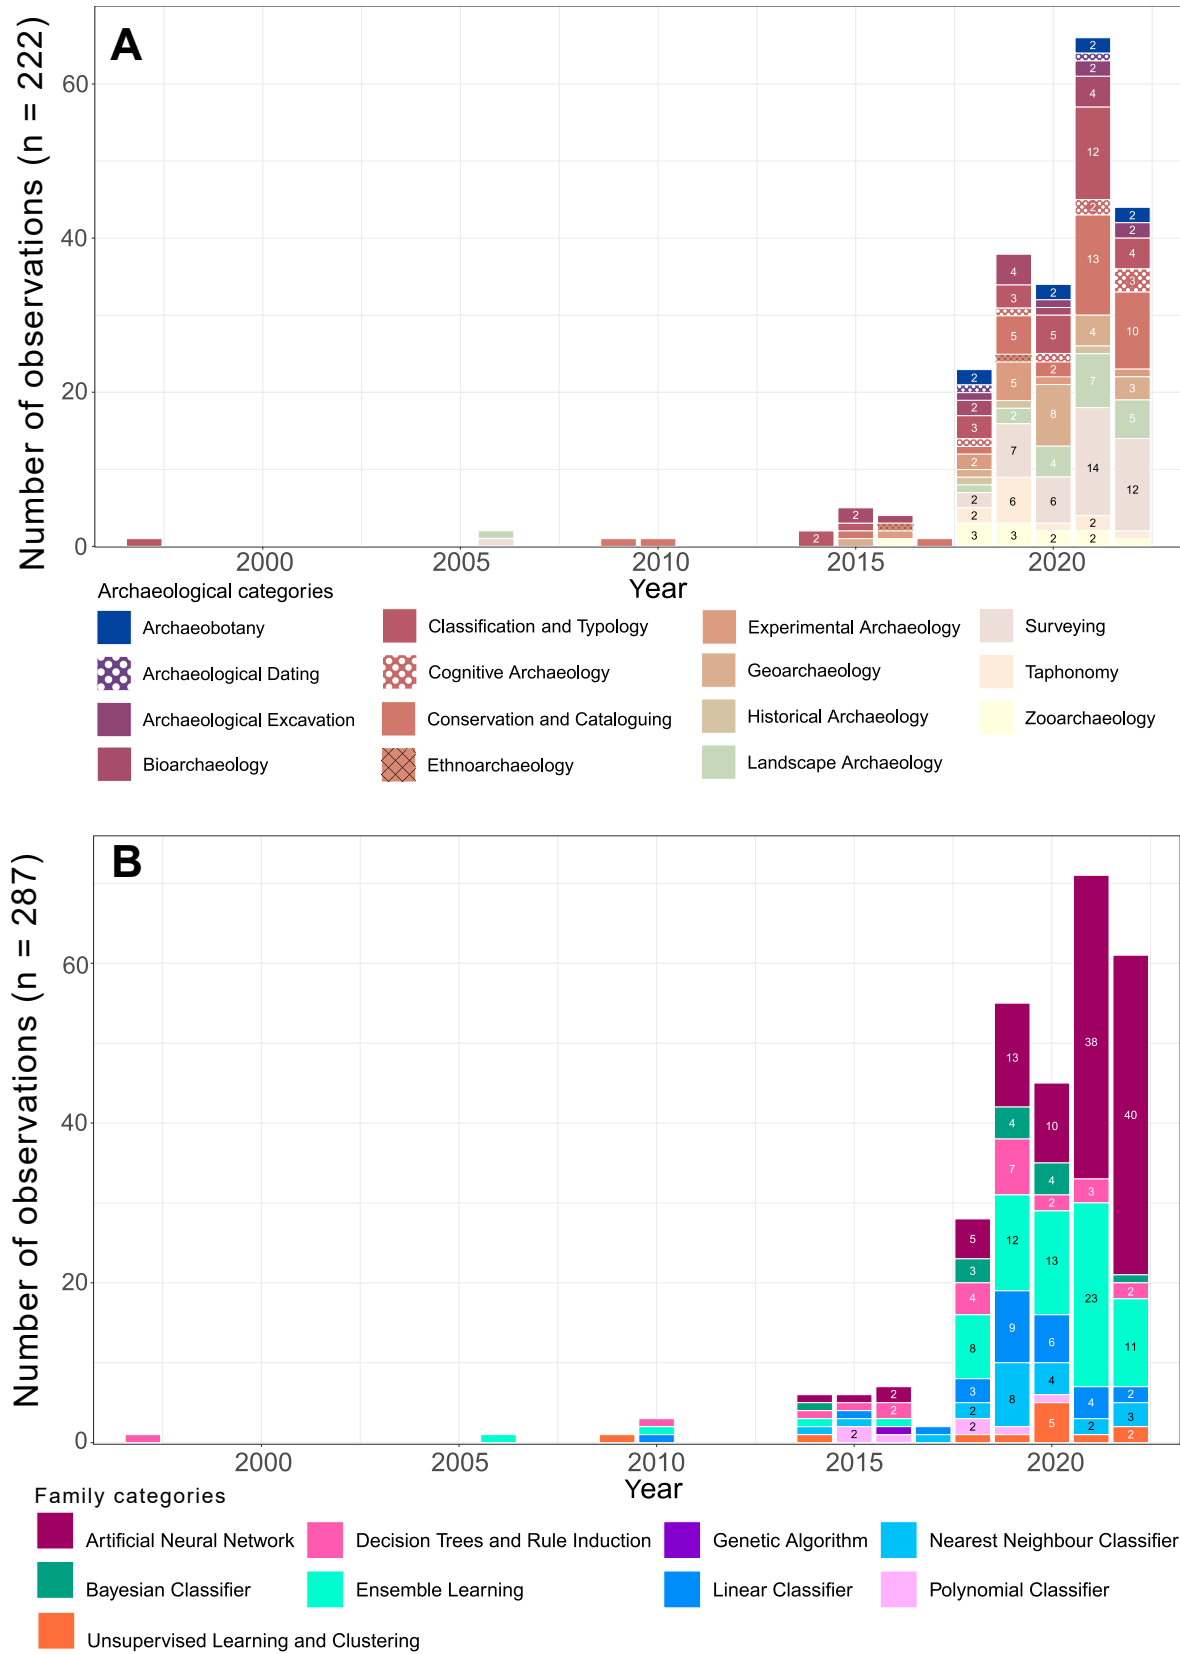


Figure 5: (A) Number of articles from each archaeological subfield between 1997 and 2023. (B) Number of articles from each architecture class between 1997 and 2023. Empty bar charts represent the number 1.

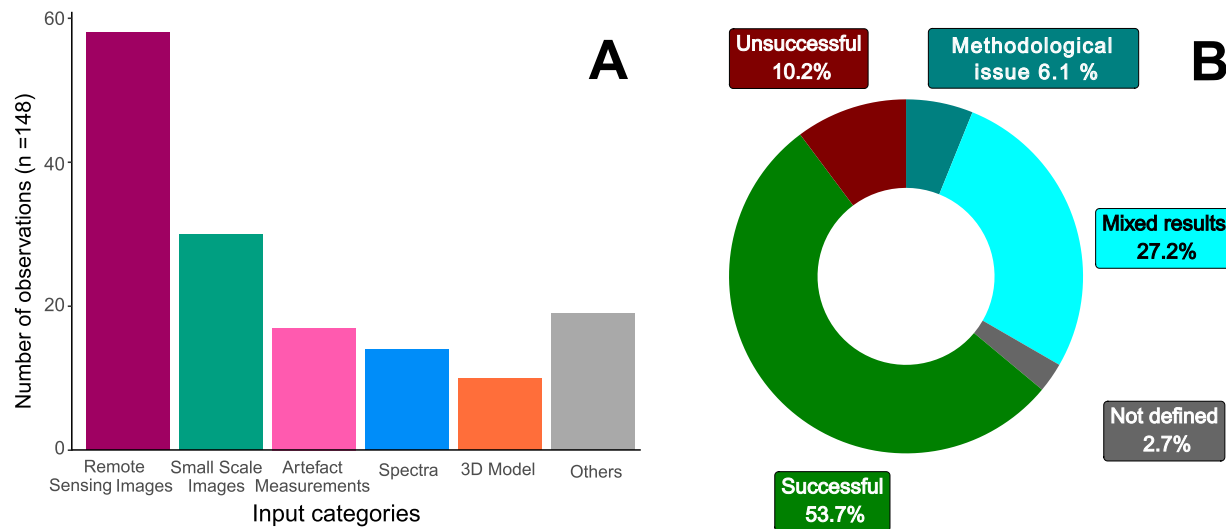


Figure 6: (A) The five more represent classes of input data among the reviewed papers,  $n = 148$ . (B) Results of the reviewed papers according to the authors or presented results,  $n = 147$ .

rate between taphonomic classification and unsupervised learning and clustering methods is 26%, the correspondence between artefact classification and ANNs is much higher, at 49%. Even stronger correlation rates could be observed between archaeological predictive models and ensemble learning methods at 66%, and between automatic structure detection and ANNs, at 60%.

The correlations between archaeological subfields and study tasks are lower than the correlations visible for architecture [Fig. 8]. Articles dealing with environmental reconstruction had their highest correlation at only 33% with the subfield of geoarchaeology. Studies treating artefact classification problematics have a higher 45% correspondence rate with subfields of classification and typology. The highest correlation rate, however, is present between the task of automatic structure detection and the subfield of surveying, at 80% correlation.

Finally, and perhaps expectedly, several of the most represented tasks had the largest number of study cases with reported unsuccessful or mixed results [Fig. 9]. Studies dealing with automatic structure detection (25.85% of total) and artefact classification (19.73% of total) accounted for 60% and 33% (respectively) of studies that reported mixed or unsuccessful results. Other less represented tasks have higher success rates. Articles dealing with artefact prediction are successful in 80% of cases, whilst articles dealing with environmental reconstruction all report successful results.

### 3.3.3 Classification of artefacts and animal remains

Whilst classification tasks were mainly performed on ceramic material (31%), as in Hörr et al. [2014] or Anichini et al. [2021], a wide range of different materials were used in our dataset of reviewed articles. Studies on coins [Boon et al., 2009], stone tools [MacLeod, 2018, Pargeter et al., 2019, Emmitt et al., 2022], archaeobotanical seed remains [Landa et al., 2021], phytoliths [Berganzo-Besga et al., 2022], ivory figurines [Gansell et al., 2014], were observed. Moreover, 17% of study cases were conducted on cave art images, such as in Kogou et al. [2020], or Horn et al. [2022a, 2022b]. On all classification study cases 17% ( $n=5$ ) dealt with the bioarchaeological classification of human or animal remains. As a consequence of the variety of materials studied, the input data for models were very diverse. Small-scale images accounted for 48% ( $n=14$ ) of all input data for classification task, metric data for 27% ( $n=8$ ), as well as less frequent input data types such as multilayer images of artefact (e.g. depth maps, 3D model layers), spectra and remote sensing images all together accounted for 23% ( $n=7$ ).

In our corpus, two machine learning method families emerge as the foremost choices for artefact classification, ANNs represent 50% of the models used, followed by ensemble learning, accounting for 31% of the models [Fig. 7]. Bayesian classifiers, as well as decision tree and rule induction are also present, but represent less than 15% of the model architectures for the artefact and animal remains classification task.

### 3.3.4 Archaeological predictive models (APMs)

Ten studies in our review focused on archaeological predictive models (APMs), dealing with either human occupation, or human-environment interactions. Input data were in 77% ( $n=7$ ) of all study case larger-scale raster images from a

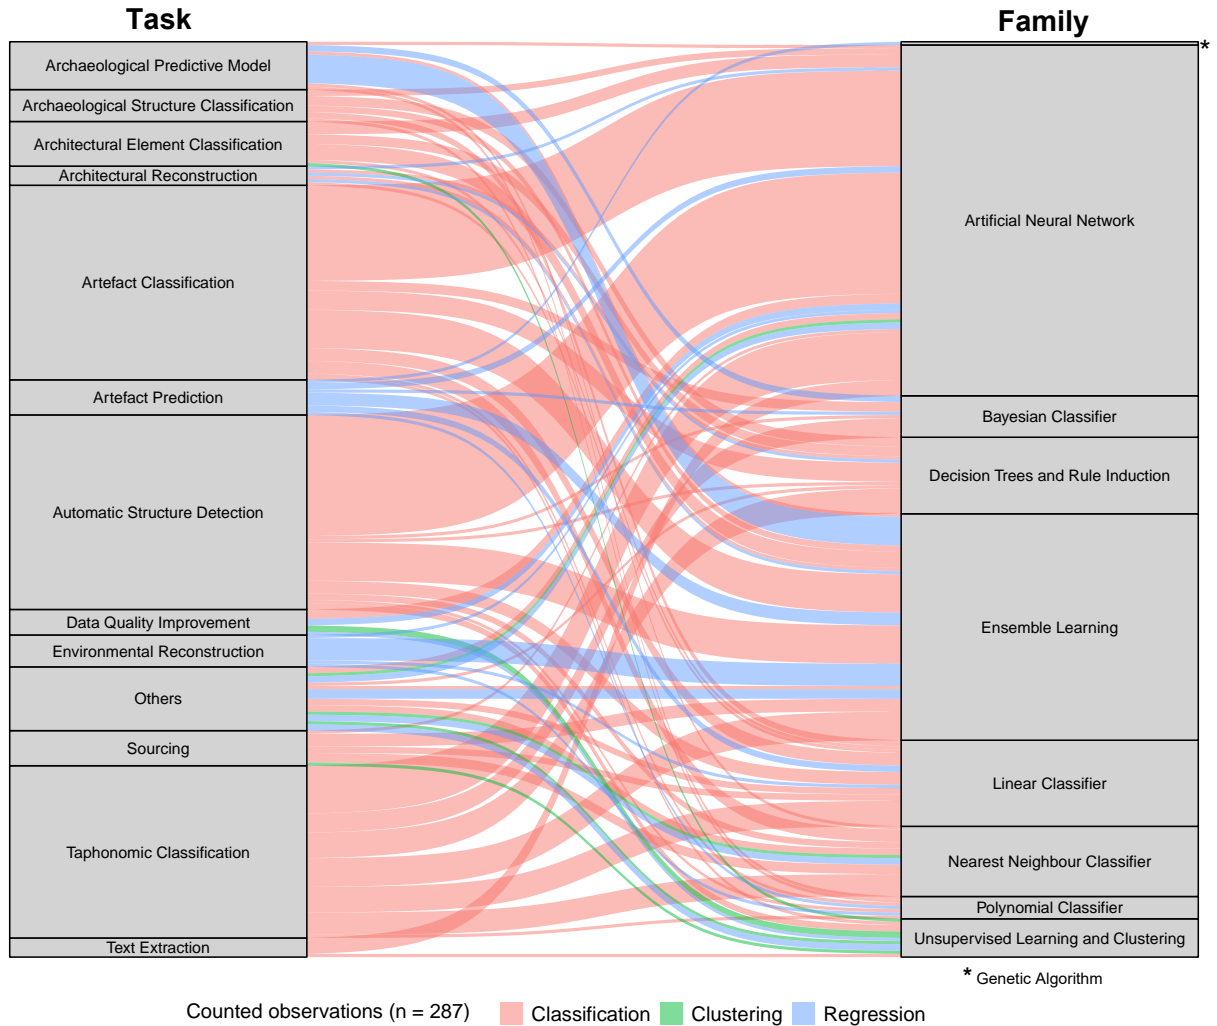


Figure 7: Alluvial diagram of the different tasks in the analysed studies on the left, the related architecture of machine learning models on the right and the evaluation process in the background. Tasks and architectures poorly represented ( $n < 5$ ) have been classified as “others”. A study might have applied numerous models or its research objectives could be classified into more than one task. In such cases, we created multiple entries for each paper where applicable [Supplementary file].

diverse range of natural covariates or remote sensing images.

The most common method family applied was ensemble learning, representing 62.5% ( $n=10$ ) of the entries for this task. A unique model entry exclusively applied to this task was Maximum Entropy (*MaxEnt*) [Benner et al., 2019, Yaworsky et al., 2020]. Regarding the results from APMs, 66% ( $n=6$ ) were classified as successful, with the remaining 44% ( $n=4$ ) classified as partially successful or unsuccessful, such as in Hansen and Nebel [2020] or Miera et al. [2022].

### 3.3.5 Automatic structures detection

Representing 25% ( $n=38$ ) of all study cases, automatic structures detection, also known as geographical object-based image analysis (GEOBIA), is the most prominent task category in our review. Input data came from a wide range of remote sensing images, mainly LiDAR or airborne laser scanning (ALS), used in 50% of all study cases in this task, or various satellite image collections (23%), such as in Menze et al. [2006] or Orengo et al. [2020]. The remaining 27% input data used were either UAV ortho-images, such as in Orengo and Garcia-Molsosa [2019], Monna et al. [2020], Agapiou et al. [2021], Altaweel et al. [2022], and Fisher et al. [2022], historical maps, such as Garcia-Molsosa et al. [2021], and since 2020, ground-penetrating radar (GPR), or even bathymetric data [Febriawan et al., 2020, Bordon et al., 2021]. ANNs were the most prominent family of methods for automatic structure detection, accounting for

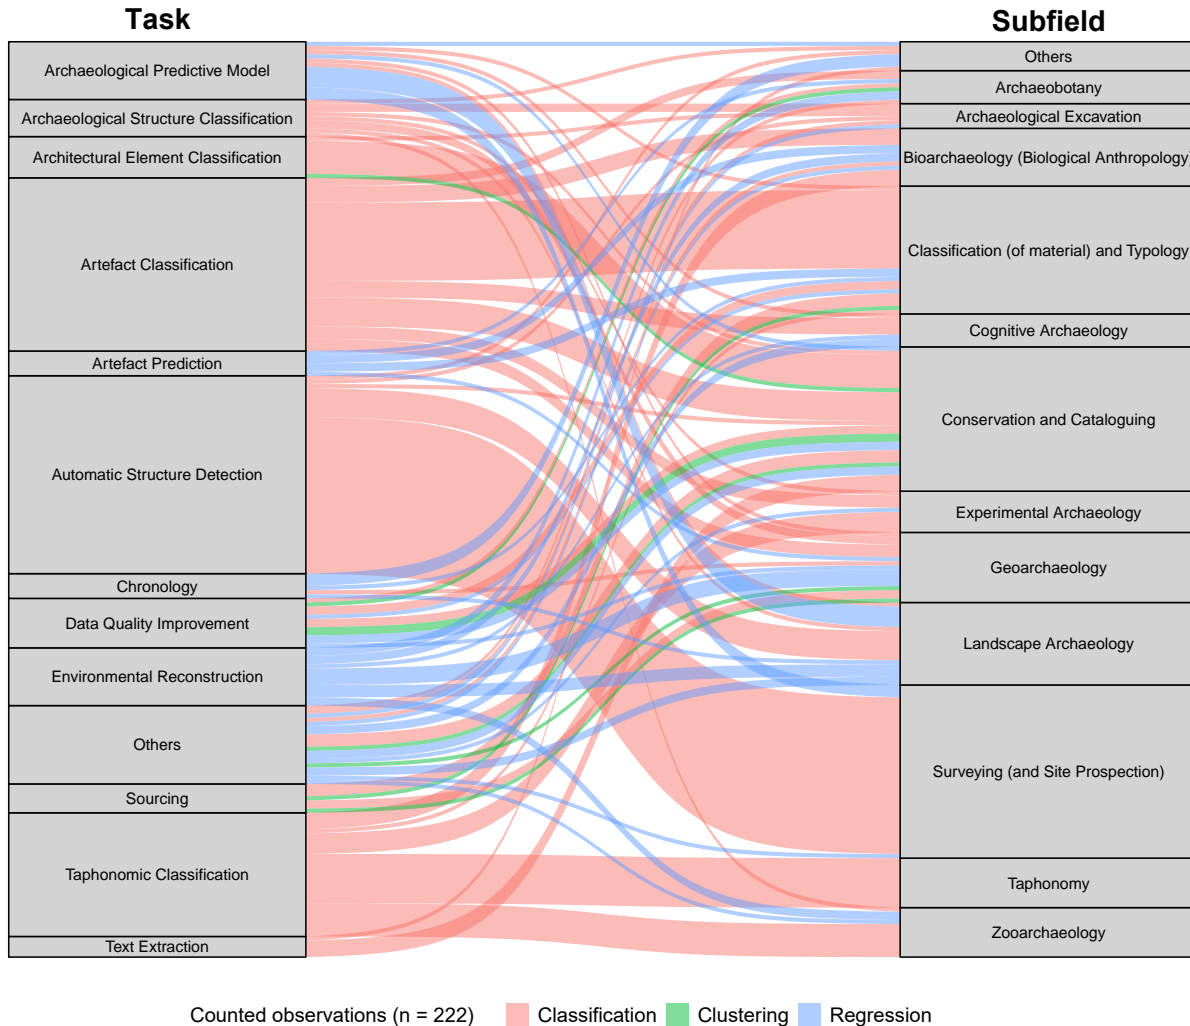


Figure 8: Alluvial diagram of the different tasks in the analysed studies on the left, the related archaeological subfields on the right with the evaluation process in the background. Tasks and subfields poorly represented ( $n < 5$ ) have been classified as “others”. A study might have been attributed to several subfields or its research objectives could be classified into more than one task. In such cases, we created multiple entries for each paper where applicable [Supplementary file].

62% of all models applied for this task. Different ANN models were used, the most popular being mask region-based convolutional neural networks (MR-CNN), which accounted for 13% of all models applied for automatic structure detection, followed by faster region-based convolutional neural networks (FR-CNN), and U-Net, which each accounted for 8% and 7% of the models used. However, the most popular model was random forest, which accounted for 16% of all models used for this task. The results of applications in this task were mainly reported as unsuccessful or partially successful (59%,  $n=31$ ).

### 3.3.6 Digital heritage

Articles focused on this task were mainly represented by those dealing with the classification and reconstruction of architectural elements, with a total of twelve study cases (8% of all 147 study cases reviewed). The models in this task category mainly used small-scale images from architectural photos as input (58%,  $n=7$ ), but also point clouds and 3D models in 33% of the revived study cases, such as in Grilli and Remondino [2019] or in Matrone and Martini [2021]. The models applied in this task are somewhat equally divided between two families of models: ensemble learning with 35% of all study cases, and decision trees and rule induction models accounting for 25% of total models applied.

Machine learning applications for this task were generally negatively assessed, in comparison to applications for other tasks, with only 40% of study cases reporting successful results.

### 3.3.7 Text analysis

We counted five study cases that applied machine learning methods to text analysis tasks (3% of all 147 study cases), and all except one [Dhivya and Devi, 2021] used text as input data for their model. Almost all applied models were based on ANNs (83%,  $n=5$ ), such as in Dhivya and Devi [2021] and Brandsen and Lippok [2021], only Boon et al. [2009] used a memory based learning (MBL) model, part of the category of unsupervised learning and clustering algorithms. The results of the applications for this task were overwhelmingly negatively assessed, with four out of the five studies reporting mixed or unsuccessful results.

### 3.3.8 Taphonomic classification

We reviewed a total of twelve study cases categorised as dealing with the classification of taphonomic features on archaeological finds (8% of all case studies). All of these articles were applied to osseous material, and all but two of them deal with bone surface modifications (BSMs), with the remaining two dealing with bone breakage. Bone surface modifications are marks left on the surface of bones by agents such as hominin butchery (*e.g.* using stone tools), animal carnivory, or trampling. The goal of all the articles under discussion was to uncover what agent caused the specific taphonomic process (BSM or breakage). Input data were primarily metric and categorical variables of bone marks or breaks in six cases (50%), or microscope images in three cases (25%), with the remaining three (25%) using PCA scores from the analysis of geometric morphometric landmarks.

ANNs were applied in all the reviewed study cases except for one [Aramendi et al., 2019] and represent 28.3% ( $n=15$ ) of all models applied for taphonomic classification. Ensemble learning, linear classifiers, decision trees and rule induction, nearest neighbour classifiers, and Bayesian classifiers all represented between 17% and 11% of the referenced architectures for this task category.

However, many of the articles found were deemed through our reviewing process to have had important methodological issues, especially due to under-reporting or under-detailing of the specific methodology used [Fig. 9, cf. 4.2.6].

## 4 Discussion

### 4.1 General considerations on the corpus

A possible initial observation is the comparatively late interest in machine learning applications in the field of archaeology compared to other sciences [Dramsch, 2020, Padarian et al., 2020, Shehab et al., 2022, Wang et al., 2022]. Indeed, the exponential increase in publications related to machine learning applications in archaeology can be dated from the period between 2018 and 2019 onwards [Fig. 3]. This late development could arguably be attributed to a tradition of suspicion in archaeology [Yoffee and Fowles, 2010]. Researchers sometimes consider archaeological data as scattered, complex [Smith and Peregrine, 2011, p.7] and unable to be explained by models that are not, fully, human-made. The uncertainty for selecting the best model to analyse the complexity of past human action is not recent [Dorans, 1990] but has been exacerbated with machine learning and even more with deep learning models, which are often *black boxes*, difficult to interpret the reasoning behind their choice and weighing of features [Ramazzotti, 2020, Fiorucci et al., 2020, Bickler, 2021, Calder et al., 2022].

Regarding publication policies across our list of reviewed articles, the high representation of open-access papers in a field where the traditional closed-access model of publications is widespread [see below; Marwick and Birch 2018] could be a signal for a paradigm change in which scholars seek to share their knowledge more broadly and fairly [Marwick et al., 2017, Nicholson et al., 2023]. While many journals that deal specifically with computer science applications in archaeology (*e.g.* *Archaeologia e Calcolatori*, *Internet Archaeology*, or *Journal of Computer Applications in Archaeology*) only have open access publication routes, more classical and broader journals like the *Journal of Archaeological Research*, *Journal of Archaeological Science* or *Antiquity* provide mainly traditional non-open access papers, with open access papers comprising only (respectively) 10%, less than 5% and less than 2% of all articles on the 1st of September 2024. These results are unlike observations made for articles dealing with machine learning applications in other disciplines such as soil science [Padarian et al., 2020], where paid-access routes vastly dominate that field of research. However, researchers have to keep in mind the existence of non-open access journal articles and book chapters to avoid a FUTON bias [Wentz, 2002], which will lead to not exploiting part of the wider research results in the field. This points to a wider adoption of both FAIR (Findable, Accessible, Interoperable, Reusable) data principles [Wilkinson et al., 2016, Nicholson et al., 2023] (Wilkinson et al. 2016; Nicholson et al. 2023) and CARE (Collective benefit, Authority to control, Responsibility, Ethics) principles [Carroll et al., 2020, Gupta et al., 2023] (Carroll et al. 2020; Gupta et al. 2023). Nonetheless, if the degree of open access of machine learning applications in archaeology



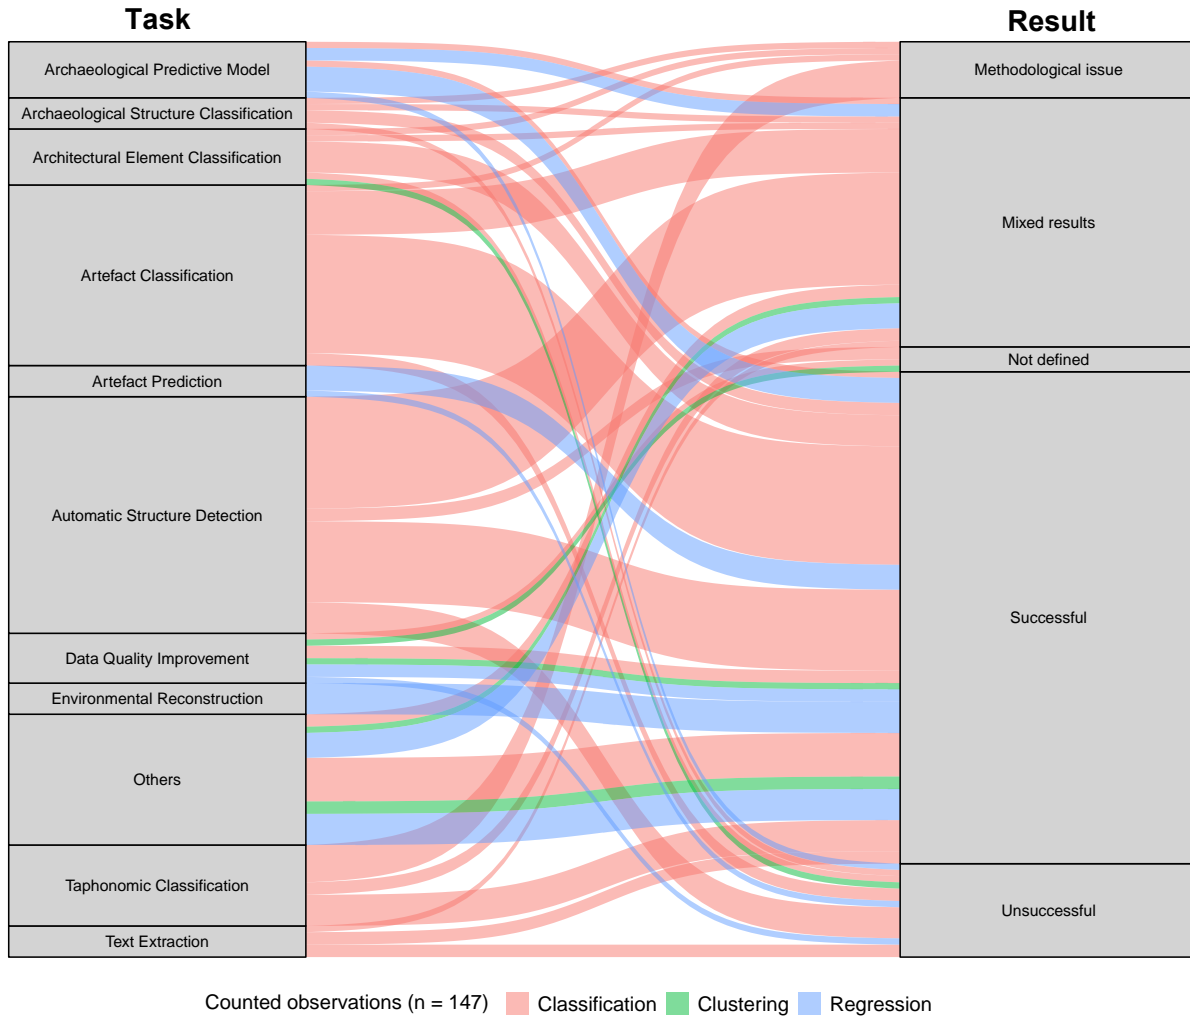


Figure 9: Alluvial diagram of the different tasks in the analysed studies on the left, the related results on the right with the evaluation process in the background. Tasks poorly represented ( $n < 5$ ) have been classified as “others”. A study might have its research objectives classified into more than one task. In such cases, we created multiple entries for each paper where applicable [**Supplementary file**].

seems promising, the large disparity borne from colonialism remains unfortunately wide [Davis, 2020]. The difference in the number of publications from “Global North” and “Global South” countries can be directly linked with the gap in the economic development between higher and lower-income countries, leading to the underdevelopment of science and technology [Sagasti, 1973, Allik et al., 2020]. Increasing collaborations between different countries and institutions could fill this gap between higher and lower-income countries [Sonnenwald, 2007].

#### 4.2 How is machine learning used across archaeology?

In the earlier stage of machine learning applications in archaeology, many archaeological questions could only be answered by seeking experts in informatics, mathematics, and physics [Menze et al., 2006, Boon et al., 2009, Menze and Ur, 2012, Hörr et al., 2014]. However a noticeable shift has occurred over time. Archaeologists have progressively embraced programming their own tools (*e.g.* Python, R, Matlab, Java), and have also turned to specialised software solutions such as Grilli and Remondino [2019], Garcia-Malsosa et al. [2021], Demjam et al. [2022] or Casini et al. [2023]. Nowadays, in many studies, archaeologists are both asking and answering the questions themselves [Orengo and Garcia-Molsosa, 2019, Orengo et al., 2020, Yaworsky et al., 2020, Carter et al., 2021]. The CAA Special Interest Group on Scientific Scripting Languages in Archaeology (*SIG-SSLA*) is one example of this polyvalency of archaeologists developing scripting or machine learning tools for their problems. In certain instances, computer science



specialists independently pose questions and generate tailored answers for specific applications [Toler-Franklin et al., 2010, Ushizima et al., 2020, Wunderlich et al., 2022]. However, there is always a question of the ratio between the time spent developing new skills [Aldenderfer, 1998, pp. 109-112] and the increasing complexity, if not in programming, then in understanding, of machine learning methods, making it more and more difficult for an archaeologist to master all abilities needed to develop an entire workflow for a computer-based approach.

The understanding between the one who poses the question and the one who answers is crucial, as the nature of the answers obtained depends intricately on the questions asked. Therefore, archaeologists should be careful to verify the suitability and validity of the applied methods, as only they can understand the full complexity of what happens outside these *black boxes*. Orton once stated that: "... *the mathematician's job is not to tell the archaeologist what to do – the archaeologist maintains his responsibility for what he does - but to help him decide how to do it.*" [Orton, 1980, pp. 15-16]. This remains easily applicable to other specialists such as informaticians, especially relevant here, to this day. However, defining a single, universally applicable methodology for archaeological applications of machine learning methods, already a very large and diverse group, or other quantitative methods remains challenging (*e.g.* "Statistical Cycle", Orton 1980, p. 20, fig. 1.3), a pragmatic approach can highlight several best practices depending on the desired task [Fig. 10].

#### 4.2.1 Classification of artefacts and animal remains

Classifying artefacts and animal (including human) remains into categories is a central aspect of archaeological work [Read, 2018]. Archaeologists have looked for solutions in computer science since the second half of the twentieth century [cf. 1 Binford and Binford 1966, Orton 1980, pp. 156-178]. It is therefore not surprising to see machine learning applications developed for this purpose already very early [Fig. 5A]. Earlier papers generally applied methods such as decision trees, ensemble learning, Bayesian classifiers, as well as linear classifiers combined with nearest neighbour classifiers [Nguifo et al., 1997, Hörr et al., 2014, Mircea et al., 2015, MacLeod, 2019, Canul-Ku et al., 2019, Pargeter et al., 2019, González-Molina et al., 2020]. Since 2020, however, ANNs have gained more traction [*e.g.* Ushizima et al. 2020, Graham et al. 2020], and now represent the most commonly used family of methods applied for this task [Fig. 7]. This choice is reasonable, as ANNs, and convolutional neural networks in particular, are at the forefront for computer vision-based tasks such as the classification of objects in images [Guo et al., 2016, Chai et al., 2021]. Dimensionality reduction methods (*e.g.* PCA and MDA) are often performed alongside machine learning algorithms, and can be an effective way to improve model accuracy when applied correctly (*e.g.* Muzzall 2021).

Concerns about the validity of certain forms of typological classification, both human-made and computer-based, as a practice have been previously raised, especially from North American researchers [Adams and Adams, 1991, Hörr et al., 2014]. Other researchers, however, do not hesitate in using computational approaches for classification [Pargeter et al., 2019], and even creating new classification methodologies with the help of machine learning. Notably, Hörr and others, seeking a less subjective approach to typological classification, developed a three-layer method for this purpose [Hörr 2011, pp. 136-137, Hörr et al. 2014], successively incorporating unsupervised, semi-supervised, and supervised classification algorithms within a framework Fayyad et al. [1996] termed the *Knowledge Discovery Process*. This approach is promising for the analysis of archaeological material, and could prove useful for many archaeological studies. Such an approach invites critical questions on the artificiality of typological classifications and opens new avenues for future studies such as those dealing with ceramic material or stone tools. We can also mention Martín-Perea et al. [2020], who used a method similar to that of [Hörr et al., 2014] with a three-level pipeline to detect fossiliferous levels of an archaeological or palaeontological site.

Assessing and comparing the outcomes of these diverse classifications is challenging, given the inherent variations in datasets, modelling techniques, and evaluation metrics employed across different studies. Nonetheless, various opinions have already emerged on the issue. Emmit et al. [2022] and Jalandoni [2022] are optimistic about using machine learning for the classification of archaeological material, though we could also add Hörr et al. [2014], who are more cautious but remain hopeful for the future of the practice. Others are less enthusiastic, however, and point to mixed results [Demjan et al., 2022, Lyons et al., 2022]. Overall it seems likely that machine learning applications for the classification of archaeological material will spread not only within the scientific community but also among professionals of archaeology, conservation institutions, and a wider public. The *ArchAIDE* project is already a noteworthy example of an application of open-access machine learning tools for archaeology to serve the public at large [Gualandi et al., 2021, Anichini et al., 2021].

#### 4.2.2 Archaeological predictive models (APMs)

Already present since the development of settlement patterns analysis [Willey, 1953], the tradition of APMs rose alongside the development of modelling and prediction theory in archaeology [Judge and Lynne, 1988]. It is therefore surprising to see little interest in applying machine learning methods to this approach in recent years even down

to 2022 [Fig. 5A]. Critics can point to the relative reluctance of researchers towards APMs [Kvamme 2006, p.7, Table 1.1, Lock and Harris 2006, pp. 42-45]. One main criticism about APMs is that "... *predictive modelling as it is presently practiced is fundamentally about environmental determinism.*" [Kohler, 1988, p.19]. This statement is particularly true when we consider the strong influence of environmental and ecological studies in the field of landscape archaeological (cf. 3.3.4). However, even if this criticism has neither recent origins, nor is it confined to the past [Wheatley, 2004, Arponen et al., 2019, Kristiansen, 2019], responses to it exist. Coombes and Barber emphasise the interest of models despite their incorrectness, stating that "A simple model cannot hope to replicate all the complexities of environment–culture relationships across a civilization, but one basic approach that can provide valuable insights is to treat human populations in ecological terms, with their ranges shifting in response to changing conditions" [Coombes and Barber, 2005, p. 305]. Furthermore, new applications of APMs dedicated to cultural heritage preservation against looting [El-Hajj, 2021] can prove to be a promising solution to further aid in the protection of cultural heritage alongside more intensive public funding.

The frequent use of the MaxEnt model for APMs, initially designed by ecologists [Phillips et al., 2006], shows the influence of environmental niche concepts in archaeology [Demjan et al., 2022, Vernon et al., 2022, Yaworsky et al., 2020]. MaxEnt is well suited to examine questions of dispersion and provides more robust and deterministic archaeological predictions due to its incorporation of *absence of data* into its modelling: "As a result, MaxEnt is more suitable for archaeological data than the other predictive modelling approaches" [Yaworsky et al., 2020, p. 14].

An essential consideration in APMs is the number of covariates, predictors, or variables required for the building of the models. In Yaworsky et al. [2020], 55 predictors were used, Hansen and Nebel [2020] employed 26 predictors, Friggens et al. [2021] used 25 predictors, Castiello and Tonini [2021] used 13 predictors, and Benner et al. [2019] relied on eight predictors. However, if data transformation techniques such as PCA are applied, which seek to reduce the number of covariates whilst maximising the impact of those that remain, a smaller number of predictors can be used for the final model instead [Hansen and Nebel, 2020, Yaworsky et al., 2020, El-Hajj, 2021].

The large number of variables required, the complex preprocessing steps needed, and the difficulty in selecting and interpreting the influence of the model variables, make APMs a time-consuming and less attractive method than approaches based on image recognition, which can be simpler to apply. Furthermore, the theoretical criticisms discussed above must also be added to the methodological difficulty of applying APMs, which could lead to a desire to avoid further complexity in the methods in the form of machine learning methods, which could explain their low numbers compared to applications for other tasks.

#### 4.2.3 Automatic structures detection

Over the past decade, there has been an explosion in machine learning methods applied to automatic structure detection tasks [Fig. 5A]. Though earlier applications were mostly based on satellite STRM or ASTER images [Menze et al., 2006, Menze and Ur, 2012], the recent explosion of light detection and ranging (LiDAR) and airborne laser scanning (ALS) data [Wurzer et al., 2015, Gillings et al., 2020], has led to an increase in interest for this field. While earlier studies employed random forest methods [Menze et al., 2006, Guyot et al., 2018, Stott et al., 2019], recent papers mainly applied ANNs, which aligns with the predominance of image data and neural network architectures that excel at image classification tasks. The recent multi-scale region-based convolutional neural network (MR-CNN) model, adapted from convolutional neural networks (CNNs), has been eagerly applied by archaeologists, as its *raison d'être* is well aligned with the task of detecting archaeological structures from image data [Bundzel et al., 2020, Bonhage et al., 2021, Davis et al., 2021, Guyot et al., 2021, Altaweel et al., 2022, Banasiak et al., 2022, Fisher et al., 2022]. The MR-CNN architecture also allows for image segmentation by masking the detected region of interest. This architecture substantially helps researchers recognise archaeological structures, as well as verify the model's prediction. Furthermore, the emergence of transfer learning has amplified the use of CNNs in archaeology [Gallwey et al., 2019, Soroush et al., 2020, Herrault et al., 2021]. By using a neural network model trained for a different, but similar, type of image data (e.g. to detect bicycles in an image), and training it on the actual desired data (e.g. detect motorcycles) but with a much smaller dataset, compared to the dataset needed without transfer learning, transfer learning can be helpful where only small datasets are available, reducing thus also the time and cost of data acquisition and preparation. In our dataset of articles, the use of transfer learning – counted at 41% (n=16) of all study cases reviewed on automatic structure detection - were generally based on models pre-trained with image datasets such as *ImageNet* [Russakovsky et al., 2015] or *COCO* [Lin et al., 2014], though in one unique case authors also relied on specialised datasets [Silburt et al., 2019].

However, as Herrault et al. [2021] has highlighted, CNNs have limitations in their interpretability? and are also too sensitive for unbalanced classes (i.e. the categories available for prediction), a common issue for archaeological data. A deeper exploration of models, as done by Monna et al. [2020], exploring six distinct families of methods (ANNs, Bayesian classifiers, linear classifiers, ensemble learning, unsupervised learning and nearest neighbour classifiers), allows for a better understanding of the data, despite the increase in complexity and time. Following the training of

the models, Monna et al. [2020] aggregate predictions through a hard voting mechanism, itself ensemble learning, ultimately identifying random forest (an ensemble learning method) as the best model.

To evaluate the success of the machine learning archaeological structure detection model, authors have access to a wide range of metrics. F1-score is the most widely used with 20 accounted uses [e.g. Character et al., 2021, Altaweel et al., 2022, Banasiak et al., 2022], but prediction accuracy is also common, with 16 application in the study cases on automatic structure detection [e.g. Monna et al. 2020, Davis and Lundin 2021]. While not always directly discussed, precision, average precision, and recall can nevertheless be found in the results in most of the study cases reviewed here [Bonhage et al., 2021, Berganzo-Besga et al., 2021]. Intersect over union (IoU) is only present in five study cases [Bundzel et al., 2020, Bordon et al., 2021, Banasiak et al., 2022, Trotter et al., 2022, Yang et al., 2022], despite revealing valuable information on a model accuracy and being particularly well-suited for image segmentation tasks. The newly developed “boundary IoU” [Cheng et al., 2021] was specifically created for evaluating image segmentation models, and could become an important addition to future studies. New metrics have even been developed explicitly for archaeological image segmentation. Fiorucci et al. [2022] introduced centroid-based and pixel-based measures, as they found IoU not ideal for evaluating discrete archaeological objects.

The significant popularity of machine learning applications for automatic structure detection can be further found in its perceived suitability to answer the research question of whether or not a certain feature is an archaeological site or structure?”. Machine learning methods seem to be particularly effective when applied to massive structures such as burial mounds [Guyot et al., 2018, Caspari and Crespo, 2019, Monna et al., 2020, Berganzo-Besga et al., 2021] or large-size archaeological sites [Menze et al., 2006, Menze and Ur, 2012, Stott et al., 2019]).

#### 4.2.4 Digital heritage

In the articles applying machine learning methods to digital heritage, we identified two different approaches. On the one hand, there were the study cases with a complete workflow, with a first step of semantic image segmentation preprocessing performed via machine learning before a second step of classification based on machine learning [Grilli and Remondino, 2019, Nogales et al., 2021]. These successive steps follow a gradual and systematic process, which meets the requirements for the *Knowledge Discovery Process* [cf. 4.2.1, Fayyad et al. 1996]. On the other hand, there were works that focused either only on the semantic segmentation step [Felicetti et al., 2021, Matrone and Martini, 2021] or only on the classification step [Toler-Franklin et al., 2010, Mesanza-Moraza et al., 2021, Prasomphan, 2022, Pavan Kumar et al., 2022, Pepe et al., 2022].

The high number of ANN models for semantic image segmentation adapted to cultural heritage tasks confirms a tendency [Sultana et al., 2020], with ANNs generally obtaining better results compared to decision trees [Boston et al., 2022]. Non-standardised datasets and the diversity in the preprocessing stages made for a heterogeneous assemblage of reviewed study cases, making them difficult to adequately compare. Furthermore, the absence of standardised protocols led to the application of older models [Fiorucci et al., 2020, part. 7] that do not take advantage of the advances in computer vision and semantic segmentation [e.g. Pepe et al. 2022]. Limiting the use of colour images or reducing the number of classes has been suggested to improve future models [Grilli and Remondino, 2019].

#### 4.2.5 Text analysis

Text analysis is one of the earliest topics to benefit from machine learning applications [Boon et al., 2009], as the potential benefits were quickly identified [Richards et al., 2015]. The quantity of information and data collected in the archaeological field rose exponentially following the development of new technologies, systematic recording processes, and the development of rescue archaeology [Brandsen, 2023, p. 229]. This veritable deluge of records [Bevan, 2015] has made analysing the tremendous number of archaeological texts difficult. It is therefore unsurprising that machine learning methods already developed for text extraction in other fields found adoption in archaeology here.

Two approaches have emerged from this new demand for parsing through large numbers of archaeological reports, along with a third unrelated one. Firstly, machine learning methods can quickly find similarity between two texts where a human may only find heterogeneity [Boon et al., 2009]. Secondly, machine learning can also be useful for highlighting the underrepresentation of certain archaeological findings in existing literature [e.g. cremation: Brandsen and Lippok 2021, p.6]. Lastly, researchers have also used machine learning to extract and interpret graphemes or other signs from archaeological material. This last application focuses on extracting glyphs from images [Dhivya and Devi, 2021] or finding matching pieces from document fragments [Abitbol et al., 2021]. For these image-based tasks, ANNs are the family of models used [Dhivya and Devi, 2021, Abitbol et al., 2021] likely due to their effectiveness in computer vision tasks (cf. 4.2.1). However, we consider the results to still be too limited as of now.

All study cases that used natural language processing, required for analysing content similarity in a text document, all relied on ANNs, except for the early application of Bonn et al. [2009], which used instead an unsupervised memory-

based-learning model (MBL). Large language models, having been introduced only recently [Vaswani et al., 2017], did not feature in our dataset due to our cutoff point of 2022, though there have already been some applications more recently [Chang et al., 2024]. Despite their youth, the impact of large language models across modern society has been large Tamkin et al. [2021], Eloundou et al. [2023], Clusmann et al. [2023], Tayan et al. [2024] and the archaeological field will undoubtedly implement these new models for either research purposes or education [Agapiou and Lysandrou, 2023, Cobb, 2023].

#### 4.2.6 Taphonomic classification

All articles found were co-authored by either Manuel Domínguez-Rodrigo or Enrique Baquedano, or other authors that nevertheless contributed with them. No other articles by a workgroup unaffiliated with either author were found in our searches.

Many of the articles applied a large number of machine learning methods as well as methods that we do not consider machine learning [such as PLSDA and MDA; *e.g.* Domínguez-Rodrigo and Baquedano 2018, Abellan et al. 2022] to compare their performance on the specific task, whilst others [*e.g.* Byeon et al. 2019, Cifuentes-Alcobendas and Domínguez-Rodrigo 2019] were more restrained. This meant that there was no clear machine learning method or family of methods that was used much more frequently than others, although neural networks were applied in all but one of the articles reviewed (cf. 3.3.8), which is not the case for other methods also commonly used in these articles, such as SVMs or random forests.

However, despite the wide range of methods, many of the articles reviewed were found to contain important methodological issues, both from unclear and insufficient reporting of the methods applied, to important considerations of the data used that were seemingly eschewed.

Some of these methodological issues have already been highlighted previously [McPherron et al., 2022; but see the reply by Abellan et al. 2022, Moclán and Domínguez-Rodrigo 2023], especially dealing with the unclear methodology applied for the process of “bootstrapping” described in one publication also part of our reviewed dataset [Domínguez-Rodrigo 2018; though note that this is also present in other publications in our dataset: Domínguez-Rodrigo and Baquedano 2018, Aramendi et al. 2019, Moclán et al. 2019, 2020]. The lack of specificity on how this process was undertaken is serious, since bootstrapping to create a larger overall dataset and *then* splitting data for validation and testing [as seems to be very explicitly stated in Domínguez-Rodrigo and Baquedano 2018, Domínguez-Rodrigo 2018, Aramendi et al. 2019] constitutes a methodological failure, as all the machine learning models will have the same data for both training and testing datasets, rendering any validation results unusable in the same way providing an exam to a student together with its answer sheet would. Although we do not wish to reiterate the discussion on the use or misuse of the term “bootstrapping” from Domínguez-Rodrigo [2018], it is important to highlight how unclear reporting of methodology or code unavailability can lead other researchers to consider the methods applied unsound. For another related example, both Domínguez-Rodrigo [2018] and Domínguez-Rodrigo and Baquedano [2018] report the use of bootstrapping, but then also describe the use of k-fold cross validation performed seemingly alongside it, both of which are part of the `caret` R package [Kuhn, 2019], but cannot be used together, as seems to be implied. The `trainControl` command of the `caret` package is presumably the one used in both articles, even though no code was made available, and no specific package version was specified [except in an appendix of a citation Kuhn 2019, p.556] to confirm any possible changes in the command’s behaviour in the past that would have made it possible. A more generous reading is that this perhaps only applies to one (C5.0 decision trees) of the six algorithms used, for which k-fold cross validation is specifically mentioned, as can be perhaps surmised from Aramendi et al. [2019], who only mention k-folds cross validation specifically for C5.0. Even so, this raises the question of whether k-folds was performed in addition to holdout testing for all methods [as seems to be the case in Domínguez-Rodrigo and Baquedano 2018, Domínguez-Rodrigo 2018], or if the C5.0 implementation alone did not use holdout testing, or was the only one to use both [either option possible in Aramendi et al. 2019]. This also exemplifies the importance of carefully reporting the software versions of the programs used, if not making code available outright.

Other issues may require more technical knowledge to identify, such as those in Moclán et al. [2019], another taphonomic classification study suffering from the main bootstrapping issue discussed above, though only partially, as they evaluated all the models used with both a bootstrapped and non-bootstrapped sample. This study sought to predict the agent that caused a specific bone fracture plane in bone fragments (in which many planes can be present) made experimentally; in this case, between anthropic direct percussion, spotted hyena (*C. crocuta*) carnivory and wolf (*C. lupus*) carnivory [Moclán et al., 2019]. However, the bone fracture plane entries dataset of fracture planes reported in the article’s Electronic Supplementary Material 1 (ESM 1) contain information on the bone fragment they are from, rather than only about the fracture plane itself [Moclán et al., 2019, app. ESM 1]. Thus, if the dataset were randomly split, some data points from the same bone fragment used for model validation may have contained identical bone fracture metadata to the training input, allowing the model to use that metadata to predict the agent of the fracture plane, since all bone fracture planes from the same bone fragment were caused by the same agent (cf. Varoquaux and

Cheplygina 2022Varoquaux and Cheplygina 2022). In some cases a single bone fragment had six fracture plane data points defined (and thus six data points available to be shuffled into both testing and training), all containing the same bone fragment metadata for the variables of epiphysis presence, length, and number of planes [Moclán et al., 2019, app. ESM 1]. Though no code was made available for this publication to examine how these metadata variables were used during model training and validation, the authors do state that they were indeed used [Moclán et al., 2019, p.4668]. In addition, the number of entries in ESM 1 do not match the number of fragments reported for any of the three classes [Moclán et al., 2019, app. ESM 1]. Even when counting only unique bone fragments instead of planes (using ESM 1), the numbers, while closer to the numbers reported in the Results section, still do not match for any class [Moclán et al., 2019]. Furthermore, for the Hyena class, it is also clear some fragments did not have all their fracture planes added to the ESM 1 dataset [*e.g.* there are an odd number of entries that state the planes per bone fragment is 2, thus implying there is one plane that was not included; Moclán et al. 2019].

The issues described above for Moclán et al. [2019] may even be present in another article in this category [Moclán et al., 2020], though the latter eschewed the use of bootstrapping altogether, as well as any supplementary material. Despite not publishing the dataset or code, the authors stated that the article was a continuation of Moclán et al. [2019], citing it continuously as their methodological starting point, and likely using the same model trained in Moclán et al. [2019], especially as the variables described were identical. Moclán et al. [2020] focused on classifying bone fracture agency in archaeological – as opposed to experimental – material [contrary to Moclán et al. 2019], though without correcting any of the issues described above, despite providing strong conclusions on the agent that caused the archaeological bone fracture based on the results of a model with considerable unaddressed issues. The use of machine learning methods to draw any conclusion from its own predictions of archaeological data must be very carefully done, the limitations of the methods must be clearly and transparently examined, and the strength of the conclusions must be scrupulously tempered. Anything else should not be considered good scientific practice.

Despite the earlier discussion, however, not all study cases reviewed had such major methodological issues. The methods used in other articles in this category such as Byeon et al. [2019] and Cifuentes-Alcobendas and Domínguez-Rodrigo [2019] are promising and well-grounded (with only a few caveats, such as the latter's omission on whether BSMs from the same bone were split into both training and testing, which could have unduly increased validation accuracy) and should definitely be the basis of further studies on the subject.

### 4.3 Recommendations and good practices

From our comprehensive review, several lessons for future improvement have emerged, which we have categorised into either methodological or theoretical considerations.

A first significant methodological concern is the lack of standardised workflows and practices. As an example, for automatic structure detection tasks [Bellat and Scholten, 2024], it is impractical to compare studies with different inputs (*e.g.* RGB, DEM, multispectral images) or different and unharmonised preprocessing. One step to increase some standardisation could be to promote transfer learning from pre-trained models based on publicly available datasets, which has proven effective in some reviewed study cases [Gallwey et al., 2019, Herrault et al., 2021]. It could be particularly efficient in artefact classification, cultural heritage reconstruction, or automatic structure detection, where numerous image collections already very similar in nature exist; *e.g.* *BigEarthNet*, [Sumbul et al., 2019] *AID* [Xia et al., 2017], *Million AID* [Long et al., 2021], and *NWPU-RESISC45* [Cheng et al., 2017]. These collections demonstrated their utility in enhancing model accuracy for remote sensing tasks [Wang et al., 2023, Thapa et al., 2023]. For text extraction or grey literature comparison tasks, adopting a common workflow for data cleansing and preparation is crucial. In addition, reported metrics should be standardised to allow for better comparisons across studies. In the case of prediction problems, the metrics of precision and recall, as well as confusion matrices should always be available to the public. The field of isoscape analyses, where most publications follow a similar workflow and script based on Bataille et al. [2018, 2021], provides a good example [Serna et al., 2020, Janzen et al., 2020, Barberena et al., 2021, Holt et al., 2021, Bataille et al., 2021] fostering a community of practitioners rather than individual practices from isolated individuals. This approach could be a goal for different archaeological subfields aiming to develop machine learning applications and create a cohesive community. In their study, Batist and Roe [2024, Table 5, Fig. 6] highlighted a similar phenomenon in an open archaeological dataset for specific communities (radiocarbon, database) that have very strong ties and an active and a solid sharing policy.

Another major concern is the difficulty of clearly delimiting the extent of machine learning. The definition used here was particularly strict, excluding algorithms that are more traditional statistical methods or mainly deal with dimensionality reduction, even if they were reported in many of the articles reviewed here as indeed machine learning, such as k-means, PAM/k-median [Mircea et al., 2015, Altaweel and Squitieri, 2019, Febriawan et al., 2020, Cacciari and Pocobelli, 2021, Demjan et al., 2022, Bouzid and Barge, 2022, Fernee and Trimmis, 2022, Badawy et al., 2022] as well as PCA, LDA, and QDA [Monna et al., 2020, Ma et al., 2021, Abellan et al., 2022, Anglisano et al., 2022, Badawy et al., 2022]. It is

not easy to draw a line between what is machine learning and what is not, since it extends across the fields of both statistics and computer science, if not more [Bzdok, 2017, Bzdok et al., 2018]. Therefore, we do not wish to suggest our definition is conclusive, but we must also highlight the varied understanding of the concept across authors, which can make an analysis of machine learning applications in a specific field challenging.

Data availability and open access to data is often discussed as a big challenge in archaeological research. In general, the entire workflow, from original data collection to publication, should be accessible. Following the FAIR principles [Wilkinson et al., 2016], data can be stored in open access data articles (e.g. *Journal of Open Archaeology Data*) or in institutional and international platforms (e.g. *Zenodo*, *OSF*, *FigShare*). The code should also be accessible either on an online platform (e.g. *GitHub*, *GitLab*) or in the supplementary material. Moreover, all the results, including those not discussed, should be available to the reader. Adopting a FAIR workflow and open-access data gives the opportunity to share methodologies and outcomes to a wider public, and potentially aid in the preservation of cultural heritage [Fisher et al., 2021]. The *Peer Community Journal Archaeology (PCI Archaeology)* provides a good example of a fully accessible and FAIR process, requesting the open publication of all data, scripts, and code used for the published study, as well as a clear and thorough reporting of all the methods used, enough to be independently reproducible. A list of software and platforms adapted for increasing reproducibility in archaeological research, although slightly outdated, is given in supplementary tables of Strupler and Wilkison [2017].

A major theoretical issue in many studies is the absence of clear archaeological questions that require, or at least are well-suited to, machine learning methodologies to be answered. Authors develop proofs-of-concept without clearly stating the problems that necessitate the application of machine learning [Albertini et al., 2017, Stott et al., 2019, Gallwey et al., 2019, Ramazzotti, 2020, Ushizima et al., 2020, Vos et al., 2021, Dhivya and Devi, 2021, Lyons et al., 2022]. This issue was already noted in remote sensing applications in African archaeology: “*Much of the recent literature employing new analytical methods for remote sensing is purely experimental and thus is interested solely in developing methods that can be more widely applied by future work*” [Davis and Douglass, 2020]. Clear, well-defined research questions are essential before applying machine learning methods, as simpler statistical solutions may suffice in many cases. The *theory in, theory out*” concept developed by Radford and Joseph [2020, Fig. 1] meets all these requirements, with a theoretical statement prior to the model design and a reflection on the model’s efficiency and its limitations for future theoretical implementation after the model has been run.

Furthermore, the validity and (especially inter-rater) reliability of the datasets used are in many cases not questioned enough [Tennie, 2023], while it is an essential element for reproducibility. Another issue is noise, the outcomes may be valid and reliable if analysed together, but may have low precision. All these problems will become more urgent once a larger transition to machine learning-based methods has happened and no traditional benchmarks exist to compare the results obtained from the models to a broader archaeological context. Besides the fact that the traditional benchmarks are often poor in validity and reliability themselves, the opacity (cf. *black box*) of many machine learning model families (especially artificial neural networks, which have recently surged in popularity) renders the whole problem even more difficult to solve.

Interdisciplinarity and collaboration pose another challenge. Archaeologists should have the primary say in formulating research questions, even when working with computer scientists [Orton, 1980, p. 15]. For example, the archaeology of early modern buildings integrates archaeologists and architects, yet the research questions ought to remain archaeological in nature for an archaeological study. Methodological questions can be developed by computer scientists, but the primary goals must stay aligned with archaeological objectives [Fig. 10].

Finally, an important theoretical issue is the reflection throughout the automation process, which also corresponds to the concept of “*theory in, theory out*”. As mentioned earlier, the use of *Knowledge Discovery Process* [Hörr, 2011, Hörr et al., 2014] represents an innovative and holistic approach to fully understand an archaeological artefact. It involves an initial clustering or unsupervised approach, followed by a supervised approach, with an optional semi-supervised step in between. This process encourages deeper reflection, a more subjective approach and more informed decision making. It is also a matter of taking the time to label the various data, as Klassen et al. state: “*Given the nature of archaeological data, it is often difficult or expensive to get “labels,” for things like artifact typologies and site chronologies*” [Klassen et al., 2018].

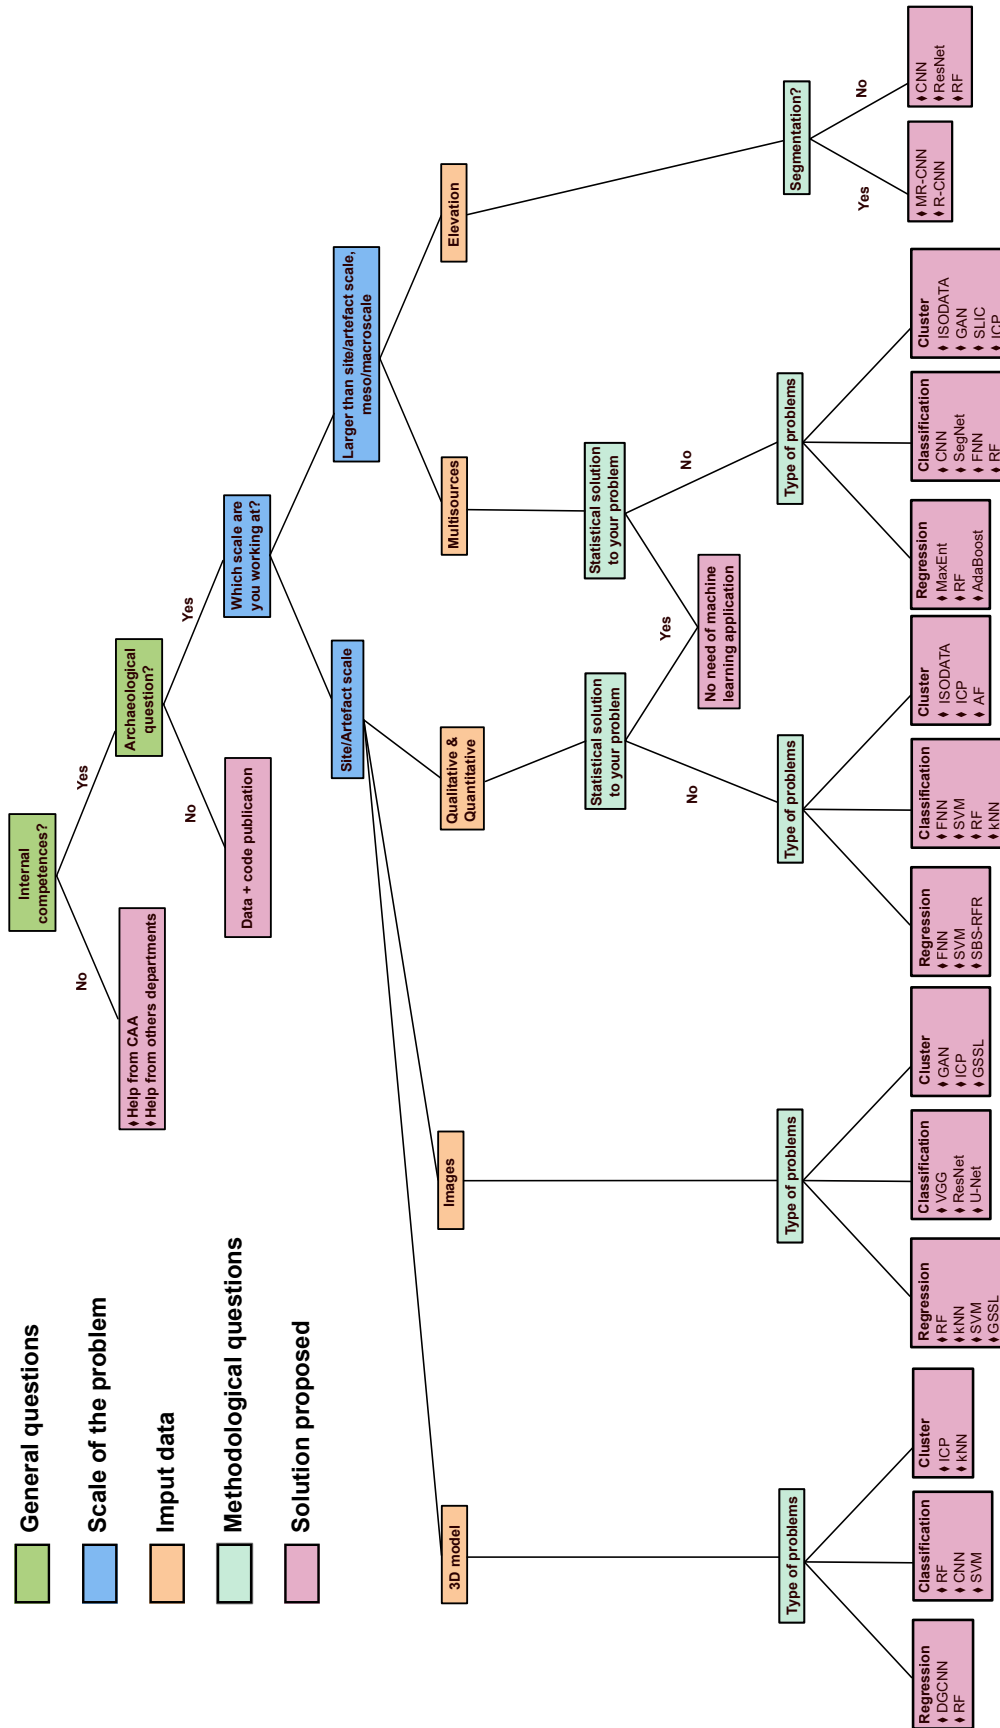


Figure 10: Workflow adapted to machine learning solutions applied to archaeological problematics.

#### 4.4 Trends and perspectives

Machine learning evolves rapidly, and the research presented in this article was based on articles published before 2023. New algorithms and applications that are not covered in our review have already emerged in the field of archaeology [e.g. LLMs, cf. Agapiou and Lysandrou 2023, Cobb 2023, Lapp and Lapp 2024]. Any exhaustive literature review takes considerable time to accomplish, and it is difficult to remain up to date to a set of technologies so quickly evolving as is machine learning. Nonetheless, our review highlights several potential trends for the future of machine learning in archaeology.

Firstly, regarding the general development of machine learning in archaeology, the academic background of new students will evolve. We identified four programs in Europe that focused on computer science applications in archaeology. The “Computational Archaeology: GIS, Data Science and Complexity” master at UCL in London, “Digital Archaeology” master at York University, the “Digital and Computational Archaeology” formation at Universität zu Köln in Cologne and the “Master in Digital Heritage and Landscape Archaeology” at the University of Cyprus in Nicosia. This number will undoubtedly grow, and machine learning will become as familiar to the next generation of archaeologists as GIS and remote sensing [Agapiou and Lysandrou, 2015] or open source principles [Batist and Roe, 2024] are today.

Secondly, for image recognition tasks, particularly those related to cultural heritage and architecture, image segmentation will become an essential preprocessing step [Grilli et al., 2018]. While already widely used, integrating segmentation at the beginning of a pipeline and linking it to a later classification algorithm is rare [Grilli and Remondino, 2019, Nogales et al., 2021]. This remark is also valid for any automatic structure detection tasks, but the large use of MR-CNNs suggests that many of the practitioners are already aware of the importance and usefulness of semantic image segmentation.

Regarding automatic structure detection, it seems that, without a doubt, these already well represented tasks in our corpus, will likely find economic opportunities. Private and public companies seek to manage costs and risks associated with new installations and construction, and automatic structure detection can help avoid unnecessary excavations. A private company in Ireland has already tested the *ADAF* model [ÅeoÅ¼ et al., 2024] to reduce archaeological intervention time during track construction, by predicting unseen and unreferenced archaeological mounds. Archaeological predictive models might also be regarded as potential tools for construction companies or even public administration to regulate their cultural heritage conservation policy. However, it is crucial to use these tools responsibly, acknowledging that machine learning models are not infallible, nor can they replace manual fieldwork. These tools, if applied commercially, ought to be seen as a way to minimise or at the very least better predict the impact of archaeological material during construction, but never as a way to avoid archaeological intervention. In fact, it might be possible to observe or even prevent the destruction of archaeological material [El-Hajj, 2021], especially with widely-verified and trusted methodologies. Both software developers and archaeologists must clearly define thresholds for feature classification or prediction and provide diverse datasets to ensure comprehensive predictions to avoid overlooking archaeological features.

The future development of new algorithms for classification of artefacts is another key area. Unlike automatic structure detection, where MR-CNNs dominate, there are no standard models in artefact classification. Although ANNs have taken the lead, a few dominant models, whether within the ANN family of methods or not, will likely emerge. *ResNet* is already very popular and well-suited for image recognition problems [Gualandi et al., 2021, Anichini et al., 2021, Kowlessar et al., 2021, Berganzo-Besga et al., 2021, Jalandoni et al., 2022], despite its relative antiquity [He et al., 2016]. The use of deep learning models, especially CNNs and ANNs, is expected to still gain interest for archaeological application as it has in other disciplines [Zheng et al., 2021, Osco et al., 2021, Thai, 2022]. Furthermore, the rising amount of data used will favour deep learning models compared to other types of models (e.g. ensemble learning, Bayesian classifier), due to its higher number of parameters [Sarker, 2021]. In the case of APMs, ensemble learning methods like random forest and *MaxEnt*, despite being several decades old, are well-suited to APMs, *MaxEnt* in particular, which does not require data points for absence of features [Yaworsky et al., 2020]. These methods will likely remain in use for some years due to the particular situation of APMs. An alternative is to employ deep learning models coupled with interpretability tools such as *LIME* [Ribeiro et al., 2016] or *SHAP* [Lundberg and Lee, 2017], which were not applied in our corpus, nor (to our knowledge) have yet to be applied in archaeology.

Finally, we have not explored large language models (LLMs) in detail. The release of *GPT* [Brown et al., 2020] and *chatGPT* chatbot based on *GPT-3.5* in November 2022 [OpenAI, 2022] opened a large number of possibilities for text analysis and software programming. Our review did not cover these developments as we excluded any articles published after 2022. However, LLMs have already shown promising results in archaeology for teaching [Cobb, 2023] and for literature scraping, as well as classification [Agapiou and Lysandrou, 2023, Bellat et al., 2024]. LLMs have even been applied to the automatic classification of artefacts with partially successful results [Lapp and Lapp, 2024]. In the future, LLMs could also be used for code generation or translation between programming languages. While *Unnatural-Code-LLaMA-34B* excels in generating new code, *GPT-4* is the better option for code translation [Zheng



et al., 2024]. LLMs could make coding more accessible to a wider audience of archaeologists and are likely to increase the number of publications on machine learning applications in archaeology. They are not without their concerns, however, as many academic institutions [of Tübingen, 2023, University, 2024, of Technology, 2024, Wang et al., 2024] or even European deciders [Commission et al., 2024] have already set up guidelines to control and regulate the use of such models.

## 5 Conclusions

Our extensive review of applications of machine learning in archaeological research, which includes both quantitative and qualitative observations, highlighted several key phenomena. Expanding on Bickler's assertion that: "*Machine learning arrives in archaeology*" [Bickler, 2021], our findings suggest that machine learning has been widely present in archaeology since at least 2019. The adoption of machine learning techniques has been slower than in other fields, likely due to the inherent inertia of the discipline. To understand the diversity of machine learning used in archaeology, we focused primarily on four parameters: archaeological subfields, family of algorithms applied, model evaluation goal, and scientific task. The initial wave of machine learning applications focused on artefact classification and bioarchaeological problems [Nguifo et al., 1997, Toler-Franklin et al., 2010, Ionescu, 2015, Mircea et al., 2015]. Automatic structure detection has strongly developed after 2019, likely due to the proliferation of image recognition algorithms based on convolutional neural networks (CNNs) and segmentation models such as Multi-Scale Region-Based CNNs, especially since 2021. The heterogeneity of models used in archaeology contrasts with other fields such as medical imaging applications, where CNNs and generative adversarial networks (GANs) are predominantly used [Barragán-Montero et al., 2021].

However, there are still some methodological concerns likely arising from the limited background of many archaeologists in machine learning, as well as vice versa for some programmers in relation to archaeological problems. Davis and Douglass have already pointed out this disconnect in remote sensing applications in archaeology, noting a "*disconnect between remote sensing applications and anthropological theory*" [Davis and Douglass, 2020]. Another critical aspect is the reliability and variability of the benchmarks themselves, which are often poor, leading to additional problems in evaluating the models [Tennie, 2023]. Furthermore, the suitability of the chosen machine learning methodology to answering the scientific question sought after is crucial: in many cases, statistical methods are sufficient to provide an answer, possibly rendering machine learning methods superfluous. To address the challenges of applying these methods to archaeological questions, we have designed a flowchart of suggested best practices [Fig. 10] to help archaeologists develop a coherent and effective approach. This small tool aims to bridge the gap between archaeological research and machine learning, promoting a more integrated and informed application of these technologies in the field.

Looking at more theoretical aspects, there are significant doubts about the validity of results obtained through machine learning results and the underlying reasoning. While the results of machine learning models need to be questioned, they can also reveal unseen relationships within a dataset, moving beyond human interpretation to a more pragmatic system: "*In this specific sense [when compared to human brain function], the application of AI models to archaeological problems has value. It recreates a possible world of other associations of meaning devoid of sources and dispersed information, it exhibits the nuances and complex interrelations and, furthermore, it helps the interpreter codify other associations that were unforeseen (or hidden).*" [Ramazzotti, 2020, p. 174]. Some might even consider highly mechanised and automated processes - machine learning being only one of many - as a new step into human technical gesture [Leroi-Gourhan, 2022, p. 74].

We are likely at (if not already past) a turning point in archaeology, as well as in other disciplines, where a new approach – machine learning – has the possibility to permeate all levels of archaeological practice. Like any other statistical tool, machine learning itself is neither inherently good nor bad; its impact on the field of archaeology depends on how it is used. We should be mindful of the thinking derived from post-processual archaeology in the late 1970s [Hodder, 1986], developed in response to processual archaeology [Phillips and Willey, 1953]. The answer of this post-processual archaeology was to: "*explain the past rather than describing it*" [Yoffee and Fowles, 2010]. Following this perspective, machine learning applications in archaeology should never be limited to data processing or analysis but should be integrated into a broader archaeological reflection with precise questions, albeit knowingly and carefully, making sure its limitations are well known, well reported, and well addressed.

**Author contributions:** M.B., J.D.O.F., C.T. and T.S. conceived the idea for the manuscript and initiated and designed the research. M.B. and J.D.O.F. collected data and selected the articles. M.B. and J.D.O.F. performed the statistical analysis and interpreted the results. M.B., J.D.O.F., C.T. and T.S. wrote the manuscript, with critical input from all co-authors. M.B., J.D.O.F., J.S.R., R.T-M., C.T. and T.S. reviewed the manuscript.

**Acknowledgment:** We would like to thank J. Padarian for his help on the scraping strategy.

**Funding:** This work has received funding from the Deutsche Forschungsgemeinschaft (DFG) Collaborative Research Center (CRC) 1070 “ResourceCultures”, grant agreement n°215859406 and from the European Research Council (ERC) under the European Union’s Horizon 2020 research and innovation program under grant agreement n°714658; (STONECULT project).

**Conflict of interest statement:** The authors declare no conflict of interest.

**Data availability statement:** The data used in this study are openly available in an OSF repository at <https://doi.org/10.17605/OSF.IO/RUPGY>. Codes are on GitHub on “Google-Scholar-Scraper” for the manual screening and “ML\_archaeology\_review”.

**Declaration of Generative AI and AI-assisted technologies in the writing process:** During the preparation of this work the authors used *ChatGPT 3.5* [Brown et al., 2020] in order to generate part of the R code used for the automatic screening protocol searches and figure plotting. After using this tool, the authors reviewed and edited the content as needed and took full responsibility for the content of the publication.

## 6 Annexes

### 6.1 Glossary

- AF = Affinity propagation
- ALS = Airborne laser scanning
- ANN = Artificial neural network
- APM = Archaeological predictive models
- CNN = Convolutional neural network
- DGCNN = Dynamic graph convolutional neural network
- FNN = Feedforward neural network
- FR-CNN = Faster region based convolutional neural network
- GAN = Generative adversarial network
- G.I.S. = Geographic information system
- GSSL = Graph-based semi-supervised learning
- GPR = Ground penetrating radar
- HC = Hierarchical clustering
- ICP = Iterative closest point
- ISODATA = Iterative self-organizing data analysis
- k-MC = k-mean clustering
- kNN = k-nearest neighbors
- LDA = Linear discriminant analysis
- LiDAR = Light detection and ranging
- LogR = Logistic regression
- MBL = Memory-based-learning
- MCC = Matthews correlation coefficient
- MDA = Mixture discriminant analysis
- ML = Machine learning
- MR-CNN = Mask region based convolutional neural network
- NLP = Natural language processing
- PCA = Principal component analysis
- QDA = Quadratic discriminant analysis
- R-CNN = Region based convolutional neural network
- RF = Random forest

- ROC = Receiver operating characteristic
- SBS-RFR = Sequential backward selection-random forest regression
- SLIC = Simple linear iterative clustering
- SVM = Support vector machine
- UAV = Unmanned aerial vehicle
- XRF = X-ray fluorescence

## 6.2 Supplementary file

The data used in this study are openly available in an OSF repository at <https://doi.org/10.17605/OSF.IO/RUPGY>.

## References

- Lewis R. Binford and Sally R. Binford. A Preliminary Analysis of Functional Variability in the Mousterian of Levallois Facies. *American Anthropologist*, 68(2):238–295, 1966. ISSN 0002-7294. URL <https://www.jstor.org/stable/670742>. Publisher: [American Anthropological Association, Wiley].
- François Djindjian. A Short History of the Beginnings of Mathematics in Archaeology. In Juan A. Barceló and Igor Bogdanovic, editors, *Mathematics and Archaeology*, pages 65–85. CRC Press, Boca Raton, FL, 2015. ISBN 978-1-4822-2681-2. OCLC: ocn897785608.
- F. R. Hodson. Cluster analysis and archaeology: Some new developments and applications. *World Archaeology*, 1:299–320, February 1970. ISSN 0043-8243. URL <https://www.tandfonline.com/doi/abs/10.1080/00438243.1970.9979449>. Publisher: Taylor & Francis Group.
- James Judge and Sebastian Lynne. Predicting the past: correlation, explanation, And the use of archaeological models. In James Judge and Sebastian Lynne, editors, *Quantifying the present and predicting the past : theory, method, and application of archaeological predictive modeling*, pages 1–18. U.S. Department of the Interior, Bureau of Land Management Service Center., Denver, u.s. department of the interior, bureau of land management service center. edition, 1988. ISBN 978-1-4960-1578-5. URL <https://www.worldcat.org/title/19925858>.
- Christopher Carr. *For concordance in archaeological analysis: bridging data structure, quantitative technique, and theory*. Waveland Press, Prospect Heights, Il., 1989. ISBN 978-0-88133-425-8. OCLC: 23152393.
- Albertus Voorrips, editor. *Mathematics and information science in archaeology: a flexible framework*. Number vol. 3 in Studies in modern archaeology. Holos, Bonn, 1990. ISBN 978-3-926216-96-0.
- B. R. Kowalski, T. F. Schatzki, and F. H. Stross. Classification of archaeological artifacts by applying pattern recognition to trace element data. *Analytical Chemistry*, 44(13):2176–2180, November 1972. ISSN 0003-2700. doi:10.1021/ac60321a002. URL <https://doi.org/10.1021/ac60321a002>. Publisher: American Chemical Society.
- I. Cacciari and G. F. Pocobelli. Machine Learning: A Novel Tool for Archaeology. In Sebastiano D’Amico and Valentina Venuti, editors, *Handbook of Cultural Heritage Analysis*, pages 961–1002. Springer International Publishing, Cham, 2022. ISBN 978-3-030-60015-0 978-3-030-60016-7. doi:10.1007/978-3-030-60016-7\_33. URL [https://link.springer.com/10.1007/978-3-030-60016-7\\_33](https://link.springer.com/10.1007/978-3-030-60016-7_33).
- Ethem Alpaydin. *Introduction to machine learning*. Adaptive computation and machine learning. The MIT Press, Cambridge, Massachusetts, third edition edition, 2014. ISBN 978-0-262-02818-9.
- Philip Verhagen. *Case studies in archaeological predictive modelling*. Number 14 in Archaeological studies Leiden University. Leiden University Press, Leiden, 2007. ISBN 978-90-8728-007-9. OCLC: ocn212626252.
- Jered Hansen and Mark Nebel. Prioritizing Archaeological Inventory and Protection with Predictive Probability Models at Glen Canyon National Recreation Area, USA. *Kiva-Journal of Southwestern Anthropology and History*, 86(1):1–23, 2020. ISSN 0023-1940. doi:10.1080/00231940.2019.1684003. Place: Abingdon Publisher: Routledge Journals, Taylor & Francis Ltd WOS:000522558000001.
- Jeff Calder, Reed Coil, J. Anne Melton, Peter J. Olver, Gilbert Tostevin, and Katrina Yezzi-Woodley. Use and Misuse of Machine Learning in Anthropology. *IEEE BITS the Information Theory Magazine*, pages 1–13, 2022. ISSN 2692-4110, 2692-4080. doi:10.1109/MBITS.2022.3205143. URL <https://ieeexplore.ieee.org/document/9888777/>.
- A Brandsen and M Koole. Labelling the past: data set creation and multi-label classification of Dutch archaeological excavation reports. *LANGUAGE RESOURCES AND EVALUATION*, 56(2):543–572, June 2022. ISSN 1574-020X. doi:10.1007/s10579-021-09552-6.
- Paul Boon, Laurens van Der Maaten, Hans Paijmans, Eric Postma, and Guus Lange. Digital Support for Archaeology. *Interdisciplinary Science Reviews*, 34(2-3):189–205, September 2009. ISSN 0308-0188. doi:10.1179/174327909X441108. Place: Abingdon Publisher: Routledge Journals, Taylor & Francis Ltd WOS:000267939000005.
- F Anichini, N Dershowitz, N Dubbini, G Gattiglia, B Itkin, and L Wolf. The automatic recognition of ceramics from only one photo: The ArchAIDE app. *JOURNAL OF ARCHAEOLOGICAL SCIENCE-REPORTS*, 36, April 2021. ISSN 2352-409X. doi:10.1016/j.jasrep.2020.102788.
- Anna Anglisano, Lluís Casas, Ignasi Queralt, and Roberta Di Febo. Supervised Machine Learning Algorithms to Predict Provenance of Archaeological Pottery Fragments. *Sustainability*, 14(18):11214, September 2022. doi:10.3390/su141811214. Place: Basel Publisher: Mdpi WOS:000856779600001.

- David Stott, Soren Munch Kristiansen, and Soren Michael Sindbaek. Searching for Viking Age Fortresses with Automatic Landscape Classification and Feature Detection. *Remote Sensing*, 11(16):1881, August 2019. doi:10.3390/rs11161881. Place: Basel Publisher: Mdpi WOS:000484387600044.
- Hector A. Orengo, Francesc C. Conesa, Arnau Garcia-Molsosa, Agustin Lobo, Adam S. Green, Marco Madella, and Cameron A. Petrie. Automated detection of archaeological mounds using machine-learning classification of multisensor and multitemporal satellite data. *Proceedings of the National Academy of Sciences of the United States of America*, 117(31):18240–18250, August 2020. ISSN 0027-8424. doi:10.1073/pnas.2005583117. Place: Washington Publisher: Natl Acad Sciences WOS:000573679600021.
- C Toler-Franklin, B Brown, T Weyrich, T Funkhouser, and S Rusinkiewicz. Multi-Feature Matching of Fresco Fragments. *ACM TRANSACTIONS ON GRAPHICS*, 29(6), December 2010. ISSN 0730-0301. doi:10.1145/1866158.1866207.
- E Grilli and F Remondino. Classification of 3D Digital Heritage. *REMOTE SENSING*, 11(7), April 2019. ISSN 2072-4292. doi:10.3390/rs11070847.
- Maria Elena Castiello. *Computational and Machine Learning Tools for Archaeological Site Modeling*. Springer Theses. Springer International Publishing, Cham, 2022. ISBN 978-3-030-88566-3 978-3-030-88567-0. doi:10.1007/978-3-030-88567-0. URL <https://link.springer.com/10.1007/978-3-030-88567-0>.
- Stephen Parsons. Hard-Hearted Scrolls: A Noninvasive Method for Reading the Herculaneum Papyri. *Theses and Dissertations—Computer Science*, January 2023. doi:<https://doi.org/10.13023/etd.2023.372>. URL [https://uknowledge.uky.edu/cs\\_etds/138](https://uknowledge.uky.edu/cs_etds/138).
- Jan Johannes Miera, Karsten Schmidt, Hans von Suchodoletz, Mathias Ulrich, Lukas Werther, Christoph Zielhofer, Peter Ettel, and Ulrich Veit. Large-scale investigations of Neolithic settlement dynamics in Central Germany based on machine learning analysis: A case study from the Weisse Elster river catchment. *PloS one*, 17(4):e0265835, 2022. ISSN 1932-6203. doi:10.1371/journal.pone.0265835. Place: United States.
- W Byeon, M Dominguez-Rodrigo, G Arampatzis, E Baquedano, J Yravedra, MA Mate-Gonzalez, and P Koumoutsakos. Automated identification and deep classification of cut marks on bones and its paleoanthropological implications. *JOURNAL OF COMPUTATIONAL SCIENCE*, 32:36–43, March 2019. ISSN 1877-7503. doi:10.1016/j.jocs.2019.02.005.
- H. A. Orengo and A. Garcia-Molsosa. A brave new world for archaeological survey: Automated machine learning-based potsherd detection using high-resolution drone imagery. *Journal of Archaeological Science*, 112:105013, December 2019. ISSN 0305-4403. doi:10.1016/j.jas.2019.105013. Place: London Publisher: Academic Press Ltd- Elsevier Science Ltd WOS:000501938100005.
- A Ginau, D Steiniger, R Hartmann, U Hartung, R Schiestl, M Altmeyer, M Seeliger, and J Wunderlich. What settlements leave behind - pXRF compositional data analysis of archaeological layers from Tell el-Fara'in (Buto, Egypt) using machine learning. *PALAEOGEOGRAPHY PALAEOCLIMATOLOGY PALAEOECOLOGY*, 546, May 2020. ISSN 0031-0182. doi:10.1016/j.palaeo.2020.109666.
- KM Reese. Deep learning artificial neural networks for non-destructive archaeological site dating. *JOURNAL OF ARCHAEOLOGICAL SCIENCE*, 132, August 2021. ISSN 0305-4403. doi:10.1016/j.jas.2021.105413.
- A Agapiou, A Vionis, and G Papantoniou. Detection of Archaeological Surface Ceramics Using Deep Learning Image-Based Methods and Very High-Resolution UAV Imageries. *LAND*, 10(12), December 2021. ISSN 2073-445X. doi:10.3390/land10121365.
- Simon H. Bickler. Machine Learning Arrives in Archaeology. *Advances in Archaeological Practice*, 9(2):186–191, May 2021. ISSN 2326-3768. doi:10.1017/aap.2021.6. Place: New York Publisher: Cambridge Univ Press WOS:000652193800009.
- Martina Tenzer, Giada Pistilli, Alex Bransden, and Alex Shenfield. Debating AI in Archaeology: applications, implications, and ethical considerations. *Internet Archaeology*, 67, March 2024. ISSN 13635387. doi:10.11141/ia.67.8. URL <https://intarch.ac.uk/journal/issue67/8/index.html>.
- Amirah Hanani Jamil, Fitri Yakub, Azizul Azizan, Shairatul Akma Roslan, Sheikh Ahmad Zaki, and Syafiq Asyraf Ahmad. A Review on Deep Learning Application for Detection of Archaeological Structures. *Journal of Advanced Research in Applied Sciences and Engineering Technology*, 26(1):7–14, January 2022. ISSN 2462-1943. doi:10.37934/araset.26.1.714. URL <https://www.akademiabaru.com/submit/index.php/araset/article/view/4431>. Number: 1.
- Argyro Argyrou and Athos Agapiou. A Review of Artificial Intelligence and Remote Sensing for Archaeological Research. *Remote Sensing*, 14(23), November 2022. ISSN 2072-4292. doi:10.3390/rs14236000. URL <https://www.mdpi.com/2072-4292/14/23/6000>.

- Cesar Gonzalez-Perez, Patricia Martin-Rodilla, and Martín Pereira-Fariña, editors. *Discourse and Argumentation in Archaeology: Conceptual and Computational Approaches*. Quantitative Archaeology and Archaeological Modelling. Springer International Publishing, Cham, 2023. ISBN 978-3-031-37155-4 978-3-031-37156-1. doi:10.1007/978-3-031-37156-1. URL <https://link.springer.com/10.1007/978-3-031-37156-1>.
- Lorenzo Mantovan and Loris Nanni. The Computerization of Archaeology: Survey on Artificial Intelligence Techniques. *SN Computer Science*, 1(5):267, August 2020. ISSN 2661-8907. doi:10.1007/s42979-020-00286-w. URL <https://doi.org/10.1007/s42979-020-00286-w>.
- Olga Palacios. Aplicacion del aprendizaje automatico en Arqueologia: Un cambio de paradigma? *Vegueta: Anuario de la Facultad de Geografica e Historia*, pages 147–186, January 2023. ISSN 2341-1112, 1133-598X. doi:10.51349/veg.2023.1.06. URL <https://revistavegueta.ulpgc.es/ojs/index.php/revistavegueta/article/view/769>.
- Robert L. Kelly and David Hurst Thomas. *Archaeology*. Cengage Learning, Boston, MA, seventh edition edition, 2017. ISBN 978-1-305-67040-2. OCLC: 915490252.
- Colin Renfrew and Paul G. Bahn. *Archaeology: theories, methods and practice*. Thames & Hudson, London, eight edition, revised & updated edition, 2020. ISBN 978-0-500-29424-6.
- Trevor Hastie, Robert Tibshirani, and Jerome Friedman. *The Elements of Statistical Learning*. Springer Series in Statistics. Springer New York, New York, NY, 2009. ISBN 978-0-387-84857-0 978-0-387-84858-7. doi:10.1007/978-0-387-84858-7. URL <http://link.springer.com/10.1007/978-0-387-84858-7>.
- Miroslav Kubat. *An Introduction to Machine Learning*. Springer International Publishing, Cham, 2017. ISBN 978-3-319-63912-3 978-3-319-63913-0. doi:10.1007/978-3-319-63913-0. URL <http://link.springer.com/10.1007/978-3-319-63913-0>.
- R. Pangti, J. Mathur, V. Chouhan, S. Kumar, L. Rajput, S. Shah, A. Gupta, A. Dixit, D. Dholakia, S. Gupta, S. Gupta, M. George, V.K. Sharma, and S. Gupta. A machine learning based, decision support, mobile phone application for diagnosis of common dermatological diseases. *Journal of the European Academy of Dermatology and Venereology*, 35(2):536–545, February 2021. ISSN 0926-9959, 1468-3083. doi:10.1111/jdv.16967. URL <https://onlinelibrary.wiley.com/doi/10.1111/jdv.16967>.
- Mrinal R. Bachute and Javed M. Subhedar. Autonomous Driving Architectures: Insights of Machine Learning and Deep Learning Algorithms. *Machine Learning with Applications*, 6:100164, December 2021. ISSN 26668270. doi:10.1016/j.mlwa.2021.100164. URL <https://linkinghub.elsevier.com/retrieve/pii/S2666827021000827>.
- Suzanne Kawamleh. Algorithmic evidence in U.S criminal sentencing. *AI and Ethics*, April 2024. ISSN 2730-5953, 2730-5961. doi:10.1007/s43681-024-00473-y. URL <https://link.springer.com/10.1007/s43681-024-00473-y>.
- Han Zhang, Tao Xu, Hongsheng Li, Shaoting Zhang, Xiaogang Wang, Xiaolei Huang, and Dimitris Metaxas. StackGAN: Text to Photo-realistic Image Synthesis with Stacked Generative Adversarial Networks, 2016. URL <https://arxiv.org/abs/1612.03242>. Version Number: 2.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention Is All You Need. *arXiv:1706.03762 [cs]*, December 2017. URL <http://arxiv.org/abs/1706.03762>. arXiv: 1706.03762.
- Vivian Liu, Tao Long, Nathan Raw, and Lydia Chilton. Generative Disco: Text-to-Video Generation for Music Visualization, September 2023. URL <http://arxiv.org/abs/2304.08551>. arXiv:2304.08551 [cs].
- Mark Petticrew and Helen Roberts. *Systematic Reviews in the Social Sciences: A Practical Guide*. Wiley, 1 edition, January 2006. ISBN 978-1-4051-2110-1 978-0-470-75488-7. doi:10.1002/9780470754887. URL <https://onlinelibrary.wiley.com/doi/book/10.1002/9780470754887>.
- Maria J. Grant and Andrew Booth. A typology of reviews: an analysis of 14 review types and associated methodologies. *Health Information and Libraries Journal*, 26(2):91–108, June 2009. ISSN 1471-1834. doi:10.1111/j.1471-1842.2009.00848.x.
- Jill K. Jesson, Lydia Matheson, and Fiona M. Lacey. *Doing your literature review: traditional and systematic techniques*. Sage, Los Angeles, Calif., repr edition, 2012. ISBN 978-1-84860-154-3 978-1-84860-153-6.
- Micah D.J. Peters, Christina M. Godfrey, Hanan Khalil, Patricia McInerney, Deborah Parker, and Cassia Baldini Soares. Guidance for conducting systematic scoping reviews. *International Journal of Evidence-Based Healthcare*, 13(3): 141–146, September 2015. ISSN 1744-1609. doi:10.1097/XEB.0000000000000050. URL <https://journals.lww.com/01787381-201509000-00005>.

- Matthew J Page, Joanne E McKenzie, Patrick M Bossuyt, Isabelle Boutron, Tammy C Hoffmann, Cynthia D Mulrow, Larissa Shamseer, Jennifer M Tetzlaff, Elie A Akl, Sue E Brennan, Roger Chou, Julie Glanville, Jeremy M Grimshaw, Asbjørn Hróbjartsson, Manoj M Lalu, Tianjing Li, Elizabeth W Loder, Evan Mayo-Wilson, Steve McDonald, Luke A McGuinness, Lesley A Stewart, James Thomas, Andrea C Tricco, Vivian A Welch, Penny Whiting, and David Moher. The PRISMA 2020 statement: an updated guideline for reporting systematic reviews. *BMJ*, page n71, March 2021. ISSN 1756-1833. doi:10.1136/bmj.n71. URL <https://www.bmj.com/lookup/doi/10.1136/bmj.n71>.
- Michelle M. Haby, Evelina Chapman, Rachel Clark, Jorge Barreto, Ludovic Reveiz, and John N. Lavis. What are the best methodologies for rapid reviews of the research evidence for evidence-informed decision making in health policy and practice: a rapid review. *Health Research Policy and Systems*, 14(1):83, November 2016. ISSN 1478-4505. doi:10.1186/s12961-016-0155-7.
- Python Software Foundation. Python Language Reference, December 2022. URL <https://www.python.org/>.
- Scott Chamberlain. habanero: Low Level Client for Crossref Search API, May 2022. URL <https://github.com/skott/habanero>.
- Steven A. Cholewiak, Panos Ipeirotis, Victor Silva, and Arun Kannawadi. scholarly: Simple access to Google Scholar authors and citations, December 2022. URL <https://github.com/scholarly-python-package/scholarly>.
- Pandas development team. pandas: Powerful data structures for data analysis, time series, and statistics, November 2022. URL <https://zenodo.org/records/7344967>.
- Mozilla. geckodriver: Proxy for using W3C WebDriver-compatible clients to interact with Gecko-based browsers, February 2023.
- R Core Team, W. N. Venables, and D. M. Smith. *An introduction to R: a programming environment for data analysis and graphics, version 4.4.1*. R Core Team, Auckland, New Zealand, 4th ed edition, 2024. OCLC: 466342073.
- Leslie Huang, Patrick O. Perry, Finn Årup Nielsen, Martin Porter, and Richard Boulton. corpus: Text Corpus Analysis, May 2021. URL <https://cran.r-project.org/web/packages/corpus/index.html>.
- Ingo Feinerer and Kurt Hornik. tm: Text Mining Package, February 2023. URL <https://cran.r-project.org/web/packages/tm/index.html>.
- Shannon P. McPherron, Will Archer, Erik R. Otárola-Castillo, Melissa G. Torquato, and Trevor L. Keevil. Machine learning, bootstrapping, null models, and why we are still not 100% sure which bone surface modifications were made by crocodiles. *Journal of human evolution*, 164:103071, March 2022. ISSN 1095-8606 0047-2484. doi:10.1016/j.jhevol.2021.103071. Place: England.
- JD Orellana Figueroa, JS Reeves, SP McPherron, and C Tennie. A proof of concept for machine learning-based virtual knapping using neural networks. *SCIENTIFIC REPORTS*, 11(1), October 2021. ISSN 2045-2322. doi:10.1038/s41598-021-98755-6.
- Dylan Davis. Geographic Disparity in Machine Intelligence Approaches for Archaeological Remote Sensing Research. *Remote Sensing*, 12(6):921, March 2020. doi:10.3390/rs12060921.
- Clement P. Bataille, Isabella C. C. von Holstein, Jason E. Laffoon, Malte Willmes, Xiao-Ming Liu, and Gareth R. Davies. A bioavailable strontium isoscape for Western Europe: A machine learning approach. *PloS one*, 13(5): e0197386, 2018. ISSN 1932-6203. doi:10.1371/journal.pone.0197386. Place: United States.
- LA Courtenay, J Yravedra, R Huguet, J Aramendi, MA Mate-Gonzalez, D Gonzalez-Aguilera, and MC Arriaza. Combining machine learning algorithms and geometric morphometrics: A study of carnivore tooth marks. *PALAEOGEOGRAPHY PALAEOCLIMATOLOGY PALAEOECOLOGY*, 522:28–39, May 2019. ISSN 0031-0182. doi:10.1016/j.palaeo.2019.03.007.
- Fujian Song, Lee Hooper, and Yoon K Loke. Publication bias: what is it? How do we measure it? How do we avoid it? *Open Access Journal of Clinical Trials*, 5:71–81, July 2013. ISSN null. doi:10.2147/OAJCT.S34419. URL <https://www.tandfonline.com/doi/abs/10.2147/OAJCT.S34419>. Publisher: Dove Medical Press \_eprint: <https://www.tandfonline.com/doi/pdf/10.2147/OAJCT.S34419>.
- Robert Rosenthal. The file drawer problem and tolerance for null results. *Psychological Bulletin*, 86(3):638–641, 1979. ISSN 1939-1455. doi:10.1037/0033-2909.86.3.638. Place: US Publisher: American Psychological Association.
- Garrett M. Sparks. Prying Open the File Drawer. *AMA Journal of Ethics*, 11(4):297–300, April 2009. ISSN 2376-6980. doi:10.1001/virtualmentor.2009.11.4.jdsc1-0904. URL <https://journalofethics.ama-assn.org/article/prying-open-file-drawer/2009-04>. Publisher: American Medical Association.
- F. Song, S. Parekh, L. Hooper, Y. K. Loke, J. Ryder, A. J. Sutton, C. Hing, C. S. Kwok, C. Pang, and I. Harvey. Dissemination and publication of research findings : an updated review of related biases. *Health Technology Assessment*, 14(8):1–220, February 2010. ISSN ISSN: 2046-4924. doi:10.3310/hta14080. URL <https://www.journalslibrary.nihr.ac.uk/hta/HTA14080>.

- Christian Hörr, Elisabeth Lindinger, and Guido Brunnett. Machine Learning Based Typology Development in Archaeology. *Acm Journal on Computing and Cultural Heritage*, 7(1):2, February 2014. ISSN 1556-4673. doi:10.1145/2533988. Place: New York Publisher: Assoc Computing Machinery WOS:000209929400001.
- N MacLeod. The quantitative assessment of archaeological artifact groups: Beyond geometric morphometrics. *QUATERNARY SCIENCE REVIEWS*, 201:319–348, December 2018. ISSN 0277-3791. doi:10.1016/j.quascirev.2018.08.024.
- Justin Pargeter, Nada Khreisheh, and Dietrich Stout. Understanding stone tool-making skill acquisition: Experimental methods and evolutionary implications. *Journal of Human Evolution*, 133:146–166, August 2019. ISSN 0047-2484. doi:10.1016/j.jhevol.2019.05.010. Place: London Publisher: Academic Press Ltd- Elsevier Science Ltd WOS:000481564400011.
- Joshua Emmitt, Sina Masoud-Ansari, Rebecca Phillipps, Stacey Middleton, Jennifer Graydon, and Simon Holdaway. Machine learning for stone artifact identification: Distinguishing worked stone artifacts from natural clasts using deep neural networks. *PLoS one*, 17(8):e0271582, 2022. ISSN 1932-6203. doi:10.1371/journal.pone.0271582. Place: United States.
- Vlad Landa, Yekaterina Shapira, Michal David, Avshalom Karasik, Ehud Weiss, Yuval Reuveni, and Elyashiv Drori. Accurate classification of fresh and charred grape seeds to the varietal level, using machine learning based classification method. *Scientific reports*, 11(1):13577, June 2021. ISSN 2045-2322. doi:10.1038/s41598-021-92559-4. Place: England.
- I Berganzo-Besga, HA Orenco, F Lumbreras, P Aliende, and MN Ramsey. Automated detection and classification of multi-cell Phytoliths using Deep Learning-Based Algorithms. *JOURNAL OF ARCHAEOLOGICAL SCIENCE*, 148, December 2022. ISSN 0305-4403. doi:10.1016/j.jas.2022.105654.
- AR Gansell, JW van de Meent, S Zairis, and CH Wiggins. Stylistic clusters and the Syrian/South Syrian tradition of first-millennium BCE Levantine ivory carving: a machine learning approach. *JOURNAL OF ARCHAEOLOGICAL SCIENCE*, 44:194–205, April 2014. ISSN 0305-4403. doi:10.1016/j.jas.2013.11.005.
- Sotiria Kogou, Golnaz Shahtahmassebi, Andrei Lucian, Haida Liang, Biwen Shui, Wenyuan Zhang, Bomin Su, and Sam van Schaik. From remote sensing and machine learning to the history of the Silk Road: large scale material identification on wall paintings. *Scientific Reports*, 10(1):19312, November 2020. ISSN 2045-2322. doi:10.1038/s41598-020-76457-9. Place: Berlin Publisher: Nature Portfolio WOS:000594627400001.
- Christian Horn, Oscar Ivarsson, Cecilia Lindhe, Rich Potter, Ashely Green, and Johan Ling. Artificial Intelligence, 3D Documentation, and Rock Art-Approaching and Reflecting on the Automation of Identification and Classification of Rock Art Images. *Journal of Archaeological Method and Theory*, 29(1):188–213, March 2022a. ISSN 1072-5369. doi:10.1007/s10816-021-09518-6. Place: New York Publisher: Springer WOS:000627702100001.
- C Horn, A Green, VW Skaerstroem, C Lindhe, M Peternell, and JH Ling. A Boat Is a Boat Is a Boat horizontal ellipsis Unless It Is a Horse - Rethinking the Role of Typology. *OPEN ARCHAEOLOGY*, 8(1):1218–1230, December 2022b. ISSN 2300-6560. doi:10.1515/opar-2022-0277.
- Jordan Benner, Anders Knudby, Julie Nielsen, Meg Krawchuk, and Ken Lertzman. Combining data from field surveys and archaeological records to predict the distribution of culturally important trees. *Diversity and Distributions*, 25(9):1375–1387, September 2019. ISSN 1366-9516. doi:10.1111/ddi.12947. Place: Hoboken Publisher: Wiley WOS:000479067100003.
- Peter M. Yaworsky, Kenneth B. Vernon, Jerry D. Spangler, Simon C. Brewer, and Brian F. Coddling. Advancing predictive modeling in archaeology: An evaluation of regression and machine learning methods on the Grand Staircase-Escalante National Monument. *Plos One*, 15(10):e0239424, October 2020. ISSN 1932-6203. doi:10.1371/journal.pone.0239424. Place: San Francisco Publisher: Public Library Science WOS:000590270000034.
- B.H. Menze, J.A. Ur, and A.G. Sherratt. Detection of Ancient Settlement Mounds. *Photogrammetric Engineering & Remote Sensing*, 72(3):321–327, March 2006. ISSN 00991112. doi:10.14358/PERS.72.3.321. URL <http://openurl.ingenta.com/content/xref?genre=article&issn=0099-1112&volume=72&issue=3&page=321>.
- Fabrice Monna, Jerome Magail, Tanguy Rolland, Nicolas Navarro, Josef Wilczek, Jamiyan-Ombo Gantulga, Yury Esin, Ludovic Granjon, Anne-Caroline Allard, and Carmela Chateau-Smith. Machine learning for rapid mapping of archaeological structures made of dry stones - Example of burial monuments from the Khirgisuur culture, Mongolia -. *Journal of Cultural Heritage*, 43:118–128, June 2020. ISSN 1296-2074. doi:10.1016/j.culher.2020.01.002. Place: Issy-Les-Moulineaux Publisher: Elsevier France-Editions Scientifiques Medicales Elsevier WOS:000545314900013.
- M Altaweel, A Khelifi, ZH Li, A Squitieri, T Basmaji, and M Ghazal. Automated Archaeological Feature Detection Using Deep Learning on Optical UAV Imagery: Preliminary Results. *REMOTE SENSING*, 14(3), February 2022. ISSN 2072-4292. doi:10.3390/rs14030553.



- Michael T. Fisher, Dovydas Jurkenas, Amina Jambajantsan, Bayarsaikhan Jamsranjav, Eredene-Ochir Nasan-Ochir, Eregzen Gelegdorj, Munkhbayar Chuluunbat, Michael Petraglia, and Nicole Boivin. Multidisciplinary digital methodologies for documentation and preservation of immovable Archaeological heritage in the Khovd River Valley, Western Mongolia. *F1000Research*, 11(1250), November 2022. URL <https://f1000research.com/articles/11-1250>.
- A Garcia-Molsosa, HA Orenge, D Lawrence, G Philip, K Hopper, and CA Petrie. Potential of deep learning segmentation for the extraction of archaeological features from historical map series. *ARCHAEOLOGICAL PROSPECTION*, 28(2):187–199, April 2021. ISSN 1075-2196. doi:10.1002/arp.1807.
- Hendra Kurnia Febriawan, Omar Moefiti, Dwi Haryanto, and Taufan Wiguna. Detection and characterization of an archaeological wreck site in Sunda Strait, Indonesia. *Forum geografic*, XIX(1):60–71, June 2020. ISSN 1583-1523, 2067-4635. doi:10.5775/fg.2020.054.i. URL <http://forumgeografic.ro/2020/2655/>.
- P Bordon, P Martinelli, PZ Medina, N Bonomo, and NR Ratto. Automatic detection of mud-wall signatures in ground-penetrating radar data. *ARCHAEOLOGICAL PROSPECTION*, 28(1):89–106, January 2021. ISSN 1075-2196. doi:10.1002/arp.1799.
- Francesca Matrone and Massimo Martini. Transfer learning and performance enhancement techniques for deep semantic segmentation of built heritage point clouds. *Virtual Archaeology Review*, 12(25):73–84, July 2021. ISSN 1989-9947. doi:10.4995/var.2021.15318. Place: Valencia Publisher: Univ Politecnica Valencia, Editorial Upv WOS:000672830700005.
- S Dhivya and GU Devi. TAMIZHI: Historical Tamil-Brahmi Script Recognition Using CNN and MobileNet. *ACM TRANSACTIONS ON ASIAN AND LOW-RESOURCE LANGUAGE INFORMATION PROCESSING*, 20(3), May 2021. ISSN 2375-4699. doi:10.1145/3402891.
- A Brandsen and F Lippok. A burning question-Using an intelligent grey literature search engine to change our views on early medieval burial practices in the Netherlands. *JOURNAL OF ARCHAEOLOGICAL SCIENCE*, 133, September 2021. ISSN 0305-4403. doi:10.1016/j.jas.2021.105456.
- J Aramendi, MC Arriaza, J Yravedra, MA Mate-Gonzalez, MC Ortega, LA Courtenay, D Gonzalez-Aguilera, A Gidna, A Mabulla, E Baquedano, and M Dominguez-Rodrigo. Who ate OH80 (Olduvai Gorge, Tanzania)? A geometric-morphometric analysis of surface bone modifications of a *Paranthropus boisei* skeleton. *QUATERNARY INTERNATIONAL*, 517:118–130, May 2019. ISSN 1040-6182. doi:10.1016/j.quaint.2019.05.029.
- Jesper Sören Dramsch. 70 years of machine learning in geoscience in review. In *Advances in Geophysics*, volume 61, pages 1–55. Elsevier, 2020. ISBN 978-0-12-821669-9. doi:10.1016/bs.agph.2020.08.002. URL <https://linkinghub.elsevier.com/retrieve/pii/S0065268720300054>.
- José Padarian, Budiman Minasny, and Alex B. McBratney. Machine learning and soil sciences: a review aided by machine learning tools. *SOIL*, 6(1):35–52, February 2020. ISSN 2199-398X. doi:10.5194/soil-6-35-2020. URL <https://soil.copernicus.org/articles/6/35/2020/>.
- Mohammad Shehab, Laith Abualigah, Qusai Shambour, Muhannad A. Abu-Hashem, Mohd Khaled Yousef Shambour, Ahmed Izzat Alsalibi, and Amir H. Gandomi. Machine learning in medical applications: A review of state-of-the-art methods. *Computers in Biology and Medicine*, 145:105458, June 2022. ISSN 00104825. doi:10.1016/j.compbiomed.2022.105458. URL <https://linkinghub.elsevier.com/retrieve/pii/S0010482522002505>.
- Zhen Wang, Jun Zhao, Hong Huang, and Xuezhong Wang. A Review on the Application of Machine Learning Methods in Tropical Cyclone Forecasting. *Frontiers in Earth Science*, 10:902596, June 2022. ISSN 2296-6463. doi:10.3389/feart.2022.902596. URL <https://www.frontiersin.org/articles/10.3389/feart.2022.902596/full>.
- Norman Yoffee and Severin Fowles. L'archéologie dans les sciences humaines. *Diogenes*, 229-230(1-2):51–77, 2010. ISSN 0419-1633. doi:10.3917/dio.229.0051. URL <https://www.cairn.info/revue-diogene-2010-1-2-page-51.htm>. Place: Paris cedex 14 Publisher: Presses Universitaires de France.
- Michael E. Smith and Peter Peregrine. Approaches to Comparative Analysis in Archaeology. In Michael E. Smith, editor, *The Comparative Archaeology of Complex Societies*, pages 4–20. Cambridge University Press, Cambridge, 2011. ISBN 978-0-521-19791-5. doi:10.1017/CBO9781139022712.004. URL <https://www.cambridge.org/core/books/comparative-archaeology-of-complex-societies/approaches-to-comparative-analysis-in-archaeology/712C402C5625A776A966B8B0E4DE9653>.
- J. Dorans. Computer based simulation and formal modeling in archaeology: A review. In *Mathematics and information science in archaeology: A flexible framework*, pages 93–114. Holos, Bonn, January 1990. ISBN 978-3-926216-96-0.

- Marco Ramazzotti. Modeling the past. Logics, semantics and neural computing in archaeology. *Archeologia E Calcolatori*, 31(2):169–180, 2020. ISSN 1120-6861. doi:10.19282/ac.31.2.2020.16. Place: Borgo San Lorenzo Publisher: Edizioni All Insegna Giglio Sas-Italian Natl Research Counc WOS:000605360700016.
- M Fiorucci, M Khoroshiltseva, M Pontil, A Traviglia, A Del Bue, and S James. Machine Learning for Cultural Heritage: A Survey. *PATTERN RECOGNITION LETTERS*, 133:102–108, May 2020. ISSN 0167-8655. doi:10.1016/j.patrec.2020.02.017.
- Ben Marwick and Suzanne E. Pilaar Birch. A Standard for the Scholarly Citation of Archaeological Data as an Incentive to Data Sharing. *Advances in Archaeological Practice*, 6(2):125–143, May 2018. ISSN 2326-3768. doi:10.1017/aap.2018.3. URL [https://www.cambridge.org/core/product/identifier/S2326376818000037/type/journal\\_article](https://www.cambridge.org/core/product/identifier/S2326376818000037/type/journal_article).
- Ben Marwick, C. Michael Barton, Lynsey Bates, Elizabeth Bollwerk, Kyle Bocinsky, Alison Kyra Carter, Cyler Conrad, Stefano Costa, Enrico R. Crema, Benjamin Davies, Lee Drake, Thomas S. Dye, Domenico Giusti, Shawn Graham, John Hawks, Damien Huffer, Mark E. Madsen, Fraser D. Neiman, Rachel Opitz, Julien Riel-Salvatore, Philip Riris, Iza Romanowska, Isaac Ullah, and Colin D. Wren. Open Science in Archaeology, January 2017. URL <https://osf.io/72n8g>.
- Christopher Nicholson, Sarah Kansa, Neha Gupta, and Rachel Fernandez. Will It Ever Be FAIR?: Making Archaeological Data Findable, Accessible, Interoperable, and Reusable. *Advances in Archaeological Practice*, 11(1):63–75, February 2023. ISSN 2326-3768. doi:10.1017/aap.2022.40. URL <https://www.cambridge.org/core/journals/advances-in-archaeological-practice/article/will-it-ever-be-fair/9073D28A74C2FE87E53B3C5A7437AC74>. Publisher: Cambridge University Press.
- Reinhard Wentz. Visibility of research: FUTON bias. *The Lancet*, 360(9341):1256, October 2002. ISSN 0140-6736, 1474-547X. doi:10.1016/S0140-6736(02)11264-5. URL [https://www.thelancet.com/journals/lancet/article/PIIS0140-6736\(02\)11264-5/fulltext](https://www.thelancet.com/journals/lancet/article/PIIS0140-6736(02)11264-5/fulltext). Publisher: Elsevier.
- Mark D. Wilkinson, Michel Dumontier, IJsbrand Jan Aalbersberg, Gabrielle Appleton, Myles Axton, Arie Baak, Niklas Blomberg, Jan-Willem Boiten, Luiz Bonino da Silva Santos, Philip E. Bourne, Jildau Bouwman, Anthony J. Brookes, Tim Clark, Mercè Crosas, Ingrid Dillo, Olivier Dumon, Scott Edmunds, Chris T. Evelo, Richard Finkers, Alejandra Gonzalez-Beltran, Alasdair J. G. Gray, Paul Groth, Carole Goble, Jeffrey S. Grethe, Jaap Heringa, Peter A. C.  $\hat{\text{a}}^{\text{TMt}}$  Hoen, Rob Hoof, Tobias Kuhn, Ruben Kok, Joost Kok, Scott J. Lusher, Maryann E. Martone, Albert Mons, Abel L. Packer, Bengt Persson, Philippe Rocca-Serra, Marco Roos, Rene van Schaik, Susanna-Assunta Sansone, Erik Schultes, Thierry Sengstag, Ted Slater, George Strawn, Morris A. Swertz, Mark Thompson, Johan van der Lei, Erik van Mulligen, Jan Velterop, Andra Waagmeester, Peter Wittenburg, Katherine Wolstencroft, Jun Zhao, and Barend Mons. The FAIR Guiding Principles for scientific data management and stewardship. *Scientific Data*, 3(1):160018, March 2016. ISSN 2052-4463. doi:10.1038/sdata.2016.18. URL <https://www.nature.com/articles/sdata201618>. Publisher: Nature Publishing Group.
- Stephanie Russo Carroll, Ibrahim Garba, Oscar L. Figueroa-Rodríguez, Jarita Holbrook, Raymond Lovett, Simeon Materchera, Mark Parsons, Kay Raseroka, Desi Rodriguez-Lonebear, Robyn Rowe, Rodrigo Sara, Jennifer D. Walker, Jane Anderson, and Maui Hudson. The CARE Principles for Indigenous Data Governance. *Data Science Journal*, 19(1), November 2020. ISSN 1683-1470. doi:10.5334/dsj-2020-043. URL <https://datascience.codata.org/articles/10.5334/dsj-2020-043>.
- Neha Gupta, Andrew Martindale, Kisha Supernant, and Michael Elvidge. The CARE Principles and the Reuse, Sharing, and Curation of Indigenous Data in Canadian Archaeology. *Advances in Archaeological Practice*, 11(1): 76–89, February 2023. ISSN 2326-3768. doi:10.1017/aap.2022.33. URL [https://www.cambridge.org/core/product/identifier/S232637682200033X/type/journal\\_article](https://www.cambridge.org/core/product/identifier/S232637682200033X/type/journal_article).
- Francisco R. Sagasti. Underdevelopment, Science and Technology: The Point of View of the Underdeveloped Countries. *Science Studies*, 3(1):47–59, 1973. ISSN 0036-8539. URL <https://www.jstor.org/stable/284464>. Publisher: Sage Publications, Ltd.
- Jüri Allik, Kalmer Lauk, and Anu Realo. Factors Predicting the Scientific Wealth of Nations. *Cross-Cultural Research*, 54(4):364–397, October 2020. ISSN 1069-3971. doi:10.1177/1069397120910982. URL <https://doi.org/10.1177/1069397120910982>. Publisher: SAGE Publications Inc.
- Diane H. Sonnenwald. Scientific collaboration. *Annu. Rev. Inf. Sci. Technol.*, 41(1):643–681, 2007.
- Bjoern H. Menze and Jason A. Ur. Mapping patterns of long-term settlement in Northern Mesopotamia at a large scale. *Proceedings of the National Academy of Sciences*, 109(14), April 2012. ISSN 0027-8424, 1091-6490. doi:10.1073/pnas.1115472109. URL <https://pnas.org/doi/full/10.1073/pnas.1115472109>.

- Peter Demjan, Peter Pavuk, and Christopher H. Roosevelt. Laser-Aided Profile Measurement and Cluster Analysis of Ceramic Shapes. *Journal of Field Archaeology*, 2022. ISSN 0093-4690. doi:10.1080/00934690.2022.2128549. Place: Abingdon Publisher: Routledge Journals, Taylor & Francis Ltd WOS:000865657600001.
- Luca Casini, Nicolò Marchetti, Andrea Montanucci, Valentina Orrù, and Marco Rocchetti. A human-AI collaboration workflow for archaeological sites detection. *Scientific Reports*, 13(1):8699, May 2023. ISSN 2045-2322. doi:10.1038/s41598-023-36015-5. URL <https://www.nature.com/articles/s41598-023-36015-5>.
- BP Carter, JH Blackadar, and WLA Conner. When Computers Dream of Charcoal Using Deep Learning, Open Tools, and Open Data to Identify Relict Charcoal Hearths in and around State Game Lands in Pennsylvania. *ADVANCES IN ARCHAEOLOGICAL PRACTICE*, 9(4):257–271, November 2021. ISSN 2326-3768. doi:10.1017/aap.2021.17.
- D Ushizima, K Xu, and PJM Monteiro. Materials Data Science for Microstructural Characterization of Archaeological Concrete. *Material Research Society Advances*, 5(7):305–318, 2020. ISSN 2731-5894. doi:10.1557/adv.2020.131.
- T Wunderlich, D Wilken, BS Majchczack, M Segschneider, and W Rabbel. Hyperbola Detection with RetinaNet and Comparison of Hyperbola Fitting Methods in GPR Data from an Archaeological Site. *REMOTE SENSING*, 14(15), August 2022. ISSN 2072-4292. doi:10.3390/rs14153665.
- Mark Aldenderfer. Quantitative Methods in Archaeology: A Review of Recent Trends and Developments. *Journal of Archaeological Research*, 6(2):91–120, June 1998. ISSN 1573-7756. doi:10.1023/A:1022893621306. URL <https://doi.org/10.1023/A:1022893621306>.
- Clive Orton. *Mathematics in archaeology*. Number 3 in Collins archaeology. Collins, London, 1980. ISBN 978-0-00-216226-5.
- Dwight W. Read. Archaeological Classification. In *The Encyclopedia of Archaeological Sciences*, pages 1–4. John Wiley & Sons, Ltd, 2018. ISBN 978-1-119-18823-0. doi:10.1002/9781119188230.saseas0025. URL <https://onlinelibrary.wiley.com/doi/abs/10.1002/9781119188230.saseas0025>. \_eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1002/9781119188230.saseas0025>.
- EM Nguifo, MS Lagrange, M Renaud, and J Sallantin. PLATA: An application of LEGAL, a machine learning based system, to a typology of archaeological ceramics. *COMPUTERS AND THE HUMANITIES*, 31(3):169–187, 1997. ISSN 0010-4817. doi:10.1023/A:1000904004065.
- Ioan-Gabriel Mircea, Gabriela Czibula, and Mara-Renata Petru<sup>ETM</sup>el. Sex Identification in Archaeological Remains Using Decision Tree Learning. *Studia Universitatis BabeÅŸ-Bolyai Informatica*, 60(2):91–103, 2015. URL <http://193.0.225.37/download/pdf/949.pdf#page=92>.
- Norman MacLeod. Artificial Intelligence & Machine Learning in the Earth Sciences. *Acta Geologica Sinica - English Edition*, 93(S3):48–51, May 2019. ISSN 1000-9515, 1755-6724. doi:10.1111/1755-6724.14241. URL <https://onlinelibrary.wiley.com/doi/10.1111/1755-6724.14241>.
- M Canul-Ku, R Hasimoto-Beltran, D Jimenez-Badillo, S Ruiz-Correa, and E Roman-Rangel. Classification of 3D Archaeological Objects Using Multi-View Curvature Structure Signatures. *IEEE ACCESS*, 7:3298–3313, 2019. ISSN 2169-3536. doi:10.1109/ACCESS.2018.2886791.
- Irene González-Molina, Blanca Jiménez-García, José-Manuel Mañllo-Fernández, Enrique Baquedano, and Manuel Domínguez-Rodrigo. Distinguishing Discoid and Centripetal Levallois methods through machine learning. *PloS one*, 15(12):e0244288, 2020. ISSN 1932-6203. doi:10.1371/journal.pone.0244288. Place: United States.
- Shawn Graham, Damien Huffer, and Jeff Blackadar. Towards a Digital Sensorial Archaeology as an Experiment in Distant Viewing of the Trade in Human Remains on Instagram. *Heritage*, 3(2):208–227, June 2020. doi:10.3390/heritage3020013. Place: Basel Publisher: Mdpi WOS:000674302400004.
- Yanming Guo, Yu Liu, Ard Oerlemans, Songyang Lao, Song Wu, and Michael S. Lew. Deep learning for visual understanding: A review. *Neurocomputing*, 187:27–48, April 2016. ISSN 0925-2312. doi:10.1016/j.neucom.2015.09.116. URL <https://www.sciencedirect.com/science/article/pii/S0925231215017634>.
- Junyi Chai, Hao Zeng, Anming Li, and Eric W. T. Ngai. Deep learning in computer vision: A critical review of emerging techniques and application scenarios. *Machine Learning with Applications*, 6:100134, December 2021. ISSN 2666-8270. doi:10.1016/j.mlwa.2021.100134. URL <https://www.sciencedirect.com/science/article/pii/S2666827021000670>.
- Ernest W. Adams and William Y. Adams. The Typological Debate. In *Archaeological Typology and Practical Reality: A Dialectical Approach to Artifact Classification and Sorting*, pages 265–277. Cambridge University Press, Cambridge, 1991. ISBN 978-0-521-04867-5. doi:10.1017/CBO9780511558207.029. URL <https://www.cambridge.org/core/books/archaeological-typology-and-practical-reality/typological-debate/04D834409517492198A14E7AF87370AA>.

- Christian Hörr. *Algorithmen zur automatisierten Dokumentation und Klassifikation archäologischer Gefäße*. Universitätsverlag Chemnitz, Chemnitz, 2011. ISBN 978-3-941003-42-2.
- Usama Fayyad, Gregory Piatetsky-Shapiro, and Padhraic Smyth. From Data Mining to Knowledge Discovery in Databases. *AI Magazine*, 17(3):37–37, March 1996. ISSN 2371-9621. doi:10.1609/aimag.v17i3.1230. URL <https://ojs.aaai.org/aimagazine/index.php/aimagazine/article/view/1230>. Number: 3.
- DM Martin-Perea, LA Courtenay, MS Domingo, and J Morales. Application of artificially intelligent systems for the identification of discrete fossiliferous levels. *PEERJ*, 8, March 2020. ISSN 2167-8359. doi:10.7717/peerj.8767.
- A Jalandoni, YS Zhang, and NA Zaidi. On the use of Machine Learning methods in rock art research with application to automatic painted rock art identification. *JOURNAL OF ARCHAEOLOGICAL SCIENCE*, 144, August 2022. ISSN 0305-4403. doi:10.1016/j.jas.2022.105629.
- M Lyons, F Fecher, and M Reindel. From LiDAR to deep learning: A case study of computer-assisted approaches to the archaeology of Guadalupe and northeast Honduras. *IT-INFORMATION TECHNOLOGY*, 2022. ISSN 1611-2776. doi:10.1515/itit-2022-0004.
- Maria Letizia Gualandi, Gabriele Gattiglia, and Francesca Anichini. An Open System for Collection and Automatic Recognition of Pottery through Neural Network Algorithms. *Heritage*, 4(1):140–159, March 2021. doi:10.3390/heritage4010008. Place: Basel Publisher: Mdpi WOS:000674317100008.
- Gordon R. Willey. Prehistoric settlement patterns in the Virú; Valley, Peru. *Bureau of American Ethnology Bulletin*, 155, 1953. ISSN 0082-8882. URL <http://repository.si.edu/xmlui/handle/10088/15450>. Accepted: 2011-04-07T16:07:01Z.
- Kenneth L. Kvamme. There and Back Again: Revisiting Archaeological Locational Modeling. In Mark Mehrer and Konnie Wescott, editors, *GIS and archaeological site location modeling*, pages 3–38. Taylor & Francis, Boca Raton, FL, 2006. ISBN 978-0-415-31548-7. Meeting Name: GIS and Archaeological Predictive Modeling Conference.
- Gary Lock and Trevor Harris. Enhancing Predictive Archaeological Modeling: Integrating Location, Landscape, and Culture. In Mark Mehrer and Konnie Wescott, editors, *GIS and archaeological site location modeling*, pages 41–62. Taylor & Francis, Boca Raton, FL, 2006. ISBN 978-0-415-31548-7. Meeting Name: GIS and Archaeological Predictive Modeling Conference.
- Timothy A. Kohler. Predictive locational modeling: History and current practice. In James Judge and Sebastian Lynne, editors, *Quantifying the present and predicting the past : theory, method, and application of archaeological predictive modeling*, pages 19–59. U.S. Department of the Interior, Bureau of Land Management Service Center., Denver, u.s. department of the interior, bureau of land management service center. edition, 1988. ISBN 978-1-4960-1578-5. URL <https://www.worldcat.org/title/19925858>.
- David Wheatley. Making space for an archaeology of place. *Internet Archaeology*, 15, 2004. ISSN 13635387. doi:10.11141/ia.15.10. URL [http://intarch.ac.uk/journal/issue15/wheatley\\_index.html](http://intarch.ac.uk/journal/issue15/wheatley_index.html).
- V. P. J. Arponen, Walter Dörfler, Ingo Feeser, Sonja Grimm, Daniel Groß, Martin Hinz, Daniel Knitter, Nils Müller-Scheeßel, Konrad Ott, and Artur Ribeiro. Environmental determinism and archaeology. Understanding and evaluating determinism in research design. *Archaeological Dialogues*, 26(01):1–9, June 2019. ISSN 1380-2038, 1478-2294. doi:10.1017/S1380203819000059. URL [https://www.cambridge.org/core/product/identifier/S1380203819000059/type/journal\\_article](https://www.cambridge.org/core/product/identifier/S1380203819000059/type/journal_article).
- Kristian Kristiansen. Who is deterministic? On the nature of interdisciplinary research in archaeology. *Archaeological Dialogues*, 26(01):12–14, June 2019. ISSN 1380-2038, 1478-2294. doi:10.1017/S1380203819000060. URL [https://www.cambridge.org/core/product/identifier/S1380203819000060/type/journal\\_article](https://www.cambridge.org/core/product/identifier/S1380203819000060/type/journal_article).
- Paul Coombes and Keith Barber. Environmental Determinism in Holocene Research: Causality or Coincidence? *Area*, 37(3):303–311, 2005. ISSN 0004-0894. URL <https://www.jstor.org/stable/20004464>. Publisher: [Royal Geographical Society (with the Institute of British Geographers), Wiley].
- Hassan El-Hajj. Interferometric SAR and Machine Learning: Using Open Source Data to Detect Archaeological Looting and Destruction. *Journal of Computer Applications in Archaeology*, 4(1):47–62, March 2021. ISSN 2514-8362. doi:10.5334/jcaa.70. URL <http://journal.caa-international.org/articles/10.5334/jcaa.70/>.
- Steven J. Phillips, Robert P. Anderson, and Robert E. Schapire. Maximum entropy modeling of species geographic distributions. *Ecological Modelling*, 190(3-4):231–259, January 2006. ISSN 03043800. doi:10.1016/j.ecolmodel.2005.03.026. URL <https://linkinghub.elsevier.com/retrieve/pii/S030438000500267X>.
- Kenneth B. Vernon, Peter M. Yaworsky, Jerry Spangler, Simon Brewer, and Brian F. Coddling. Decomposing Habitat Suitability Across the Forager to Farmer Transition. *Environmental Archaeology*, 27(4):420–433, July 2022. ISSN

- 1461-4103. doi:10.1080/14614103.2020.1746880. URL <https://doi.org/10.1080/14614103.2020.1746880>. Publisher: Routledge \_eprint: <https://doi.org/10.1080/14614103.2020.1746880>.
- Megan M. Friggens, Rachel A. Loehman, Connie I. Constan, and Rebekah R. Kneifel. Predicting wildfire impacts on the prehistoric archaeological record of the Jemez Mountains, New Mexico, USA. *Fire Ecology*, 17(1):18, June 2021. ISSN 1933-9747. doi:10.1186/s42408-021-00103-6. Place: New York Publisher: Springer WOS:000658752800001.
- Maria Elena Castiello and Marj Tonini. An Explorative Application of Random Forest Algorithm for Archaeological Predictive Modeling. A Swiss Case Study. *Journal of Computer Applications in Archaeology*, 4(1):110–125, May 2021. ISSN 2514-8362. doi:10.5334/jcaa.71. URL <http://journal.caa-international.org/articles/10.5334/jcaa.71/>.
- Gabriel Wurzer, Kerstin Kowarik, and Hans Reschreiter, editors. *Agent-based Modeling and Simulation in Archaeology*. Advances in Geographic Information Science. Springer International Publishing, Cham, 2015. ISBN 978-3-319-00007-7 978-3-319-00008-4. doi:10.1007/978-3-319-00008-4. URL <http://link.springer.com/10.1007/978-3-319-00008-4>.
- Mark Gillings, Piraye Hacigüzeller, and G. R. Lock, editors. *Archaeological spatial analysis: a methodological guide*. Routledge, New York, 2020. ISBN 978-0-8153-7322-3 978-0-8153-7323-0.
- Alexandre Guyot, Laurence Hubert-Moy, and Thierry Lorho. Detecting Neolithic Burial Mounds from LiDAR-Derived Elevation Data Using a Multi-Scale Approach and Machine Learning Techniques. *Remote Sensing*, 10(2):225, February 2018. doi:10.3390/rs10020225. Place: Basel Publisher: Mdpi WOS:000427542100071.
- Marek Bundzel, Miroslav Jascur, Milan Kovac, Tibor Lieskovsky, Peter Sincak, and Tomas Tkacik. Semantic Segmentation of Airborne LiDAR Data in Maya Archaeology. *Remote Sensing*, 12(22):3685, November 2020. doi:10.3390/rs12223685. Place: Basel Publisher: Mdpi WOS:000594583200001.
- A Bonhage, M Eltaher, T Raab, M Breuss, A Raab, and A Schneider. A modified Mask region-based convolutional neural network approach for the automated detection of archaeological sites on high-resolution light detection and ranging-derived digital elevation models in the North German Lowland. *ARCHAEOLOGICAL PROSPECTION*, 28(2):177–186, April 2021. ISSN 1075-2196. doi:10.1002/arp.1806.
- Dylan Davis, G Caspari, CP Lipo, and MC Sanger. Deep learning reveals extent of Archaic Native American shell-ring building practices. *JOURNAL OF ARCHAEOLOGICAL SCIENCE*, 132, August 2021. ISSN 0305-4403. doi:10.1016/j.jas.2021.105433.
- Alexandre Guyot, Marc Lennon, Thierry Lorho, and Laurence Hubert-Moy. Combined Detection and Segmentation of Archeological Structures from LiDAR Data Using a Deep Learning Approach. *Journal of Computer Applications in Archaeology*, 4(1):1, February 2021. ISSN 2514-8362. doi:10.5334/jcaa.64. URL <https://journal.caa-international.org/article/10.5334/jcaa.64/>.
- PZ Banasiak, PL Berezowski, R Zaplata, M Mielcarek, K Duraj, and K Sterenczak. Semantic Segmentation (U-Net) of Archaeological Features in Airborne Laser Scanning-Example of the Bialowieza Forest. *REMOTE SENSING*, 14(4), February 2022. ISSN 2072-4292. doi:10.3390/rs14040995.
- J Gallwey, M Eyre, M Tonkins, and J Coggan. Bringing Lunar LiDAR Back Down to Earth: Mapping Our Industrial Heritage through Deep Transfer Learning. *REMOTE SENSING*, 11(17), September 2019. ISSN 2072-4292. doi:10.3390/rs11171994.
- M Soroush, A Mehrtash, E Khazraee, and JA Ur. Deep Learning in Archaeological Remote Sensing: Automated Qanat Detection in the Kurdistan Region of Iraq. *REMOTE SENSING*, 12(3), February 2020. ISSN 2072-4292. doi:10.3390/rs12030500.
- PA Herrault, Q Poterek, B Keller, D Schwartz, and D Ertlen. Automated detection of former field systems from airborne laser scanning data: a new approach for Historical Ecology. *INTERNATIONAL JOURNAL OF APPLIED EARTH OBSERVATION AND GEOINFORMATION*, 104, December 2021. ISSN 1569-8432. doi:10.1016/j.jag.2021.102563.
- Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, Alexander C. Berg, and Li Fei-Fei. ImageNet Large Scale Visual Recognition Challenge. *International Journal of Computer Vision*, 115(3):211–252, December 2015. ISSN 1573-1405. doi:10.1007/s11263-015-0816-y. URL <https://doi.org/10.1007/s11263-015-0816-y>.
- Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C. Lawrence Zitnick. Microsoft COCO: Common Objects in Context. In David Fleet, Tomas Pajdla, Bernt Schiele, and Tinne Tuytelaars, editors, *Computer Vision - ECCV 2014*, pages 740–755, Cham, 2014. Springer International Publishing. ISBN 978-3-319-10602-1. doi:10.1007/978-3-319-10602-1\_48.

- Ari Silburt, Mohamad Ali-Dib, Chenchong Zhu, Alan Jackson, Diana Valencia, Yevgeni Kissin, Daniel Tamayo, and Kristen Menou. Lunar crater identification via deep learning. *Icarus*, 317:27–38, January 2019. ISSN 0019-1035. doi:10.1016/j.icarus.2018.06.022. URL <https://www.sciencedirect.com/science/article/pii/S0019103518301386>.
- Leila Character, Agustin Ortiz Jr, Tim Beach, and Sheryl Luzzadder-Beach. Archaeologic Machine Learning for Shipwreck Detection Using Lidar and Sonar. *Remote Sensing*, 13(9):1759, May 2021. doi:10.3390/rs13091759. Place: Basel Publisher: Mdpi WOS:000650734800001.
- Dylan Davis and J Lundin. Locating Charcoal Production Sites in Sweden Using LiDAR, Hydrological Algorithms, and Deep Learning. *REMOTE SENSING*, 13(18), September 2021. ISSN 2072-4292. doi:10.3390/rs13183680.
- Iban Berganzo-Besga, Hector A. Orenge, Felipe Lumbreras, Miguel Carrero-Pazos, Joao Fonte, and Benito Vilas-Estevez. Hybrid MSRM-Based Deep Learning and Multitemporal Sentinel 2-Based Machine Learning Algorithm Detects Near 10k Archaeological Tumuli in North-Western Iberia. *Remote Sensing*, 13(20):4181, October 2021. doi:10.3390/rs13204181. Place: Basel Publisher: Mdpi WOS:000714547800001.
- Ezra Francis Leslie Trotter, Ana Cristina Mosebo Fernandes, Casper Samsø Fibaek, and Carsten Kessler. Machine learning for automatic detection of historic stone walls using LiDAR data. *International Journal of Remote Sensing*, 43(6):2185–2211, March 2022. ISSN 0143-1161. doi:10.1080/01431161.2022.2057206. Place: Abingdon Publisher: Taylor & Francis Ltd WOS:000779833200001.
- S Yang, L Luo, Q Li, YY Chen, L Wu, and XY Wang. Auto-identification of linear archaeological traces of the Great Wall in northwest China using improved DeepLabv3+ from very high-resolution aerial imagery. *INTERNATIONAL JOURNAL OF APPLIED EARTH OBSERVATION AND GEOINFORMATION*, 113, September 2022. ISSN 1569-8432. doi:10.1016/j.jag.2022.102995.
- Bowen Cheng, Ross Girshick, Piotr Dollár, Alexander C. Berg, and Alexander Kirillov. Boundary IoU: Improving Object-Centric Image Segmentation Evaluation, March 2021. URL <http://arxiv.org/abs/2103.16562>. arXiv:2103.16562.
- Marco Fiorucci, Wouter B. Verschoof-van der Vaart, Paolo Soleni, Bertrand Le Saux, and Arianna Traviglia. Deep Learning for Archaeological Object Detection on LiDAR: New Evaluation Measures and Insights. *Remote Sensing*, 14(7):1694, April 2022. doi:10.3390/rs14071694. Place: Basel Publisher: Mdpi WOS:000780686800001.
- Gino Caspari and Pablo Crespo. Convolutional neural networks for archaeological site detection Finding princely tombs. *Journal of Archaeological Science*, 110:104998, October 2019. ISSN 03054403. doi:10.1016/j.jas.2019.104998. URL <https://linkinghub.elsevier.com/retrieve/pii/S0305440319300846>.
- A Nogales, E Delgado-Martos, A Melchor, and AJ Garcia-Tejedor. ARQGAN: An evaluation of generative adversarial network approaches for automatic virtual inpainting restoration of Greek temples. *EXPERT SYSTEMS WITH APPLICATIONS*, 180, October 2021. ISSN 0957-4174. doi:10.1016/j.eswa.2021.115092.
- A Felicetti, M Paolanti, P Zingaretti, R Pierdicca, and ES Malinverni. MO.SE.: Mosaic image segmentation based on Deep cascading Learning. *VIRTUAL ARCHAEOLOGY REVIEW*, 12(24):25–38, January 2021. ISSN 1989-9947. doi:10.4995/var.2021.14179.
- Amaia Mesanza-Moraza, Ismael Garcia-Gomez, and Agustin Azkarate. Machine Learning for the Built Heritage Archaeological Study. *Acm Journal on Computing and Cultural Heritage*, 14(1):10, February 2021. ISSN 1556-4673. doi:10.1145/3422993. Place: New York Publisher: Assoc Computing Machinery WOS:000618193500010.
- S Prasomphan. Toward Fine-grained Image Retrieval with Adaptive Deep Learning for Cultural Heritage Image. *COMPUTER SYSTEMS SCIENCE AND ENGINEERING*, 44(2):1295–1307, 2022. ISSN 0267-6192. doi:10.32604/csse.2023.025293.
- M. P. Pavan Kumar, B. Poornima, H. S. Nagendraswamy, C. Manjunath, B. E. Rangaswamy, M. Varsha, and H. P. Vinutha. Image Abstraction Framework as a Pre-processing Technique for Accurate Classification of Archaeological Monuments Using Machine Learning Approaches. *SN Computer Science*, 3(1):87, January 2022. ISSN 2662-995X, 2661-8907. doi:10.1007/s42979-021-00935-8. URL <https://link.springer.com/10.1007/s42979-021-00935-8>.
- Massimiliano Pepe, Vincenzo Saverio Alfio, Domenica Costantino, and Daniele Scaringi. Data for 3D reconstruction and point cloud classification using machine learning in cultural heritage environment. *Data in Brief*, 42:108250, June 2022. ISSN 23523409. doi:10.1016/j.dib.2022.108250. URL <https://linkinghub.elsevier.com/retrieve/pii/S2352340922004528>.
- Farhana Sultana, Abu Sufian, and Paramartha Dutta. Evolution of Image Segmentation using Deep Convolutional Neural Network: A Survey. *Knowledge-Based Systems*, 201-202:106062, August 2020. ISSN 09507051. doi:10.1016/j.knosys.2020.106062. URL <https://linkinghub.elsevier.com/retrieve/pii/S0950705120303464>.

- Tony Boston, Albert Van Dijk, Pablo Larraondo, and Richard Thackway. Comparing CNNs and Random Forests for Landsat Image Segmentation Trained on a Large Proxy Land Cover Dataset. *Remote Sensing*, 14(14):3396, July 2022. ISSN 2072-4292. doi:10.3390/rs14143396. URL <https://www.mdpi.com/2072-4292/14/14/3396>.
- Julian Richards, Douglas Tudhope, and Andreas Vlachidis. Text Mining in Archaeology: Extracting Information from Archaeological Reports. In Juan A Barceló and Igor Bogdanovic, editors, *Mathematics and Archaeology*, pages 240–254. CRC Press, 2015. ISBN 978-0-429-17233-5. URL <https://www.taylorfrancis.com/chapters/edit/10.1201/b18530-17/text-mining-archaeology-extracting-information-archaeological-reports?context=ubx&refId=06856a30-b793-4705-82ab-f063a9aa6f1f>.
- Alex Brandsen. Information Extraction and Machine Learning for Archaeological Texts. In Cesar Gonzalez-Perez, Patricia Martin-Rodilla, and Martín Pereira-Fariña, editors, *Discourse and Argumentation in Archaeology: Conceptual and Computational Approaches*, Quantitative Archaeology and Archaeological Modelling, pages 229–261. Springer International Publishing, Cham, 2023. ISBN 978-3-031-37156-1. doi:10.1007/978-3-031-37156-1\_11. URL [https://doi.org/10.1007/978-3-031-37156-1\\_11](https://doi.org/10.1007/978-3-031-37156-1_11).
- Andrew Bevan. The data deluge. *Antiquity*, 89(348):1473–1484, December 2015. ISSN 0003-598X, 1745-1744. doi:10.15184/aqy.2015.102. URL <https://www.cambridge.org/core/journals/antiquity/article/data-deluge/D77DE6754E82D6972581F95541EC23F6>.
- Roy Abitbol, Ilan Shimshoni, and Jonathan Ben-Dov. Machine Learning Based Assembly of Fragments of Ancient Papyrus. *Acm Journal on Computing and Cultural Heritage*, 14(3):33, July 2021. ISSN 1556-4673. doi:10.1145/3460961. Place: New York Publisher: Assoc Computing Machinery WOS:000679805600008.
- Yupeng Chang, Xu Wang, Jindong Wang, Yuan Wu, Linyi Yang, Kaijie Zhu, Hao Chen, Xiaoyuan Yi, Cunxiang Wang, Yidong Wang, Wei Ye, Yue Zhang, Yi Chang, Philip S. Yu, Qiang Yang, and Xing Xie. A Survey on Evaluation of Large Language Models. *ACM Transactions on Intelligent Systems and Technology*, January 2024. ISSN 2157-6904. doi:10.1145/3641289. URL <https://dl.acm.org/doi/10.1145/3641289>. Just Accepted.
- Alex Tamkin, Miles Brundage, Jack Clark, and Deep Ganguli. Understanding the Capabilities, Limitations, and Societal Impact of Large Language Models, February 2021. URL <http://arxiv.org/abs/2102.02503>. arXiv:2102.02503 [cs].
- Tyna Eloundou, Sam Manning, Pamela Mishkin, and Daniel Rock. GPTs are GPTs: An Early Look at the Labor Market Impact Potential of Large Language Models, August 2023. URL <http://arxiv.org/abs/2303.10130>. arXiv:2303.10130 [econ].
- Jan Clusmann, Fiona R. Kolbinger, Hannah Sophie Muti, Zunamys I. Carrero, Jan-Niklas Eckardt, Narmin Ghaffari Laleh, Chiara Maria Lavinia Löffler, Sophie-Caroline Schwarzkopf, Michaela Unger, Gregory P. Veldhuizen, Sophia J. Wagner, and Jakob Nikolas Kather. The future landscape of large language models in medicine. *Communications Medicine*, 3(1):1–8, October 2023. ISSN 2730-664X. doi:10.1038/s43856-023-00370-1. URL <https://www.nature.com/articles/s43856-023-00370-1>. Publisher: Nature Publishing Group.
- Omar Tayan, Ali Hassan, Khaled Khankan, and Sanaa Askool. Considerations for adapting higher education technology courses for AI large language models: A critical review of the impact of ChatGPT. *Machine Learning with Applications*, 15:100513, March 2024. ISSN 2666-8270. doi:10.1016/j.mlwa.2023.100513. URL <https://www.sciencedirect.com/science/article/pii/S266682702300066X>.
- Athos Agapiou and Vasiliki Lysandrou. Interacting with the Artificial Intelligence (AI) Language Model ChatGPT: A Synopsis of Earth Observation and Remote Sensing in Archaeology. *Heritage*, 6(5):4072–4085, May 2023. ISSN 2571-9408. doi:10.3390/heritage6050214. URL <https://www.mdpi.com/2571-9408/6/5/214>. Number: 5 Publisher: Multidisciplinary Digital Publishing Institute.
- Peter J. Cobb. Large Language Models and Generative AI, Oh My!: Archaeology in the Time of ChatGPT, Midjourney, and Beyond. *Advances in Archaeological Practice*, 11(3):363–369, August 2023. ISSN 2326-3768. doi:10.1017/aap.2023.20. URL <https://www.cambridge.org/core/journals/advances-in-archaeological-practice/article/large-language-models-and-generative-ai-oh-my/314BA1339E6908606B90202C0DEF266E>. Publisher: Cambridge University Press.
- M Domínguez-Rodrigo and Enrique Baquedano. Distinguishing butchery cut marks from crocodile bite marks through machine learning methods. *Scientific reports*, 8(1):5786, April 2018. ISSN 2045-2322. doi:10.1038/s41598-018-24071-1. Place: England.
- N Abellan, E Baquedano, and M Dominguez-Rodrigo. High-accuracy in the classification of butchery cut marks and crocodile tooth marks using machine learning methods and computer vision algorithms. *GEOBIOS*, 72-73:12–21, August 2022. ISSN 0016-6995. doi:10.1016/j.geobios.2022.07.001.

- Gabriel Cifuentes-Alcobendas and Manuel Domínguez-Rodrigo. Deep learning and taphonomy: high accuracy in the classification of cut marks made on fleshed and defleshed bones using convolutional neural networks. *Scientific reports*, 9(1):18933, December 2019. ISSN 2045-2322. doi:10.1038/s41598-019-55439-6. Place: England.
- A Moclán and M Domínguez-Rodrigo. Are highly accurate models of agency in bone breaking the result of misuse of machine learning methods? *JOURNAL OF ARCHAEOLOGICAL SCIENCE-REPORTS*, 51, October 2023. ISSN 2352-409X. doi:10.1016/j.jasrep.2023.104150.
- M Domínguez-Rodrigo. Successful classification of experimental bone surface modifications (BSM) through machine learning algorithms: a solution to the controversial use of BSM in paleoanthropology? *ARCHAEOLOGICAL AND ANTHROPOLOGICAL SCIENCES*, 11(6):2711–2725, 2018. ISSN 1866-9557. doi:10.1007/s12520-018-0684-9.
- Abel Moclán, Manuel Domínguez-Rodrigo, and José Yravedra. Classifying agency in bone breakage: an experimental analysis of fracture planes to differentiate between hominin and carnivore dynamic and static loading using machine learning (ML) algorithms. *Archaeological and Anthropological Sciences*, 11(9):4663–4680, September 2019. ISSN 1866-9565. doi:10.1007/s12520-019-00815-6. URL <https://doi.org/10.1007/s12520-019-00815-6>.
- A Moclán, R Hugueta, B Marquez, C Laplana, JL Arsuaga, A Perez-Gonzalez, and E Baquedano. Identifying the bone-breaker at the Navalmaillo Rock Shelter (Pinilla del Valle, Madrid) using machine learning algorithms. *Archaeological and Anthropological Sciences*, 12(2), January 2020. ISSN 1866-9557. doi:10.1007/s12520-020-01017-1.
- Max Kuhn. The caret Package, 2019. URL <http://topepo.github.io/caret/index.html>.
- Gaël Varoquaux and Veronika Cheplygina. Machine learning for medical imaging: methodological failures and recommendations for the future. *npj Digital Medicine*, 5(1):1–8, April 2022. ISSN 2398-6352. doi:10.1038/s41746-022-00592-y. URL <https://www.nature.com/articles/s41746-022-00592-y>. Publisher: Nature Publishing Group.
- Mathias Bellat and Thomas Scholten. Automated features detection in archaeology: Standardisation in the area of big data, April 2024. URL <https://hal.science/hal-04612232>.
- Gencer Sumbul, Marcela Charfuelan, Begum Demir, and Volker Markl. Bigearthnet: A Large-Scale Benchmark Archive for Remote Sensing Image Understanding. In *IGARSS 2019 - 2019 IEEE International Geoscience and Remote Sensing Symposium*, pages 5901–5904, Yokohama, Japan, July 2019. IEEE. ISBN 978-1-5386-9154-0. doi:10.1109/IGARSS.2019.8900532. URL <https://ieeexplore.ieee.org/document/8900532/>.
- Gui-Song Xia, Jingwen Hu, Fan Hu, Baoguang Shi, Xiang Bai, Yanfei Zhong, Liangpei Zhang, and Xiaoqiang Lu. AID: A Benchmark Data Set for Performance Evaluation of Aerial Scene Classification. *IEEE Transactions on Geoscience and Remote Sensing*, 55(7):3965–3981, July 2017. ISSN 1558-0644. doi:10.1109/TGRS.2017.2685945. URL <https://ieeexplore.ieee.org/abstract/document/7907303>. Conference Name: IEEE Transactions on Geoscience and Remote Sensing.
- Yang Long, Gui-Song Xia, Shengyang Li, Wen Yang, Michael Ying Yang, Xiao Xiang Zhu, Liangpei Zhang, and Deren Li. On Creating Benchmark Dataset for Aerial Image Interpretation: Reviews, Guidances and Million-AID, March 2021. URL <http://arxiv.org/abs/2006.12485>. arXiv:2006.12485 [cs].
- Gong Cheng, Junwei Han, and Xiaoqiang Lu. Remote Sensing Image Scene Classification: Benchmark and State of the Art. *Proceedings of the IEEE*, 105(10):1865–1883, October 2017. ISSN 1558-2256. doi:10.1109/JPROC.2017.2675998. URL <https://ieeexplore.ieee.org/abstract/document/7891544>. Conference Name: Proceedings of the IEEE.
- Di Wang, Jing Zhang, Bo Du, Gui-Song Xia, and Dacheng Tao. An Empirical Study of Remote Sensing Pre-training. *IEEE Transactions on Geoscience and Remote Sensing*, 61:1–20, 2023. ISSN 0196-2892, 1558-0644. doi:10.1109/TGRS.2022.3176603. URL <http://arxiv.org/abs/2204.02825>. arXiv:2204.02825 [cs].
- Aakash Thapa, Teerayut Horanont, Bipul Neupane, and Jagannath Aryal. Deep Learning for Remote Sensing Image Scene Classification: A Review and Meta-Analysis. *Remote Sensing*, 15(19):4804, January 2023. ISSN 2072-4292. doi:10.3390/rs15194804. URL <https://www.mdpi.com/2072-4292/15/19/4804>. Number: 19 Publisher: Multidisciplinary Digital Publishing Institute.
- Clement P. Bataille, Klervia Jaouen, Stefania Milano, Manuel Trost, Sven Steinbrenner, Eric Crubezy, and Rozenn Colleter. Triple sulfur-oxygen-strontium isotopes probabilistic geographic assignment of archaeological remains using a novel sulfur isotope of western Europe. *Plos One*, 16(5):e0250383, May 2021. ISSN 1932-6203. doi:10.1371/journal.pone.0250383. Place: San Francisco Publisher: Public Library Science WOS:000664610500024.
- Alejandro Serna, Luciano Prates, Emiliano Mange, Domingo C. Salazar-Garcia, and Clement P. Bataille. Implications for paleomobility studies of the effects of quaternary volcanism on bioavailable strontium: A test case in North Patagonia (Argentina). *Journal of Archaeological Science*, 121:105198, September 2020. ISSN 0305-4403. doi:10.1016/j.jas.2020.105198. Place: London Publisher: Academic Press Ltd- Elsevier Science Ltd WOS:000575104000004.



- Anneke Janzen, Clement Bataille, Sandi R. Copeland, Rhonda L. Quinn, Stanley H. Ambrose, Denne Reed, Marian Hamilton, Vaughan Grimes, Michael P. Richards, Petrus le Roux, and Patrick Roberts. Spatial variation in bioavailable strontium isotope ratios (Sr-87/Sr-86) in Kenya and northern Tanzania: Implications for ecology, paleoanthropology, and archaeology. *Palaeogeography Palaeoclimatology Palaeoecology*, 560:109957, December 2020. ISSN 0031-0182. doi:10.1016/j.palaeo.2020.109957. Place: Amsterdam Publisher: Elsevier WOS:000591245000004.
- R Barberena, M Cardillo, G Lucero, PJ le Roux, A Tessone, C Llano, A Gasco, EJ Marsh, A Nuevo-Delaunay, P Novellino, C Frigole, D Winocur, A Benitez, L Cornejo, F Falabella, L Sanhueza, FS Sagredo, A Troncoso, V Cortegoso, VA Duran, and C Mendez. Bioavailable Strontium, Human Paleogeography, and Migrations in the Southern Andes: A Machine Learning and GIS Approach. *FRONTIERS IN ECOLOGY AND EVOLUTION*, 9, March 2021. ISSN 2296-701X. doi:10.3389/fevo.2021.584325.
- Emily Holt, Jane A. Evans, and Richard Madgwick. Strontium (Sr-87/Sr-86) mapping: A critical review of methods and approaches. *Earth-Science Reviews*, 216:103593, May 2021. ISSN 0012-8252. doi:10.1016/j.earscirev.2021.103593. Place: Amsterdam Publisher: Elsevier WOS:000641464400005.
- Zachary Batist and Joe Roe. Open Archaeology, Open Source? Collaborative practices in an emerging community of archaeological software engineers. *Internet Archaeology*, 67, July 2024. ISSN 1363-5387. doi:10.11141/ia.67.13. URL <https://intarch.ac.uk/journal/issue67/13/index.html>. Publisher: Internet Archaeology.
- Mark Altaweel and Andrea Squitieri. Finding a Relatively Flat Archaeological Site with Minimal Ceramics: A Case Study from Iraqi Kurdistan. *Journal of Field Archaeology*, 44(8):523–537, November 2019. ISSN 0093-4690. doi:10.1080/00934690.2019.1662269. Place: Abingdon Publisher: Routledge Journals, Taylor & Francis Ltd WOS:000487965800001.
- Ilaria Cacciari and Giorgio F. Pocobelli. The contribution of artificial intelligence to aerial photointerpretation of archaeological sites: a comparison between traditional and machine learning methods. *Archeologia e Calcolatori*, 32(1):81–98, 2021. ISSN 1120-6861, 2385-1953. doi:10.19282/ac.32.1.2021.05. URL <https://doi.org/10.19282/ac.32.1.2021.05>.
- S Bouzid and O Barge. Towards a typology of desert kites combining quantitative and spatial approaches. *ARCHAEOLOGICAL AND ANTHROPOLOGICAL SCIENCES*, 14(5), May 2022. ISSN 1866-9557. doi:10.1007/s12520-022-01551-0.
- CL Fernee and KP Trimmis. The rolling stones of Bronze Age Aegean: Applying machine learning to explore the use of lithic spheres from Akrotiri, Thera. *JOURNAL OF ARCHAEOLOGICAL SCIENCE-REPORTS*, 45, October 2022. ISSN 2352-409X. doi:10.1016/j.jasrep.2022.103615.
- WM Badawy, AY Dmitriev, VY Koval, VS Smirnova, OE Chepurchenko, VV Lobachev, MO Belova, and AM Galushko. Formation of reference groups for archaeological pottery using neutron activation and multivariate statistical analyses. *ARCHAOMETRY*, 64(6):1377–1393, December 2022. ISSN 0003-813X. doi:10.1111/arc.12793.
- Y Ma, V Grimes, G Van Biesen, L Shi, KL Chen, MA Mannino, and BT Fuller. Aminoisoscapes and palaeodiet reconstruction: New perspectives on millet-based diets in China using amino acid delta C-13 values. *JOURNAL OF ARCHAEOLOGICAL SCIENCE*, 125, January 2021. ISSN 0305-4403. doi:10.1016/j.jas.2020.105289.
- Danilo Bzdok. Classical Statistics and Statistical Learning in Imaging Neuroscience. *Frontiers in Neuroscience*, 11: 543, 2017. ISSN 1662-4548. doi:10.3389/fnins.2017.00543.
- Danilo Bzdok, Naomi Altman, and Martin Krzywinski. Statistics versus machine learning. *Nature Methods*, 15(4): 233–234, April 2018. ISSN 1548-7105. doi:10.1038/nmeth.4642. URL <https://www.nature.com/articles/nmeth.4642>. Publisher: Nature Publishing Group.
- Michael Fisher, Michael Fradley, Pascal Flohr, Bijan Rouhani, and Francesca Simi. Ethical considerations for remote sensing and open data in relation to the endangered archaeology in the Middle East and North Africa project. *Archaeological Prospection*, 28(3):279–292, 2021. ISSN 1099-0763. doi:10.1002/arp.1816. URL <https://onlinelibrary.wiley.com/doi/abs/10.1002/arp.1816>. \_eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1002/arp.1816>.
- Néhémie Strupler and Toby C. Wilkinson. Reproducibility in the Field: Transparency, Version Control and Collaboration on the Project Panormos Survey. *Open Archaeology*, 3(1):279–304, November 2017. ISSN 2300-6560. doi:10.1515/opar-2017-0019. URL <https://www.degruyter.com/document/doi/10.1515/opar-2017-0019/html>. Publisher: De Gruyter Open Access.
- Niccolo Albertini, Andrea Brogni, Riccardo Olivito, Emanuele Taccola, Baptiste Caramiaux, and Marco Gillies. Designing natural gesture interaction for archaeological data in immersive environments. *Virtual Archaeology Review*, 8(16):12–21, May 2017. ISSN 1989-9947. doi:10.4995/var.2016.5872. Place: Valencia Publisher: Univ Politecnica Valencia, Editorial Upv WOS:000401836800002.

- Daniella Vos, Richard Stafford, Emma L. Jenkins, and Andrew Garrard. A model based on Bayesian confirmation and machine learning algorithms to aid archaeological interpretation by integrating incompatible data. *PloS one*, 16(3): e0248261, 2021. ISSN 1932-6203. doi:10.1371/journal.pone.0248261. Place: United States.
- Dylan Davis and Kristina Douglass. Aerial and Spaceborne Remote Sensing in African Archaeology: A Review of Current Research and Potential Future Avenues. *African Archaeological Review*, 37(1):9–24, March 2020. ISSN 0263-0338. doi:10.1007/s10437-020-09373-y. Place: New York Publisher: Springer WOS:000516935000001.
- Jason Radford and Kenneth Joseph. Theory In, Theory Out: The Uses of Social Theory in Machine Learning for Social Science. *Frontiers in Big Data*, 3:18, May 2020. ISSN 2624-909X. doi:10.3389/fdata.2020.00018. URL <https://www.frontiersin.org/article/10.3389/fdata.2020.00018/full>.
- Claudio Tennie. The Earliest Tools and Cultures of Hominins. In Jamshid J. Tehrani, Jeremy Kendal, and Rachel Kendal, editors, *The Oxford Handbook of Cultural Evolution*. Oxford University Press, 1 edition, February 2023. ISBN 978-0-19-886925-2. doi:10.1093/oxfordhb/9780198869252.013.33. URL <https://doi.org/10.1093/oxfordhb/9780198869252.013.33>.
- Sarah Klassen, Jonathan Weed, and Damian Evans. Semi-supervised machine learning approaches for predicting the chronology of archaeological sites: A case study of temples from medieval Angkor, Cambodia. *Plos One*, 13(11): e0205649, November 2018. ISSN 1932-6203. doi:10.1371/journal.pone.0205649. Place: San Francisco Publisher: Public Library Science WOS:000449291400009.
- EC Lapp and LWP Lapp. Evaluating ChatGPT as a viable research tool for typological investigations of cultural heritage artefacts-Roman clay oil lamps. *ARCHAEOOMETRY*, 66(3):696–717, June 2024. ISSN 0003-813X. doi:10.1111/arc.12937.
- Athos Agapiou and Vasiliki Lysandrou. Remote sensing archaeology: Tracking and mapping evolution in European scientific literature from 1999 to 2015. *Journal of Archaeological Science: Reports*, 4:192–200, December 2015. ISSN 2352409X. doi:10.1016/j.jasrep.2015.09.010. URL <https://linkinghub.elsevier.com/retrieve/pii/S2352409X15301139>.
- E Grilli, D Dinunno, L Marsicano, G Petrucci, and F Remondino. Supervised segmentation of 3D cultural heritage. In AC Addison and H Thwaites, editors, *2018 3rd Digital Heritage International Congress (DigitalHERITAGE) held jointly with 2018 24th International Conference on Virtual Systems & Multimedia (VSMM 2018)*, pages 467–474, San Francisco, CA, USA, 2018. ISBN 978-1-72810-292-4. doi:10.1109/DigitalHeritage.2018.8810107.
- Nejc Åkesson, Åziga Kokalj, and Ana Kostovska. EarthObservation/adaf, June 2024. URL <https://github.com/EarthObservation/adaf>. original-date: 2023-09-19T09:08:21Z.
- Jarrad Kowlessar, James Keal, Daryl Wesley, Ian Moffat, Dudley Lawrence, Abraham Weson, and Alfred Nayinggul. Reconstructing rock art chronology with transfer learning: A case study from Arnhem Land, Australia. *Australian Archaeology*, 87(2):115–126, May 2021. ISSN 0312-2417. doi:10.1080/03122417.2021.1895481. Place: Abingdon Publisher: Taylor & Francis Ltd WOS:000635049600001.
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep Residual Learning for Image Recognition. In *2016 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 770–778, June 2016. doi:10.1109/CVPR.2016.90. URL <https://ieeexplore.ieee.org/document/7780459>. ISSN: 1063-6919.
- Lianming Zheng, Rui Lin, Xuemei Wang, and Weihua Chen. The Development and Application of Machine Learning in Atmospheric Environment Studies. *Remote Sensing*, 13(23):4839, January 2021. ISSN 2072-4292. doi:10.3390/rs13234839. URL <https://www.mdpi.com/2072-4292/13/23/4839>. Number: 23 Publisher: Multidisciplinary Digital Publishing Institute.
- Lucas Prado Osco, José Marcato Junior, Ana Paula Marques Ramos, Lúcio André de Castro Jorge, Sarah Narges Fatholahi, Jonathan de Andrade Silva, Edson Takashi Matsubara, Hemerson Pistori, Wesley Nunes Gonçalves, and Jonathan Li. A review on deep learning in UAV remote sensing. *International Journal of Applied Earth Observation and Geoinformation*, 102:102456, October 2021. ISSN 1569-8432. doi:10.1016/j.jag.2021.102456. URL <https://www.sciencedirect.com/science/article/pii/S030324342100163X>.
- Huu-Tai Thai. Machine learning for structural engineering: A state-of-the-art review. *Structures*, 38:448–491, April 2022. ISSN 2352-0124. doi:10.1016/j.istruc.2022.02.003. URL <https://www.sciencedirect.com/science/article/pii/S2352012422000947>.
- Iqbal H. Sarker. Deep Learning: A Comprehensive Overview on Techniques, Taxonomy, Applications and Research Directions. *SN Computer Science*, 2(6):420, August 2021. ISSN 2661-8907. doi:10.1007/s42979-021-00815-1. URL <https://doi.org/10.1007/s42979-021-00815-1>.
- Marco Tulio Ribeiro, Sameer Singh, and Carlos Guestrin. "Why Should I Trust You?": Explaining the Predictions of Any Classifier. In *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and*

- Data Mining*, KDD '16, pages 1135–1144, New York, NY, USA, 2016. Association for Computing Machinery. ISBN 978-1-4503-4232-2. doi:10.1145/2939672.2939778. URL <https://doi.org/10.1145/2939672.2939778>.
- Scott M. Lundberg and Su-In Lee. A unified approach to interpreting model predictions. In *Proceedings of the 31st International Conference on Neural Information Processing Systems*, NIPS'17, pages 4768–4777, Red Hook, NY, USA, 2017. Curran Associates Inc. ISBN 978-1-5108-6096-4.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language Models are Few-Shot Learners, July 2020. URL <http://arxiv.org/abs/2005.14165>. arXiv:2005.14165 [cs].
- OpenAI. ChatGPT “” Release Notes, November 2022. URL <https://help.openai.com/en/articles/6825453-chatgpt-release-notes>.
- Mathias Bellat, Ruhollah Tagizadeh-Mehrjardi, and Thomas Scholten. Fail and try again: Return on topic modelling apply to archaeological scientific literature, April 2024. URL <https://hal.science/hal-04613953>. Publisher: Computer Applications and Quantitative Methods in Archaeology (CAA) and University of Auckland Published: CAA51st Across the Horizon.
- Zibin Zheng, Kaiwen Ning, Yanlin Wang, Jingwen Zhang, Dewu Zheng, Mingxi Ye, and Jiachi Chen. A Survey of Large Language Models for Code: Evolution, Benchmarking, and Future Trends, January 2024. URL <http://arxiv.org/abs/2311.10372>. arXiv:2311.10372 [cs].
- University of Tübingen. Guidelines on generative AI. Guidlines, University of Tübingen, Tübingen, 2023.
- Oxford University. Guidelines on the use of generative AI, February 2024. URL <https://communications.admin.ox.ac.uk/communications-resources/ai-guidance>.
- Massachusetts Institute of Technology. Initial guidance for use of Generative AI tools, March 2024. URL <https://ist.mit.edu/ai-guidance>.
- Hui Wang, Anh Dang, Zihao Wu, and Son Mac. Generative AI in higher education: Seeing ChatGPT through universities' policies, resources, and guidelines. *Computers and Education: Artificial Intelligence*, 7:100326, December 2024. ISSN 2666-920X. doi:10.1016/j.caeai.2024.100326. URL <https://www.sciencedirect.com/science/article/pii/S2666920X24001292>.
- European Commission, Directorate-General for Research and Innovation, and Directorate E-Prosperity. Living guidelines on the responsible use of generative AI in research. Guidelines, European Commission, Brussels, March 2024.
- Vlad-Sebastian Ionescu. Applying Support Vector Regression Methods for Height Estimation in Archaeology. *Studia Universitatis BabeÅy-Bolyai Informatica*, 70(2):70–82, 2015. URL <http://193.0.225.37/download/pdf/949.pdf#page=71>.
- Ana Barragán-Montero, Umair Javaid, Gilmer Valdés, Dan Nguyen, Paul Desbordes, Benoit Macq, Siri Willems, Liesbeth Vandewinckele, Mats Holmström, Fredrik Löfman, Steven Michiels, Kevin Souris, Edmond Sterpin, and John A. Lee. Artificial intelligence and machine learning for medical imaging: A technology review. *Physica Medica*, 83:242–256, March 2021. ISSN 1120-1797. doi:10.1016/j.ejmp.2021.04.016. URL <https://www.sciencedirect.com/science/article/pii/S1120179721001733>.
- André Leroi-Gourhan. *Le geste et la parole*. Espaces libres. Albin Michel, Paris, 2 edition, 2022. ISBN 978-2-226-45437-9 978-2-226-46781-2.
- I. Hodder. *Reading the Past*. Cambridge University Press, Cambridge England ; New York, 1st edition edition, December 1986. ISBN 978-0-521-32743-5.
- Philip Phillips and Gordon R. Willey. Method and Theory in American Archeology: An Operational Basis for Culture-Historical Integration. *American Anthropologist*, 55(5):615–633, 1953. ISSN 0002-7294. URL <https://www.jstor.org/stable/664720>. Publisher: [American Anthropological Association, Wiley].