

FeynGame 3.0

Lars Bündgen, Robert V. Harlander, Sven Yannick Klein, Magnus C. Schaaf

*Institute for Theoretical Particle Physics and Cosmology,
RWTH Aachen University, 52056 Aachen, Germany*

Abstract

A major update of the program *FeynGame* is introduced. One of its main new functionalities is to visualize Feynman graphs generated by *qgraf*. The *qgraf* output can be either pasted into the *FeynGame* canvas for individual graphs, or the whole *qgraf* output file can be processed. In addition, a number of new features and improvements have been implemented into *FeynGame-3.0* in order to further facilitate the efficient drawing of Feynman diagrams in publication quality. *FeynGame* is freely available

- as jar or MacOS app file from <https://web.physik.rwth-aachen.de/user/harlander/software/feyngame>
- as source code from <https://gitlab.com/feyngame/FeynGame>

Keywords: Feynman diagrams, graphical user interface, spring layout algorithm

PROGRAM SUMMARY

Program Title: *FeynGame-3.0*

Developer's repository link: <https://gitlab.com/feyngame/FeynGame>

Licensing provisions: GNU General Public License 3 (GPLv3)

Programming language: Java

Nature of problem: Efficient drawing of Feynman diagrams for presentations and publications; automatic visualization of computer-generated Feynman graphs [1]; playful elementary introduction to the concept of Feynman diagrams.

Solution method: Graphical interface based on version 1 of *FeynGame* [2]; spring-layout algorithm [3] for the automatic positioning of vertices.

References

- [1] P. Nogueira, *Automatic Feynman graph generation*, *J. Comput. Phys.* **105** (1993) 279–289.
- [2] R. V. Harlander, S. Y. Klein, and M. Lipp, *FeynGame*, *Comput. Phys. Commun.* **256** (2020) 107465, [arXiv:2003.00896](https://arxiv.org/abs/2003.00896) [physics.ed-ph].
- [3] T. Fruchterman and E. Reingold, *Graph drawing by force-directed placement*, *Software: Practice and Experience* **21** no. 11, (1991) 1129–1164.

1. Introduction

Modern perturbative calculations often involve thousands, if not millions of Feynman graphs. Obviously, this requires a large degree of automation, with human intervention kept at very few and highly localized interaction points. In particular, Feynman graph generation, insertion of Feynman rules and many of the subsequent algebraic operations are typically part of a fully automated workflow.

Visual representations of the graphs, i.e. the associated diagrams, seem to be irrelevant in a modern calculation. While the role of Feynman diagrams as communicative tool remains undebated, be it at the scientific or educative level, the typical toolchain of the practitioner does not require any drawing of the diagrams.

However, this is only true if the toolchain works flawlessly. But at the frontier of scientific research, this is usually not the case. Quite generally, the number of relevant physical problems that can be solved completely with existing tools is finite, and thus they will be solved by somebody at some point. But progress in science happens by solving as-of-yet unsolvable problems. It requires to go beyond the limits of existing tools and methods. In this process, it frequently happens that a toolchain fails at a certain point, and the process of “debugging” begins.

Quite a common situation in a perturbative calculation is that, after calculating $N \sim \mathcal{O}(10^4)$ Feynman graphs, the workflow unexpectedly terminates during the calculation of graph number $N + 1$, for example due to some memory overflow. This immediately poses the question about what distinguishes this graph from the previous N graphs. It is here where one may want to actually *see* the corresponding diagram.

One of the most popular Feynman graph generators is *qgraf* [1, 2], mostly due to its computational speed. While its output is human readable and highly customizable ASCII code, it does not provide the corresponding visual diagrams. Most researchers working in the field will have found themselves manually connecting dots and lines on a piece of paper, aiming to translate the *qgraf* output to a diagram. For complicated diagrams, this usually is a two-step process, where the first step involves figuring out the topology of the diagram, and in the second step, one tries to disentangle crossed lines by moving around vertices and curving lines.

In fact, already the original version of *FeynGame* was very helpful in this respect because it literally allows one to move vertices around in a topology-preserving manner [3]. Originally developed as an educational tool for high-school and undergraduate students, *FeynGame* has turned out to be quite useful also for preparing high-quality Feynman diagrams for scientific publications and presentations in a very efficient way.

While the original release already had most of the distinctive features, the recently published version 2.1 has been improved in several respects, including full L^AT_EX support for line and vertex labels. One of its most significant new features was to produce the mathe-

matical form of the amplitude from the diagram drawn on the canvas.

With the current release of *FeynGame*, we include the functionality of converting *qgraf* output to visual diagrams. It relies on the spring layout algorithm to draw the diagrams and allows for various adjustments of the associated parameters. Aside from this, *FeynGame-3.0* includes a large number of new features and improvements which we will describe in this paper. Among them is the preview of diagrams in the file chooser, a double-grid, and the possibility to convert diagrams to different models.


The remainder of the paper is structured as follows. After briefly reviewing the underlying philosophy of *FeynGame*, we will explain in detail the *qgraf* visualization functionality in Section 3. Even though it was already included in *FeynGame-2.1* and briefly described in Ref. [4], we will describe the feature of producing the algebraic form of the amplitude associated with a particular diagram in Section 4. Other improvements and new features will be briefly introduced in Section 5. While the graphical user interface (GUI) of *FeynGame* is one of its central elements that allow for an efficient drawing of Feynman diagrams, it is often useful to be able to perform certain operations on existing diagrams (export, conversion, etc.) without opening the GUI. This is why *FeynGame* is also equipped with a command-line mode, whose most important commands are described in Section 6. Conclusions and an outlook are presented in Section 7.

2. The *FeynGame* philosophy


FeynGame's philosophy differs in various aspects from other programs designed for drawing Feynman diagrams. Its most important characteristics are:

- *FeynGame* is model-based, meaning that it “knows” the particles¹ and their interaction vertices of the underlying model (the Standard Model (SM) by default). Each particle can be assigned its unique line style (plain/wave/spiral/..., dashing, thickness, color, directed/undirected, label, etc.). Instead of drawing a generic line and modifying its attributes, one simply draws the line of a specific particle, for example a gluon or a top quark, and it will already have the correct attributes; see Fig. 1 (a)
- *FeynGame* automatically creates vertices if the end of line A is dragged to the vicinity of line B anywhere along line B. The two parts of line B separated by the vertex are then treated by *FeynGame* as two distinct lines; see Fig. 1 (b) and (d).
- When moving a vertex on the canvas, lines attached to it will be dragged along. This makes it very easy to adjust the shape of a Feynman diagram; see Fig. 1 (c).


¹We use “particle” and “field” interchangeably.

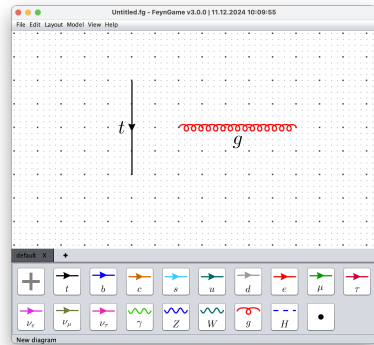


(a)

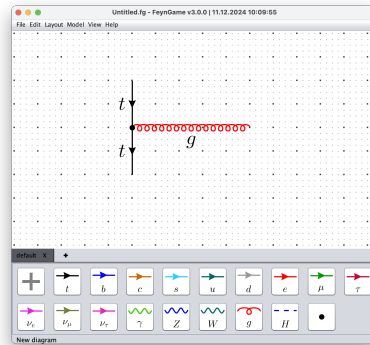


(b)

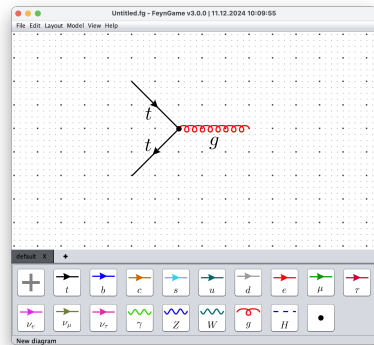

(c)

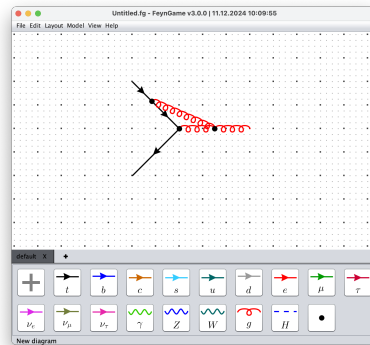

(d)

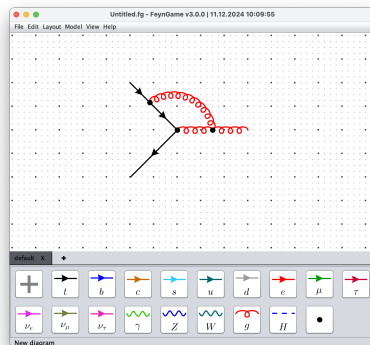

(e)

Figure 1: Screenshots of *FeynGame* illustrating its basic philosophy. They show the main window of *FeynGame* with the *canvas* (upper part) and the *current model* (lower part), represented by tiles containing the particles of the Standard Model. (a) A top-quark t and a gluon line g are drawn on the canvas; (b) a $t\bar{t}g$ vertex was created by moving the gluon line close to the top-quark line; (c) the shape of the diagram was changed by clicking-and-dragging the vertex point to the right; (d) an additional gluon line was attached to form a loop diagram; (e) the gluon line was curved using the track pad (mouse wheel).

- Lines can be moved/rotated/stretched/shrunk using the mouse in a very intuitive way.
- For *FeynGame*, straight or curved lines are represented by the same type of object. By default, the user draws a straight line and subsequently applies a curvature with the mouse wheel (or some other suitable input device) if desired, see Fig. 1 (e). A line can even be curved into a full circle.
- Many operations are accessible in various ways, for example via the menu, the keyboard/mouse, or the so-called `EditFrame`.

We recommend that the reader who is not yet familiar with *FeynGame* to download it from the *FeynGame* website and start drawing. Its general functionality should be sufficiently intuitive to draw standard Feynman diagrams without reading any instructions. In order to explore all features of *FeynGame*, we recommend to consult Refs. [3, 4], and of course the remainder of the current paper.

3. Importing *qgraf* output

One of the most significant new features of *FeynGame-3.0* is its capability to visualize the output of *qgraf* in diagrammatical form. *qgraf* is a software tool to generate Feynman graphs in a very efficient way [1, 2]. For example, it takes of the order of a second to generate all 10,584 one-particle-irreducible (1PI) graphs for the process $e^+e^- \rightarrow \gamma\gamma$ at four-loop level within Quantum Electrodynamics (QED). However, it does not provide a visual representation of the generated diagrams. This section describes how *FeynGame-3.0* supplies this capability.

3.1. Basic functionality

Given a specific interaction model like Quantum Chromodynamics (QCD) or the SM, *qgraf* writes the set of diagrams that contribute to a specific process to an ASCII output file. The format of the output is highly adjustable by the user via a so-called style file. The *qgraf* distribution provides a number of sample style files. For example, using `form.sty`, the *qgraf* output for a typical one-loop graph for the process $e^+e^- \rightarrow \gamma\gamma$ reads

```

1 *--#[ d1:
2 *
3     1
4     *vx(E(2),e(-1),ph(1))
5     *vx(E(-3),e(3),ph(1))
6     *vx(E(4),e(2),ph(-2))
7     *vx(E(3),e(4),ph(-4))
8 *
9 *--#[ d1:

```

Listing 1: *qgraf* output for a one-loop Feynman graph contributing to the process $e^+e^- \rightarrow \gamma\gamma$.




Figure 2: The diagram corresponding to the graph of Listing 1. The numbers on the lines correspond to the line labels of *qgraf* in Listing 1.

This indicates that the diagram contains four QED vertices `vx(...)`. The symbols `e`, `E`, and `ph` denote the particles e^- , e^+ , and γ , respectively, and the integers in brackets label the different lines of the diagram (positive: propagators, negative: external particles). The reader may easily verify that the corresponding diagram is given by the one of Fig. 2.

In fact, this image was obtained by a simple copy-paste operation of Listing 1 into the *FeynGame* canvas, without any further manual adjustments. To be able to better appreciate the power of this feature, let us consider a two-loop diagram of the same process:

```

1 *--#[ d...:
2 *
3     -1
4     *vx(E(1),e(-1),ph(2))
5     *vx(E(-3),e(1),ph(3))
6     *vx(E(5),e(4),ph(-2))
7     *vx(E(4),e(6),ph(-4))
8     *vx(E(7),e(5),ph(2))
9     *vx(E(6),e(7),ph(3))
10 *
11 *--#[ d...:

```

Listing 2: *qgraf* output for a two-loop Feynman graph contributing to the process $e^+e^- \rightarrow \gamma\gamma$.

We challenge the reader to find the corresponding diagram in Fig. 3, which shows all two-loop 1PI diagrams contributing to $e^+e^- \rightarrow \gamma\gamma$ in QED. The figure was produced by *FeynGame* from the corresponding *qgraf* output, again without any further manual manipulation. In this case, the whole *qgraf* output file was imported into *FeynGame*, and the resulting diagrams were exported to PDF. This can be done using `File` `Import qgraf`, and subsequently `qgraf` `Export all diagrams`.

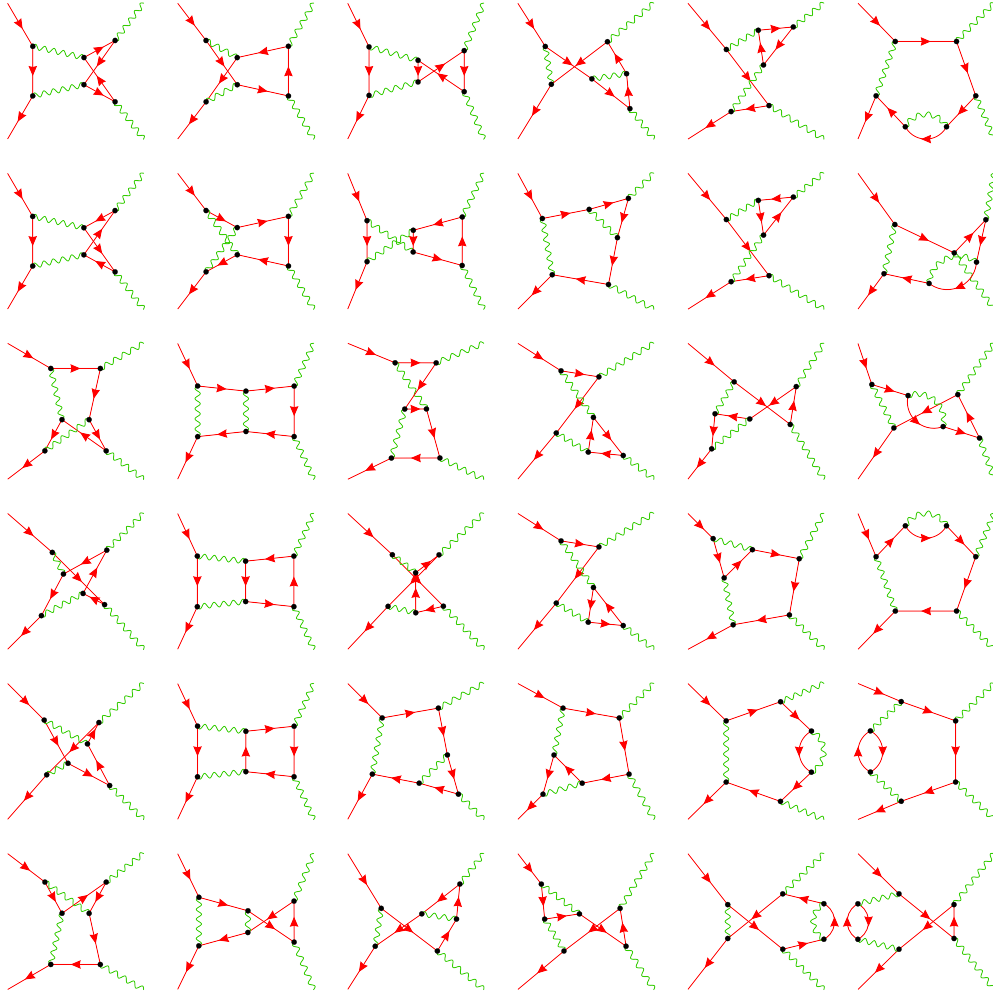


Figure 3: All two-loop 1PI Feynman diagrams contributing to the process $e^+e^- \rightarrow \gamma\gamma$ in QED as drawn by *FeynGame* from the corresponding *qgraf* output.

3.2. *qgraf* style

The specific form of the *qgraf* output is highly adjustable by what we call the “*qgraf* style file”. In particular, the user may choose to encode a Feynman graph in terms of its vertices, as it is done in the examples of Listings 1 and 2, or in terms of its propagators (or both). For example, using the style file `qgraf-tapir.sty` [5], the diagram in Listing 1 would be output by *qgraf* as

```
1 {
2 diagram          1
3 pre_factor       (+1)*1
4
5 number_propagators 4
6 number_loops     1
7 number_legs_in   2
8 number_legs_out  2
9
10
11 external_leg     q1|1|e
12 external_leg     q2|2|E
13
14
15 external_leg     q3|3|ph
16 external_leg     q4|4|ph
17
18
19 momentum         p1|2,1|ph,ph
20 momentum         p2|1,3|E,e
21 momentum         p3|4,2|E,e
22 momentum         p4|3,4|E,e
23 }
```

Listing 3: The graph represented by Listing 1 and Fig. 2 using the `qgraf-tapir.sty` style file.

For this reason, *FeynGame-3.0* needs to know the style file which was used to produce the output. It comes with a number of pre-defined styles, among them `form.sty` and `qgraf-tapir.sty`. User-specific style files can be added via `File` \gg `Settings` \gg `Qgraf Options`. *FeynGame* will remember the style file also for future sessions, until it is removed by the user via the same interface.

If a single graph from the *qgraf* output file is pasted into the canvas, *FeynGame* will try to draw it on the basis of any of the known style files. On the other hand, if the user imports the *qgraf* output via `File` \gg `Import qgraf`, one needs to select the *qgraf* style file from *FeynGame*'s list of known styles, or add a new one.

3.3. Synchronizing the *qgraf* and the *FeynGame* model file

In order for *FeynGame* to identify the particles in the *qgraf* output file, they have to be part of the *FeynGame* model file. This section will describe how to achieve this.

Aside from the style file (see Section 3.2), *qgraf* requires two input files. One of them, typically referred to as `qgraf.dat`, specifies the type of diagrams to be generated: initial

and final state, number of loops, topological restrictions, etc. What concerns us here, however, is the so-called *qgraf* model file. It defines the underlying model (or theory), such as QED, QCD, or the SM. For example, QED with a single electron could be defined as

```

1 [ph, ph, + ]
2 [e, E, - ]
3 [E, e, ph ]

```

Listing 4: *qgraf* model file for QED.

Lines 1 and 2 specify the particle content, including the spin-statistics (+ for bosons, - for fermions), and line 3 defines the only vertex of theory. For more details and options concerning the *qgraf* model file, we refer the reader to Refs. [1, 6]. The crucial observation in the current context is that each particle is associated with a unique, user-defined identifier. In Listing 4, this is `ph` for the photon, `e` for the electron, and `E` for its adjoint. These identifiers will also be used by *qgraf* to encode the generated Feynman diagrams, see Listings 1–3.

The basic structure of the *FeynGame* model file is very close to the one of *qgraf*. For example, the default *FeynGame* model file contains the lines (among many others)

```

1 [ph, ph, WAVE, color=ff00ff00, stroke=4.0, dash=false, <...> ]
2 [e, E, PLAIN, color=ffff0000, stroke=4.0, dash=false, <...> ]

```

where `<...>` denotes more line specifications. Also here, the first two elements in each square bracket are identifiers for the particles. The fact that they coincide with the identifiers used by *qgraf* allows *FeynGame* to associate the respective line style to the diagrams in the *qgraf* output.

This means that, in order to achieve the most satisfactory results when displaying a *qgraf* output file in *FeynGame*, the user is asked to synchronize their *FeynGame* and *qgraf* model file. Since the latter is typically part of an existing toolchain, the user may be reluctant to modify the identifiers here. We therefore recommend to adjust the identifiers in the *FeynGame* model file instead. This can be done in several ways:

- If the user’s *qgraf* model file represents the SM or a subset thereof, one may directly edit the default *FeynGame* model file in one’s favorite editor and simply adjust the particle identifiers. The location of the default model file is platform dependent:
 - MacOS: `$HOME/Library/Preferences/FeynGame/default.model`
 - Linux: `$HOME/.config/FeynGame/default.model`
 - Windows: `%APPDATA%\FeynGame\default.model`

The location is also reported at the bottom line of the *FeynGame* main window when loading the default model file with `Model >> Load default model` (see also Section 5, *Action messages*).

- Otherwise, the user may convert their *qgraf* model file into a *FeynGame* model file using `Model >> Import qgraf model`. This automatically generates a unique line style for each particle which the user can then edit from within *FeynGame* with the help of the `EditFrame` (see Ref. [3, 4] for details), and subsequently save to disk, or even set as the default model file. Of course, the generated *FeynGame* model file can also be edited in one’s favorite text editor.
- If the Feynman graph imported from *qgraf* involves a particle whose identifier does not appear in the *FeynGame* model file, *FeynGame* will automatically generate a unique line style for that particle. It will prompt the user to decide whether the new particle should be added to the current model. In this way, one can successively create a *FeynGame* model file which is suitable for the process under consideration.

3.4. The drawing algorithm

As already pointed out above, *qgraf* only provides extended information about the topological structure of the Feynman graphs. In mathematical terms, the essential information can be described as a *directed pseudograph*. In order to display this graph as a diagram and place the vertices and lines in an optimal way, *FeynGame* adopts the so-called spring layout algorithm, which is also used by the L^AT_EX package *TikZ-Feynman* [7]. It belongs to the class of force-directed graph drawing algorithms which were first described in Ref. [8].

The idea behind this type of algorithm is to describe the graph as a physical system whose minimal energy state corresponds to the desired graph layout. A vertex is treated as a charged mass point and a propagator is treated as a spring. The charges of all vertices are equal, so there is a repulsive force between any two vertices. The scale of the spacing between the vertices is controlled by a length parameter ℓ : The springs that model the propagators are tuned such that, when combined with the electrical force, they produce a net attractive force between vertices for distances $d > \ell$ and a net repulsive force for distances $d < \ell$. This keeps vertices which are directly connected by a spring close to one another. The exact configuration of spring and electrical forces is described in Ref. [9]. Starting from a random distribution of the vertices, the system is then evolved towards its minimum energy state in discrete timesteps. The simulation is stopped after a certain number of iterations, and the resulting physical system is used to set the vertex positions in the Feynman diagram.

We extended the algorithm to the multi-edge case, where the same two vertices are connected by more than one line, and self-loops, where one line starts and ends at the same vertex.² In these cases, the lines will be drawn with a curvature, see Fig. 4. Furthermore, external lines are interpreted as either in- or outgoing, depending on where their open end is located on the canvas. The drawing algorithm will preserve this character.

²In particle physics, these are usually referred to as “self-energy” and “tadpole” diagrams, respectively.

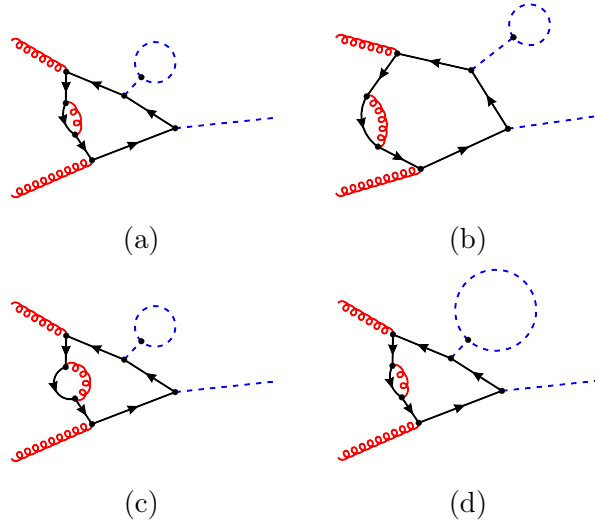


Figure 4: Adjusting the layout parameters. Starting from some default setting in (a), the diagrams (b)–(d) visualize the effect of increasing the *Length parameter*, the *Multi-edge curve scale*, and the *Self-loop radius scale*, respectively.

Most of the parameters for this algorithm can be modified by the user in order to adjust the appearance of the diagrams to one’s individual aesthetic notion. They can be accessed via `File` \gg `Settings` which opens a new window. From there, choose `Settings` \gg `Layout Options`. Three of the available options are visualized in Fig. 4.

3.5. Manual application of the spring layout

The spring layout functionality of *FeynGame* is not restricted to Feynman graphs produced by *qgraf*. It may be applied to any diagram that the user draws on the canvas. This makes drawing of individual Feynman diagrams even more efficient than in previous versions of *FeynGame*. Imagine you would like to draw a representative tree-level Feynman diagram for the SM process $gg \rightarrow t\bar{t}$ including the decay of the top quark to (quasi-)stable particles. A “raw” version drawn with *FeynGame* is shown in Fig. 5 (a). Due to the large number of particles involved, it appears rather skew, and it would take some effort to make it more symmetric manually. But *FeynGame-3.0* offers the option to turn any diagram into spring layout. Choosing `Layout` \gg `Apply automatic layout` with this diagram on the canvas will produce Fig. 5 (b), for example. An easy option to modify the proportions of the diagram from their default values is to define a bounding box via `Layout` \gg `Manual Bounding Box`, which allows one to arrive at Fig. 5 (c).

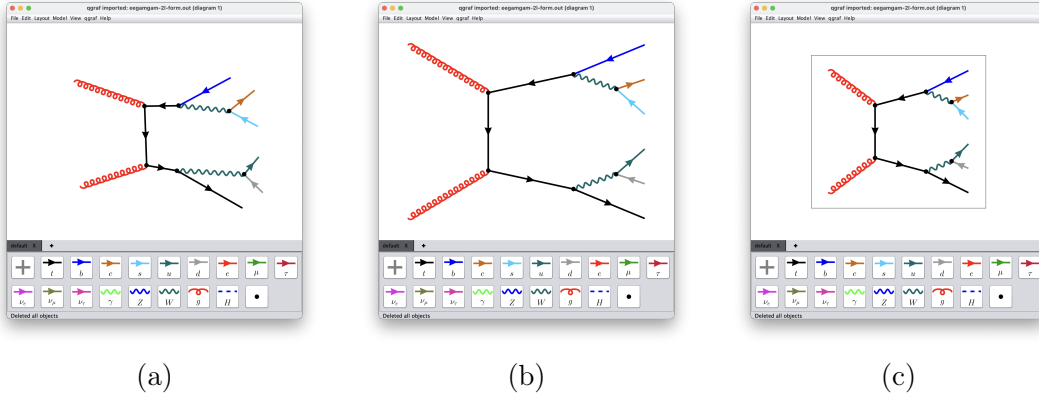


Figure 5: (a) Rough drawing of a Feynman diagram in *FeynGame*; (b) after application of the spring layout; (c) spring layout with a manual bounding box.

3.6. Limitations and caveats

The spring layout typically manages to draw the diagram of an arbitrary graph in a “reasonable” way. For example, a human can easily tell whether two graphs have the same topology or not if both of them are visualized in the spring layout. This does not mean that the diagrams produced by the spring layout agree with the way a human would draw them, for several reasons. On the one hand, every human has their own understanding of what is visually most pleasing. On the other hand, quite often practitioners will draw Feynman diagrams from the point of view of perturbation theory. For example, given a diagram that contributes to a certain process at leading order, a subset of higher-order contributions is given by “dressing” this leading-order diagram with additional lines. In this case, one often simply attaches the “corrections” to the leading-order diagram while keeping its shape unchanged. Consider, for example, the diagram in Fig. 6 (a) which contributes to Higgs production in gluon fusion at leading-order (LO). A next-to-LO (NLO) QCD contribution is obtained by simply attaching a gluon to this diagram as done, for example, in Fig. 6 (b). Applying the spring layout, however, results in Fig. 6 (c), and no researcher working in the field would draw this NLO contribution in this form, unless there is a very specific reason for it.

Finally, the original spring layout algorithm relies on straight lines only. In certain cases this leads to lines that are drawn on top of each other. As mentioned above, we extended the spring layout to catch self-energy loops and draw them with curved lines, but this is only a subset of cases where overlays of lines can occur.

Naturally, all these limitations become more severe the larger the number of lines in the diagram.

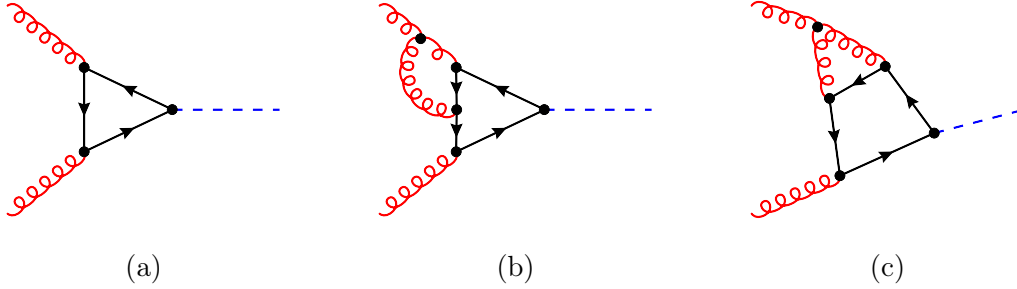


Figure 6: (a) Leading order contribution to the process $gg \rightarrow H$ in spring layout; (b) an NLO contribution to this process as drawn by a practitioner; (c) same contribution as in (b), but in the spring layout.

4. Amplitudes

Even though it was already introduced in *FeynGame-2.1* and briefly discussed in Ref. [4], let us describe the feature of generating the mathematical expression for an amplitude with *FeynGame* in a bit more detail at this point.

Assume that we work with *FeynGame*'s default model, corresponding to the SM. After drawing a diagram, one can ask *FeynGame* to check whether the diagram is consistent with the Feynman rules by pressing or . If the diagram is valid, *FeynGame* will offer to generate the corresponding Feynman amplitude, or to distribute momenta among the lines of the diagram, preserving momentum conservation (see Fig. 7 (a)). The amplitude is generated in \LaTeX format and can be pasted immediately into a \LaTeX document (line breaks need to be taken care of manually).


On the other hand, if the diagram involves vertices that are not part of the model, *FeynGame* will report the erroneous vertices and mark them by red circles in the canvas, see Fig. 7 (b). Obviously, *FeynGame* cannot produce an amplitude in this case. However, it still offers to distribute momenta among the lines of the diagram.

The basic functionality for producing the amplitude is not restricted to \LaTeX output, of course. To illustrate this, let us look at the full definition of the top quark propagator in the default model file:

```

1  [t, T, PLAIN,
2  color=ff000000, stroke=4.0, dash=false, double=false,
3  showArrow=true, arrowSize=21, arrowPlace=0.5, arrowDent=2,
4  arrowHeight=18,
5  label=t,
6  indices=<0|1|0|1>,
7  propagator=
8  \frac{i\delta_{\langle idxE.cf \rangle \langle idxS.cf \rangle}(\not{p} + \langle m \rangle)_{\langle idxE.di \rangle \langle idxS.di \rangle}}
9  \{\langle p \rangle^2 - \langle m \rangle^2 + i\epsilon\},
10 external=u_{\langle idx.di \rangle}^{\langle idx.cf \rangle}(\not{p}.vector) |

```

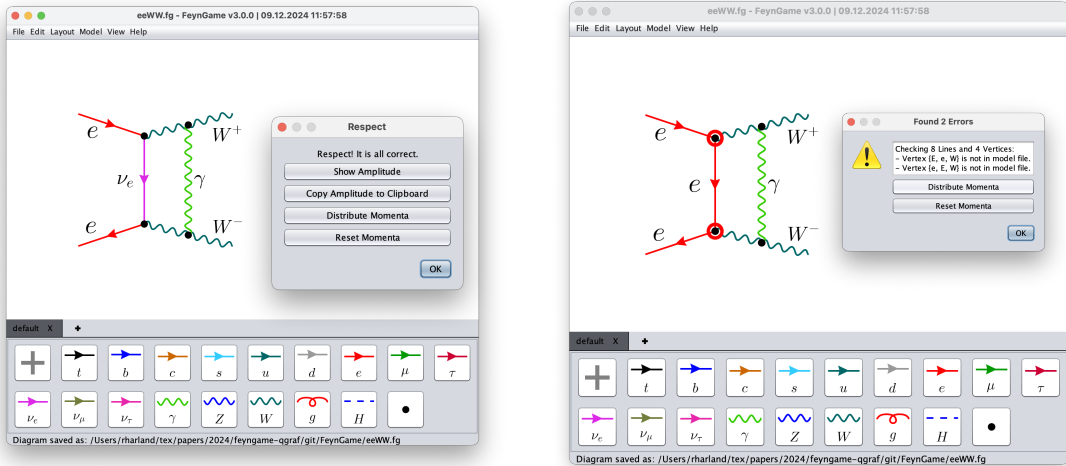

(a) (b)

Figure 7: Checking the validity of a Feynman diagram. (a) The diagram exists in the SM; *FeynGame* then offers to produce the algebraic expression for the amplitude. (b) The diagram is in conflict with the Feynman rules of the SM; *FeynGame* reports the erroneous vertices and marks them by red circles.

```

11     \bar{u}_{<idx.di>}^{<idx.cf>}(<p.vector>),
12     external*=\bar{v}_{<idx.di>}^{<idx.cf>}(<p.vector>) |
13         v_{<idx.di>}^{<idx.cf>}(<p.vector>),
14     anticommuting=true]

```

Listing 5: Definition of the top-quark line in the default *FeynGame* model file.

The first few entries determine the graphical appearance of the line within *FeynGame*, see also Section 3.3. Starting from `indices=<0|1|0|1>`, however, the entries define the Feynman rule for this line. Specifically, this entry defines the number of the Lorentz, Dirac, adjoint, and fundamental color indices carried by this object.³ For the remaining entries, their notation should be sufficiently suggestive for an expert reader to derive their meaning. We refrain from explaining them here in detail, but rather refer the reader to the template file `examples/amplitude.model` which is part of the *FeynGame* distribution and contains a detailed documentation.

Despite the fact that these entries are specific for \LaTeX output, they contain all information to generate the amplitude in other formats as well. In particular, one may convert the entries to *FORM* [10–12] or *Mathematica* [13] format, which allows the user to directly continue with the algebraic or numerical evaluation of the amplitude. Let us emphasize that

³This list can be arbitrarily extended by additional indices.

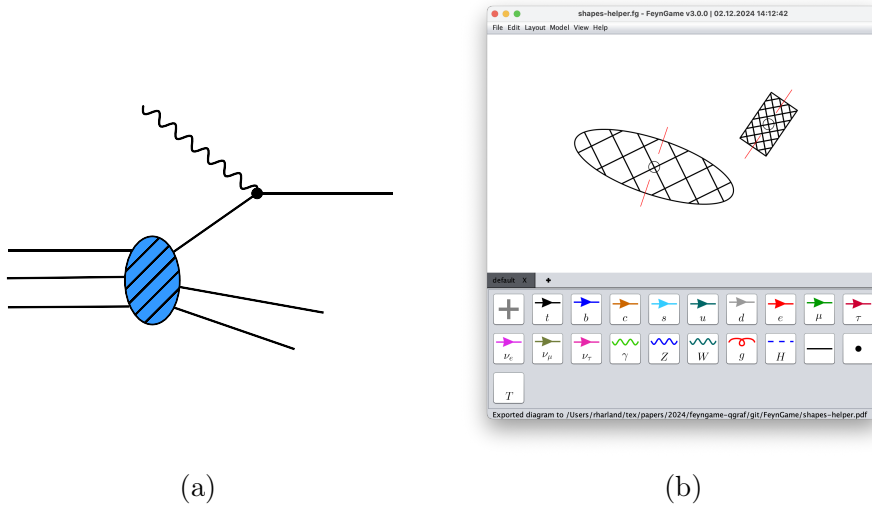


Figure 8: Shapes in *FeynGame*. (a) Using a shape in a Feynman diagram; (b) shapes on the canvas with *helper lines* activated; this facilitates rotating and moving the shapes by mouse.

this is not the main purpose of *FeynGame* though; the calculation of Feynman amplitudes can be done much more efficiently with other tools. But we hope that the amplitude feature of *FeynGame* may be still be helpful, for example in an educational context.

5. Further improvements

In this section, we will discuss a number of new features in *FeynGame* which have been implemented to facilitate its use. Some of these features were already available in *FeynGame-2.1*, but we think it is worth including them in this list.

Shapes: Using `Edit >> Add new shape`, one can paste a *shape* onto the *FeynGame* canvas. Currently, ovals and rectangles are supported shapes, see Fig. 8 (a). For the manipulation of shapes, it is recommended to switch on the *helper lines* [3] by pressing `h`, see Fig. 8 (b).

File chooser preview: *FeynGame*'s file chooser now provides a preview of the selected diagram. This is very convenient for finding existing Feynman diagrams in a directory. For example, Fig. 9 shows the file chooser that opens with `File >> Open` in the directory that contains the `.fg`-files related to this paper.

Conversion to a different model: A `.fg`-file which was drawn with a foreign model file can be converted to the current model by loading the `.fg`-file into the *FeynGame*


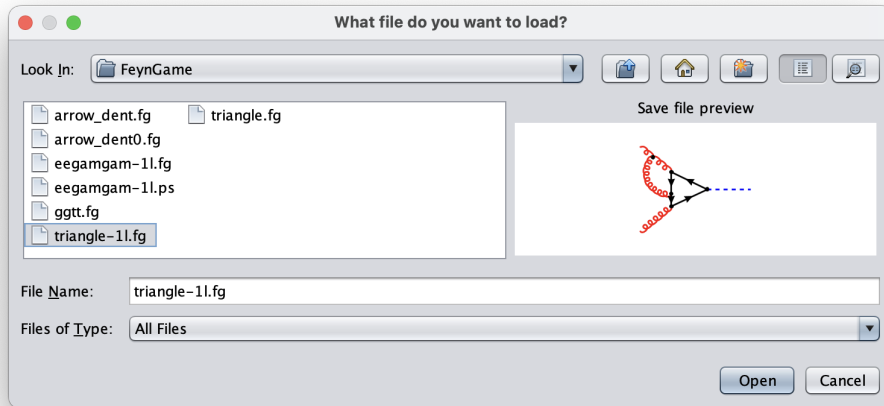


Figure 9: File chooser of *FeynGame* with a preview of the diagram.

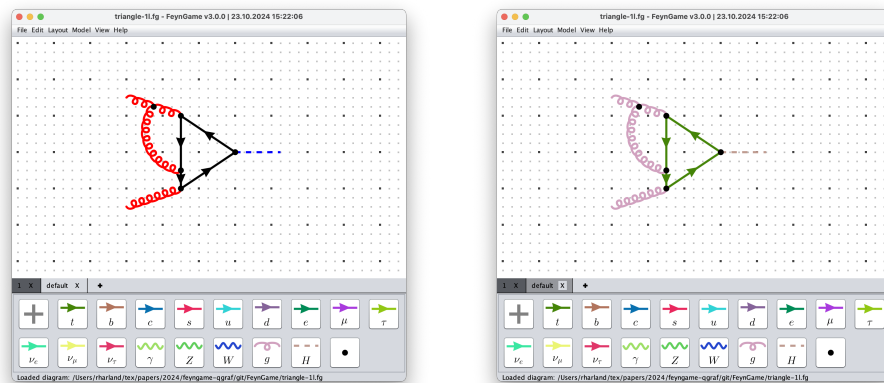

(a)

(b)

Figure 10: (a) Diagram drawn with the default model; (b) diagram after applying the current model.

window and selecting **Model** **Apply model to canvas**. This feature can also be accessed from the command line:

```
$ feyngame --diagram <path_to_diagram.fg> --model <new_model> --apply-model  
↪ --export <diagram>
```

This command will produce a PDF file `<diagram>.pdf` of the diagram, using the `<new_model>` file. See also Section 6.

Improved grid: The grid of *FeynGame-3.0* (toggled with **g**, or **View** **Grid**) consists of two overlaid grids of different periodicity, marked by different grid dots (see, e.g., Fig. 10). This significantly facilitates the symmetric positioning of lines and vertices etc.

Bounding box: The user may set a bounding box on the canvas by using the menu items **Layout** **Show bounding box**. It can be adjusted either by mouse, or via **Layout** **Configure bounding box**. When exporting the diagram to some image format, *FeynGame* will restrict the exported area to the bounding box. The bounding box will be saved with the diagram in the `.fg`-file. It can also be re-used for the next diagram to be drawn on the canvas. This enables one to draw a series of diagrams, all of whose PDF files will have the same proportions.

Improved export options: Like in previous versions, the diagrams can be exported to all common image formats. For presentations, the format of choice is probably PNG which provides the option of a transparent background. The most convenient way when preparing a Keynote or PowerPoint presentation is to copy the image to the clipboard (either by using **⌘-i**, or **File** **Export to clipboard**) and pasting it into the presentation. For publications, one may prefer vector graphics like (Encapsulated) PostScript or PDF.⁴

Arrows: They now have the additional parameter `arrowDent`. Its effect should be clear when looking at Fig. 11. Additionally, the height and length of arrows can now be adjusted independently from one another.

Spiral and wave lines: Several improvements have been made for these lines, see Fig. 11:

- There is a straight section at both of their ends. Its (absolute) length is set by the parameter `straightLength` in the model file, and can be adjusted in the `EditFrame`.
- If the `arrow` attribute is switched on, the arrow is drawn at a position where a wiggle crosses the longitudinal axis. One may also add straight sections before

⁴The latter will be produced via the detour of first producing PostScript, and subsequently converting it to PDF using `ps2pdf` (if available on your system).

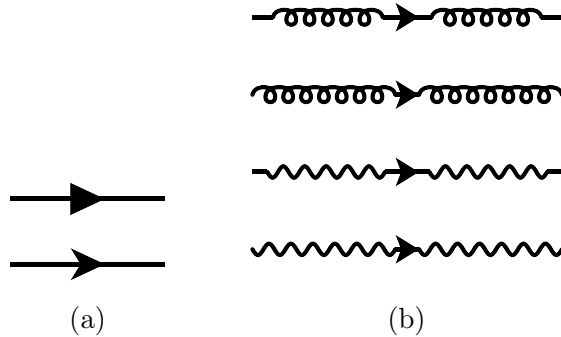


Figure 11: (a) Lines with arrows with parameter `arrowDent` equal to zero (upper) and non-zero (lower); (b) spring and wave lines with arrows, and different settings for the parameters `straightLength` and `straightLengthArrow`.

and after the arrow whose length is set by the parameter `straightLengthArrow` in the model file and can be set in `EditFrame`.

Fermion direction: The direction of fermion lines has been adjusted to be in accordance with *qgraf*.

Action messages: *FeynGame-3.0* reports its last action at the bottom of the *FeynGame* window. This is helpful, for example, when saving or exporting diagrams, in which case *FeynGame* will report on the exact location of the saved or exported file.

Log file: Some information about *FeynGame*'s internal actions are logged into a file which the user can view via `Help >> View Log`.

Check for updates: When connected to the internet, *FeynGame* will check for updates upon startup and inform the user about it.

6. Installation and modes of operation

6.1. Download, installation, and graphical mode

Compiled versions of *FeynGame* can be obtained from

<https://web.physik.rwth-aachen.de/user/harlander/software/feyngame>

These include a `jar` file which can be run from a terminal as

```
$ java -jar FeynGame.jar
```

Alternatively, we provide the executable `feyngame` which can be opened simply by saying

```
$ ./feyngame
```

in a terminal window. For MacOS, we also provide `FeynGame.dmg`, which contains an app that can be moved into the `/Applications` folder and linked to the *Dock*, for example. The source code of *FeynGame* is located at

<https://gitlab.com/feyngame/FeynGame>

Note that, in any case, you need to have a working version of *Java* installed on your computer, ideally version 9 or newer.

By default, the commands above (or opening the app) will open a dialogue window which allows one to choose between the *drawing mode* and the *game mode* of *FeynGame*. The latter is described in detail in Ref. [3]. In both cases, *FeynGame* will subsequently open its main window. However, *FeynGame* provides a number of options for the calls from a terminal. Assuming that the `feyngame` executable has been placed into the user's path, the full list can be viewed via

```
$ feyngame --help
```

6.2. Command-line mode

Many of *FeynGame*'s functionalities can be accessed via its command-line mode, i.e. without opening its GUI. This may be particularly helpful in combination with the new *qgraf* import functionality, see Section 3. An example for a command-line operation of *FeynGame* could look as follows:

```
$ feyngame --qgraf-file <qgraf-out> --qgraf-style form.sty --export all.pdf --  
  ↪ diagrams-per-page 6 6
```

This command reads the *qgraf* output file `<qgraf-out>` which we assume to be produced with the *qgraf* style file `form.sty`, and exports the diagrams in PDF format to the file `all.pdf`, putting six diagrams per row and column (similar to Fig. 3). In this case, *FeynGame* effectively acts as a converter from *qgraf* output to PDF. This is done without ever showing the *FeynGame* window and can be included in automated scripts as part of a larger workflow⁵.

Another application of the command line mode is to re-export diagrams to, say, PDF format after modifying the model file, as described in Section 5, *Conversion to different model*.

⁵This conversion internally still uses a hidden window, so it will not work in a headless graphics environment.

7. Conclusions and outlook

We have presented version 3.0 of *FeynGame* and described its central new features. Among them is the capability to display Feynman graphs generated by *qgraf*, and to produce a mathematical expression for the amplitude of an arbitrary SM Feynman diagram. A number of other improvements are included, such as a double grid and the preview of diagrams in the file chooser.

Future projects within *FeynGame* include improved visual representation of crossed lines, updates for *FeynGame*'s game mode, and a tutorial on Feynman diagrams for high-school and graduate students.

Acknowledgments. This research was supported by the *Deutsche Forschungsgemeinschaft (DFG, German Research Foundation)* under grant 396021762 - TRR 257.

References

- [1] P. Nogueira, *Automatic Feynman graph generation*, *J. Comput. Phys.* **105** (1993) 279–289.
- [2] P. Nogueira, *Feynman graph generation and propagator mixing, I*, *Comput. Phys. Commun.* **269** (2021) 108103.
- [3] R. V. Harlander, S. Y. Klein, and M. Lipp, *FeynGame*, *Comput. Phys. Commun.* **256** (2020) 107465, [arXiv:2003.00896 \[physics.ed-ph\]](#).
- [4] R. Harlander, S. Y. Klein, and M. C. Schaaf, *FeynGame-2.1 – Feynman diagrams made easy*, *PoS EPS-HEP2023* (2024) 657, [arXiv:2401.12778 \[hep-ph\]](#).
- [5] M. Gerlach, F. Herren, and M. Lang, *tapir: A tool for topologies, amplitudes, partial fraction decomposition and input for reductions*, *Comput. Phys. Commun.* **282** (2023) 108544, [arXiv:2201.05618 \[hep-ph\]](#).
- [6] P. Nogueira, *Abusing QGRAF*, *Nucl. Instrum. Meth. A* **559** (2006) 220–223.
- [7] J. Ellis, *TikZ-Feynman: Feynman diagrams with TikZ*, *Comput. Phys. Commun.* **210** (2017) 103–123, [arXiv:1601.05437 \[hep-ph\]](#).
- [8] P. Eades, *A heuristic for graph drawing*, *Congressus Numerantium* **42** (1984) 149–160.
- [9] T. Fruchterman and E. Reingold, *Graph drawing by force-directed placement*, *Software: Practice and Experience* **21** no. 11, (1991) 1129–1164.
- [10] J. A. M. Vermaseren, *New features of FORM*, [arXiv:math-ph/0010025](#).

- [11] J. Kuipers, T. Ueda, J. A. M. Vermaseren, and J. Vollinga, *FORM version 4.0*, *Comput. Phys. Commun.* **184** (2013) 1453–1467, [arXiv:1203.6543 \[cs.SC\]](#).
- [12] B. Ruijl, T. Ueda, and J. Vermaseren, *FORM version 4.2*, [arXiv:1707.06453 \[hep-ph\]](#).
- [13] Wolfram Research, Inc., “Mathematica, Version 14.1.”
<https://www.wolfram.com/mathematica>. Champaign, IL, 2024.