

---

# SOUP TO GO: MITIGATING FORGETTING DURING CONTINUAL LEARNING WITH MODEL AVERAGING

Anat Kleiman<sup>1</sup>, Gintare Karolina Dziugaite<sup>2</sup>, Jonathan Frankle<sup>3</sup>, Sham Kakade<sup>1</sup> & Mansheej Paul<sup>3</sup>

<sup>1</sup>Harvard University, <sup>2</sup>Kempner Institute, <sup>3</sup>Google DeepMind, <sup>\*</sup>Databricks\*

## ABSTRACT

In continual learning, where task data arrives in a sequence, fine-tuning on later tasks will often lead to performance degradation on earlier tasks. This is especially pronounced when these tasks come from diverse domains. In this setting, how can we mitigate catastrophic forgetting of earlier tasks and retain what the model has learned with minimal computational expenses? Inspired by other merging methods, and L2-regression, we propose Sequential Fine-tuning with Averaging (SFA), a method that merges currently training models with earlier checkpoints *during the course of training*. SOTA approaches typically maintain a data buffer of past tasks or impose a penalty at each gradient step. In contrast, our method achieves comparable results without the need to store past data, or multiple copies of parameters for each gradient step. Furthermore, our method outperforms common merging techniques such as Task Arithmetic, TIES Merging, and WiSE-FT, as well as other penalty methods like L2 and Elastic Weight Consolidation. In turn, our method offers insight into the benefits of merging partially-trained models during training across both image and language domains.

## 1 INTRODUCTION

Fine-tuning deep learning models on new tasks often leads to catastrophic forgetting: the rapid degradation of performance on previously learned tasks (Scialom et al., 2022; Lesort et al., 2019; Delange et al., 2021; Belouadah et al., 2021; Luo et al., 2023). This poses a major challenge for continual learning (CL) scenarios, where data comes in a stream of sequences of tasks that may not reappear. As such, we are in need of fine-tuning procedures that would allow models to continually adapt to new knowledge without sacrificing past abilities.

Previous work has analyzed catastrophic forgetting of different types of information, as well as the impact of scale. Scialom et al. (2022) explain that LLMs can perform worse on past fine-tuning tasks as they learn new ones. Furthermore, Luo et al. (2023) show a model can also forget general knowledge, not specific to a single past task. Finally, forgetting also grows in severity as model size increases (Luo et al., 2023).

Existing state-of-the-art approaches to mitigate forgetting primarily focus on modifying the training data used in fine-tuning. These methods either maintain a data buffer of past tasks (Robins, 1995; Lopez-Paz & Ranzato, 2022; de Masson d’Autume et al., 2019), or generate approximations of past task data for joint training with current tasks (Shin et al., 2017; Mocanu et al., 2016). However, both strategies introduce additional costs. Data buffers increase memory overhead and require careful management, while generating data approximations necessitates extra training and computational resources. Likewise, more classical methods of CL that incorporate a penalty directly into training to constrain weights ((Kirkpatrick et al., 2017), L2 penalty) are memory-intensive as they require storing multiple copies of model parameters to be used at each gradient step.

Recently, buffer-free and computationally efficient model merging techniques ((Wortsman et al., 2022b)Ilharco et al. (2023)) have been proposed to address forgetting in CL. However, in scenarios involving numerous tasks or domains with significant variation, these methods often

---

\*Correspondence to: anatkleiman@g.harvard.edu

---

struggle to achieve a competitive balance between retaining knowledge of previous tasks and learning new ones.

Building on the computational efficiency of these approaches, we posit the following: Why should model averaging occur only *once* at the end of training? Could averaging partially trained models help mitigate forgetting while simultaneously improving performance on new tasks through additional training?

Inspired by L2-regression, we introduce **Sequential Fine-tuning Averaging (SFA)**, a novel method that merges the model currently training on a new task with a checkpoint from a previous task *during* training, rather than exclusively at the end. Additionally, we define the concept of averaging frequency ( $p$ ), which allows us to control the frequency of merging during training to balance past and new task performance. As such, relative to other continual learning methods that incorporate a data buffer, our solution offers the advantage of not needing to store past data. Furthermore, our solution also does not require training an additional past data generator, because it uses previous model checkpoints as proxies for such data. Finally, our experiments demonstrate that our method, by incorporating averaging during training, consistently outperforms other merging methods that only merge at the conclusion of training, achieving superior performance across all tasks.

We systematically investigate forgetting across two extensive settings: (1) the classical continual learning scenario, characterized by a large sequence of image classification tasks, and (2) fine-tuning pretrained large language models (LLMs) on highly distinct domains, including Law, Math, and Code. These settings were chosen to evaluate SFA under both standard continual learning conditions— where tasks are presented in a long stream— and in scenarios involving drastically different tasks, testing its robustness to domain shifts.

Our work can be summarized by the following contributions:

- We introduce Sequential Fine-tuning Averaging (SFA), a method for mitigating forgetting by averaging model checkpoints from past tasks during fine-tuning on a new task. This enables the model to retain knowledge on past tasks while learning a new task. (Section 3.)
- We show consistent results that across a scale of models and for both image and language tasks, SFA achieves comparable results to using a data buffer without storing any additional data, while outperforming other model merging techniques, as well as classical continual learning methods. (Sections 5 and 6.)
- We provide intuition for why model merging is effective by showing how SFA roughly approximates a classical continual learning algorithm: L2-regression. In turn, we bridge classical continual learning algorithms that incorporate a penalty with commonly used model merging techniques. (Section 6.)

## 2 RELATED WORK

**Forgetting and Continual Learning** A large and growing body of literature investigates different aspects of catastrophic forgetting in continual and sequential learning. When the training data consists of disjoint tasks, training classifiers can cause catastrophic forgetting (Rebuffi et al., 2017). Furthermore, if forgetting occurs, it can be tracked during training and is dependent on when examples are seen by the model: models are less likely to remember earlier training examples (Jagielski et al., 2022; Tirumala et al., 2022). Interestingly, forgetting can also occur for general knowledge rather than for specific tasks, and is more severe for larger models (Luo et al., 2023). Lesort et al. (2022) show that overlap between tasks and task repetition in continual learning settings can mitigate catastrophic forgetting of such examples resulting in solutions to forgetting that involve maintaining a data buffer with past data. Such solutions can also be extrapolated to LLMs where continual learning with data repetition can prevent catastrophic forgetting (Scialom et al., 2022). Mitigating forgetting in continual learning can also occur by introducing a penalty in the loss objective. L2 penalty in continual learning constrains the weights of a model as it is learning a new task by introducing a penalty based on the difference between the current and initial model’s weights. Similarly, Elastic Weight Consolidation (EWC) (Kirkpatrick et al., 2017) also introduces a penalty to constrain the weights of a model and mitigate increased loss on learned tasks while incorporating the importance of specific weights on learned tasks.

---

**Model Merging** There exist many techniques and applications for merging multiple models to create a single model with improved generalization on a given set of tasks. Model souping (Wortsman et al., 2022a) involves averaging the parameters of existing models to create a new model. This technique can be applied after training multiple variations of a model on data during a hyperparameter sweep to combine the models and achieve higher performance than any individual model. Task Arithmetic (Ilharco et al., 2023) involves finding and adding task vectors to create a multi-task model. WiSE-FT (Wortsman et al., 2022b) merges the weights of an initial and a fine-tuned model. Our method builds upon these 3 works, but with key differences as described in Section 3.

Additional influential model merging techniques include: Ramé et al. (2023) use a model souping approach to obtain a network with improved out-of-distribution performance by averaging the weights of models fine-tuned on different tasks. TIES (Yadav et al., 2023) only merges influential parameters whose signs are in the direction of greatest movement across the models. Fisher merging (Matena & Raffel, 2022; Dhawan et al., 2023; Jhunjhunwala et al., 2023) requires keeping data from all previous tasks and computing gradients.

Finally for merging different textual domains, Branch-Train-Merge (BTM) (Li et al., 2022) maintains a set of distinct domain models that can be merged and then trained to create new experts.

### 3 METHODOLOGY: SEQUENTIAL FINE-TUNING AVERAGING (SFA)

Our method, Sequential Fine-tuning Averaging (SFA), leverages existing techniques in model merging (Ilharco et al., 2023; Wortsman et al., 2022a;b) to mitigate forgetting in the continual learning setting. In this method, we consider a pretrained model that is fine-tuning on a sequence of tasks or domains. While the model is being fine-tuned on the current task, we periodically average the parameters of the current model with an earlier checkpoint that resulted from fine-tuning on previous tasks. We then continue fine-tuning this new averaged model on the current task.

More precisely, let  $\theta_o$  denote the parameters of the network optimized for previous tasks. Let  $\theta_{t+1}^*$  be the parameters of the model after taking a gradient step on a new task at  $1 \leq t \leq T$  using current model parameters  $\theta_t$ . Then, every  $pT$  iterations, as well as at the end of fine-tuning, we reset the parameters to be a weighted combination of  $\theta_o$  and  $\theta_{t+1}^*$ , where the weighing is determined by a hyperparameter  $0 \leq \beta \leq 1$  (default: 0.5).

---

#### Algorithm 1 Sequential Fine-tuning Averaging During Task Fine-tuning

---

```

Input:  $\theta_o, p, \beta, T$ 
for  $t$  in  $1, \dots, T$ 
     $\theta_{t+1}^* = \theta_t - \alpha \nabla_{\theta_t} L_{\text{task}}$ 
    if  $t \bmod pT = 0$  then
         $\theta_{t+1} = (\beta)\theta_o + (1 - \beta)\theta_{t+1}^*$ 
    else
         $\theta_{t+1} = \theta_{t+1}^*$ 
if  $T \bmod pT \neq 0$  then
     $\theta_{T+1}^* = (\beta)\theta_o + (1 - \beta)\theta_{T+1}$ 

```

---

We show how our method roughly approximates L2-regression in Section 6. By averaging with an optimized model of the last learned task  $\theta_o$ , our method prevents the current model parameters from moving significantly from the original model’s and thus losing optimal performance on past tasks (Appendix A.2). In this way, our technique combines the intuition of continual learning with Rehearsal (Robins, 1995), Task Arithmetic (Ilharco et al., 2023) and WiSE-FT (Wortsman et al., 2022b). However, unlike Rehearsal-based methods that store data in a buffer, we use a model fine-tuned on past tasks/domains. Furthermore, unlike Task Arithmetic, our method merges a past checkpoint of a given model with the current model, rather than the task vectors from individual models. Finally, while our method focuses on merging during actual fine-tuning and across tasks/domains, WiSE-FT merges a pretrained and a fine-tuned model. In this way, our work generalizes WiSE-FT throughout continual learning. As the number of tasks increases, we continue to average the most recent initial model  $\theta_o$ , which has high performance on all previous tasks, with the current model parameters. As such, after finishing fine-tuning with SFA on a new task, we update  $\theta_o$  to be the merged model of all tasks seen so far. In Section 5 we show that SFA is able to preserve performance on all past tasks through continuous averaging.

---

## 4 DATA

In order to measure and mitigate forgetting, we fine-tune our models on both a stream of image classification tasks, and 3 distinct language domains: Law, Math and Code.

In our classical continual learning setting, we construct a stream of 20 tasks from Food-101 (Bossard et al., 2014), as well as a stream of 20 tasks from CIFAR-100 (Krizhevsky, 2009). For Food-101, we construct our tasks by grouping 5-labels together for all labels except 100. For CIFAR-100, we group 5-labels together for all labels.

For each language domain, we fine-tune our model on a dataset featuring domain-specific knowledge, as well as unique instruction tasks. For Law, we combine CaseHOLD (Zheng et al., 2021), Terms of Service (ToS) (Lippi et al., 2019; tos, 2023), and Overruling (Zheng et al., 2021) to create a more general Law dataset. For Math, we use MetaMathQA (Yu et al., 2023), and for Code we use MagiCoder110k (Wei et al., 2023). We believe that required task knowledge across these 3 domains is distinct with minimal overlap. As such, we purposefully aim to test our models’ ability to generalize across a wide range of knowledge to measure the validity of our method under maximal domain shifts.

**Evaluation Metrics for Data:** In our work, we reference the *forgetting* of various tasks. We define forgetting specific knowledge as a decrease in performance on a given evaluation task between the current model and the original model before fine-tuning. For example, if evaluation performance on Task A drops when a model fine-tunes on Task B, given that the model has already fine-tuned on task A, we consider the model to forget Task A. To evaluate performance on our fine-tuning data, we use the metrics and holdout sets described in Table 8.

## 5 RESULTS

### 5.1 CLASSICAL CONTINUAL LEARNING: MITIGATING FORGETTING ACROSS SEQUENCES OF IMAGE TASKS

We first fine-tune models on sequences of image tasks from both Food-101 and CIFAR-100 (as described in Section 4) while applying different forgetting mitigation strategies. Then, we measure each final model’s average task accuracy (Fig. 1). We first provide an upper baseline by simultaneously fine-tuning the initial model on all tasks to obtain a multitask fine-tuning model which performs well on average (black star). However, given a continual learning setting where task data appears sequentially, this is infeasible. Next, sequential fine-tuning without intervention (red bar), as expected, results in low average accuracy due to the catastrophic forgetting of earlier tasks. To mitigate this forgetting, we implement 2 variations of Rehearsal with a data buffer: one that includes 5% past task data and 95% current task data, and another that includes 10% past task data and 90% current task data (pink dashed horizontal lines). We use these implementations to create a Rehearsal region of commonly used data buffer sizes to compare other methods to. Rehearsal is a common technique for mitigating forgetting in continual learning. It involves maintaining a buffer of past task data and interleaving it with new task data during fine-tuning (Robins, 1995), where the size of the buffer is a hyperparameter. A data buffer however, has significant drawbacks: it requires storing data from all previous tasks, leading to rapidly increasing storage costs as the number of tasks, and the size of the buffer grow. It also adds to the training cost, because we must continue to train on data from past tasks. Furthermore, maintaining a subset of past data can also threaten data privacy and security (Li et al., 2024).

This makes model based mitigations of forgetting appealing. As such, we next apply commonly used model merging methods. Task Arithmetic (Ilharco et al., 2023) (blue bar) and WiSE-FT (Wortsman et al., 2022b) (orange bar). As we explain in Section 3, WiSE-FT is technically equivalent to SFA with  $p = 1$ , because it only involves merging the final trained and initial model. Finally, we compare these baselines to our method, SFA, which merges a partially-trained and an initial model, using varying averaging frequency  $p$ . SFA outperforms most other methods on both Food-101 and CIFAR-100, and performs comparably to using a reasonably sized data buffer. As expected, most methods except interestingly Task Arithmetic, outperform using no intervention. SFA with varying  $p$  generally outperforms both using a smaller-sized data buffer and Task Arithmetic. Finally, SFA ( $p = 0.98$  for Food-101, and  $p = 0.96$  for CIFAR-100) where averaging occurs near the end and after training, achieves higher performance than WiSE-FT or SFA ( $p = 1$ ) where averaging occurs

only once at end. This suggests that averaging models during training is more effective than averaging only at the end of training, indicating an inherent difference in learning dynamics when an averaged model continues training on some task. The performance gap between WiSE-FT and SFA becomes even more pronounced as task domains diverge (Section 5.3).

Finally, to better understand how averaging impacts performance differences during training, we track the accuracy (y-axis) of both past and current tasks as a model fine-tunes on a sequence of tasks from Food-101 (Fig. 2). We compare a model fine-tuning without intervention (top graph) to fine-tuning using SFA ( $p=0.98$ ) (bottom graph). As is shown, without intervention, past task performance continues to decrease as new tasks are introduced. Meanwhile, SFA boosts past task performance when averaging occurs (performance spikes in graph). Furthermore, as can be seen, each task requires a substantial portion of training steps to raise its performance on the given task. This may explain why SFA ( $p = 0.98$ ) outperforms SFA ( $p < 0.98$ ), as averaging before substantial learning on the given task has taken place may hinder current task performance. As we show in Section 5.3, averaging earlier on in training can be beneficial given tasks that are more quickly learned.

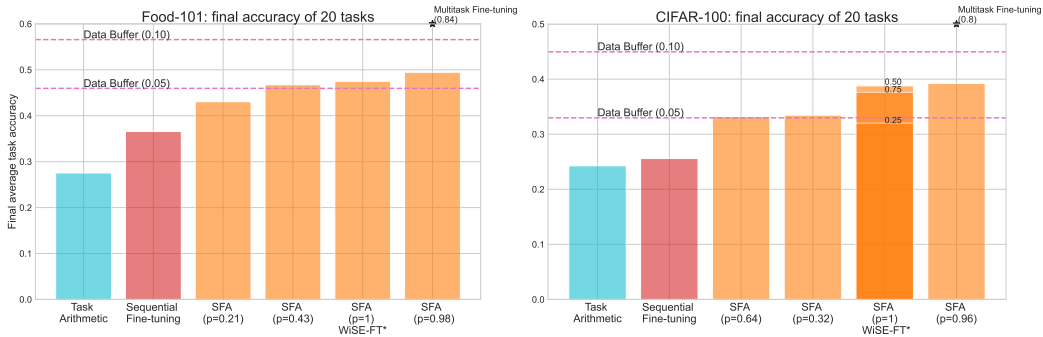


Figure 1: A comparison of ViT (base) fine-tuned on a sequence of 20 tasks from Food-101 (left) and CIFAR-100 (right) using various continual learning techniques. Across both datasets, using SFA with varying  $p$  results in a high final average accuracy across all tasks (y-axis) comparable to using a data buffer. Furthermore, averaging during training ( $p < 1$ ) achieves higher performance than only once at the end ( $p = 1$ ).

## 5.2 TESTING METHOD ROBUSTNESS: MITIGATING FORGETTING FROM CROSS LANGUAGE DOMAINS

In the following sections, we test the robustness of SFA by focusing on mitigating pairs of successive instruction fine-tuning tasks with large domain shifts, such as from Math to Code or Math to Law, using datasets outlined in Section 4. By restricting ourselves to pairs of dissimilar tasks, we can clearly quantify the trade off between learning the second task and forgetting the first one by visualizing the results on a plane that measures the accuracy of the first task on the y-axis and the accuracy of the second task on the x-axis. First, we confirm that forgetting occurs when fine-tuning on successive language tasks (Appendix A.4). We present our results for sequentially learning Math and Law with Llama 2 (7B) in Fig. 3, Math and Law with Qwen2.5 (1.5B) in Fig. 4, and Math and Law, as well as Math and Code with Pythia (2.8B) in Fig. 5 (see Appendix A.5 for model descriptions).

We first fine-tune our model Llama 2 (7B) in Fig. 3, Qwen2.5 (1.5B) in Fig. 4, and Pythia (2.8B) in Fig. 5 on MetaMathQA to obtain the initial model (dark blue circle). Note the base model performance on the first (second) task is represented by dark green for Llama 2 (7B), dark red for Qwen2.5 (1.5B), and blue for Pythia (2.8B) horizontal (vertical) dashed lines. This initial model improves upon the base model on our Math benchmark and is thus higher on the y-axis (performance on first task) while not being significantly different or being worse on the x-axis (performance on the second task which it has not been trained on yet). We then fine-tune the initial model on the second task to obtain the sequential fine-tuning model (red circle). In Figs. 3 and 4 the second task is Law while in Fig. 5 the second task is either Law or Code. The sequential fine-tuning model performs really well on the second task (higher on the x-axis) while forgetting almost everything it has learned

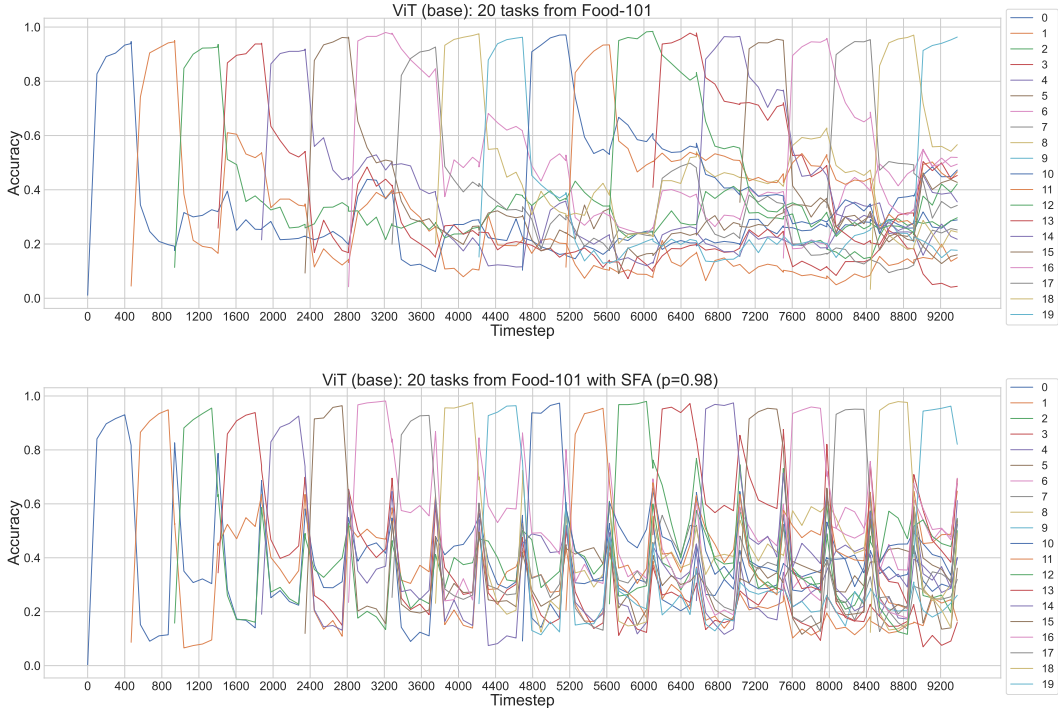


Figure 2: A comparison of sequentially fine-tuning ViT (base) on 20 tasks (Food-101) with (**bottom**) and without SFA (**top**). Each new task is introduced with a different colored curve across gradient timesteps (x-axis) resulting in changes to both current and past task accuracies (y-axis). The use of SFA can be seen to improve cumulative past task performance at averaging steps.

about the first task (base model level on the y-axis). This movement down and to the right of the initial model (dark blue circle) to the sequential fine-tuning model (red circle) on the task 1 - task 2 performance plane in Figs. 3 to 5 is emblematic of catastrophic forgetting of an earlier task as the model learns a new task. For reference, the performance of just fine-tuning the base model on the second task is represented by the vertical purple for Law, or green for Code dashed line.

For our upper baseline, we show the results of simultaneously fine-tuning the base model on a mixture of both tasks to obtain the multitask fine-tuning model (black star). This model sits at the upper right of the plane as it does not exhibit forgetting and performs well on both tasks. However, as stated before, in our continual learning setting where data streams in as a sequence of tasks, this is infeasible.

We demonstrate the effectiveness of rehearsal in our continual learning setting by further training our initial model (dark blue circle, fine-tuned on Math) on a mixture of 90% (95%) task 2 data and 10% (5%) of Math data sampled randomly from the full Math dataset. The resulting continual learning (CL) with data buffer model (pink diamond in Figs. 3 to 5) effectively improves on the initial model on task 2 (higher Law performance, i.e. x-axis) while mitigating forgetting (maintains high Math performance i.e. y-axis). As we increase the proportion of Math data from 5% to 10%, we see higher performance on Math (Fig. 4). However, this increase in performance also presents a higher cost through larger data buffer storage. Note, this does not work as well for Pythia (2.8B) on Math to Code (Fig. 5, right), we hypothesize that this is because of suboptimal hyperparameters.

### 5.3 SFA ON CROSS DOMAIN DATA

Recall that in SFA, we take a model that has already been fine-tuned on Task A, and while fine-tuning on Task B, every  $pT$  steps we average the weights with the final model after fine-tuning on Task A and continue fine-tuning on Task B. We evaluate SFA with varying averaging frequency  $p$  during cross-domain sequential fine-tuning. Figs. 3 and 5 show that as  $p$  decreases, signifying more frequent averaging with the initial model, we observe stronger retention of past domain knowledge

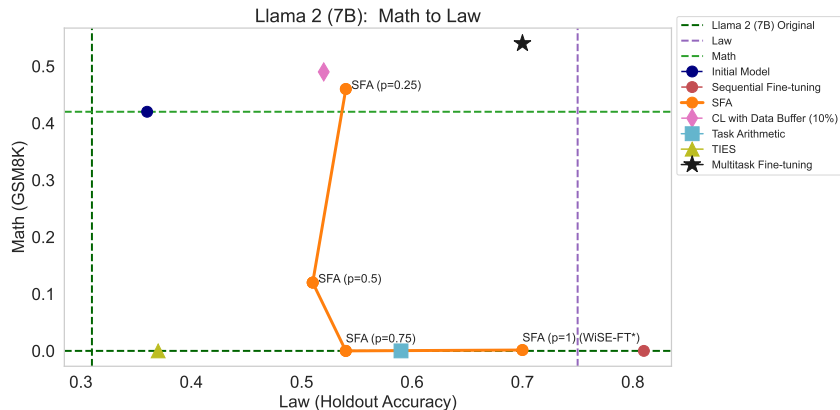


Figure 3: A comparison of Llama 2 (7B)’s performance on Math (y-axis) and Law (x-axis) using various fine-tuning and model merging techniques. The results are contained by dashed boundary boxes: the left and bottom lines represent the performance of a pretrained Llama 2 (7B) on Math and Law, whereas the right and top lines represent the performance of Llama 2 (7B) after fine-tuning on Law and Math respectively. A curve shows the performance of SFA with varying  $p$ , next to comparisons of continual learning with a data buffer, Task Arithmetic, and TIES. Finally, we also show an initial model (fine-tuned on math) and performance after sequentially fine-tuning it on Law.

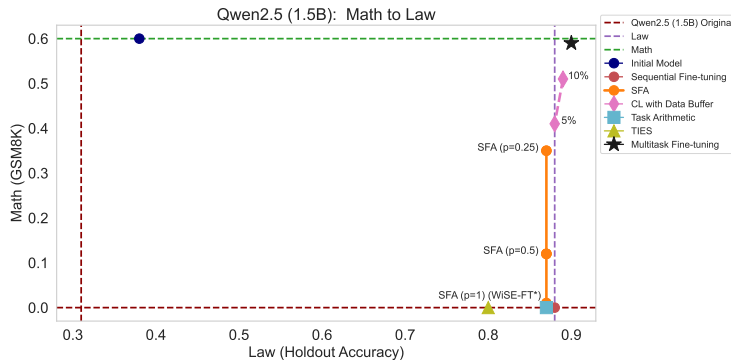


Figure 4: A comparison of Qwen2.5 (1.5B)’s performance on Math, Law using various fine-tuning and model merging techniques similar to Fig. 3. On Math to Law, SFA  $p = 0.25$  can be seen as having comparable performance to using a data buffer with 5% past task data, while outperforming Task Arithmetic, which resembles fine-tuning with no intervention and WiSE-FT in performance.

(orange curve). By adjusting the averaging frequency ( $p$ ), we control the balance between past and new knowledge retention. This is evident, because as  $p$  decreases, the performance on Math (y-axis) increases, indicating stronger retention of task 1. Furthermore, there is minimal loss to the potential learning of task 2 (Law or Code on the x-axis). Notably, when fine-tuning on Math followed by Law, a  $p$  of 0.25 yields results comparable to rehearsal (pink diamond), demonstrating that SFA can mitigate forgetting without the need for data buffers. Crucially, our method is able to achieve such performance without requiring a data buffer, but just two model checkpoints: the initial one and the current checkpoint throughout fine-tuning.

Additionally, in this sequential fine-tuning scenario, our method also outperforms other model merging methods. We implement Task Arithmetic (Ilharco et al., 2023) (blue square), TIES (Yadav et al., 2023) (green triangle), and WiSE-FT (Wortsman et al., 2022b) (and show that our method achieves superior performance to all of these. In the Math-then-Law fine-tuning setting, we find that both of these methods, Task Arithmetic and TIES, fail to retain Math performance completely, whereas SFA with a low enough  $p$  is able to achieve performance on par with rehearsal. Our figure values for Pythia (2.8B) can be found in Table 1 (Math and Law), and Table 5 (Math and Code). Results

for Llama 2 (7B) can be found in Table 3 (Math and Law), and Table 6 (Math and Code). Finally, results for Qwen2.5 (1.5B) can be found in Table 4 (Math and Law).

Finally, to see how our method scales as the number of domains increases, we also continue fine-tuning and applying SFA on our model for 3 domains (Fig. 6). In these graphs, we take a high performing SFA model ( $p$  of 0.25) on Math and Law, and Math and Code from Fig. 5, and continue fine-tuning the model with SFA on the final domain (Code and Law respectively). We find that by using SFA (specifically adjusting  $p$ ), we are able to maintain high performance on the previous 2 domains while also learning an additional domain. As such, SFA is a useful forgetting mitigation technique for continual learning given a sequence of domains. In both scenarios, Math-Code to Law, and Math-Law to Code, SFA (orange curve) outperforms Task Arithmetic, WiSE-FT, and sequential fine-tuning. In the case of Math-Code to Law, SFA with  $p$  of 0.25 yields performance comparable to rehearsal (pink diamond). The figure results of Pythia (2.8B) fine-tuning on Math-Code to Law, and Math-Law to Code can be found in Table 7.

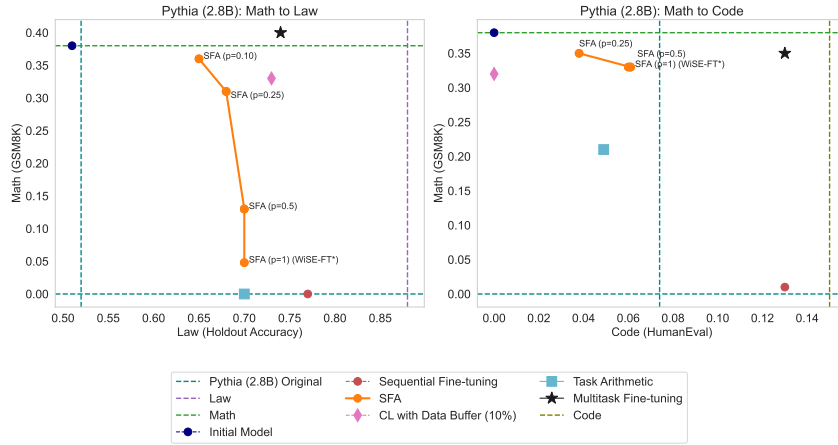


Figure 5: A comparison of Pythia (2.8B)’s performance on multiple domains (Math, Law and Math, Code) using various fine-tuning and model merging techniques similar to Fig. 3. On Math to Law, SFA  $p = 0.25$  can be seen as having comparable performance to using a data buffer, while outperforming Task Arithmetic. Likewise, in Math to Code, SFA with varying  $p$  outperform using a data buffer and Task Arithmetic.

#### 5.4 AVERAGING WEIGHTS

To further understand the advantages of SFA, we investigate alternative strategies of manipulating model parameter weights. Unlike the continuous averaging throughout fine-tuning employed by SFA, we explore the impact of modifying weights solely at the final stage. Our results underscore the importance of SFA’s *continual* averaging approach for achieving optimal performance across multiple domains.

Recall that SFA combines parameters from the initial and current model during fine-tuning. We posit that the initial model represents expertise in past tasks/domains, while the current model embodies new task/domain knowledge. Our default parameter weighting (0.50 for each) provides a balance. We explore if, instead of varying  $p$ , the frequency of averaging in SFA, we can get similar flexibility by first fine-tuning the model on a new task ( $p = 1$ , or WiSE-FT) and then averaging the final model with the previous task model using different relative weights (vary  $\beta$ ). In Figs. 7 and 8, we show that SFA with  $p < 1$  and  $\beta = 0.5$  (orange curve) performs the same if not better than a sweep of weighting parameter  $\beta$  for SFA ( $p = 1$ , or WiSE-FT) (blue curve). Furthermore, for SFA ( $p = 1$ , or WiSE-FT) with  $\beta \geq 0.50$ , the trade off between Math and Law for both Pythia (2.8B) and Llama 2 (7B) is especially large, resulting in the complete failure to retain math. Likewise, for CIFAR-100 in Fig. 1, we show that varying  $\beta$  for SFA ( $p = 1$ , or WiSE-FT) is not as effective as SFA ( $p = 0.96$ ), implying that averaging during fine-tuning, with additional fine-tuning afterwards offers additional performance benefits. This suggests that SFA’s continual averaging during fine-tuning is key to its success in preserving cross-domain, and sequential task competence.



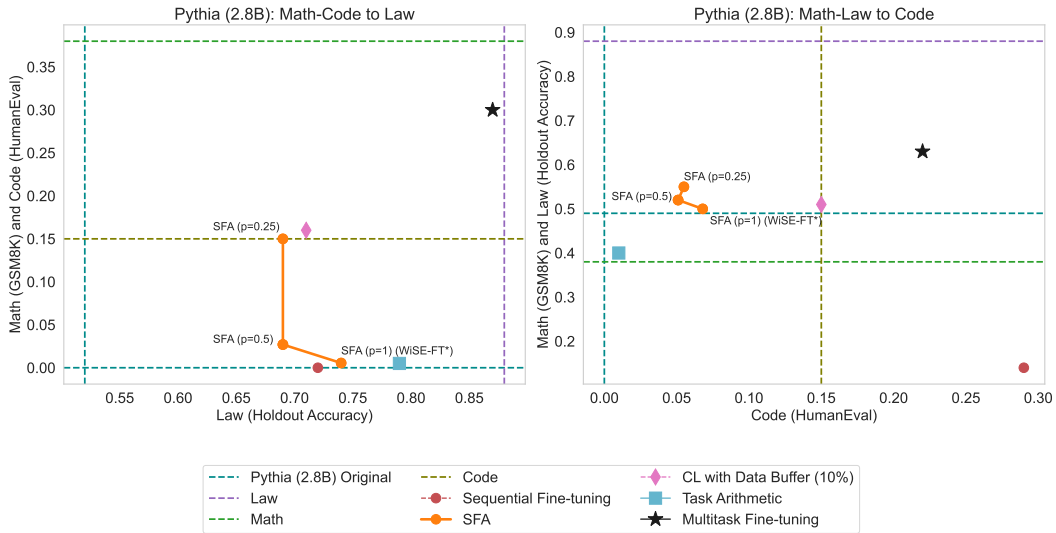


Figure 6: A comparison of Pythia (2.8B)’s performance when training on more than 2 domains (e.g. Math-Law and Code, Math-Code and Law) using various fine-tuning and model merging techniques similar to Fig. 5. On Math-Code to Law, SFA  $p = 0.25$  can be seen as having comparable performance to using a data buffer, while outperforming Task Arithmetic. While, SFA with varying  $p$  on Math-Law to Code outperforms Task Arithmetic, but performs worse than using a data buffer.

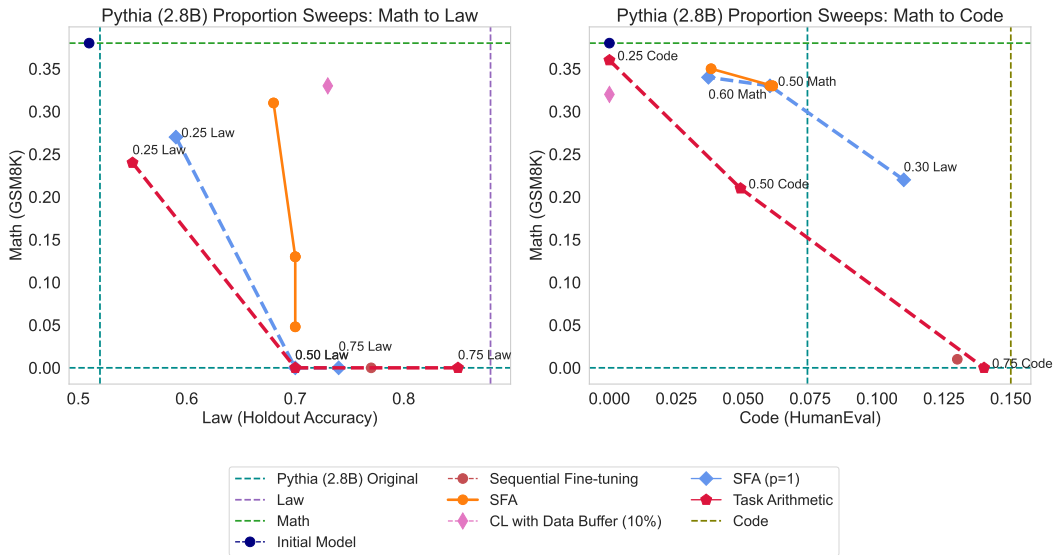


Figure 7: A comparison of varying the Task Arithmetic model weights, and  $\beta$  on SFA ( $p=1$ ), with SFA (varying  $p, \beta = 0.5$ ) for Pythia (2.8B). We reproduce the results varying  $p$  in SFA (orange curve) from Fig. 5 and add 2 sweeps showing change in performance on Pythia (2.8B) when the weights for the current and past checkpoints are varied for SFA ( $p = 1$ ) (dashed blue) and the domain-specific models are merged in Task Arithmetic (dashed red). Generally, SFA with  $p < 1$  achieves highest performance, followed by SFA ( $p = 1$ ) with varying weights, and lastly is Task Arithmetic with varying weights.

We extend this analysis to Task Arithmetic, another model merging technique. In Figs. 7 and 8 we report the results sweeping over the weight values for averaging (red curve), and observe that Task Arithmetic, like SFA ( $p = 1$ , or WiSE-FT) with varying  $\beta$ , fails to achieve the cross-domain

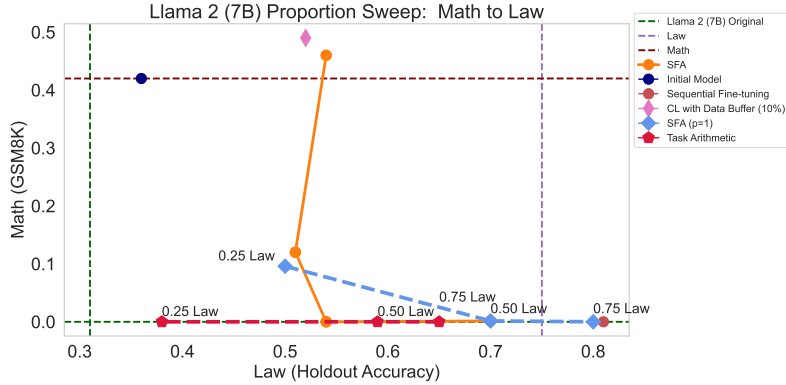


Figure 8: A comparison of varying the Task Arithmetic model weights, and  $\beta$  on SFA ( $p=1$ ), with SFA (varying  $p, \beta = 0.5$ ) for Llama 2 (7B). We reproduce the results varying  $p$  in SFA (orange curve) from Fig. 3 and add 2 sweeps for the weights on the checkpoints and domain models of SFA ( $p = 1$ ) and Task Arithmetic, similarly to Fig. 7, to compare SFA with merging at different proportions. We see a similar outcome, where SFA with  $p < 1$  generally achieves a better trade off in performance between Math and Law.

performance improvements that SFA demonstrates. Specifically, it also shows even worse combined performance on task 1 (Math, y-axis) and task 2 (Law, or Code, x-axis). Furthermore, in the Math-Law setting, for weights on Law  $\geq 0.50$ , it also fails to retain Math. As such, SFA  $p < 1$  with  $\beta = 0.50$  offers superior performance for cross domain fine-tuning on both tasks even when accounting for proportion sweeps.

## 6 SFA AND L2-REGRESSION: INTUITION FOR MODEL MERGING

There exist many methods of continual learning that aim to mitigate forgetting of past tasks by constraining training weights using a penalty. This penalty is often used to prevent weights from straying from model weights that perform well on past tasks. Some methods include L1 and L2 penalty, as well as EWC (Kirkpatrick et al., 2017). Typically, these methods add a penalty to an existing loss objective for every gradient step. This becomes computationally expensive as models scale for modern day applications, because for each gradient step, multiple copies of model weights have to be loaded in memory to calculate the penalty (e.g. the initial and currently training model), in addition to potential gradients. However, our work roughly approximates existing continual learning methods with model merging, thereby making them feasible to implement. Specifically, we can show that SFA resembles L2-regression. Consider, starting with  $\theta_o$ , the model trained on the previous task and  $\theta_t$ , the model currently being trained on the new task. Calculating the loss with an L2 penalty takes the form

$$L(\theta_t) = L_{\text{task}}(\theta_t) + \frac{\lambda}{2} \|\theta_t - \theta_o\|^2. \quad (1)$$

Updating the model once using the gradient of this loss results in

$$\theta_{t+1} = \theta_t - \eta(\nabla_{\theta_t} L_{\text{task}} + \lambda(\theta_t - \theta_o)). \quad (2)$$

This can be rewritten as

$$\theta_{t+1} = (1 - \eta\lambda)\theta_t + (\eta\lambda)\theta_o - \eta\nabla_{\theta_t} L_{\text{task}}. \quad (3)$$

Now we can compare this to an extreme case of SFA with averaging occurring after each gradient step. As such, following the setup in Algorithm 1 given some  $T$ , for each gradient step, current model parameters are first updated using only task loss, before being averaged with initial model:

$$\theta_{t+1}^* = \theta_t - \alpha \nabla_{\theta_t} L_{\text{task}} \quad (4)$$

$$\theta_{t+1} = (1 - \beta)\theta_{t+1}^* + \beta(\theta_o). \quad (5)$$

We can combine these 2 steps to get the following form:

$$\theta_{t+1} = (1 - \beta)(\theta_t - \alpha \nabla_{\theta_t} L_{\text{task}}) + \beta(\theta_o). \quad (6)$$

This is equivalent to

$$\theta_{t+1} = (1 - \beta)\theta_t + (\beta)\theta_o - \alpha \nabla_{\theta_t} L_{\text{task}}(1 - \beta). \quad (7)$$

As such, Equations 3 and 7 can even be equivalent if  $\beta = \eta\lambda$  and  $\alpha = \frac{\eta}{(1-\eta\lambda)}$ . While in practice, SFA is averaged infrequently, rather than after every gradient step to offer a computational advantage, this implies that it typically is not equivalent to L2-regression. However, the resemblance between Equations 3 and 7, suggests SFA can be understood as approximating L2-regression. We also offer an empirical example that shows the correlation between L2 distance of the initial and training model in the context of our experimental setup (Appendix A.2), as well as suggest that SFA may have Bayesian motivation because of its similarity to L2-regression (Appendix A.1). Similarly, the EWC penalty can also be approximated as a model merging technique (Appendix A.3). We emphasize these connections to bridge commonly used model merging algorithms with classical continual learning ones.

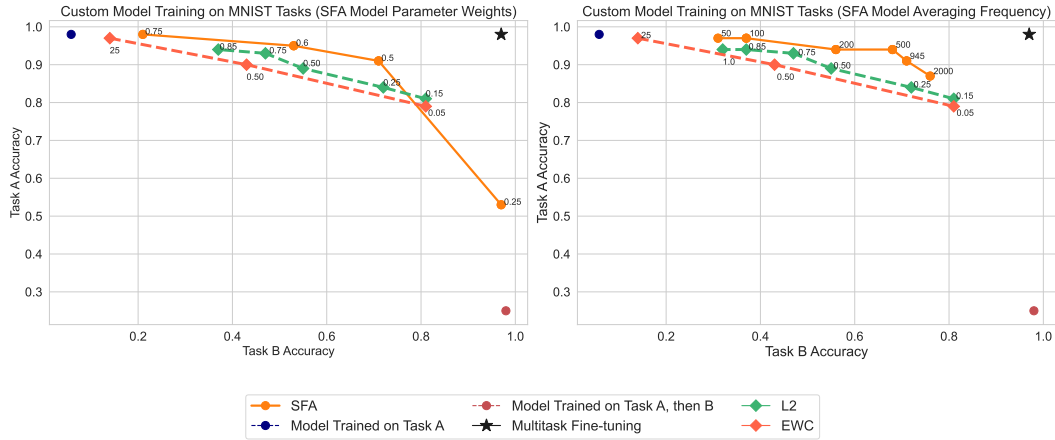


Figure 9: SFA compared against other continual learning methods, where the two tasks (Task A and B) were created by splitting MNIST by label. The accuracy after single-task training, sequential training, and multitask training is also shown. The lines for EWC and L2 are created by varying the coefficient corresponding to each method (and are the same for the left and right plots). **(Left)** visualizes SFA performance under varying  $\beta$  coefficient, which determines how much weight is being placed on the initial model. **(Right)** visualizes SFA with varying averaging frequency

In order to show how our method, SFA, compares with existing continual learning methods, including the one it’s approximating, L2-regression, and EWC, we provide an empirical analysis. In Fig. 9, we train a small, custom neural network on 2 sequential MNIST tasks (Task A and Task B) separated by label introduced in Moriarity (2020). Task A involves labelling the first 5 even numbers, whereas Task B labels the first 5 odd numbers. The blue dot refers to the model after training on Task A, whereas the red dot is additionally trained on Task B without intervention. As such, performance rapidly drops on Task A as the model optimizes for Task B. The solid orange curve refers to SFA where, in Fig. 9 (left) we vary the averaging weight  $\beta$  from Algorithm 1 and in Fig. 9 (right) we vary the frequency of averaging in number of batches. As such, placing a higher  $\beta$  or lower number of batches before averaging results in a model that performs better on Task A, and vice versa. The green dotted line shows L2-regression where  $\lambda$  (weight on L2 penalty) varies, with a higher  $\lambda$  performing better on Task A (and vice versa). Finally, an orange dotted line shows EWC with varying  $\lambda$  (weight on EWC penalty) with a higher weight performing better on Task A (and vice versa). L2-regression outperforms EWC with a better trade off between performance on Task A and B. Interestingly, SFA outperforms both L2-regression and EWC when hyperparameters are optimized. As such, not only is SFA computationally much cheaper due to infrequent averaging steps, but it is also able to outperform imposing a penalty at every step.

---

## 7 CONCLUSION

After showing how quickly a given model can forget learned tasks as it sequentially fine-tunes on new ones, we evaluate methods that aim to mitigate this forgetting. We introduce SFA and show how, by treating a past model as representative of past data, we can use parameter averaging to retain knowledge of past tasks *during* fine-tuning on new ones. We likewise compare SFA to a range of baselines during both classical continual learning, as well as maximal domain shifts. Finally, we provide intuition for why SFA works by showing how it roughly approximates L2-regression, and in turn show how model merging methods can approximate imposing a penalty. The final performance of SFA tends to outperform other merging, as well as penalty methods. Furthermore, it is comparable to continual learning with rehearsal, but has the advantage of not maintaining a data buffer.

---

## 8 ETHICS

This paper presents work whose goal is to advance the field of Machine Learning. There are many potential societal consequences of our work, none which we feel must be specifically highlighted here.

## 9 REPRODUCIBILITY

The tools we use in this project are all open-source. A description of our models and how we fine-tune/evaluate can be found in Appendix A.5. Descriptions of the tasks we fine-tune models on are in Appendix A.6 and Section 4. Finally, our evaluation metrics are in Table 8. We are working on releasing a repository with our specific configurations and SFA code.

---

## ACKNOWLEDGMENTS

This work has been made possible in part by a gift from the Chan Zuckerberg Initiative Foundation to establish the Kempner Institute for the Study of Natural and Artificial Intelligence. Thank you to Ben Deaner and Vincent Dumoulin for reading the draft and offering suggestions.

## REFERENCES

- Bayesian interpretation of ridge regression. 2018. URL <https://statisticaloddsandends.wordpress.com/2018/12/29/bayesian-interpretation-of-ridge-regression/>.
- LawInformedAI/claurette\_tos, 2023. URL [https://huggingface.co/datasets/LawInformedAI/claurette\\_tos](https://huggingface.co/datasets/LawInformedAI/claurette_tos).
- Eden Belouadah, Adrian Popescu, and Ioannis Kanellos. A comprehensive study of class incremental learning algorithms for visual tasks. *Neural Networks*, 135:38–54, 2021. ISSN 0893-6080. doi: <https://doi.org/10.1016/j.neunet.2020.12.003>. URL <https://www.sciencedirect.com/science/article/pii/S0893608020304202>.
- Stella Biderman, Hailey Schoelkopf, Quentin Anthony, Herbie Bradley, Kyle O’Brien, Eric Hallahan, Mohammad Aflah Khan, Shivanshu Purohit, USVSN Sai Prashanth, Edward Raff, Aviya Skowron, Lintang Sutawika, and Oskar van der Wal. Pythia: A suite for analyzing large language models across training and scaling, 2023.
- Raad Bin Tareaf. Tweets Dataset - Top 20 most followed users in Twitter social platform, 2017. URL <https://doi.org/10.7910/DVN/JBXXFD>.
- Lukas Bossard, Matthieu Guillaumin, and Luc Van Gool. Food-101 – mining discriminative components with random forests. In *European Conference on Computer Vision*, 2014.
- Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, Alex Ray, Raul Puri, Gretchen Krueger, Michael Petrov, Heidy Khlaaf, Girish Sastry, Pamela Mishkin, Brooke Chan, Scott Gray, Nick Ryder, Mikhail Pavlov, Alethea Power, Lukasz Kaiser, Mohammad Bavarian, Clemens Winter, Philippe Tillet, Felipe Petroski Such, Dave Cummings, Matthias Plappert, Fotios Chantzis, Elizabeth Barnes, Ariel Herbert-Voss, William Hebgen Guss, Alex Nichol, Alex Paino, Nikolas Tezak, Jie Tang, Igor Babuschkin, Suchir Balaji, Shantanu Jain, William Saunders, Christopher Hesse, Andrew N. Carr, Jan Leike, Josh Achiam, Vedant Misra, Evan Morikawa, Alec Radford, Matthew Knight, Miles Brundage, Mira Murati, Katie Mayer, Peter Welinder, Bob McGrew, Dario Amodei, Sam McCandlish, Ilya Sutskever, and Wojciech Zaremba. Evaluating large language models trained on code, 2021.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. Training verifiers to solve math word problems, 2021.
- Cyprien de Masson d’Autume, Sebastian Ruder, Lingpeng Kong, and Dani Yogatama. Episodic memory in lifelong language learning, 2019.
- Matthias Delange, Rahaf Aljundi, Marc Masana, Sarah Parisot, Xu Jia, Ales Leonardis, Greg Slabaugh, and Tinne Tuytelaars. A continual learning survey: Defying forgetting in classification tasks. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, pp. 1–1, 2021. ISSN 1939-3539. doi: [10.1109/tpami.2021.3057446](https://doi.org/10.1109/tpami.2021.3057446). URL <http://dx.doi.org/10.1109/TPAMI.2021.3057446>.
- Nikita Dhawan, Nicole Mitchell, Zachary Charles, Zachary Garrett, and Gintare Karolina Dziugaite. Leveraging function space aggregation for federated learning at scale. *arXiv preprint arXiv:2311.10291*, 2023.

- 
- Angela Fan, Yacine Jernite, Ethan Perez, David Grangier, Jason Weston, and Michael Auli. ELI5: Long form question answering. In Anna Korhonen, David Traum, and Lluís Màrquez (eds.), *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 3558–3567, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1346. URL <https://aclanthology.org/P19-1346>.
- Leo Gao, Jonathan Tow, Baber Abbasi, Stella Biderman, Sid Black, Anthony DiPofi, Charles Foster, Laurence Golding, Jeffrey Hsu, Alain Le Noac’h, Haonan Li, Kyle McDonell, Niklas Muenighoff, Chris Ociepa, Jason Phang, Laria Reynolds, Hailey Schoelkopf, Aviya Skowron, Lintang Sutawika, Eric Tang, Anish Thite, Ben Wang, Kevin Wang, and Andy Zou. A framework for few-shot language model evaluation, 12 2023. URL <https://zenodo.org/records/10256836>.
- Charles Goddard, Shamane Siriwardhana, Malikeh Ehghaghi, Luke Meyers, Vlad Karpukhin, Brian Benedict, Mark McQuade, and Jacob Solawetz. Arcee’s mergekit: A toolkit for merging large language models. *arXiv preprint arXiv:2403.13257*, 2024.
- David Graff, Junbo Kong, Ke Chen, and Kazuaki Maeda. English gigaword. *Linguistic Data Consortium, Philadelphia*, 4(1):34, 2003.
- Gabriel Ilharco, Marco Tulio Ribeiro, Mitchell Wortsman, Suchin Gururangan, Ludwig Schmidt, Hannaneh Hajishirzi, and Ali Farhadi. Editing models with task arithmetic, 2023.
- Matthew Jagielski, Om Thakkar, Florian Tramer, Daphne Ippolito, Katherine Lee, Nicholas Carlini, Eric Wallace, Shuang Song, Abhradeep Thakurta, Nicolas Papernot, et al. Measuring forgetting of memorized training examples. *arXiv preprint arXiv:2207.00099*, 2022.
- Divyansh Jhunjhunwala, Shiqiang Wang, and Gauri Joshi. Towards a theoretical and practical understanding of one-shot federated learning with fisher information. In *Federated Learning and Analytics in Practice: Algorithms, Systems, Applications, and Opportunities*, 2023.
- Chao Jiang, Mounica Maddela, Wuwei Lan, Yang Zhong, and Wei Xu. Neural CRF model for sentence alignment in text simplification. In Dan Jurafsky, Joyce Chai, Natalie Schluter, and Joel Tetreault (eds.), *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 7943–7960, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.709. URL <https://aclanthology.org/2020.acl-main.709>.
- James Kirkpatrick, Razvan Pascanu, Neil Rabinowitz, Joel Veness, Guillaume Desjardins, Andrei A. Rusu, Kieran Milan, John Quan, Tiago Ramalho, Agnieszka Grabska-Barwinska, Demis Hassabis, Claudia Clopath, Dharshan Kumaran, and Raia Hadsell. Overcoming catastrophic forgetting in neural networks. *Proceedings of the National Academy of Sciences*, 114(13): 3521–3526, March 2017. ISSN 1091-6490. doi: 10.1073/pnas.1611835114. URL <http://dx.doi.org/10.1073/pnas.1611835114>.
- Alex Krizhevsky. Learning multiple layers of features from tiny images. Technical report, 2009.
- Timothee Lesort, Oleksiy Ostapenko, Pau Rodriguez, Md Rifat Arefin, Diganta Misra, Laurent Charlin, and Irina Rish. Challenging common assumptions about catastrophic forgetting. 2022.
- Timothee Lesort, Vincenzo Lomonaco, Andrei Stoian, Davide Maltoni, David Filliat, and Natalia Díaz-Rodríguez. Continual learning for robotics: Definition, framework, learning strategies, opportunities and challenges, 2019.
- Depeng Li, Tianqi Wang, Junwei Chen, Qining Ren, Kenji Kawaguchi, and Zhigang Zeng. Towards continual learning desiderata via hsic-bottleneck orthogonalization and equiangular embedding, 2024.
- Margaret Li, Suchin Gururangan, Tim Dettmers, Mike Lewis, Tim Althoff, Noah A Smith, and Luke Zettlemoyer. Branch-train-merge: Embarrassingly parallel training of expert language models. *arXiv preprint arXiv:2208.03306*, 2022.

- 
- Marco Lippi, Przemysław Pałka, Giuseppe Contissa, Francesca Lagioia, Hans-Wolfgang Micklitz, Giovanni Sartor, and Paolo Torroni. Claudette: an automated detector of potentially unfair clauses in online terms of service. *Artificial Intelligence and Law*, 27(2):117–139, February 2019. ISSN 1572-8382. doi: 10.1007/s10506-019-09243-2. URL <http://dx.doi.org/10.1007/s10506-019-09243-2>.
- David Lopez-Paz and Marc’Aurelio Ranzato. Gradient episodic memory for continual learning, 2022.
- Yun Luo, Zhen Yang, Fandong Meng, Yafu Li, Jie Zhou, and Yue Zhang. An empirical study of catastrophic forgetting in large language models during continual fine-tuning. *arXiv preprint arXiv:2308.08747*, 2023.
- Michael S Matena and Colin Raffel. Merging models with fisher-weighted averaging. In Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho (eds.), *Advances in Neural Information Processing Systems*, 2022. URL [https://openreview.net/forum?id=LSKlp\\_aceOC](https://openreview.net/forum?id=LSKlp_aceOC).
- Decebal Constantin Mocanu, Maria Torres Vega, Eric Eaton, Peter Stone, and Antonio Liotta. Online contrastive divergence with generative replay: Experience replay without storing data, 2016.
- Timo Möller, Anthony Reina, Raghavan Jayakumar, and Malte Pietsch. COVID-QA: A question answering dataset for COVID-19. In Karin Verspoor, Kevin Bretonnel Cohen, Mark Dredze, Emilio Ferrara, Jonathan May, Robert Munro, Cecile Paris, and Byron Wallace (eds.), *Proceedings of the 1st Workshop on NLP for COVID-19 at ACL 2020*, Online, July 2020. Association for Computational Linguistics. URL <https://aclanthology.org/2020.nlpCOVID19-acl.18>.
- Sean Moriarity. Continual learning with elastic weight consolidation in tensorflow 2. 2020.
- Alexandre Ramé, Kartik Ahuja, Jianyu Zhang, Matthieu Cord, Léon Bottou, and David Lopez-Paz. Model ratatouille: Recycling diverse models for out-of-distribution generalization. In *International Conference on Machine Learning*, pp. 28656–28679. PMLR, 2023.
- Sylvestre-Alvise Rebuffi, Alexander Kolesnikov, Georg Sperl, and Christoph H. Lampert. icarl: Incremental classifier and representation learning, 2017.
- Anthony Robins. Catastrophic forgetting, rehearsal and pseudorehearsal. *Connection Science*, 7(2): 123–146, 1995. doi: 10.1080/09540099550039318. URL <https://doi.org/10.1080/09540099550039318>.
- Alexander M. Rush, Sumit Chopra, and Jason Weston. A neural attention model for abstractive sentence summarization. *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, 2015. doi: 10.18653/v1/d15-1044. URL <http://dx.doi.org/10.18653/v1/d15-1044>.
- Victor Sanh, Albert Webson, Colin Raffel, Stephen H. Bach, Lintang Sutawika, Zaid Alyafeai, Antoine Chaffin, Arnaud Stiegler, Teven Le Scao, Arun Raja, Manan Dey, M Saiful Bari, Canwen Xu, Urmish Thakker, Shanya Sharma Sharma, Eliza Szczechla, Taewoon Kim, Gunjan Chhablani, Nihal Nayak, Debajyoti Datta, Jonathan Chang, Mike Tian-Jian Jiang, Han Wang, Matteo Manica, Sheng Shen, Zheng Xin Yong, Harshit Pandey, Rachel Bawden, Thomas Wang, Trishala Neeraj, Jos Rozen, Abheesht Sharma, Andrea Santilli, Thibault Fevry, Jason Alan Fries, Ryan Teehan, Stella Biderman, Leo Gao, Tali Bers, Thomas Wolf, and Alexander M. Rush. Multitask prompted training enables zero-shot task generalization, 2021.
- Thomas Scialom, Tuhin Chakrabarty, and Smaranda Muresan. Fine-tuned language models are continual learners. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pp. 6107–6122, 2022.
- Hanul Shin, Jung Kwon Lee, Jaehong Kim, and Jiwon Kim. Continual learning with deep generative replay, 2017.
- The Mosaic ML Team. composer. <https://github.com/mosaicml/composer/>, 2021.



- 
- Kushal Tirumala, Aram H. Markosyan, Luke Zettlemoyer, and Armen Aghajanyan. Memorization without overfitting: Analyzing the training dynamics of large language models, 2022.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. Llama 2: Open foundation and fine-tuned chat models, 2023.
- Yuxiang Wei, Zhe Wang, Jiawei Liu, Yifeng Ding, and Lingming Zhang. Magicoder: Source code is all you need. *arXiv preprint arXiv:2312.02120*, 2023.
- Mitchell Wortsman, Gabriel Ilharco, Samir Ya Gadre, Rebecca Roelofs, Raphael Gontijo-Lopes, Ari S Morcos, Hongseok Namkoong, Ali Farhadi, Yair Carmon, Simon Kornblith, et al. Model soups: averaging weights of multiple fine-tuned models improves accuracy without increasing inference time. In *International Conference on Machine Learning*, pp. 23965–23998. PMLR, 2022a.
- Mitchell Wortsman, Gabriel Ilharco, Jong Wook Kim, Mike Li, Simon Kornblith, Rebecca Roelofs, Raphael Gontijo-Lopes, Hannaneh Hajishirzi, Ali Farhadi, Hongseok Namkoong, and Ludwig Schmidt. Robust fine-tuning of zero-shot models, 2022b.
- Prateek Yadav, Derek Tam, Leshem Choshen, Colin Raffel, and Mohit Bansal. Ties-merging: Resolving interference when merging models, 2023.
- Longhui Yu, Weisen Jiang, Han Shi, Jincheng Yu, Zhengying Liu, Yu Zhang, James T Kwok, Zhenguo Li, Adrian Weller, and Weiyang Liu. Metamath: Bootstrap your own mathematical questions for large language models. *arXiv preprint arXiv:2309.12284*, 2023.
- Lucia Zheng, Neel Guha, Brandon R. Anderson, Peter Henderson, and Daniel E. Ho. When does pretraining help? assessing self-supervised learning for law and the casehold dataset, 2021.

## A APPENDIX

### A.1 BAYESIAN INTERPRETATION

We have shown that our method approximates, and sometimes is equivalent to minimizing an L2-regression loss during training. Next we use the well known point that L2-regression has a Bayesian Interpretation (bay, 2018) to motivate our method:

Assume that the prior distribution of the ideal model  $\theta_t^*$  for a past and current task is Gaussian with mean the initial model,  $\theta_t^* \sim N(\theta_o, \tau^2 I)$  for some  $\tau$ . Furthermore, assume that the distribution  $y$  given input  $X$ , model weights  $\theta_t^*$ , and a function  $f$  is Gaussian with mean the output of the function given  $X, \theta_t^* : y \sim N(f(X, \theta_t^*), \sigma^2 I)$  As such, the posterior of  $\theta_t^*$  is:

$$p(\theta_t^* | y, X, f) \propto \exp\left[\frac{-1}{2\sigma^2} (y - f(X, \theta_t^*))^T (y - f(X, \theta_t^*)) - \frac{-1}{2\tau^2} (\theta_t^* - \theta_o)^T (\theta_t^* - \theta_o)\right] \quad (8)$$

We can compute the Maximum a Posteriori (MAP) for  $\theta_t^*$ :

$$\hat{\theta}_t^* = \operatorname{argmax}_{\theta_t^*} \exp\left[\frac{-1}{2\sigma^2} (y - f(X, \theta_t^*))^T (y - f(X, \theta_t^*)) - \frac{-1}{2\tau^2} (\theta_t^* - \theta_o)^T (\theta_t^* - \theta_o)\right] \quad (9)$$

$$\hat{\theta}_t^* = \operatorname{argmin}_{\theta_t^*} (y - f(X, \theta_t^*))^T (y - f(X, \theta_t^*)) + \frac{\sigma^2}{\tau^2} (\theta_t^* - \theta_o)^T (\theta_t^* - \theta_o) \quad (10)$$

Set  $\frac{\sigma^2}{\tau^2} = \lambda$

$$\hat{\theta}_t^* = \operatorname{argmin}_{\theta_t^*} (y - f(X, \theta_t^*))^T (y - f(X, \theta_t^*)) + \lambda (\theta_t^* - \theta_o)^T (\theta_t^* - \theta_o) \quad (11)$$

As such, L2-regression tries to solve this Bayesian interpretation (Equation 11). As shown previously, SFA approximates L2-regression. This suggests that SFA may have a Bayesian motivation.

### A.2 L2 DISTANCE AND SFA

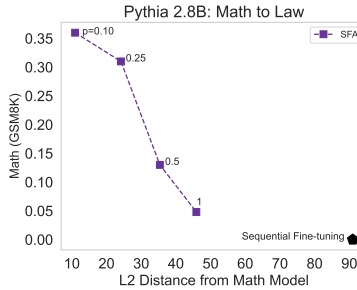


Figure 10: An analysis of the negative correlation between accuracy on Math and the L2 distance of the final model (fine-tuned on Math, then Law) from the original model (fine-tuned on Math only). The fine-tuning on Law is done using SFA with varying values of  $p$  that determine the merging frequency. For reference we also mark sequential fine-tuning which leads to much higher L2 distance due to no merging, and accuracy just above that achieved with SFA merging once at the end of fine-tuning on law ( $p = 1$ ).

To further explore this intuition of SFA and its relation to constraining parameter weights in the context of our experimental setup, we also show how accuracy and L2 distance are correlated when fine-tuning on different language domains. We use the setup described in Fig. 5 where our model first fine-tunes on Math, then Law. As Fig. 10 shows, when proportion of fine-tuning before averaging  $p$  decreases on SFA (purple curve), the L2 distance to the initial Math model decreases, while the accuracy on Math increases. This is in direct contrast to sequential fine-tuning without intervention (black pentagon), because of its much higher L2 distance to the initial model. As such,  $p$  directly relates to L2 distance, as well as performance on previous tasks, because averaging frequency constrains how much model parameters can change from their initial positions. The values for this figure can be found in Table 2.

### A.3 EWC APPROXIMATED BY MODEL MERGING

Consider fine-tuning a model with an EWC penalty (Kirkpatrick et al., 2017) where  $\lambda = 1, j = 1, \dots, |\theta|$

$$L(\theta_t) = L_{\text{task}}(\theta_t) + \sum_j \frac{1}{2} F_o^{(j)} (\theta_t^{(j)} - \theta_o^{(j)})^2 \quad (12)$$

where  $\theta_o$  and  $\theta_t$  are the weights of the initial and fine-tuning model respectively.  $\eta$  is a hyperparameter, and  $F_o$  is a diagonal matrix with the initial model’s Fisher information. Assume that this loss update is split into 2 model updates. First, update model parameters using task loss on current weights:

$$\theta_{t+1}^* = \theta_t - \eta \Delta_{\theta_t} L_{\text{task}} \quad (13)$$

Then, update model parameters using EWC penalty:

$$\theta_{t+1} = (I - \eta F_o) \theta_{t+1}^* + \eta F_o \theta_o \quad (14)$$

Thus, applying the EWC penalty can be understood as model merging weighted by the Fisher information of the initial model. This is reminiscent of Fisher model merging from Matena & Raffel (2022) where merging an initial and fine-tuning model has the form:

$$\theta^{*(j)} = \frac{\lambda_o F_o^{(j)} \theta_o^{(j)} + \lambda_t F_t^{(j)} \theta_t^{(j)}}{\lambda_o F_o^{(j)} + \lambda_t F_t^{(j)}} \quad (15)$$

which can be rewritten as

$$\theta^{*(j)} = \left( 1 - \frac{\lambda_o F_o^{(j)}}{\lambda_o F_o^{(j)} + \lambda_t F_t^{(j)}} \right) \theta_t^{(j)} + \left( \frac{\lambda_o F_o^{(j)}}{\lambda_o F_o^{(j)} + \lambda_t F_t^{(j)}} \right) \theta_o^{(j)}. \quad (16)$$

Unlike the EWC approximation, this uses the Fisher information of both the initial and current model for merging.

### A.4 FORGETTING UNDER SEQUENTIAL FINE-TUNING

We start by confirming that fine-tuning on a sequence of different tasks leads to performance degradation on previously learned tasks. This forgetting phenomenon occurs across different task domains and for different model sizes. In this work, we focus on catastrophic forgetting of capabilities acquired during instruction fine-tuning instead of base pretrained model capabilities. This is because, as we will show, forgetting of skills learned during instruction finetuning can be quite severe and experiments at this scale are more feasible. We fine-tune our models on a sequence of instruction, language generation datasets that test general knowledge to measure forgetting. Specifically, we use Scialom et al. (2022)’s: Text Simplification (Simpl), Inquisitive Question Generation (InqQG), Headline Generation with Constraint (HGen), COVID-fact, Covid QA (CQA), and Twitter Stylometry (TwSt). Many of these tasks incorporate existing datasets which we describe in Appendix A.6. In our first experiments, we fine-tune the T0.3B (3B) and T0pp (11B) models (see Appendix A.5 for model descriptions) on the sequence of tasks described in Section 4 while measuring forgetting on the first task. The results are shown in Fig. 11. The model is first trained on Simpl which leads to a decrease in validation loss shown in blue. Subsequently, the model is trained on a sequence of other tasks; the decrease in validation loss on these tasks is shown in different colors. During this process, we continue to monitor the validation loss on Simpl, displayed in pink. As models fine-tune on new tasks, their performance on Simpl consistently declines as loss increases. This is true at both the 3B and 11B (Fig. 11) model scales, indicating that merely scaling up parameter size does not help mitigate forgetting despite the increased capacity.

But how severe is this forgetting? We quantify this by comparing a model that was trained on and has then forgotten Simpl to a model that has never seen Simpl. In Fig. 12, the pink line shows validation loss on Simpl for a model trained on a sequence of fine-tuning tasks starting with Simpl. As the model learns new tasks, its performance deteriorates. After 2000 steps, the sequentially fine-tuned model’s loss on Simpl is the same order of magnitude as that of the multitask model trained on all tasks except Simpl. Thus if a model that has learned Simpl is finetuned on other tasks for as little as 2000 steps, its performance degrades to that of a model that has never seen Simpl. This indicates significant forgetting, as the model loses the ability to respond to tasks it previously was able to.

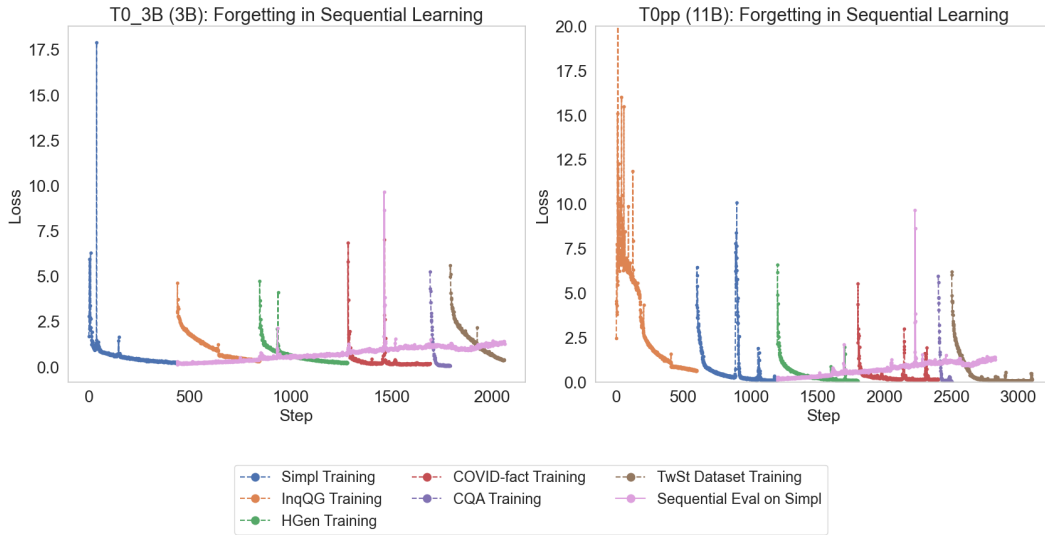


Figure 11: The fine-tuning of T0\_3B (3B) and T0pp (11B) on a stream of language generation tasks. Training loss on each subsequent task decreases as the model learns it, while evaluation loss on Simpl continues to increase, indicating that forgetting is present.

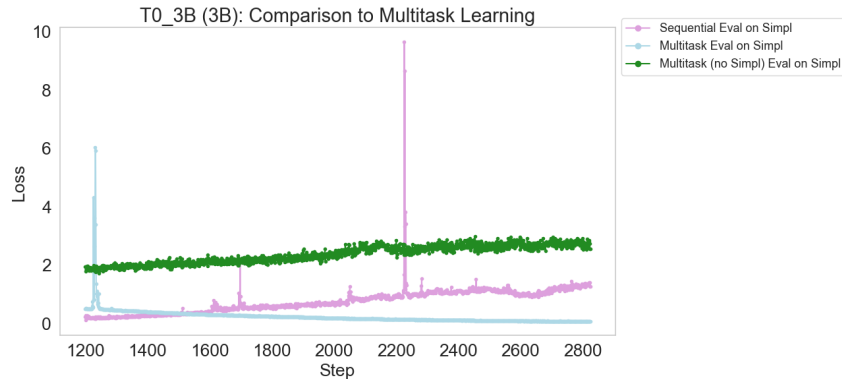


Figure 12: The Simpl loss curve of T0\_3B (3B) from Fig. 11 is compared to a multitask model training on all tasks, and a multitask model training on all tasks except Simpl. As T0\_3B (3B) continues to fine-tune on each new task, the loss on Simpl becomes the same order of magnitude as that of a model that is never exposed to Simpl.

To summarize, we see a consistent trend of forgetting knowledge: as models are sequentially fine-tuned on new tasks, performance on past tasks drops resulting in lower evaluation metrics. This gets worse as more tasks are added and is not mitigated by model scale. We will show that forgetting is even stronger when there is a domain shift between consecutive tasks (e.g. Math to Law or Code).

## A.5 MODELS

We fine-tune a combination of encoder-decoder and decoder only models. Specifically, we measure forgetting on T0\_3B (3B) and T0pp (11B) (Sanh et al., 2021), two models already pretrained and fine-tuned on many tasks, when sequentially fine-tuning on instruction tasks (Appendix A.4). We also fine-tune Pythia (2.8B) (Biderman et al., 2023) and Llama 2 (7B) (Touvron et al., 2023) on tasks from different domains (Math, Law, Code) to measure performance on sequential learning, in addition to a variety of merging techniques (Section 5.3).

Mainly, we use Composer (Team, 2021) for fine-tuning and evaluation. For additional evaluation

Table 1: Results of Pythia (2.8B) models fine-tuning on Math and Law

PYTHIA (2.8B)	CASE_HOLD	TOS	OVERRULING	GSM8K (0-SHOT)
PYTHIA (2.8B) ORIGINAL	0.25	0.85	0.45	0
METAMATHQA	0.19	0.87	0.48	0.38
LAW	0.74	0.93	0.97	0
METAMATHQA, LAW	0.76	0.95	0.59	0
METAMATHQA, LAW (P=1)	0.74	0.88	0.49	0.048
METAMATHQA, LAW (P=1, 0.75 LAW, 0.25 MATH)	0.78	0.93	0.52	0
METAMATHQA, LAW (P=1, 0.25 LAW, 0.75 MATH)	0.42	0.87	0.49	0.27
METAMATHQA, LAW (P=0.5)	0.69	0.89	0.52	0.13
METAMATHQA, LAW (P=0.25)	0.67	0.87	0.49	0.31
METAMATHQA, LAW (P=0.10)	0.59	0.87	0.49	0.36
TASK ARITHMETIC (0.5 LAW, 0.5 MATH)	0.68	0.87	0.55	0
TASK ARITHMETIC (0.75 LAW, 0.25 MATH)	0.73	0.88	0.95	0
TASK ARITHMETIC (0.25 LAW, 0.75 MATH)	0.30	0.87	0.49	0.24
MULTITASK	0.76	0.87	0.58	0.40
CONTINUAL LEARNING (DATA BUFFER 10%)	0.72	0.93	0.54	0.33

Table 2: The L2 distance of Pythia (2.8B) models from previous checkpoints of models fine-tuning on Math and law

PYTHIA (2.8B)	L2-DISTANCE
METAMATHQA, LAW - METAMATHQA	90.99
METAMATHQA, LAW (P=1) - METAMATHQA	45.50
METAMATHQA, LAW (P=0.5) - METAMATHQA	35.38
METAMATHQA, LAW (P=0.25) - METAMATHQA	24.16
METAMATHQA, LAW (P=0.10) - METAMATHQA	10.94
TASK ARITHMETIC (0.5 LAW, 0.5 MATH)- METAMATHQA	101.77
MULTITASK - METAMATHQA	178.96
CONTINUAL LEARNING (DATA BUFFER 10%) - METAMATHQA	82.21

Table 3: Results of Llama 2 (7B) models fine-tuning on Math and law

LLAMA 7B	CASE_HOLD	TOS	OVERRULING	GSM8K (0-SHOT)
LLAMA 2 (7B) ORIGINAL	0.32	0.13	0.49	0
METAMATHQA	0.21	0.38	0.49	0.42
LAW	0.81	0.51	0.94	0
METAMATHQA, LAW	0.64,	0.86	0.93	0
METAMATHQA, LAW (P=1)	0.61	0.59	0.90	0.0015
METAMATHQA, LAW (P=1, 0.75 LAW, 0.25 MATH)	0.64	0.83	0.94	0
METAMATHQA, LAW (P=1, 0.25 LAW, 0.75 MATH)	0.55	0.16	0.79	0.096
METAMATHQA, LAW (P=0.75)	0.53	0.13	0.97	0
METAMATHQA, LAW (P=0.5)	0.50	0.13	0.90	0.12
METAMATHQA, LAW (P=0.25)	0.53	0.13	0.95	0.46
METAMATHQA, LAW (P=0.17)	0.48	0.13	0.63	0.48
TASK ARITHMETIC (0.5 LAW, 0.5 MATH)	0.68	0.13	0.96	0
TASK ARITHMETIC (0.75 LAW, 0.25 MATH)	0.79	0.18	0.97	0
TASK ARITHMETIC (0.25 LAW, 0.75 MATH)	0.44	0.13	0.56	0
TIES	0.37	0.13	0.61	0.014
MULTITASK	0.86	0.27	0.97	0.54
CONTINUAL LEARNING (DATA BUFFER 10%)	0.46	0.13	0.96	0.49

Table 4: Results of Qwen2.5 (1.5B) models fine-tuning on Math and law

QWEN2.5 1.5B	CASE_HOLD	TOS	OVERRULING	GSM8K (0-SHOT)
QWEN2.5 (1.5B) ORIGINAL	0.47	0.28	0.90	0
METAMATHQA	0.26	0.19	0.69	0.60
LAW	0.77	0.91	0.95	0
METAMATHQA, LAW	0.78,	0.92	0.94	0
METAMATHQA, LAW (P=1)	0.81	0.88	0.93	0.01
METAMATHQA, LAW (P=0.5)	0.77	0.89	0.94	0.12
METAMATHQA, LAW (P=0.25)	0.79	0.89	0.94	0.35
TASK ARITHMETIC	0.77	0.88	0.96	0
TIES	0.57	0.88	0.94	0
MULTITASK	0.83	0.90	0.96	0.59
CONTINUAL LEARNING (DATA BUFFER 5%)	0.78	0.93	0.93	0.41
CONTINUAL LEARNING (DATA BUFFER 10%)	0.79	0.93	0.95	0.51

Table 5: Results of Pythia (2.8B) models fine-tuning on Math and code

PYTHIA (2.8B)	HUMANEval (5-SHOT)	GSM8K (0-SHOT)
ORIGINAL PYTHIA (2.8B)	0.074	0
METAMATHQA	0.0	0.38
MAGICODER-EVOL-INSTRUCT-110K	0.15	0
METAMATHQA, MAGICODER-EVOL-INSTRUCT-110K	0.13	0.01
METAMATHQA, MAGICODER-EVOL-INSTRUCT-110K (P=1)	0.06	0.33
METAMATHQA, MAGICODER-EVOL-INSTRUCT-110K (P=1, 0.3 MATH, 0.7 CODE)	0.11	0.22
METAMATHQA, MAGICODER-EVOL-INSTRUCT-110K (P=1, 0.6 MATH, 0.4 CODE)	0.037	0.34
METAMATHQA, MAGICODER-EVOL-INSTRUCT-110K (P=1, 0.7 MATH, 0.3 CODE)	0.018	0.38
METAMATHQA, MAGICODER-EVOL-INSTRUCT-110K (P=0.5)	0.061	0.33
METAMATHQA, MAGICODER-EVOL-INSTRUCT-110K (P=0.25)	0.038	0.35
TASK ARITHMETIC (0.5 CODE, 0.5 MATH)	0.049	0.21
TASK ARITHMETIC (0.75 CODE, 0.25 MATH)	0.14	0
TASK ARITHMETIC (0.25 CODE, 0.75 MATH)	0	0.36
MULTITASK	0.13	0.35
CONTINUAL LEARNING (DATA BUFFER 10%)	0	0.32

Table 6: Results of Llama 2 (7B) models fine-tuning on Math and code

LLAMA 2 (7B)	HUMANEval (5-SHOT)	GSM8K (0-SHOT)
LLAMA 2 (7B) ORIGINAL	0.15	0
METAMATHQA	0	0.55
MAGICODER-EVOL-INSTRUCT-110K	0.35	0
MAGICODER-EVOL-INSTRUCT-110K, METAMATHQA	0.046	0.54
MAGICODER-EVOL-INSTRUCT-110K, METAMATHQA (P=1)	0.18	0.49
MAGICODER-EVOL-INSTRUCT-110K, METAMATHQA (P=0.75)	0.22	0.41
MAGICODER-EVOL-INSTRUCT-110K, METAMATHQA (P=0.5)	0.17	0.44
MAGICODER-EVOL-INSTRUCT-110K, METAMATHQA (P=0.25)	0.22	0.36
TASK ARITHMETIC	0.19	0.44
TIES	0.27	0.090
MULTITASK	0.09	0.40

Table 7: Results of Pythia (2.8B) models fine-tuning on Math, Law and Code for 2 orders

PYTHIA (2.8B)	CASE_HOLD	TOS	OVERRULING
PYTHIA (2.8B) ORIGINAL	0.25	0.85	0.45
METAMATHQA	0.19	0.87	0.48
LAW	0.74	0.93	0.97
MAGICODER-EVOL-INSTRUCT-110K	0.22	0.28	0.52
METAMATHQA, LAW, MAGICODER-EVOL-INSTRUCT-110K	0.30	0.87	0.51
METAMATHQA, LAW, MAGICODER-EVOL-INSTRUCT-110K (P=1)	0.50	0.88	0.59
METAMATHQA, LAW, MAGICODER-EVOL-INSTRUCT-110K (P=0.5)	0.55	0.88	0.57
METAMATHQA, LAW, MAGICODER-EVOL-INSTRUCT-110K (P=0.25)	0.57	0.88	0.67
METAMATHQA, MAGICODER-EVOL-INSTRUCT-110K, LAW	0.73	0.93	0.49
METAMATHQA, MAGICODER-EVOL-INSTRUCT-110K, LAW (P=1)	0.75	0.87	0.60
METAMATHQA, MAGICODER-EVOL-INSTRUCT-110K, LAW (P=0.5)	0.70	0.88	0.49
METAMATHQA, MAGICODER-EVOL-INSTRUCT-110K, LAW (P=0.25)	0.68	0.88	0.51
TASK ARITHMETIC (0.33 MATH, 0.33 LAW, 0.33 CODE)	0.63	0.87	0.88
MULTITASK	0.80	0.88	0.93
CONTINUAL LEARNING (METAMATHQA, MAGICODER-EVOL-INSTRUCT-110K, LAW) (DATA BUFFER 10%)	0.75	0.89	0.49
CONTINUAL LEARNING (METAMATHQA, LAW, MAGICODER-EVOL-INSTRUCT-110K) (DATA BUFFER 10%)	0.69	0.89	0.56

PYTHIA (2.8B)	GSM8K (0-SHOT)	HUMANEval (5-SHOT)
PYTHIA (2.8B) ORIGINAL	0	0.0
METAMATHQA	0.38	0
LAW	0	0
MAGICODER-EVOL-INSTRUCT-110K	0	0.15
METAMATHQA, LAW, MAGICODER-EVOL-INSTRUCT-110K	0.01	0.14
METAMATHQA, LAW, MAGICODER-EVOL-INSTRUCT-110K (P=1)	0.34	0.068
METAMATHQA, LAW, MAGICODER-EVOL-INSTRUCT-110K (P=0.5)	0.37	0.051
METAMATHQA, LAW, MAGICODER-EVOL-INSTRUCT-110K (P=0.25)	0.39	0.055
METAMATHQA, MAGICODER-EVOL-INSTRUCT-110K, LAW	0.0	0.00
METAMATHQA, MAGICODER-EVOL-INSTRUCT-110K, LAW (P=1)	0.011	0
METAMATHQA, MAGICODER-EVOL-INSTRUCT-110K, LAW (P=0.5)	0.054	0
METAMATHQA, MAGICODER-EVOL-INSTRUCT-110K, LAW (P=0.25)	0.30	0.0012
TASK ARITHMETIC (0.33 MATH, 0.33 LAW, 0.33 CODE)	0	0.01
MULTITASK	0.38	0.22
CONTINUAL LEARNING (METAMATHQA, MAGICODER-EVOL-INSTRUCT-110K, LAW) (DATA BUFFER 10%)	0.30	0.029
CONTINUAL LEARNING (METAMATHQA, LAW, MAGICODER-EVOL-INSTRUCT-110K) (DATA BUFFER 10%)	0.30	0.15

Table 8: Evaluation metrics for each task and domain used in our work.

TASK/DOMAIN	EVAL METRIC
FOOD-101	FOOD-101 HOLDOUT SET
CIFAR-100	CIFAR-100 HOLDOUT SET
TEXT SIMPLIFICATION (SIMPL)	TEXT SIMPLIFICATION (SIMPL) HOLDOUT SET
INQUISITIVE QUESTION GENERATION (INQGG)	INQUISITIVE QUESTION GENERATION (INQGG) HOLDOUT SET
TWITTER STYLOMETRY (TWST)	TWITTER STYLOMETRY (TWST) HOLDOUT SET
HEADLINE GENERATION WITH CONSTRAINT (HGEN)	HEADLINE GENERATION WITH CONSTRAINT (HGEN) HOLDOUT SET
COVID-FACT	COVID-FACT HOLDOUT SET
COVID QA (CQA)	COVID QA (CQA) HOLDOUT SET
LAW	CASEHOLD, ToS, OVERRULING HOLDOUT SETS
MATH	GSM8K (COBBE ET AL., 2021)
CODE	HUMANEVAL (CHEN ET AL., 2021)

metrics, we also use Language Model Evaluation Harness (Gao et al., 2023). Finally, we create some model merging baselines using mergekit (Goddard et al., 2024).

#### A.6 INSTRUCTION DATASETS

We use language generation tasks described in (Scialom et al., 2022) to measure forgetting. These tasks are based on pre-existing datasets that we also reference here: Text Simplification (Simpl) (Wiki-Auto (Jiang et al., 2020)), Inquisitive Question Generation (InqQG) (Eli5 (Fan et al., 2019)), Headline Generation with Constraint (HGen) (Gigaword (Graff et al., 2003; Rush et al., 2015)), Covid QA (CQA) (COVID-QA (Möller et al., 2020)), and Twitter Stylometry (TwSt) (Tweets Dataset (Bin Tareaf, 2017)).

Note: We retrieve the data for COVID-fact from (Scialom et al., 2022)’s existing codebase. We reference it using (Scialom et al., 2022) due to a lack of other citation in the paper.