Comprehensive Metapath-based Heterogeneous Graph Transformer for Gene-Disease Association Prediction

Wentao Cui^{1,2,3}, Shoubo Li^{1,2}, Chen Fang^{2,4}, Qingqing Long^{1,2}, Chengrui Wang¹,

Xuezhi Wang^{1,2,3*} and Yuanchun Zhou^{1,2,3}

¹ Computer Network Information Center, Chinese Academy of Sciences, China

² University of Chinese Academy of Sciences, China

³ Hangzhou Institute for Advanced Study, University of Chinese Academy of Sciences, China

⁴ State Key Laboratory of Stem Cell and Reproductive Biology, Institute of Zoology, Chinese Academy of Sciences, China

{cuiwentao, sbli, qqlong, crwang, wxz, zyc}@cnic.cn, fangchen23@ioz.ac.cn

Abstract-Discovering gene-disease associations is crucial for understanding disease mechanisms, yet identifying these associations remains challenging due to the time and cost of biological experiments. Computational methods are increasingly vital for efficient and scalable gene-disease association prediction. Graph-based learning models, which leverage node features and network relationships, are commonly employed for biomolecular predictions. However, existing methods often struggle to effectively integrate node features, heterogeneous structures, and semantic information. To address these challenges, we propose COmprehensive MEtapath-based heterogeneous graph Transformer(COMET) for predicting gene-disease associations. COMET integrates diverse datasets to construct comprehensive heterogeneous networks, initializing node features with BioGPT. We define seven Metapaths and utilize a transformer framework to aggregate Metapath instances, capturing global contexts and long-distance dependencies. Through intra- and inter-metapath aggregation using attention mechanisms, COMET fuses latent vectors from multiple Metapaths to enhance GDA prediction accuracy. Our method demonstrates superior robustness compared to state-of-the-art approaches. Ablation studies and visualizations validate COMET's effectiveness, providing valuable insights for advancing human health research.

Index Terms—gene-disease associations, transformer, graph representation learning, meta-path, heterogeneous graph

I. INTRODUCTION

Identifying gene-disease associations (GDAs) is crucial in biomedicine for understanding disease mechanisms [2]. Traditional methods like genetic linkage analysis [14] and genomewide association studies (GWAS) [12] are valuable but can be costly and time-consuming. To expedite the discovery of disease-related genes, new computational models are needed to predict pathogenic genes from existing data [3]. Current approaches for predicting GDAs fall into three main categories: machine learning-based methods, deep learning-based methods, and graph representation learning-based methods.

Machine learning-based methods use algorithms like support vector machines (SVM) and random forests to predict GDAs. Xu et al. [24] employed SVM to rank prostate cancer genes, while Chen et al. [4] introduced RFMDA, a random forest-based model. However, these approaches often require manual feature extraction, which can be time-consuming and potentially biased. In contrast, **deep learning-based methods** automatically extract high-level features from raw data, enhancing GDA prediction accuracy and robustness. For instance, RENET [22] uses text mining to analyze sentence correlations for GDAs, and PheSeq [26] applies Bayesian deep learning to integrate phenotype data. Despite their potential, these methods require substantial training data and often lack interpretability due to their black-box nature.

With the rapid growth of modern biotechnology, extensive biological network data has driven the development of network biology and network medicine [13]. Researchers are integrating diverse datasets to build heterogeneous biological networks for predicting GDA using graph representation learning based-methods. It is formulated as a link prediction task, where relationships between diseases and genes can be learned from different dimensions of heterogeneous networks. Graph representation learning methods can be categorized into three types based on how they obtain node representations. The first type is **random walk-based algorithms** on graphs. Valdeolivas et al. [19] constructed gene-protein and diseasedisease networks, using a restart random walk method to predict disease-related candidate genes. However, the node sequences generated by random walks start locally and do not directly leverage the constructed graph's global structural information. As a result, they may fail to capture global consistency patterns and features comprehensively, thereby limiting their ability to fully express complex relationships between nodes. In contrast, the second type involves GNNbased methods that leverage global consistency to model complex relationships within the graph. Rao et al. [16] incorporated pathway and phenotype data into disease gene networks using graph convolution methods to identify potential disease genes. Xiang et al. [23] utilized phenotype and gene

^{*} Corresponding author.

ontology (GO) information to build a heterogeneous network, applying fast network embedding to predict disease-related genes. However, these methods do not effectively leverage prior biological knowledge about known GDA. The third type involves **metapath-based methods**, which construct metapaths based on prior knowledge to obtain node representations. Renet utilized five meta paths in the heterogeneous diseasegene network, employing singular value decomposition to create low-dimensional feature matrices for diseases and genes, facilitating disease-gene association prediction [22]. Despite recent advances in gene-disease association prediction, several limitations persist:

- Limited exploration in GDA mining. Current methods [10], [25] do not fully capture complex relationships in bioinformatics networks, potentially overlooking important gene–disease associations critical for understanding diseases and developing treatments.
- **Ignoring long-distance structural correlations.** Most approaches use mean pooling, which smooths out differences among distant yet functionally similar genes. This can hide important interactions, reducing the accuracy and reliability of predictions.
- Neglect of characteristic node information. Many methods initialize gene and disease nodes with random or generic values, missing key characteristics that shape biological context and impact disease association predictions.

To tackle the aforementioned limitations, we proposed a **CO**mprehensive **ME**tapath-based heterogeneous graph Transformer (COMET) for GDAs. Firstly, we construct heterogeneous networks for diseases and genes using diverse types of data including diseases, genes, ontologies, and phenotypes. We initialize node vectors in the graph using BioGPT [11], a domain-specific language representation model pretrained on large-scale biomedical corpora. Next, we define seven Metapaths and employ transformer [19] to aggregate Metapath instances, capturing global contexts to model longdistance dependencies. Finally, we conduct intra-metapath aggregation and inter-metapath using the attention mechanism to fuse latent vectors obtained from multiple metapaths into final node embeddings for gene-disease association prediction.

Overall, our contributions to this work can be summarized as follows:

- We propose COMET, a framework designed to capture comprehensive structural and semantic information across diseases, genes, ontologies, and phenotypes for GDA prediction.
- To the best of our knowledge, we are the first to explore the pre-trained language models for predicting GDA.
- COMET introduces a transformer to message passing between the nodes of different types, and adopts a twolevel attention mechanism to uncover crucial biological relationships, which outperforms various state-of-the-art gene-disease prediction methods.

II. MATERIALS AND METHODS

In this section, we will introduce the proposed COMET. The overall model consists of three parts: heterogeneous network construction, gene and disease representation learning and GDA prediction. More information can be found in Figure. 1.

A. Preliminary

In this section, we give formal definitions of some important terminologies related to heterogeneous graphs.

Definition 1 (*Heterogeneous Graph*). A heterogeneous graph G = (V, E) is defined as a graph associated with a node type mapping function $\varphi : V \to A$ and an edge type mapping function $\psi : E \to B$. A and B denote the predefined sets of node types and edge types, respectively, with |A| + |B| > 2. **Definition 2** (*Metapath*). A metapath R is defined as a path in the form of

$$A_1 \xrightarrow{C_1} A_2 \xrightarrow{C_2} \cdots \xrightarrow{C_l} A_{l+1}$$

(abbreviated as $C_1C_2 \cdots C_{l+1}$), which describes a composite relation $C = C_1 \circ C_2 \circ \cdots \circ C_l$ between node types A_1 and A_{l+1} , where \circ denotes the composition operator on relations. **Definition 3** (*Metapath Instance*). Given a metapath P of a heterogeneous graph, a metapath instance $R_{(i,j)}$ of R is defined as a node sequence in the graph G following the schema defined by R with start node i and end node j.

Definition 4 (*Metapath-based Neighbors*). Given a metapath R of a heterogeneous graph, the metapath-based neighbors N_v^R of a node v is defined as the set of nodes that connect with node v via metapath instances of R. A neighbor connected by two different metapath instances is regarded as two different nodes in N_v^R . Note that N_v^R includes v itself if R is symmetric.

B. Heterogeneous network construction


The pathogenesis of diseases is influenced by factors like environment and genetics [9]. To understand the complex relationships between genes and diseases, we integrate diverse data sources—phenotype, protein, and RNA—into a heterogeneous network model using five resources: HumanNet [5], Human Phenotype Ontology (HPO) [17], Gene Ontology (GO) [1], Disease Ontology (DO) [18], and DisGeNet [15].

Gene Heterogeneous Network. We construct a gene heterogeneous network by combining gene–gene, gene–GO, and gene–HPO associations. Gene–gene interactions, derived from HumanNet, are represented by a similarity score $S(g_i, g_j)$:

$$S_{\text{gene-gene}}[i][j] = \begin{cases} 1, & \text{if } e_{i,j} \text{ exists in HumanNet} \\ 0, & \text{otherwise} \end{cases}$$

The gene–GO and gene–HPO networks are similarly constructed using data from GO and HPO, respectively, resulting in a network with five interaction types: gene–gene, gene–HPO, gene–GO, HPO–gene, and GO–gene.

Disease Heterogeneous Network. We use gene–disease associations from DisGeNet and disease–disease associations from Disease Ontology to form a disease network with

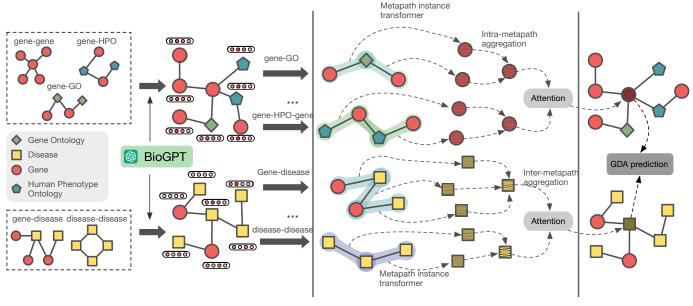

(A) Heterogeneous network construction

(B) Gene and disease representation learning

(C) GDA prediction

Fig. 1: Overview of the proposed COMET.(A) Heterogeneous network construction:We constructed heterogeneous graphs of genes and diseases from five subnetworks and initialized the node feature using BioGPT. (B) Gene and disease representation learning: We define seven Metapaths and use a transformer to aggregate them, and then we employ intra- and inter-metapath aggregation with the attention mechanism to fuse latent vectors. (C) GDA prediction:

three types of interactions: disease-disease, disease-gene, and gene-disease.

Node Feature Initialization. Node features for genes and diseases are initialized with BioGPT [11], which provides contextual representations based on gene and disease names. This initialization improves the model's ability to capture complex relationships and enhance predictions of gene–disease associations.

C. Gene and disease representation learning

Metapath instance transformer. We construct seven types of metapath instances: gene-gene (g-g), gene-HPO-gene(gh-g), gene-Go-gene (g-o-g), gene-disease (g-d), diseasedisease(d-d), gene-disease-gene (g-d-g) and disease-genedisease (d-g-d). In bioinformatics, heterogeneous networks pose a challenge as different node types have distinct feature spaces. To address this, we transform features of various node types into a unified latent vector space, obtaining the initial embedding \mathbf{h}_i for each node *i*. Capturing a node's hidden features involves modeling its context through metapath instances. A metapath instance-level transformer maps these sequences into continuous representations and averages them to obtain the metapath instance embedding. Specifically, the transformer converts each metapath instance sequence $R_k(i, j)$ into the metapath instance embedding $\mathbf{Z}_{R_k(i,j)}$ as follows:

$$\mathbf{Z}_{R_k(i,j)} = \text{Transformer}\left(\left\| (\mathbf{h}_t \mid \forall t \in R_k(i,j)) \right), \quad (1) \right.$$

The metapath transformer encoder features multi-head attention and a feed-forward network. It processes queries, keys, and values in parallel, incorporating residual connections, normalization, and ReLU activation. Node positions within metapaths offer key information for predicting gene-disease associations, particularly distant nodes with pharmacological relevance. By combining multi-head self-attention with positional embeddings, it captures long-range dependencies and improves gene-disease prediction performance significantly.

Intra-metapath aggregation The target node *i* possesses multiple instances of certain types of metapaths. The idea of semantic aggregation for single-pathway semantics is to aggregate the semantic information of multiple instances of the same metapath type into the corresponding target node. Inspired by the work of Wang et al. [20], we adopt a self-attention mechanism to aggregate the metapath instance information of the target node. In a heterogeneous network, the target node *i* has multiple instances of certain types of metapaths, but the importance of different metapath instances varies. Therefore, we introduce the weight α_{ij}^R for the target node *i*, which measures the importance of the target node *i*. The weight w_{ij}^R of metapath instance $R_k(i, j)$ and the weight w_{ii}^R of the target node *i* can be described as follows:

$$w_{ij}^{R_k} = \text{Attention}(h'_i; Z'_{R_k(i,j)}; R_k), \tag{2}$$

$$w_{ii}^{R_k} = \text{Attention}(h_i'; R_k), \tag{3}$$

in this paper, we use the softmax function to normalize the weight coefficients. For $i \in N_v^R$, the normalized weight coefficients α_{ij}^R and α_{ii}^R can be uniformly calculated:

$$\alpha_{im}^{R_k} = \frac{\exp(w_{im}^{R_k})}{\sum_{n \in N_i^R} \exp(w_{in}^{R_k})},\tag{4}$$

this process ensures that the weights of different metapath instances and the target node are properly weighted for subsequent aggregation.

To address the high variance issue in network data, we extends single-semantic attention to multi-head single-semantic attention to achieve stable model training. Given a metapath type R_k and a target node *i*, the embedding $Z_i^{R_k}$ of the target node under specific metapath R_k semantics can be learned by repeating *H* attention calculations and concatenating the embedding results, as shown in:

$$Z_{i}^{R_{k}} = \prod_{h=1}^{H} \sigma \left(\sum_{j \in N_{i}^{R_{k}-i}} \left[\alpha_{ij}^{R_{k}} \right]_{h} \cdot h_{R_{k}(j)}^{'} + \left[\alpha_{ii}^{R_{k}} \right]_{h} \cdot h_{i}^{'} \right),$$

$$(5)$$

here, $\sigma(\cdot)$ denotes the activation function, $\left[\alpha_{ij}^{R_k}\right]_h$ represents the normalized importance of node *i* for metapath instance $R_k(i,j)$ at attention head *H*, and $\left[\alpha_{ii}^{R_k}\right]_h$ represents the normalized importance of central node *i* at attention head *H*.

Inter-metapath aggregation. Different metapath types have distinct bioinformatics meanings. To learn the semantic representation of a target node across multiple metapath types, semantic aggregation of multiple metapath types is required. Similar to intra-metapath aggregation, different metapath types also have varying importance for the central node. For example, different metapath types, such as d-d and d-g-d, exhibit significant differences in the importance of embedding for disease nodes. The differences in metapath types need to be distinguished and reflected in the multi-metapath semantic aggregation of the target node. Therefore, after aggregating node and edge information for each metapath type, this paper employs a multi-metapath semantic attention layer to combine semantic information from all metapath types. This paper introduces the weight β_{R_k} for each metapath type R_k to describe the differences in importance for the target node *i*:

$$\beta_{R_k} = \operatorname{Attention}(Z_i^{R_k}), \tag{6}$$

then, the normalized weight coefficients β_{R_k} are obtained through the softmax function.

$$\beta_{R_k} = \frac{\exp(w_{R_k})}{\sum_{R_t \in \mathcal{R}} \exp(w_{R_t})},\tag{7}$$

given the target node *i*, its final representation vector Z_i can be obtained using the aggregated representation vectors $Z_i^{R_k}$ and normalized weight coefficients β_{R_k} :

$$Z_i = \sum_{R_k \in \mathcal{R}} \beta_{R_k} \cdot Z_i^{R_k}, \tag{8}$$

here, \mathcal{R} represents the set of all metapaths.

D. GDA prediction

After obtaining the low-dimensional multi-semantic representations of genes and diseases, we project the node embeddings into a space with node similarity measures for the downstream gene-disease prediction task. Given the gene embedding z_g and the disease embedding z_d , we optimize the model weights by minimizing the following loss function through negative sampling:

$$L = -\sum_{(d,g)\in\mathcal{D}} \log \sigma(\mathbf{z}_d^T \cdot \mathbf{z}_g) - \sum_{(d',g')\in\mathcal{D}^-} \log \sigma(-\mathbf{z}_{d'}^T \cdot \mathbf{z}_{g'}),$$
(9)

where $\sigma(\cdot)$ is the sigmoid function, $\sigma(\mathbf{z}_d^T \cdot \mathbf{z}_g)$ is the probability that gene g interacts with disease d, \mathcal{D} is the set of observed node pairs, and \mathcal{D}^- (the complement of \mathcal{D}) is the set of nonexisting gene-disease pairs sampled from all unobserved genedisease pairs.

III. EXPERIMENT

A. Datasets

In this section, we detail our dataset, constructed from five public sources: HumanNet, GO, HPO, DO, and Dis-GeNet, as outlined in Table I. HumanNet provides a human gene network, including 18,462 genes and their functional associations through protein-protein interactions, mRNA coexpression, and genomic context. GO (Gene Ontology) describes gene functions with unique identifiers, linking genes to multiple terms, aiding in reconstructing the gene heterogeneous network. HPO (Human Phenotype Ontology) outlines relationships between phenotypic abnormalities in diseases, offering insights into gene functions and genetic networks. Disease Ontology (DO) provides a standardized classification and clear definitions for diseases, which we use to calculate disease similarities. DisGeNet compiles information on genes and mutations associated with diseases from various sources, supporting research on disease genes and validation of predictions.

TABLE I: Statistics of datasets

Database	# Nodes	# Edges	Relations
HumanNet	18,462	1,051,038	Gene-Gene
Gene Ontology	19,661	290,214	Gene-Go terms
Human Phenotype Ontology	16,870	182,144	Gene-Phenotype
Disease Ontology	6,453	13,444	Disease-Disease
DisGeNet	21,354	86,297	Gene-Disease

B. Baselines

To evaluate the efficacy of our approach, we benchmark it against two random walk-based approaches including HerGePred [25], dgn2vec [10], two GCN-based methods including GCN [6], HOGCN [7], and two metapath-based methods including HNEEM [21], DGP-PGTN [8]. The detailed introduction to each method can be found as follows.

- HerGePred uses random walks for low-dimensional representations of diseases and genes in heterogeneous networks, facilitating association predictions.
- **dgn2vec** employs a random walk algorithm to generate node embeddings, focusing on disease-gene association prediction.
- GCN applies a semi-supervised Graph Convolutional Network (GCN) directly to disease and gene heterogeneous networks using the original adjacency matrix.
- **HOGCN** collects neighbor nodes at varying distances to capture informative representations for disease-gene association predictions.
- **HNEEM** extracts node features from multiple heterogeneous networks, concatenating disease and gene vectors for disease-gene pair representations, and uses random forests for classification.
- **DGP-PGTN** integrates diverse data sources and utilizes a parallel graph transformer network to predict GDAs, focusing on capturing latent interactions.

For all the baselines mentioned above, we conduct experiments on the same dataset with the same parameters as their experimental settings. We compare COMET with baselines using evaluation measures including AUC, AUPR, precision, recall, and F1-measure, with AUC and AUPR as primary metrics for overall performance evaluation, while employing Youden's index to determine the optimal threshold for calculating accuracy, precision, recall, and F1-score.

IV. RESULTS

A. The results of gene-disease prediction

In our experimental evaluation, we conducted a comprehensive comparison of several state-of-the-art models, aiming to assess their effectiveness in predicting GDAs. As shown in table II, Metapath2vec and HerGePred, based on random walk methods, achieved the poorest performance because they cannot effectively capture the complex relationships present in heterogeneous networks. HNEEM and DGP-PGTN performed better due to the use of pre-defined Metapaths based on prior knowledge, which helps in obtaining better node representations. Our method, COMET, achieved the best performance. This is primarily because we extracted more Metapath information based on biological prior knowledge and used transformers to capture more comprehensive and context-aware associations. This enhanced semantic aggregation capability allows COMET to outperform other models across various evaluation metrics. Overall, these results affirm the effectiveness of our proposed approach, showcasing its ability to provide more accurate and reliable predictions for gene-disease associations compared to existing state-of-the-art methods.

B. Ablation Study

COMET's strong performance stems from three key innovations: heterogeneous graph node initialization, metapath design based on prior knowledge, and a metapath-based hierarchical transformer and attention network. We performed ablation

TABLE II: Comparison Experiment Results

Model	Precision	Recall	F1	AUC	AUPR
dgn2vec	0.8504	$0.8454 \\ 0.8747$	0.8445	0.8799	0.8428
HerGePred	0.8749		0.8746	0.9291	0.9015
GCN	0.9112	0.9119	0.9120	0.9417	0.8991
HOGCN	0.9447	0.9406	0.9426	0.9582	0.9014
HNEEM	0.9468	0.9469	0.9468	0.9647	0.9273
DGP-PGTN	0.9527	0.9483	0.9505	0.9650	0.9315
COMET	0.9693	0.9679	0.9682	0.9811	0.9648

studies to assess how these components contribute to overall performance.

Effects of different node feature. To assess the impact of different node feature initialization methods on COMET's performance, we compared random initialization with BioGPT. As shown in Table III, initializing node features with BioBERT significantly enhances performance across all metrics compared to random initialization. BioGPT captures relevant semantic information from the biomedical domain, aiding more accurate GDA predictions. Therefore, using BioBERT for node feature initialization improves the model's ability to learn meaningful representations, leading to better GDA prediction performance.

Effects of different metapath type. To assess the importance of different metapath types in semantic information aggregation, we conducted an ablation study on the disease-gene heterogeneous network. The COMET model was trained using metapaths g-g, g-d-g, g-o-g, d-g-d, g-d, g-h-g, and d-d. As shown in Table III, using all metapaths significantly improved performance. Removing the G-D-G and D-G-D metapaths resulted in the largest decline in AUROC and AUPR, as these paths contain essential association information between diseases and genes. The removal of G-O-G and D-S-D also caused a 1% to 2% performance drop, indicating that including GO and disease nodes enhances the model's semantic aggregation capability.

Effects of different metapath instance encoders. In COMET, we use a transformer encoder as a metapath instance aggregator. To evaluate its impact, we conducted ablation experiments with Average pooling, Max-Pooling, Bi-LSTM, Bi-GRU, and the Transformer aggregator. As shown in Table III, the transformer aggregator achieved the best performance. Bi-LSTM and Bi-GRU also performed well, as they capture sequential features effectively. In contrast, Average and Max-Pooling led to information loss due to their simple pooling approach.

C. Conclusion

In this paper, we propose COMET, a comprehensive metapath-based heterogeneous graph transformer for GDAs prediction. We leverage diverse sources of gene and diseaserelated information to construct a heterogeneous bioinformatics network. Node features in this network are initialized using pretrained models from the biomedical domain. To capture rich

TABLE III: Results of Ablation Study

Ablation	Model	Precision	Recall	F1	AUC	AUPR
Node feature	Random	0.9331	0.9283	0.9307	0.9503	0.9340
Metapath Instance encoders	Average	0.9427	0.9325	0.9376	0.9514	0.9331
	Max-Pooling	0.9312	0.9378	0.9345	0.9465	0.9337
	Bi-LSTM	0.9298	0.9332	0.9315	0.9441	0.9334
	Bi-GRU	0.9550	0.9578	0.9564	0.9583	0.9510
Metapath Type	w/o g-g	0.9295	0.9385	0.9339	0.9431	0.9354
	w/o g-d-g	0.9398	0.9327	0.9362	0.9442	0.9345
	w/o g-o-g	0.9334	0.9350	0.9342	0.9524	0.9450
	w/o d-g-d	0.9281	0.9335	0.9308	0.9437	0.9325
	w/o d-d	0.9410	0.9315	0.9362	0.9446	0.9348
	w/o g-h-g	0.9469	0.9447	0.9458	0.9511	0.9434
	w/o g-d	0.9289	0.9297	0.9293	0.9508	0.943
Full model	COMET	0.9693	0.9679	0.9682	0.9811	0.9670

structural and semantic information, we employ a transformer encoder and a two-level attention mechanism. This approach enables us to derive low-dimensional vector representations of genes and diseases for association prediction. We validate COMET's effectiveness and robustness by comparing it against six state-of-the-art methods using a constructed meta-path dataset for gene-disease prediction. Results show significant performance improvements with COMET. Ablation studies analyze the contributions of different meta-path types and components within COMET to prediction performance. COMET offers a powerful and robust tool for advancing genedisease association prediction in life sciences. Future work will focus on expanding COMET by integrating additional heterogeneous attribute information and validating prediction results through wet-lab experiments.

ACKNOWLEDGMENT

This study is supported by grants from the Strategic Priority Research Program of the Chinese Academy of Sciences XDA0460101, the Strategic Priority Research Program of the Chinese Academy of Sciences XDB38030300.

REFERENCES

- [1] Michael Ashburner, Catherine A Ball, Judith A Blake, David Botstein, Heather Butler, J Michael Cherry, Allan P Davis, Kara Dolinski, Selina S Dwight, Janan T Eppig, et al. Gene ontology: tool for the unification of biology. *Nature genetics*, 25(1):25–29, 2000.
- [2] Albert-László Barabási, Natali Gulbahce, and Joseph Loscalzo. Network medicine: a network-based approach to human disease. *Nature reviews* genetics, 12(1):56–68, 2011.
- [3] Xing Chen, Chenggang Clarence Yan, Xiaotian Zhang, Zhaohui Li, Lixi Deng, Yongdong Zhang, and Qionghai Dai. Rbmmmda: predicting multiple types of disease-microrna associations. *Scientific reports*, 5(1):13877, 2015.
- [4] Xing Chen, Chun-Chun Wang, Jun Yin, and Zhu-Hong You. Novel human mirna-disease association inference based on random forest. *Molecular Therapy-Nucleic Acids*, 13:568–579, 2018.
- [5] Sohyun Hwang, Chan Yeong Kim, Sunmo Yang, Eiru Kim, Traver Hart, Edward M Marcotte, and Insuk Lee. Humannet v2: human gene networks for disease research. *Nucleic acids research*, 47(D1):D573– D580, 2019.
- [6] Thomas N Kipf and Max Welling. Semi-supervised classification with graph convolutional networks. arXiv preprint arXiv:1609.02907, 2016.
- [7] KC Kishan, Rui Li, Feng Cui, and Anne R Haake. Predicting biomedical interactions with higher-order graph convolutional networks. *IEEE/ACM transactions on computational biology and bioinformatics*, 19(2):676– 687, 2021.
- [8] Yang Li, Zihou Guo, Keqi Wang, Xin Gao, and Guohua Wang. Endto-end interpretable disease–gene association prediction. *Briefings in Bioinformatics*, 24(3):bbad118, 2023.

- [9] Yang Li, Wang Keqi, and Guohua Wang. Evaluating disease similarity based on gene network reconstruction and representation. *Bioinformatics*, 37(20):3579–3587, 2021.
- [10] Yang Liu, Yuchen Guo, Xiaoyan Liu, Chunyu Wang, and Maozu Guo. Pathogenic gene prediction based on network embedding. *Briefings in Bioinformatics*, 22(4):bbaa353, 2021.
- [11] Renqian Luo, Liai Sun, Yingce Xia, Tao Qin, Sheng Zhang, Hoifung Poon, and Tie-Yan Liu. Biogpt: generative pre-trained transformer for biomedical text generation and mining. *Briefings in bioinformatics*, 23(6):bbac409, 2022.
- [12] Teri A Manolio. Genomewide association studies and assessment of the risk of disease. *New England journal of medicine*, 363(2):166–176, 2010.
- [13] Yajie Meng, Changcheng Lu, Min Jin, Junlin Xu, Xiangxiang Zeng, and Jialiang Yang. A weighted bilinear neural collaborative filtering approach for drug repositioning. *Briefings in bioinformatics*, 23(2):bbab581, 2022.
- [14] Jurg Ott, Jing Wang, and Suzanne M Leal. Genetic linkage analysis in the age of whole-genome sequencing. *Nature Reviews Genetics*, 16(5):275–284, 2015.
- [15] Janet Piñero, Àlex Bravo, Núria Queralt-Rosinach, Alba Gutiérrez-Sacristán, Jordi Deu-Pons, Emilio Centeno, Javier García-García, Ferran Sanz, and Laura I Furlong. Disgenet: a comprehensive platform integrating information on human disease-associated genes and variants. *Nucleic acids research*, page gkw943, 2016.
- [16] Aditya Rao, Saipradeep Vg, Thomas Joseph, Sujatha Kotte, Naveen Sivadasan, and Rajgopal Srinivasan. Phenotype-driven gene prioritization for rare diseases using graph convolution on heterogeneous networks. *BMC medical genomics*, 11:1–12, 2018.
- [17] Peter N Robinson, Sebastian Köhler, Sebastian Bauer, Dominik Seelow, Denise Horn, and Stefan Mundlos. The human phenotype ontology: a tool for annotating and analyzing human hereditary disease. *The American Journal of Human Genetics*, 83(5):610–615, 2008.
- [18] Lynn Marie Schriml, Cesar Arze, Suvarna Nadendla, Yu-Wei Wayne Chang, Mark Mazaitis, Victor Felix, Gang Feng, and Warren Alden Kibbe. Disease ontology: a backbone for disease semantic integration. *Nucleic acids research*, 40(D1):D940–D946, 2012.
- [19] Alberto Valdeolivas, Laurent Tichit, Claire Navarro, Sophie Perrin, Gaelle Odelin, Nicolas Levy, Pierre Cau, Elisabeth Remy, and Anaïs Baudot. Random walk with restart on multiplex and heterogeneous biological networks. *Bioinformatics*, 35(3):497–505, 2019.
- [20] Xiao Wang, Houye Ji, Chuan Shi, Bai Wang, Yanfang Ye, Peng Cui, and Philip S Yu. Heterogeneous graph attention network. In *The world wide web conference*, pages 2022–2032, 2019.
- [21] Xiaochan Wang, Yuchong Gong, Jing Yi, and Wen Zhang. Predicting gene-disease associations from the heterogeneous network using graph embedding. In 2019 IEEE international conference on bioinformatics and biomedicine (BIBM), pages 504–511. IEEE, 2019.
- [22] Ye Wu, Ruibang Luo, Henry CM Leung, Hing-Fung Ting, and Tak-Wah Lam. Renet: A deep learning approach for extracting genedisease associations from literature. In *Research in Computational Molecular Biology: 23rd Annual International Conference, RECOMB* 2019, Washington, DC, USA, May 5-8, 2019, Proceedings 23, pages 272–284. Springer, 2019.
- [23] Ju Xiang, Ning-Rui Zhang, Jia-Shuai Zhang, Xiao-Yi Lv, and Min Li. Prgefne: predicting disease-related genes by fast network embedding. *Methods*, 192:3–12, 2021.
- [24] Juan Xu, Chuan-Xing Li, Jun-Ying Lv, Yong-Sheng Li, Yun Xiao, Ting-Ting Shao, Xiao Huo, Xiang Li, Yan Zou, Qing-Lian Han, et al. Prioritizing candidate disease mirnas by topological features in the mirna target–dysregulated network: Case study of prostate cancer. *Molecular cancer therapeutics*, 10(10):1857–1866, 2011.
- [25] Kuo Yang, Ruyu Wang, Guangming Liu, Zixin Shu, Ning Wang, Runshun Zhang, Jian Yu, Jianxin Chen, Xiaodong Li, and Xuezhong Zhou. Hergepred: heterogeneous network embedding representation for disease gene prediction. *IEEE journal of biomedical and health informatics*, 23(4):1805–1815, 2018.
- [26] Xinzhi Yao, Sizhuo Ouyang, Yulong Lian, Qianqian Peng, Xionghui Zhou, Feier Huang, Xuehai Hu, Feng Shi, and Jingbo Xia. Pheseq, a bayesian deep learning model to enhance and interpret the gene-disease association studies. *Genome Medicine*, 16(1):56, 2024.