LARGE LANGUAGE MODELS FOR TEXT CLASSIFICATION: CASE STUDY AND COMPREHENSIVE REVIEW

Arina Kostina, Marios D. Dikaiakos, Dimosthenis Stefanidis, George Pallis

Computer Science, University of Cyprus
Nicosia, Cyprus
akosti02@ucy.ac.cy, mdd@cs.ucy.ac.cy, dstefa02@ucy.ac.cy, gpallis@cs.ucy.ac.cy

ABSTRACT

Unlocking the potential of Large Language Models (LLMs) in data classification represents a promising frontier in natural language processing. In this work, we evaluate the performance of different LLMs in comparison with state-of-the-art deep-learning and machine-learning models, in two different classification scenarios: i) the classification of employees' working locations based on job reviews posted online (multiclass classification), and 2) the classification of news articles as fake or not (binary classification). Our analysis encompasses a diverse range of language models differentiating in size, quantization, and architecture. We explore the impact of alternative prompting techniques and evaluate the models based on the weighted F1-score. Also, we examine the trade-off between performance (F1-score) and time (inference response time) for each language model to provide a more nuanced understanding of each model's practical applicability. Our work reveals significant variations in model responses based on the prompting strategies. We find that LLMs, particularly Llama3 and GPT-4, can outperform traditional methods in complex classification tasks, such as multiclass classification, though at the cost of longer inference times. In contrast, simpler ML models offer better performance-to-time trade-offs in simpler binary classification tasks.

Keywords Large Language Model (LLM) · Text Classification · Natural Language Processing · Prompt Engineering

1 Introduction

Text Classification is a fundamental task in natural language processing (NLP) that involves categorizing text into predefined labels or classes based on its content. This process is crucial for knowledge discovery and decision-making, as it allows us to extract valuable information from the data. As digital data continues to grow exponentially, the importance of effective text classification methods has become more prominent.

In parallel with this growth, advancements in deep learning and artificial intelligence have propelled Pre-Trained Language Models (PLM) to the forefront of NLP research. Among these PLMs, Large Language Models (LLMs) stand out for their impressive performance and significant promise in various tasks. Their deep learning architecture enables them to identify detailed and complex feature representations, which has led to substantial improvements in performance and adaptability in various NLP tasks, making them a focal point of interest in both - academic research and practical applications for data analysis [1].

The multilayered abilities of LLMs prompted us to investigate their effectiveness in addressing two complex classification tasks: (i) fake news detection, and (ii) employee review classification based on the working location. With these classification scenarios we compare multiple LLMs with ML and state-of-the-art models, and identify prompting strategies that can enhance LLM performance. In our analysis, we examine multiple dimensions, including models' performance, and time efficiency, exploring how model size, quantization, and prompting techniques can potentially impact the results. Specifically, we make the following contributions:

1. **Comparison of LLMs and traditional classification methods:** We provide a detailed evaluation of multiple LLMs, ML algorithms, and a state-of-the-art model on two text classification scenarios. This study seeks to

- determine whether the LLMs' ability to "understand" and process language contextually gives an advantage over traditional ML and state-of-the-art models in real-world classification challenges. Our analysis considers multiple aspects, using the performance-time trade-off, and weighted F1-score as key metrics.
- 2. **Identification of effective prompting techniques:** We analyze how different prompting strategies influence LLM performance, showing that upfront optimization can improve outcomes. We investigate the disparities in the influence of different prompting techniques on the models, analyzing the potential causes of differences in models' behavior.

The findings of this investigation enhance our understanding of LLM capabilities and their applicability in real-world scenarios.

2 Related Work

Recent advances in deep learning have significantly transformed the field, introducing powerful models based on neural networks such as Convolutional Neural Networks (CNNs) [2, 3, 4], Recurrent Neural Networks (RNNs) [5], and Transformer architectures [6]. Models like GPT (Generative Pre-trained Transformer) [7], BERT [8], and their variants, have profoundly impacted the field of NLP. The rapid advancements of LLMs have sparked numerous questions about their capabilities and applicability in real-world scenarios. Notably, there is a gap in the research in comparing and discussing LLM capabilities specifically in the task of text classification. An extensive overview of recent work in text classification using LLMs, covering a range of aspects, like models' training datasets, sizes, cost, and performance can be found in [9]. We build on this work by incorporating various prompting techniques to explore the full potential of LLMs in this task. Several studies cover details of the PML architectures and PLM-driven NLP techniques [10], while other cover a wide range of deep learning models [11] or compare advanced PLMs with traditional methods [12] in the task of text classification, including studies specifically targeting fake news detection [13]. However, these studies offer limited to no evaluation of LLMs and Transformer-based architectures. We expand the analysis by comparing traditional classification methods with LLMs and use a custom evaluation dataset for further assessment. Recent work in [14] discusses LLM performance improvements in sentiment analysis tasks, while also delving in prompt engineering analysis, comparing zero-shot and few-shot settings. Other studies focus on specific model families, like GPT, and evaluate their performance on a range of NLP tasks, such as Emotion Recognition Sentiment Analysis, and question-answering tasks [15, 16].

While many researchers experiment with LLMs to identify their most effective use cases, others focus on developing innovative techniques that enhance the LLM performance. Prompting techniques, for instance, have gained significant attention as a means to improve LLM performance without the need for down-stream fine-tuning. Researches have proposed different techniques, such as Chain-of-Thought (CoT) [17], Tree-of-Thought - an extension of the CoT which explores multiple reasoning paths over thoughts [18], Few-shot learning [19], Emotional Prompting [20], and other methods to obtain better performance. Recent research [21] explores the potential LLMs in text classification tasks, introducing a prompting strategy that improves LLMs' reasoning abilities. A study in [22] offers a detailed overview of the prompting techniques and their specific applications. In contrast to these studies, our work provides an evaluation of various prompting techniques across multiple LLMs, specifically within the context of text classification tasks. We analyze how these techniques influence LLM reasoning and task understanding, providing insights into the potential causes of the performance variability across different prompts.

3 Background on LLM and ML Models

3.1 Large Language Models

Large Language Models (LLMs) are advanced artificial intelligence models, typically based on transformer architectures [6], trained on vast amounts of text data to understand and generate human-like text. LLMs have the capability to process and comprehend natural language in a wide range of contexts, enabling them to perform tasks such as language translation, text summarization, sentiment analysis, question answering, and more. On a broader scale, LLMs can be divided into 3 major categories based on their architecture:

- 1. **Encoder-only** models, like BERT [8], which consist only of transformer encoder layers. During the training, with the Masked Language Modeling (MLM) technique, some input tokens are replaced with a masking token. The encoder layers use self-attention to generate contextual embeddings for each token from both directions. Then, based on these embeddings of the surrounding text the model is asked to predict the original tokens.
- 2. **Decoder-only** models, like GPT [23], which consist of transformer decoder layers. The layers use self-attention to process the input sequentially and predict the next tokens based on the previous ones.

3. **Encoder-decoder** models, like T5 [24]. The encoder processes the entire input sequence and converts it into an encoded representation. Then the decoder takes this representation and reconstructs it step-by-step, using both the encoded context and previously generated tokens, into the output sequence.

Models used for text generation, have key hyperparameters that can be tuned to control output quality, creativity, and coherence. These include 1) Temperature, which controls randomness — lower values (e.g., 0.2) make more predictable outputs, while higher values (e.g., 1.0 or above) increase creativity; 2) Top-k Sampling, which limits the model's word choices to the top-k most likely options; and 3) Max Tokens, which sets the maximum number of tokens the model can generate. Moreover, as awareness of the ecological impacts of high computational resource use grows, techniques like quantization have emerged. Quantization techniques lower the precision of model weights and activations from floating-point (32-bit or 16-bit) to lower-bit formats (8-bit or 4-bit). This reduces model size, computation time, memory usage, and energy consumption. Some of the common quantization techniques are AWQ [25], GPTQ [26], QuaRot [27], Atom [28].

In our experiments, we compare decoder-only models with RoBERTa, an encoder-only baseline for text classification, as encoder-decoder models are conventionally used for sequence generation tasks. The LLMs used for the experiments differed in several key aspects: model size, foundational architecture, quantization status, and deployment method (local installation versus API-accessible services such as Groq and GPT). Specifically, the models for our experiments are the following:

3.1.1 Decoder-Only Models

- 1. Mistral-7B OpenOrca (**Mistral-OO**). Mistral-OO is an instruct-tuned Mistral-7B model [29], trained on the dataset reproduced from the Microsoft Research team's OpenOrca Paper [30, 31, 32].
- 2. OpenHermes 2.5 Mistral-7B (**Mistral-OH**). Mistral-OH is a fine-tuned Mistral-7B model, trained on GPT-4 generated data and various open datasets [33].
- 3. zephyr-7B-beta (**Zephyr**). Zephyr is a fine-tuned, intent-aligned version of Mistral-7B, meaning that it has an improved ability to grasp onto the user's preference and intent. To achieve this objective, the methodology involved Direct Preference Optimization (DPO) training [34] and additional fine-tuning of the Mistral-7B model [35].
- 4. Nous-Hermes Llama2 13B (**Llama2**). Llama 2 [36] is a family of pre-trained LLM models that were developed by researchers at Meta. The particular model is additionally fine-tuned on high-quality GPT-4 datasets [37].
- 5. Xwin-MLewd 13B v0.2 (**Xwin**). Xwin utilizes the Llama2 model as its foundation, which was additionally exposed to various training data and underwent Reinforcement Learning (RL) training [38] [39].
- 6. Gemma 2 9B (**Gemma**). Gemma was developed by Google as a family of lightweight, state-of-the-art open models, suitable for environments with limited resources due to their small size [40].
- 7. Meta Llama 3 70B (**Llama 3 70B**); and
- 8. Meta Llama 3 8B (**Llama 3 8B**) are both part of the Llama 3 family models, which are auto-regressive language models developed by Meta that use an optimized transformer architecture [41].
- 9. Mixtral 8x7B (**Mistral**). The Mixtral-8x7B Large Language Model (LLM) is an open-source, state-of-the-art language model [29].
- 10. gpt-4-turbo (**Gpt4-turbo**). The Gpt4-turbo is a high-intelligence model developed by the OpenAI [42].

3.1.2 Encoder-Only Model

In this experiment, we utilized the state-of-the-art model RoBERTa (Robustly optimized BERT approach) [43], which builds upon BERT's architecture [8] with modifications to training objectives, hyperparameters, and training data. The implementation details and the hyperparameters used for the trainings are discussed further in section 4.1

3.1.3 Prompt Engineering

Prompt engineering is a technique that involves crafting and phrasing instructions in a way that guides the LLMs toward producing the desired outputs [44]. We construct our prompts in Zero-Shot and Few-shot settings, where:

1. **Zero-shot** (**ZS**), is a method that gives only the base instruction of the task to the model with no additional attempt to evoke reasoning, so the model relies solely on its pre-existing knowledge to produce a response [23].

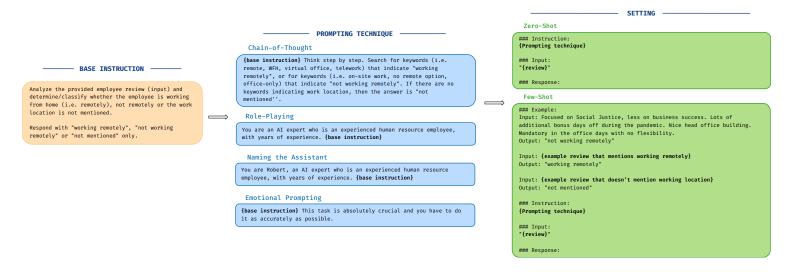


Figure 1: Example Prompt Construction: The base instruction combines with a prompting technique, then is wrapped in a ZS or FS setting, which forms the final prompt sent to the LLM.

2. **Few-shot** (**FS**), is a method that apart from the base instruction, additionally provides the model with a small number of training examples [19].

We used the following prompt engineering techniques:

- 1. Chain of Thought (CoT), a technique that explains the logic and the reasoning behind a correct response, providing a step-by-step thought process to the model [17].
- 2. **Emotional prompting (EP)**, which is based on appending a psychological phrase to the end of an existing prompt, that acts as emotional stimuli for the LLM [20].
- 3. **Role-playing (RP)**, also referred to as the "Persona" theme, a strategy that provides the persona's description in the prompt to make the LLMs adopt a specific character and take on specific perspectives to solve the given task [44].
- 4. Naming the Assistant (NA), a practice of giving a nickname to the LLM. In our experiment, this technique is used in combination with the Role-playing technique by appending the name to the beginning of the instruction.

All prompting techniques are constructed upon the same base instruction. This ensures that we have an objective evaluation of how each one of the prompting techniques affects the output.

3.2 Traditional ML Models

For our experiments we use 2 Machine Learning (ML) models:

Naive Bayes (NB), which is an ML algorithm based on Bayes' theorem, commonly used in classification tasks, and **Support Vector Machines (SVM)**, which is a supervised ML algorithm that is often used in classification tasks, due to its ability to handle high-dimensional data effectively [45].

Further implementation details are also discussed in section 4.1.

4 Experimental Setup

4.1 Configurations and Implementation

Hardware: The Groq and OpenAI models were accessed with an API key, with their computational resources managed externally. Specifically, Groq models (Mistral, Llama3 70B, Llama3 8B, Gemma) run on the Groq Language Processing Unit (LPU), hardware designed for AI inference [46]. For Gpt4-turbo, details on model architecture, and hardware are not disclosed by OpenAI. The five open-source AWQ-quantized [25] models (Llama2, Xwin, Mistral-OO, Mistral-OH, Zephyr) were sourced from HuggingFace [47] - a platform that provides an open-source library of a wide range

of pre-trained models - and loaded on NVIDIA Tesla T4 GPU in Google Colaboratory [48]. RoBERTa and ML algorithms were also trained on the T4 GPU in Google Colaboratory.

LLM Hyperparameters: To eliminate randomness, and ensure precise responses solely based on the input, the temperature for the models was set to 0. We request outputs only once per prompt, as a previous small-scale experiment showed that with temperature 0, repeating the questions consistently gave identical results.

RoBERTa Training: We use Transformers library [49] to access pre-trained models and PyTorch library [50] for fine-tuning. The process involved loading the pre-trained RoBERTa model and modifying the output layer to match our specific classification task. Then, we trained the model on our annotated dataset, using the Adam [51] optimizer, which adapts learning rates for each parameter. We apply 5-fold cross-validation, and set the learning rate to 1e-5 and a batch size to 32, which are commonly used values that balance computational efficiency and learning stability.

NB and SVM Training: We use the scikit-learn library [52], which provides the NB and SVM classifiers, different ML tools, and text feature extraction methods. For each model our pipeline utilizes TfidfVectorizer [52], optimized via GridSearchCV [52], which uses grid search with 5-fold cross-validation to choose the optimal combinations of parameters. Feature extraction varies by dataset and model, aiming to optimize model performance for each task: FakeNewsNet uses up to 5000 (for SVM) and 10000 (for NB) features, while Employee Reviews uses up to 10000 (for SVM) and 5000 (for NB) features.

LLM Querying: For the HuggingFace models we use the vLLM library, which improves the throughput by batching multiple requests together [53]. Groq does not have an inference for request batching, so the prompts were sent sequentially. The free Groq plan comes with certain API request rate limitations (e.g. Llama3 70B allows 6,000 tokens per minute), which introduced additional delay in obtaining the results. GPT4-turbo model was accessed with batched requests, which optimized the inference costs and handled rate-limiting constraints, which is ideal for high-volume dataset classification.

4.2 Datasets

Our experiments focus on 2 classification scenarios: binary and multiclass classification (3 classes), for which we utilize two distinct datasets. To select the samples that form our datasets we excluded records exceeding 4,096 tokens, to ensure compatibility with all the models' input constraints, and the records that we reserved as examples for the Few-Shot setting. The same datasets were used to train the RoBERTa model, and the NB and SVM classifiers.

4.2.1 FakeNewsNet Dataset

This is a widely recognized and publicly available dataset [54, 55, 56] used for a binary classification task, where the model must categorize each article as either "fake" or "real". The challenge lies in the model's ability to detect subtle clues such as sensationalist language, exaggerated claims, or unverifiable facts, which helps to distinguish real news from fake. Additionally, fake articles may selectively use facts alongside misleading or false information, complicating the classification process. For our analysis, we selected a total of 214 reviews from the 'politifact_fake.csv' and 'politifact_real.csv' files.

4.2.2 Employee Reviews Dataset

This dataset consists of 1,000 employee company reviews sourced from a platform where current and former employees provide anonymous feedback on companies and their management. To ensure balanced classes, we first filtered a larger pool of reviews using location-related keywords, then, based on the keyword groupings we randomly selected an equal amount (~33%) of reviews for each class, and manually annotated the reviews into the categories. This presents a multi-class classification task, where the model categorizes the reviews into three classes: "working remotely," "not working remotely," or "not mentioned". This task presents an interesting challenge due to its real-world context, the growing relevance of remote work in modern work environments, and increased complexity compared to binary tasks.

 Metric
 Employee Reviews
 FakeNewsNet

 Total Records
 1,000
 214

 Working Remotely 37% (372)
 Fake 50% (107)

 Not Working Remotely 28% (279)
 Real 50% (107)

 Not Mentioned 35% (349)
 593 tokens

Table 1: Datasets Details

4.3 Evaluation Metrics

4.3.1 Weighted F1-score

We use weighted F1-score as our main metric, which is a balanced measure between precision and recall, and also considers the proportion for each class, giving more weight to classes with more instances. This ensures proportional performance evaluation across all classes, crucial in our experiment due to a slight class imbalance in the Employee Reviews dataset. For the RoBERTa and ML models, as the datasets are relatively small (214 and 1000 records), we utilize k-fold cross-validation, mitigating the risk of overfitting that can occur with small datasets, and use the mean weighted F1-score across folds as our primary metric.

4.3.2 Time

We consider the F1 score - time trade-off from the user's perspective. We measure the total response time for Hugging Face's and API-accessed LLMs, and inference time on Google Colab's T4 GPU for the RoBERTa and traditional ML models.

5 Result Analysis

5.1 Model Comparison

Prompting Method	Llama3 70B	Llama3 8B	Gemma2	Mistral	Mistral OO	Mistral OH	Zephyr	Llama2	Xwin	Gpt4-turbo	RoBERTa	Naive Bayes	SVM
FakeNewsNet													
1) ZS	92.5	89.2	82.8	84.5	83.1	81.6	76.8	78.3	47.9	81.7	93.0	90.0	88.8
2) ZS+COT	91.1	78.4	80.4	80.8	83.6	84.6	84.6	77.8	78.0	81.7			
3) ZS+EM	92.0	89.2	83.3	84.1	84.1	79.1	75.9	79.4	45.9	83.2			
4) ZS+RP+NA	94.4	88.3	82.8	84.1	84.5	78.8	78.0	53.3	48.7	82.2			
5) ZS+COT+EM	91.1	86.4	82.3	86.0	83.6	85.5	85.0	80.8	76.2	81.7			
6) ZS+RP	93.0	87.4	83.3	83.2	83.5	77.4	75.4	47.8	46.9	82.7			
7) FS	92.5	86.4	81.4	80.8	81.2	81.0	75.6	52.1	60.9	82.3			
8) FS+RP+NA	92.5	86.0	82.8	85.5	79.7	80.7	71.2	41.1	55.8	83.7			
9) ZS+COT+RP+NA	93.0	80.8	81.3	85.0	83.6	82.2	79.9	74.8	70.1	82.2			
10) FS+COT+RP+NA	93.6	83.2	81.7	87.8	81.9	81.4	81.1	44.1	69.1	82.8			
Employee Reviews													
1) ZS	83.9	81.9	82.8	83.3	83.4	71.6	61.1	50.7	52.2	80.2	83.8	61.3	68.7
2) ZS+COT	86.9	83.7	80.4	81.4	85.8	81.9	76.3	53.0	64.1	85.2			
3) ZS+EM	83.4	82.0	83.3	83.4	84.4	72.9	62.2	47.8	55.7	81.6			
4) ZS+RP+NA	81.7	81.0	82.8	82.5	81.2	70.9	60.3	52.6	56.5	81.8			
5) ZS+COT+EM	86.9	84.0	82.3	81.1	86.4	81.1	75.7	48.4	62.3	85.6			
6) ZS+RP	80.7	82.1	83.3	82.1	81.0	72.6	60.1	52.3	52.0	82.5			
7) FS	84.1	81.8	84.2	80.9	80.4	75.0	70.5	55.8	70.7	84.7			
8) FS+RP+NA	82.2	82.1	84.1	81.3	80.0	72.8	71.2	52.7	71.0	85.7			
9) ZS+COT+RP+NA	87.1	83.2	81.5	80.7	85.9	81.1	75.9	54.0	64.3	84.8			
10) FS+COT+RP+NA	86.8	84.9	84.7	82.5	81.7	78.5	71.7	62.7	74.2	87.6			

Table 2: F1-Score Results of the Models Across Various Prompting Methods

We observe that for the FakeNewsNet Dataset Llama3 70B achieved the highest F1-score of **94.4%** using the ZS+RP+NA prompt, with its other F1 scores consistently being above 91% across all the prompts. RoBERTa achieved an excellent score of 93.0%, surpassing all the other LLMs and ML models. This peak performance was observed after 7 epochs of training, based on the empirical evaluation over 10 epochs. The ML models NB and SVM also demonstrated competitive performance, achieving 90.0% and 88.8% F1 scores respectively, surpassing all of the LLMs except Llama3 70B and 8B, and RoBERta. Surprisingly, the Gpt4-turbo model, which typically excels in various tasks, was outperformed by 5 models, and struggled on this dataset with its best score being 83.7% using FS+RP+NA prompt. Zephyr, Xwin, and Llama2 showed variable performance, with the first two achieving mid-80s F1 scores, while Llama2 had the worst overall performance.

For the 3-class classification task, Gpt4-turbo achieved the highest F1-score of **87.6%** using the FS+COT+RP+NA prompting method, with Llama3 70B and Mistral OO, falling behind by only 0.5% and 1.2% respectively. Llama3 8B achieved the 2nd highest score, reaching 84.9% with FS+COT+RP+NA prompt. RoBERTa maintained a strong performance with an F1-score of 83.8% achieved after 5 epochs of training, although it is surpassed by 5 LLM models, being closely behind with the highest score difference being 3.7%. Gemma2, similarly to Gpt4-turbo showed improved performance compared to the FakeNewsNet task, with the F1-score reaching 84.9%. Zephyr, Llama2, and Xwin again showed variable performance, with the last two particularly struggling on this task.

5.2 Impact of Prompting methods

For the Employee Reviews dataset, from Figure 5 we can see that by utilizing different prompting techniques, the models can achieve a much higher F1 score, reaching as much as a 22.2% point increase compared with the basic

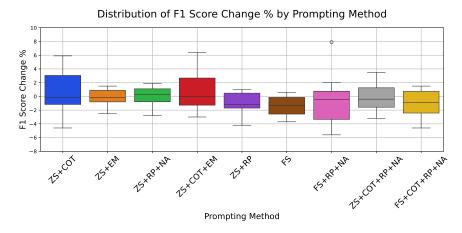


Figure 2: Boxplot of F1 Score % change that Each Prompt Caused Compared to Basic ZS (FakeNewsNet Dataset)

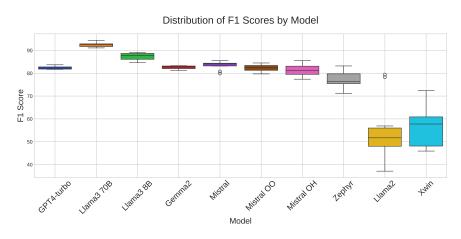


Figure 3: Boxplot of Performance Range for Each Model (FakeNewsNet Dataset)

ZS approach. Specifically, the results demonstrate that CoT is a powerful technique that can improve performance in both - ZS and FS settings. Also, the FS setting, particularly when combined with other prompting techniques, demonstrated a reasonable performance increase across most models, showing that the examples provide additional information and context for the task [19]. For the particular task, the three best prompting techniques appeared to be FS+COT+RP+NA, ZS+COT+RP+NA, and ZS+COT+EM. We observe that the latter method - where we combine multiple techniques, yields better results. However, prompts employing the Naming-the-Assistant (NA) and Role-playing (RP) techniques often reduced performance, resulting in an F1-score inferior even to that of the basic ZS approach. A possible explanation could be the additional challenge of providing accurate results while trying to align with the given persona.

In Figure 2 for the FakeNewsNet dataset, we observe a different behavior compared to the previous classification scenario, with the best techniques being ZS+RP+NA, standard ZS, and ZS+COT+EM. Surprisingly, while most of the prompting techniques led to a decreased performance, the prompt ZS+RP+NA employing the Role-Playing and Naming-the-Assistant techniques, appeared to be the most stable, providing a relatively small but consistent performance increase to most of the models. Also, similarly to the Employee Reviews dataset, prompts employing the CoT technique managed to yield higher performance in some cases (ZS+COT+EM, ZS+COT).

This behavior difference can be attributed to the ambiguity in how LLMs interpret natural language. LLMs may find certain information in prompts irrelevant and distracting, even if it appears essential to humans, which may cause a drop in performance [57]. This is largely because there is no established theoretical explanation of how LLMs interpret natural language, which makes their internal decision-making process somewhat opaque [58]. Table 2 shows differences in model performance across the prompting techniques, indicating that prompts are not universally effective. While some models benefit from specific phrasing, others do not, emphasizing the lack of generalizability in prompt design across different LLMs [59, 60, 61].

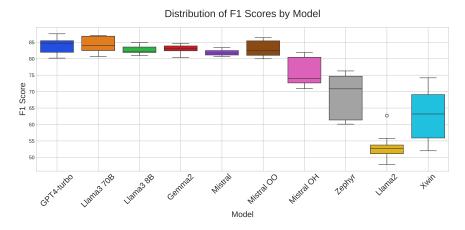


Figure 4: Boxplot of Performance Range for Each Model (Employee Reviews Dataset)

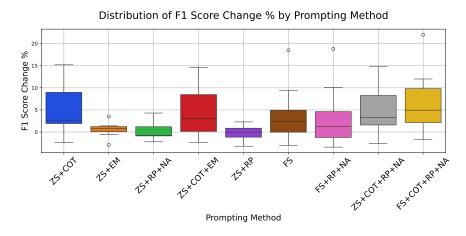


Figure 5: Boxplot of F1 Score % change that Each Prompt Caused Compared to Basic ZS (Employee Reviews Dataset)

5.3 Variability In Performance

From figures 3, 4 we can observe the variability of the model performance. This is expected since, despite extensive training, LLMs most certainly have not seen every conceivable phrasing of a certain task. Consequently, the model is required to speculate on the possible tasks and answer that the user expects to get, relying on semantic similarity with questions in its training data. Hence, the significance of prompt engineering is evident, as a poorly constructed prompt can potentially mislead the model, resulting in poor performance [62]. Interestingly, models like Xwin, Llama2, and Zephyr had the biggest fluctuations in the results, while also having the worst median performance among all of the models. Llama2 had the biggest performance variability with the FakeNewsNet dataset, with a significant 42.3% difference between its best and worst results, while Xwin, with the Employee Reviews dataset, had the biggest performance difference of 22.2%. This behavior suggests a correlation between the performance of a model and its sensitivity to the phrasing of the task. Models with lower performance tend to have bigger fluctuations across different prompts. Conversely, higher-performing models, which are more certain about their answers, are less affected by the phrasing of the task.

5.4 Model Scaling and Quantization

Our results reveal that Llama3 70B dominates the leaderboard, consistently outperforming all of the smaller models. In contrast, smaller models such as Llama3 8B and Mistral exhibit decent performance, especially on the Employee Reviews dataset. Although they trail Llama3 70B by only 2.2% and 0.7% respectively on the Employee Reviews dataset, they still cannot match the results of larger models, even with advanced prompting. We observe that the quantized Mistral models manage to match, and even exceed the performance of the standard Mistral model. Notably, Mistral-OO outperforms the standard Mistral by 4.5% on the Employee Reviews dataset. This observation reveals two insights: that quantization did not negatively impact Mistral's efficiency; and that the additional fine-tuning improved its performance,

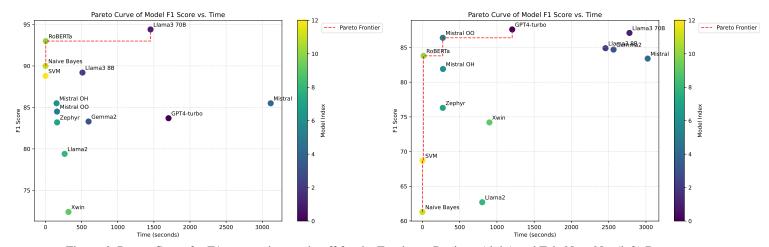


Figure 6: Pareto Curve for F1-score - time trade-off for the Employee Reviews (right) and FakeNewsNet (left) Datasets

highlighting the importance of a carefully-chosen training dataset. While quantized Mistral models can match and surpass their non-quantized version, we cannot generalize it to all models. For instance, the notable performance gap between Llama2-based models (Llama2, Xwin), and Llama3-based models may result from their different architectures and not from the application of quantization.

5.5 Trade-offs and Practical Implications

The Pareto curves in Figure 6 illustrate the trade-off between F1-score and time required to obtain results. Pareto curves visually represent the trade-off between two competing objectives, where improving the one often comes at a cost of the other. This allows to choose the appropriate model, that offers the best performance for a reasonable time, or conversely, requires the least amount of time to achive the desired level of performance. For the Employee Reviews dataset, Gpt4-turbo exhibits the highest F1-score (~88%), but at a significant time cost (over 2500 seconds). Mistral OO, while performed slightly worse, required less than 300 seconds. RoBERTa scored a competitive ~84% in only 15 seconds. The traditional models SVM and NB offer the lowest F1-scores but are the fastest, with inference times under 2 seconds. In the FakeNewsNet dataset, Llama3 70B achieves the highest F1-score (~95%), though this comes with a high time cost similar to Gpt4-turbo (~1500 sec). RoBERTa again scores an excellent score of 93% in 4 seconds, and NB and SVM achieve F1-scores of over 88% in less than 1 second, indicating that for binary classification tasks like FakeNewsNet, traditional models can achieve competitive results, in an exceptionally short amount of time. The overall trend across both datasets shows that while larger LLMs can achieve higher F1-scores, traditional models, and smaller LLMs provide impressive results with significantly lower total response time.

6 Conclusion and Future Work

The results showcase that Large Language Models can match and even exceed the performance of traditional state-of-the-art methods, especially in complex classification tasks, which, however, usually comes with higher response times. Llama 70B showed top-tier performance across both tasks and various prompting methods, while Gpt4-turbo excelled in the 3-class classification task.

We observe that the ML approaches NB and SVM can achieve excellent performance on simpler - binary classification scenarios, outperforming most of the models. However, with a more complex problem like 3-class classification task both - NB and SVM demonstrate some of the lowest performance.

While RoBERTa does not match the peak performance of larger LLMs, especially in the complex classification scenario, it achieves competitive results across both tasks with significantly shorter inference times. This highlights the trade-off between time efficiency and performance, making model selection highly dependent on the specific performance and speed requirements of a task.

The effectiveness of prompting methods varied across models and tasks, showing that task phrasing can significantly impact the results, especially in lower-performing models. We observe that the CoT technique and the FS setting are able to offer notable performance increases to the models. Both provide the models with supplementary, task-relevant information that benefits the results.

In future work, we intend to extend our experiments by including a broader selection of datasets and models, focusing on the trade-off between price and performance across the models. Additionally, we aim to incorporate more prompting

combinations to further investigate their influence on model performance. This will enable a more comprehensive examination of LLMs and allow us to discern whether the performance disparities stem from differences in model scale, inherent characteristics of the underlying LLM base model, or training datasets and methodologies. We also plan to explore additional datasets from diverse domains such as medical, legal, and social media, and particularly datasets with higher complexity, such as datasets with longer text sequences or more than three classes.

References

- [1] Humza Naveed, Asad Ullah Khan, Shi Qiu, Muhammad Saqib, Saeed Anwar, Muhammad Usman, Nick Barnes, and Ajmal S. Mian. A comprehensive overview of large language models. *ArXiv*, abs/2307.06435, 2023.
- [2] Yoon Kim. Convolutional neural networks for sentence classification. In *Conference on Empirical Methods in Natural Language Processing*, 2014.
- [3] Fusheng Wei, Han Qin, Shi Ye, and Haozhen Zhao. Empirical study of deep learning for text classification in legal document review. In 2018 IEEE International Conference on Big Data (Big Data), pages 3317–3320, 2018.
- [4] Rishi Chhatwal, Robert Keeling, Peter Gronvall, Nathaniel Huber-Fliflet, Jianping Zhang, and Haozhen Zhao. Cnn application in detection of privileged documents in legal document review. In 2020 IEEE International Conference on Big Data (Big Data), pages 1485–1492, 2020.
- [5] Guoyin Wang, Chunyuan Li, Wenlin Wang, Yizhe Zhang, Dinghan Shen, Xinyuan Zhang, Ricardo Henao, and Lawrence Carin. Joint embedding of words and labels for text classification. In *Annual Meeting of the Association for Computational Linguistics*, 2018.
- [6] Ashish Vaswani, Noam M. Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Neural Information Processing Systems*, 2017.
- [7] Alec Radford and Karthik Narasimhan. Improving language understanding by generative pre-training. 2018.
- [8] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *North American Chapter of the Association for Computational Linguistics*, 2019.
- [9] John Fields, Kevin Chovanec, and Praveen Madiraju. A survey of text classification with transformers: How wide? how large? how long? how accurate? how expensive? how safe? *IEEE Access*, 12:6518–6531, 2024.
- [10] Bonan Min, Hayley Ross, Elior Sulem, Amir Pouran Ben Veyseh, Thien Huu Nguyen, Oscar Sainz, Eneko Agirre, Ilana Heinz, and Dan Roth. Recent advances in natural language processing via large pre-trained language models: A survey. *ACM Computing Surveys*, 56:1 40, 2021.
- [11] Shervin Minaee, E. Cambria, and Jianfeng Gao. Deep learning–based text classification. *ACM Computing Surveys* (CSUR), 54:1–40, 2020.
- [12] Manon Reusens, Alexander Stevens, Jonathan Tonglet, Johannes De Smedt, Wouter Verbeke, Seppe vanden Broucke, and Bart Baesens. Evaluating text classification: A benchmark study. *Expert Systems with Applications*, 254:124302, 2024.
- [13] Junaed Younus Khan, Md Tawkat Islam Khondaker, Sadia Afroz, Gias Uddin, and Anindya Iqbal. A benchmark study of machine learning models for online fake news detection. *Machine Learning with Applications*, 4:100032, 2021.
- [14] Wenxuan Zhang, Yue Deng, Bing-Quan Liu, Sinno Jialin Pan, and Lidong Bing. Sentiment analysis in the era of large language models: A reality check. *ArXiv*, abs/2305.15005, 2023.
- [15] Jan Kocoń, Igor Cichecki, Oliwier Kaszyca, Mateusz Kochanek, Dominika Szydło, Joanna Baran, Julita Bielaniewicz, Marcin Gruza, Arkadiusz Janz, Kamil Kanclerz, Anna Kocoń, Bartłomiej Koptyra, Wiktoria Mieleszczenko-Kowszewicz, Piotr Miłkowski, Marcin Oleksy, Maciej Piasecki, Łukasz Radliński, Konrad Wojtasik, Stanisław Woźniak, and Przemysław Kazienko. Chatgpt: Jack of all trades, master of none. *Information Fusion*, 99:101861, 2023.
- [16] Xuanting Chen, Junjie Ye, Can Zu, Nuo Xu, Rui Zheng, Minlong Peng, Jie Zhou, Tao Gui, Qi Zhang, and Xuanjing Huang. How robust is gpt-3.5 to predecessors? a comprehensive study on language understanding tasks. *ArXiv*, abs/2303.00293, 2023.
- [17] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Ed Huai hsin Chi, F. Xia, Quoc Le, and Denny Zhou. Chain of thought prompting elicits reasoning in large language models. *ArXiv*, abs/2201.11903, 2022.
- [18] Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Thomas L. Griffiths, Yuan Cao, and Karthik Narasimhan. Tree of thoughts: Deliberate problem solving with large language models. *ArXiv*, abs/2305.10601, 2023.

- [19] Tom B Brown. Language models are few-shot learners. arXiv preprint arXiv:2005.14165, 2020.
- [20] Cheng Li, Jindong Wang, Kaijie Zhu, Yixuan Zhang, Wenxin Hou, Jianxun Lian, and Xingxu Xie. Large language models understand and can be enhanced by emotional stimuli. 2023.
- [21] Xiaofei Sun, Xiaoya Li, Jiwei Li, Fei Wu, Shangwei Guo, Tianwei Zhang, and Guoyin Wang. Text classification via large language models. In *Conference on Empirical Methods in Natural Language Processing*, 2023.
- [22] Pranab Sahoo, Ayush Kumar Singh, Sriparna Saha, Vinija Jain, Samrat Sohel Mondal, and Aman Chadha. A systematic survey of prompt engineering in large language models: Techniques and applications. *ArXiv*, abs/2402.07927, 2024.
- [23] Alec Radford, Jeff Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. 2019.
- [24] Colin Raffel, Noam M. Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *J. Mach. Learn. Res.*, 21:140:1–140:67, 2019.
- [25] Ji Lin, Jiaming Tang, Haotian Tang, Shang Yang, Xingyu Dang, and Song Han. Awq: Activation-aware weight quantization for on-device llm compression and acceleration. In *Conference on Machine Learning and Systems*, 2023.
- [26] Elias Frantar, Saleh Ashkboos, Torsten Hoefler, and Dan Alistarh. Gptq: Accurate post-training quantization for generative pre-trained transformers. *ArXiv*, abs/2210.17323, 2022.
- [27] Saleh Ashkboos, Amirkeivan Mohtashami, Maximilian L. Croci, Bo Li, Martin Jaggi, Dan Alistarh, Torsten Hoefler, and James Hensman. Quarot: Outlier-free 4-bit inference in rotated llms. *ArXiv*, abs/2404.00456, 2024.
- [28] Yilong Zhao, Chien-Yu Lin, Kan Zhu, Zihao Ye, Lequn Chen, Size Zheng, Luis Ceze, Arvind Krishnamurthy, Tianqi Chen, and Baris Kasikci. Atom: Low-bit quantization for efficient and accurate llm serving. *ArXiv*, abs/2310.19102, 2023.
- [29] Albert Qiaochu Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de Las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, L'elio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timothée Lacroix, and William El Sayed. Mistral 7b. *ArXiv*, abs/2310.06825, 2023.
- [30] Subhabrata Mukherjee, Arindam Mitra, Ganesh Jawahar, Sahaj Agarwal, Hamid Palangi, and Ahmed Hassan Awadallah. Orca: Progressive learning from complex explanation traces of gpt-4. *ArXiv*, abs/2306.02707, 2023.
- [31] Shayne Longpre, Le Hou, Tu Vu, Albert Webson, Hyung Won Chung, Yi Tay, Denny Zhou, Quoc V. Le, Barret Zoph, Jason Wei, and Adam Roberts. The flan collection: Designing data and methods for effective instruction tuning, 2023.
- [32] Wing Lian, Bleys Goodson, Guan Wang, Eugene Pentland, Austin Cook, Chanvichet Vong, and "Teknium". Mistralorca: Mistral-7b model instruct-tuned on filtered openorcav1 gpt-4 dataset, 2023.
- [33] teknium. Openhermes-2.5-mistral-7b. Retrieved in June 2024.
- [34] Rafael Rafailov, Archit Sharma, Eric Mitchell, Christopher D Manning, Stefano Ermon, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model. *Advances in Neural Information Processing Systems*, 36, 2024.
- [35] Lewis Tunstall, Edward Beeching, Nathan Lambert, Nazneen Rajani, Kashif Rasul, Younes Belkada, Shengyi Huang, Leandro von Werra, Clémentine Fourrier, Nathan Habib, Nathan Sarrazin, Omar Sanseviero, Alexander M. Rush, and Thomas Wolf. Zephyr: Direct distillation of lm alignment. *ArXiv*, abs/2310.16944, 2023.
- [36] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- [37] NousResearch. Nous-hermes-llama2-13b. Retrieved in June 2024.
- [38] Leslie Pack Kaelbling, Michael L Littman, and Andrew W Moore. Reinforcement learning: A survey. *Journal of artificial intelligence research*, 4:237–285, 1996.
- [39] Xwin-LM Team. Xwin-lm, 9 2023.
- [40] Gemma Team. Gemma. 2024.
- [41] AI@Meta. Llama 3 model card. 2024.
- [42] OpenAI. gpt-4-turbo-in-the-openai-api, 2024.

- [43] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized bert pretraining approach. ArXiv, abs/1907.11692, 2019.
- [44] S. Mahmoud Bsharat, Aidar Myrzakhan, and Zhiqiang Shen. Principled instructions are all you need for questioning llama-1/2, gpt-3.5/4. *ArXiv*, abs/2312.16171, 2023.
- [45] Corinna Cortes and Vladimir Naumovich Vapnik. Support-vector networks. Machine Learning, 20:273–297, 1995.
- [46] Groq Inc./Ansys Z. Yang et al. Optimized simulation methodology of warpage and localized stress hotspot prediction for assembly risk assessment. 2024.
- [47] Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander M. Rush. Transformers: State-of-the-art natural language processing. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 38–45, Online, October 2020. Association for Computational Linguistics.
- [48] Google. Google cloud tpu official documentation. Retrieved in June 2024.
- [49] Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander M. Rush. Transformers: State-of-the-art natural language processing. In Conference on Empirical Methods in Natural Language Processing, 2019.
- [50] Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Köpf, Edward Yang, Zach DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. Pytorch: An imperative style, high-performance deep learning library. ArXiv, abs/1912.01703, 2019.
- [51] Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. CoRR, abs/1412.6980, 2014.
- [52] Fabian Pedregosa, Gaël Varoquaux, Alexandre Gramfort, Vincent Michel, Bertrand Thirion, Olivier Grisel, Mathieu Blondel, Gilles Louppe, Peter Prettenhofer, Ron Weiss, Ron J. Weiss, J. Vanderplas, Alexandre Passos, David Cournapeau, Matthieu Brucher, Matthieu Perrot, and E. Duchesnay. Scikit-learn: Machine learning in python. *ArXiv*, abs/1201.0490, 2011.
- [53] Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Haotong Zhang, and Ion Stoica. Efficient memory management for large language model serving with pagedattention. *Proceedings of the 29th Symposium on Operating Systems Principles*, 2023.
- [54] Kai Shu, Deepak Mahudeswaran, Suhang Wang, Dongwon Lee, and Huan Liu. Fakenewsnet: A data repository with news content, social context and dynamic information for studying fake news on social media. *arXiv* preprint *arXiv*:1809.01286, 2018.
- [55] Kai Shu, Amy Sliva, Suhang Wang, Jiliang Tang, and Huan Liu. Fake news detection on social media: A data mining perspective. *ACM SIGKDD Explorations Newsletter*, 19(1):22–36, 2017.
- [56] Kai Shu, Suhang Wang, and Huan Liu. Exploiting tri-relationship for fake news detection. *arXiv preprint arXiv:1712.07709*, 2017.
- [57] Freda Shi, Xinyun Chen, Kanishka Misra, Nathan Scales, David Dohan, Ed Huai hsin Chi, Nathanael Scharli, and Denny Zhou. Large language models can be easily distracted by irrelevant context. In *International Conference* on Machine Learning, 2023.
- [58] Kaiyan Chang, Songcheng Xu, Chenglong Wang, Yingfeng Luo, Tong Xiao, and Jingbo Zhu. Efficient prompting methods for large language models: A survey. *ArXiv*, abs/2404.01077, 2024.
- [59] Tony Zhao, Eric Wallace, Shi Feng, Dan Klein, and Sameer Singh. Calibrate before use: Improving few-shot performance of language models. In *International Conference on Machine Learning*, 2021.
- [60] Timo Schick and Hinrich Schütze. Exploiting cloze-questions for few-shot text classification and natural language inference. In *Conference of the European Chapter of the Association for Computational Linguistics*, 2020.
- [61] Ethan Perez, Douwe Kiela, and Kyunghyun Cho. True few-shot learning with language models. *ArXiv*, abs/2105.11447, 2021.
- [62] Zhengbao Jiang, Frank F. Xu, J. Araki, and Graham Neubig. How can we know what language models know? *Transactions of the Association for Computational Linguistics*, 8:423–438, 2019.