

PIER: A Novel Metric for Evaluating What Matters in Code-Switching

Enes Yavuz Ugan^{*}, Ngoc-Quan Pham^{*†}, Leonard Bärmann^{*}, and Alex Waibel[†]

^{*}Interactive Systems Lab, Karlsruhe Institut of Technology (KIT), Germany

[†]InterACT, Carnegie Mellon University (CMU), USA

enes.ugan@kit.edu

Abstract—Code-switching, the alternation of languages within a single discourse, presents a significant challenge for Automatic Speech Recognition. Despite the unique nature of the task, performance is commonly measured with established metrics such as Word-Error-Rate (WER). However, in this paper, we question whether these general metrics accurately assess performance on code-switching. Specifically, using both Connectionist-Temporal-Classification and Encoder-Decoder models, we show fine-tuning on non-code-switched data from both matrix and embedded language improves classical metrics on code-switching test sets, although actual code-switched words worsen (as expected). Therefore, we propose Point-of-Interest Error Rate (PIER), a variant of WER that focuses only on specific words of interest. We instantiate PIER on code-switched utterances and show that this more accurately describes the code-switching performance, showing huge room for improvement in future work. This focused evaluation allows for a more precise assessment of model performance, particularly in challenging aspects such as inter-word and intra-word code-switching.

Index Terms—Code-switching, Code-mixing, Speech Recognition, Evaluation metric

I. INTRODUCTION

Code-switching (CSW), a pervasive linguistic phenomenon, can manifest in a variety of forms¹. Typically, it involves the use of a foreign “embedded” language within the main “matrix” language of the discourse, such as mixing in English words or phrases into a German conversation. Naturally, this poses a formidable challenge for all natural language processing (NLP) [2] tasks, with Automatic Speech Recognition (ASR) [3], [4] being one outstanding example. Nevertheless, mastering CSW is of greatest importance, as usage of a second language can have a lot of socio-linguistic importance and convey meaningful information [5], [6] that should not be neglected for downstream NLP applications [7]–[11].

Multilingual speech recognition research has evolved significantly over time. Beginning with classical models [12], [13], to nowadays prevalent End-to-End trained neural networks [14]. Recent works on CSW cover language pairs such as Mandarin-English [16], [17], Arabic/Tunisian-English [14], [15] and German-English [18], [19].

While prior research has acknowledged the complexity of code-switching concerning data collection [20], [21] and processing [22], in this paper, we ask: *How to meaningfully*

isolate the problem of code-switching to accurately measure its performance? Although Word- and Character-Error-Rate (WER/CER) are established and meaningful metrics for ASR evaluation, we observe that they are in fact not sufficient to evaluate the true code-switching performance, and can even be misleading. These common metrics underweigh the actually important points of code-switching speech by mixing them with the performance on the (dominant) matrix language. Our experiments prove that the prevalence of this problem is independent of language or model architecture. Specifically, we fine-tune different competitive models on various language pairs using mixed data from matrix and embedded language. While this training is multilingual, it does not include code-switched samples, i.e. each sample is monolingual in itself. Intuitively, such training should not help a lot when evaluating on a CSW test set, as such samples are still out-of-distribution for the fine-tuned model. Despite that, results using metrics such as WER show performance improvements, while the recognition of actual code-switched instances is deteriorating.

To address this shortcoming, we propose a new metric called **Point of Interest Error Rate (PIER)**, which calculates Error Rate only considering words at interesting positions. We instantiate this with treating the embedded language’s words as points of interest, and show that PIER actually increases when applying the fine-tuning described above, accurately describing the worsened CSW performance. PIER is easily applicable when the points of interest can be identified, which is the case for most available CSW test sets, as they either consist of different writing scripts or provide additional language annotations. Language pairs such as Arabic/German & English can lead to morphological mixing of those languages within a word, which we refer to as intra-word CSW. PIER also enables the analysis of such intra-word CSW by defining only those words as points of interest. In our experiments, we show that this task is even more challenging for current models than inter-word CSW, i.e. the mixing of monolingual words within a utterance.

Similarly, researchers across various domains have highlighted the limitations of existing evaluation metrics and proposed new ones to improve model assessment. Examples include tasks like lip synchronization [23], and supervised quality estimation for machine translation (MT) [24]. Papers like “A call for clarity” [25], [26] have contributed to standard-

¹By definition, CSW, sometimes also called code-mixing, can be viewed differently in different areas of linguistic studies [1].

TABLE I: Test data.

Dataset	Language	Speech [h]	Utterances
TED [30]	EN	2.62	1155
MLS [31]	DE	14.29	3394
MGB [32]	AR	9.58	5365
Aishell [33]	ZH	10.03	7176
CommonVoice [34]	ES	26.85	15753
Fisher [35]	ES-EN	1.63	986
Arzen [36]	AR-EN	2.87	1470
SEAME.sge [37]	ZH-EN	3.93	5321
SEAME.man [37]	ZH-EN	7.49	6531

izing MT evaluation. Similarly, [27] points out that BLEU, a standard MT metric, disadvantages large language models, suggesting the need for additional metrics.

To summarize, by evaluating with our proposed PIER metric, researchers working on CSW can better understand whether a model’s performance gains result from better monolingual capabilities of the model or truly improved CSW ability. To the best of our knowledge, this is the first attempt to separate code-switching specific errors within a test set enabling us to identify and quantify the errors for intra-word and inter-word types of CSW in several datasets. Find our open-source implementation here².

II. EXPERIMENTAL SETUP

We employ recent competitive models whisper-large-v3 (W-large) and whisper-small (W-small) [28] to show our results are independent of the initial model’s performance. Additionally, we employ the massively multilingual MMS model [29], a connectionist-temporal-classification (CTC) model.

Data Table I shows the publicly available and widely used datasets that we use, ensuring the diversity and representativeness of our test cases. They cover a wide range of linguistic scenarios for code-switching: In Fisher, data has the same writing script but differing language families. Arzen consists of code-switching between two languages of different families, also utilizing different writing scripts. Datasets for Mandarin-English code-switching such as SEAME showcase different language families and not just different writing scripts but also very different script semantics. By using such diverse data we highlight that our findings are not just language- or dataset-specific but a general phenomenon over all code-switching datasets and languages.

III. EVALUATING CODE-SWITCHING WITH WER/CER

In this section we want to show that only using WER or CER is not enough for evaluating code-switching performance properly. In case of intra-sentential code-switching there are only few words or even only one word in the embedded language. Therefore, improvements in terms of the matrix language can overshadow the impact of the embedded language. For example, the surrounding words can be recognized correctly leading to a low error rate overall. Thus, even wrong conclusions might be drawn, or at least the model’s true

TABLE II: Monolingual evaluation of pre-trained models. For Mandarin, the evaluation metric is CER, all other data sets are evaluated using WER.

Model	English	German	Arabic	Spanish	Chinese
	TED	MLS	MGB	CV	AISHELL
W-large	6.07	5.88	22.61	4.91	10.02
W-small	6.38	10.58	35.07	10.24	24.99
MMS	11.16	8.68	40.41	9.93	31.23

capability of switching/predicting a foreign language inside the matrix language is not obvious.

Monolingual Base Scores In Table II we initially show the results of the base models used in our experiments on monolingual data. The goal is to show that our decoding parameters and settings are well suited and yield SotA results on widely used monolingual test sets. All our following experiments utilize the same decoding parameters.

CSW Base Scores Baseline results of our pre-trained models on code-switching data are reported on the left side of Table III. We can see an expected performance drop compared to monolingual tests even for our competitive models trained on thousands of hours of paired data. For more detailed analysis, we report results using different decoding strategies. For Whisper, these include an ‘agnostic’ setting where the model automatically determines the language being decoded. The ‘EN’ setting specifies that the task is to transcribe English speech, while ‘X’ corresponds to the matrix language of each dataset (e.g., for the Fisher test set, ‘X’ is set to Spanish). For the MMS model, we select either the English (EN) or the respective matrix language adapters (X) based on the dataset’s matrix language.

A. Why WER is not enough

In this section we want to improve our models performance on our code-switching test cases. Fine-tuning or solely using training data, provided with the test set, is a common practice in many works in the literature [38], [39]. Therefore, we use the training splits that come along with the Fisher, Arzen and SEAME data sets, assuming that the training and validation/test sets are drawn from the same condition, for example recording conditions, noise levels and styles. However, in order to better make our case, we restrict ourselves to only using monolingual utterances out of those training sets. This will potentially show that code-switching examples are not really needed for improving code-switching ASR. Additionally, for each experiment, we randomly sample the same amount of monolingual English utterances from publicly available datasets such as TED or CV. For fine-tuning, we apply early-stopping if the model does not improve after five consecutive evaluations. WER and CER results are depicted on the right side of Table III. Comparing with the values of the base models on the left hand side of the table, its quite surprising that the common error rates are improved over the test sets. There are a few cases where the WER remains unchanged or deteriorates slightly. The language agnostic Whisper large model (W-large) improves absolute by 1.49% WER on the Spanish-English

²<https://github.com/enesyugan/PIER-CodeSwitching-Evaluation>

TABLE III: Comparison of pre-trained and fine-tuned model performances. Fisher (ES-EN), Arzen (AR-EN) values are reported in WER/CER. MER for SEAME. Decoding X depicts the respective matrix language of the dataset. For right hand part of the table, MMS X represents fine-tuned adapter layers for CTC.

Model	Decoding	Pre-trained Model				Fine-tuned Model			
		Fisher	Arzen	SEAME.man	SEAME.sge	Fisher	Arzen	SEAME.man	SEAME.sge
		WER / CER	WER / CER	MER	MER	WER / CER	WER / CER	MER	MER
W-large	agnostic	29.43 / 19.17	52.80 / 28.78	31.01	53.81	27.94 / 15.96	39.68 / 20.41	36.13	52.90
	EN	42.58 / 28.59	103.81 / 84.38	59.81	47.79	27.34 / 15.21	102.81 / 81.82	35.72	52.03
	X	30.57 / 20.65	53.90 / 29.38	30.26	65.67	28.01 / 15.99	40.07 / 20.79	36.13	52.92
W-small	agnostic	35.98 / 22.74	69.16 / 41.06	41.17	68.24	36.77 / 21.50	55.08 / 31.31	42.09	87.67
	EN	68.04 / 47.14	105.80 / 85.35	84.76	65.26	36.33 / 21.32	114.25 / 90.56	62.13	55.57
	X	36.13 / 23.35	69.56 / 41.12	38.22	63.17	36.81 / 21.50	55.36 / 31.56	43.55	94.03
MMS	EN	50.58 / 25.13	96.95 / 81.13	95.86	89.20	—	—	—	—
	X	47.29 / 24.47	86.44 / 49.85	68.25	87.41	38.87 / 18.25	66.48 / 34.06	61.19	91.55

Fisher data. On the Arabic-English code-switching test data (Arzen) all our models are marginally improved. The agnostic Whisper small model improves by 14.08% WER.

However, it is questionable if most of the improvement above comes from recognizing the main languages more accurately while the minority of code-switched words are ignored. To answer this question, we suggest to evaluate models' code-switching performance by looking at the Point of Interest Error Rate (PIER).

IV. POINT OF INTEREST ERROR RATE

Let \mathcal{I} be the set of indexes (positions) of points of interest, i.e. $\mathcal{I} = \{i_1, i_2, \dots, i_n\}$, $n \leq |\text{REF}|$. We compute an alignment \mathcal{A} between two strings, REF and HYP, which produces a set of edit operations. Each edit operation is characterized by:

$$o = (t, i_{\text{src}}, i_{\text{res}})$$

with, $t \in \{\text{substitution, insertion, deletion}\}$, i_{src} being the position of the word in REF, i_{res} being the position of the word in HYP.

We define the subset $\mathcal{A}_{\mathcal{I}}^*$ of the alignments \mathcal{A} as:

$$\mathcal{A}_{\mathcal{I}}^* = \{o \in \mathcal{A} \mid i_{\text{src}}^o \in \mathcal{I}\}$$

Additionally, if the last index in \mathcal{I} corresponds to the last word in REF, we also include all alignments where i_{src} is greater than the last index in \mathcal{I} :

$$\mathcal{A}_{\mathcal{I}} = \begin{cases} \mathcal{A}_{\mathcal{I}}^* \cup \{o \in \mathcal{A} \mid i_{\text{src}}^o > |\text{REF}|\}, & \max(\mathcal{I}) = |\text{REF}| \\ \mathcal{A}_{\mathcal{I}}^*, & \text{otherwise} \end{cases}$$

Finally, we count the operations in $\mathcal{A}_{\mathcal{I}}$ and normalize by the total number of indexes (words) we are interested in.

$$\text{PIER} = \frac{|\mathcal{A}_{\mathcal{I}}|}{|\mathcal{I}|}$$

The idea of PIER is to stay as close to the established WER as possible, to have a similarity to known and proven metrics while also focusing on the actual capabilities of code-switching. This way, during evaluation, we do not only get the amount of miss-transcribed words of the embedded language, but we can also get which errors were associated with points of code-switching. As an example, while one model might just substitute English words with literal transliterations of Mandarin tokens, another might not transcribe anything at all.

The algorithm expects the user to provide two aligned lists of strings, one with the models hypothesis and another one with the references, in which words of interest, in our case the embedded language, are tagged. In the example reference “das mit den <tag bots> glaub ich nicht” (I dont believe that thing with the bots), the word “bots” would be considered the point of interest. Due to the nature of language pairs with different writing scripts such as Arabic/Mandarin-English code-switching, this is done automatically in the metrics. For other commonly available code-switching test data such as DECM [21] the language information is usually provided as well, and words can easily be tagged appropriately.

V. EVALUATING CSW WITH PIER

In most cases, English is treated as the embedded language, and the matrix language is one of Spanish, Arabic, German, or Mandarin. For that reason, we determine English words to be our points of interest and want to focus evaluation of model predictions to these words, asking: *is the model able to do code-switching or does it get confused?* For this evaluation, we excluded the monolingual utterances from the code-switching test set to avoid any contamination in the evaluation. The left hand side of Table IV shows the pre-trained models base PIER performance on our test data. The first thing we can observe is that the PIER is notably higher than the general WER, indicating that these code-switched locations are naturally more challenging than the main languages in the test sets.

The right side of Table IV shows the PIER results after fine-tuning and improving on our test data (in analogy to Table III, right). However, we can clearly see for several examples that while the WER improved after fine-tuning, the PIER increases. While the W-large (agnostic) model showed a relative improvement of 5.06% WER on the Fisher data, the PIER performance shows a relative worsening of 39.47%. For a better visualisation of the phenomenon the blue lines in Figure 1 a) show an increase in the gap between WER and PIER after fine-tuning. Another point where this evaluation reveals the truth about code-switching performance is on the SEAME.sge evaluation of the same model (orange lines). While the relative WER improvement was 1.69% the performance on PIER decreased by 6.17%. These numbers suggest that evaluating PIER instead of WER provides more valuable insights on how the model actually behaves on the code-switched parts of the utterance.

TABLE IV: Comparison of pre-trained and fine-tuned model PIER \downarrow evaluations on Fisher (ES-EN), Arzen (AR-EN), and SEAME (ZH-EN).

Model	Decoding	Pre-trained Model (PIER \downarrow)				Fine-tuned Model (PIER \downarrow)			
		Fisher	Arzen	SEAME.man	SEAME.sge	Fisher	Arzen	SEAME.man	SEAME.sge
W-large	agnostic	36.41	58.99	58.73	64.51	50.78	57.18	72.49	68.49
	EN	33.31	38.77	39.90	36.10	36.95	38.72	71.26	67.36
	X	59.92	70.78	60.23	76.26	51.16	58.63	72.49	68.49
W-small	agnostic	48.14	75.91	74.95	83.08	63.52	78.10	88.82	97.60
	EN	42.56	45.16	45.02	44.55	51.63	44.91	44.55	42.34
	X	62.55	80.66	72.88	77.13	63.87	79.57	90.24	100.03
MMS	EN	74.90	79.80	86.48	86.08	-	-	-	-
	X	75.29	100.52	109.78	105.70	71.73	89.68	108.61	103.97

□ Fisher ▲ ARZEN ○ SEAME.MAN ★ SEAME.SGE — WER - - - PIER

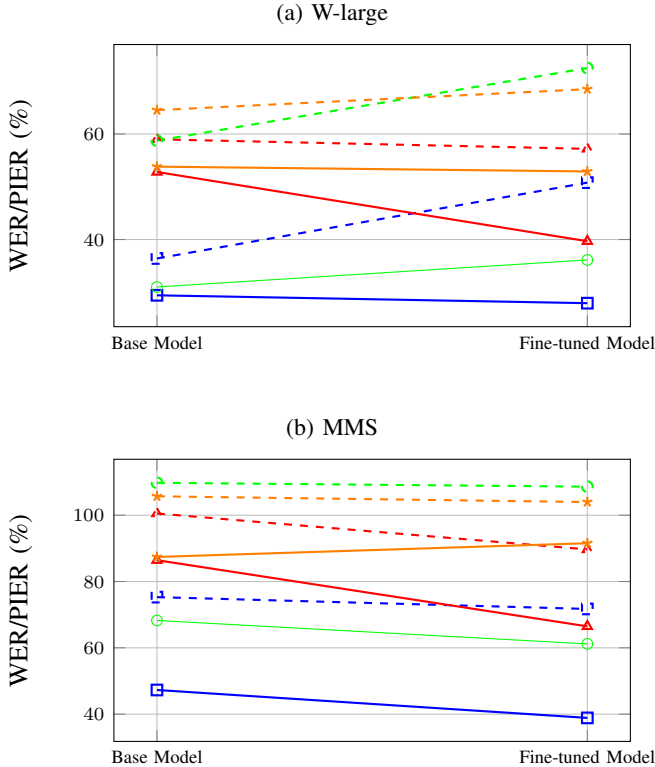


Fig. 1: Comparison of WER and PIER behaviour after fine-tuning base models. (a) W-large, (b) MMS. Values are taken from the agnostic decoding for (a).

Fine-grained evaluation For languages like German & Arabic, intra-word code-switching is a common occurrence. This form of code-switching is even more difficult than inter-word switching, because new words are created by using parts of each language. Using PIER enables us to attribute improvements to the different kinds of code-switching by defining only intra- or inter-word code-switched cases as points of interest. This way, more focused and clearer contributions can be made.

For DECM (German-English), we extended the data by manually annotating whether a word is English, German, a name, or an intra-word case of CSW. Arzen (Arabic-English) also provides necessary annotations to determine any intra-word switching. Table V shows our pre-trained models PIER performance on inter-word and intra-word level code-

TABLE V: PIER \downarrow of different pre-trained models across DECM and Arzen datasets. Evaluation for inter-word (Inter.W) and intra-word (Intra.W) code-switching.

Model	Decoding	DECM (PIER \downarrow)		Arzen (PIER \downarrow)	
		Inter.W	Intra.W	Inter.W	Intra.W
W-large	agnostic	30.42	45.23	49.50	105.71
W-small	agnostic	39.56	73.32	69.12	107.45
MMS	X	64.22	83.26	100.46	100.79

switching. The ASR models significantly struggle for both cases, but it is clear that intra-word level code-switching is significantly more challenging.

VI. CONCLUSION

In this work, we introduced PIER, a metric for evaluating and analyzing code-switching ASR in a standardized and more expressive way. More importantly, our proposed metric also enables to quantify the amount of errors for different types of code-switching, such as inter-& intra-word level. To the best of our knowledge, this is the first attempt to separate code-switching specific errors within a test set, and in several datasets we can also identify and quantify the errors for intra-word and inter-word types of CSW. By doing so, we can show that, typical practices that improve WER in general, such as fine-tuning on in-domain data that sounds like an obvious way to improve, do not get closer to solving this problem even with models at the caliber of Whisper. We hope that our work enables a more sophisticated evaluation of models when it comes to specific tasks wherein points of interest are overshadowed by some other majority, such as the matrix language in the case of code-switching speech. This will also enable researchers to tackle and analyze different difficulties arising in code-switching speech in a more pinpointed way.

VII. ACKNOWLEDGMENT

This work was funded by the German Federal Ministry of Education and Research (BMBF) under grant 01EF1803B (RELATER), the pilot program Core-Informatics of the Helmholtz Association (HGF) and the EU Horizon program (grant 101135798, Meetween), the HoreKa supercomputer funded by the Ministry of Science, Research and the Arts Baden-Württemberg and BMBF, also partly DeltaGPU at NCSA through allocation CIS240493 from the Advanced Cyberinfrastructure Coordination Ecosystem: Services & Support (ACCESS) program, supported by U.S. National Science Foundation grants #2138259, #2138286, #2138307, #2137603, and #2138296 [40].

REFERENCES

- [1] Ezech, N., Umeh, I., Anyanwu, E. & Others Code Switching and Code Mixing in Teaching and Learning of English as a Second Language: Building on Knowledge. *English Language Teaching*. **15**, 106-106 (2022)
- [2] Zhang, R., Cahyawijaya, S., Cruz, J., Winata, G. & Aji, A. Multilingual large language models are not (yet) code-switchers. *ArXiv Preprint arXiv:2305.14235*. (2023)
- [3] Yan, B., Wiesner, M., Klejch, O., Jyothi, P. & Watanabe, S. Towards zero-shot code-switched speech recognition. *ICASSP 2023-2023 IEEE International Conference On Acoustics, Speech And Signal Processing (ICASSP)*. pp. 1-5 (2023)
- [4] Biswas, A., Yilmaz, E., Westhuizen, E., Wet, F. & Niesler, T. Code-switched automatic speech recognition in five South African languages. *Computer Speech & Language*. **71** pp. 101262 (2022)
- [5] Scotton, C. & Ury, W. Bilingual strategies: The social functions of code-switching. (Walter de Gruyter, Berlin/New York Berlin, New York,1977)
- [6] Dođruöz, A., Sitaram, S., Bullock, B. & Toribio, A. A survey of code-switching: Linguistic and social perspectives for language technologies. *ArXiv Preprint arXiv:2301.01967*. (2023)
- [7] Ugan, E., Mediani, M., Al Jawabra, O., Khader, A., Liu, Y. & Waibel, A. Modular Design of a Front-End and Back-End Speech-to-Speech Translation Application for Psychiatric Treatment of Refugees. *2023 IEEE Global Humanitarian Technology Conference (GHTC)*. pp. 128-131 (2023)
- [8] Hourin, S., Binder, J., Jaeger, D., Gernerding, C., Wilson, K. & Torres-Smith, K. undefined. *SPEECH-TO-SPEECH TRANSLATION TOOL (S2ST2) Limited Utility Assessment Final Report*. pp. 1-77 (2013)
- [9] Waibel, A. Speech translators for humanitarian projects. *Spoken Language Technologies for Under-Resourced Languages*. pp. 4-5 (2010)
- [10] Huber, C., Dinh, T., Mullo, C., Pham, N., Nguyen, T., Retkowski, F., Constantin, S., Ugan, E., Liu, D., Li, Z. & Others End-to-End Evaluation for Low-Latency Simultaneous Speech Translation. *ArXiv Preprint arXiv:2308.03415*. (2023)
- [11] Waibel, A., Steusloff, H., Stiefelwagen, R. & Others CHIL: Computers in the human interaction loop. (Citeseer,2005)
- [12] Stuker, S., Schultz, T., Metz, F. & Waibel, A. Multilingual articulatory features. *2003 IEEE International Conference On Acoustics, Speech, And Signal Processing, 2003. Proceedings.(ICASSP'03)*. **1** pp. I-1 (2003)
- [13] Müller, M., Stüker, S. & Waibel, A. Language adaptive multilingual CTC speech recognition. *Speech And Computer: 19th International Conference, SPECOM 2017, Hatfield, UK, September 12-16, 2017, Proceedings 19*. pp. 473-482 (2017)
- [14] Abdallah, A., Kabboudi, A., Kanoun, A. & Zaiem, S. Leveraging Data Collection and Unsupervised Learning for Code-Switched Tunisian Arabic Automatic Speech Recognition. *ICASSP 2024-2024 IEEE International Conference On Acoustics, Speech And Signal Processing (ICASSP)*. pp. 12607-12611 (2024)
- [15] Kadaoui, K., Ali, M., Toyin, H., Mohammed, I. & Aldarmaki, H. PolyWER: A Holistic Evaluation Framework for Code-Switched Speech Recognition. *Findings Of The Association For Computational Linguistics: EMNLP 2024*. pp. 6144-6153 (2024,11), <https://aclanthology.org/2024.findings-emnlp.356/>
- [16] Aditya, B., Rohmatillah, M., Tai, L. & Chien, J. Attention-Guided Adaptation for Code-Switching Speech Recognition. *ICASSP 2024-2024 IEEE International Conference On Acoustics, Speech And Signal Processing (ICASSP)*. pp. 10256-10260 (2024)
- [17] Liu, H., Garcia, L., Zhang, X., Khong, A. & Khudanpur, S. Enhancing code-switching speech recognition with interactive language biases. *ICASSP 2024-2024 IEEE International Conference On Acoustics, Speech And Signal Processing (ICASSP)*. pp. 10886-10890 (2024)
- [18] Ugan, E., Huber, C., Hussain, J. & Waibel, A. Language-agnostic Code-Switching in Sequence-To-Sequence Speech Recognition. *ArXiv Preprint arXiv:2210.08992*. (2022)
- [19] Huber, C., Ugan, E. & Waibel, A. Code-switching without switching: Language agnostic end-to-end speech translation. *ArXiv Preprint arXiv:2210.01512*. (2022)
- [20] Dođruöz, A., Sitaram, S. & Yong, Z. Representativeness as a Forgotten Lesson for Multilingual and Code-switched Data Collection and Preparation. *Findings Of The Association For Computational Linguistics: EMNLP 2023*. pp. 5751-5767 (2023,12), <https://aclanthology.org/2023.findings-emnlp.382>
- [21] Ugan, E., Pham, N. & Waibel, A. DECM: Evaluating Bilingual ASR Performance on a Code-switching/mixing Benchmark. *Proceedings Of The 2024 Joint International Conference On Computational Linguistics, Language Resources And Evaluation (LREC-COLING 2024)*. pp. 4468-4475 (2024)
- [22] Çetinođlu, Ö., Schulz, S. & Vu, N. Challenges of Computational Processing of Code-Switching. *Proceedings Of The Second Workshop On Computational Approaches To Code Switching*. pp. 1-11 (2016,11), <https://aclanthology.org/W16-5801>
- [23] Yaman, D., Eyiokur, F., Bärmann, L., Akti, S., Ekenel, H. & Waibel, A. Audio-Visual Speech Representation Expert for Enhanced Talking Face Video Generation and Evaluation. *Proceedings Of The IEEE/CVF Conference On Computer Vision And Pattern Recognition*. pp. 6003-6013 (2024)
- [24] Dinh, T. & Niehues, J. Perturbation-based qe: An explainable, unperturbed word-level quality estimation method for blackbox machine translation. *ArXiv Preprint arXiv:2305.07457*. (2023)
- [25] Post, M. A call for clarity in reporting BLEU scores. *ArXiv Preprint arXiv:1804.08771*. (2018)
- [26] Schmidt, R., Pires, T., Peitz, S. & Lööf, J. Non-autoregressive neural machine translation: A call for clarity. *ArXiv Preprint arXiv:2205.10577*. (2022)
- [27] Gaido, M., Papi, S., Negri, M. & Bentivogli, L. Speech Translation with Speech Foundation Models and Large Language Models: What is There and What is Missing?. *ArXiv Preprint arXiv:2402.12025*. (2024)
- [28] Radford, A., Kim, J., Xu, T., Brockman, G., McLeavey, C. & Sutskever, I. Robust speech recognition via large-scale weak supervision. *International Conference On Machine Learning*. pp. 28492-28518 (2023)
- [29] Pratap, V., Tjandra, A., Shi, B., Tomasello, P., Babu, A., Kundu, S., Elkahky, A., Ni, Z., Vyas, A., Fazel-Zarandi, M. & Others Scaling speech technology to 1,000+ languages. *Journal Of Machine Learning Research*. **25**, 1-52 (2024)
- [30] Rousseau, A., Deléglise, P. & Esteve, Y. TED-LIUM: an Automatic Speech Recognition dedicated corpus. *LREC*. pp. 125-129 (2012)
- [31] Pratap, V., Xu, Q., Sriram, A., Synnaeve, G. & Collobert, R. Mls: A large-scale multilingual dataset for speech research. *ArXiv Preprint arXiv:2012.03411*. (2020)
- [32] Ali, A., Bell, P., Glass, J., Messaoui, Y., Mubarak, H., Renals, S. & Zhang, Y. The MGB-2 challenge: Arabic multi-dialect broadcast media recognition. *2016 IEEE Spoken Language Technology Workshop (SLT)*. pp. 279-284 (2016)
- [33] Bu, H., Du, J., Na, X., Wu, B. & Zheng, H. Aishell-1: An open-source mandarin speech corpus and a speech recognition baseline. *2017 20th Conference Of The Oriental Chapter Of The International Coordinating Committee On Speech Databases And Speech I/O Systems And Assessment (O-COCOSDA)*. pp. 1-5 (2017)
- [34] Ardila, R., Branson, M., Davis, K., Henretty, M., Kohler, M., Meyer, J., Morais, R., Saunders, L., Tyers, F. & Weber, G. Common voice: A massively-multilingual speech corpus. *ArXiv Preprint arXiv:1912.06670*. (2019)
- [35] Weller, O., Sperber, M., Pires, T., Setiawan, H., Gollan, C., Telaar, D. & Paulik, M. End-to-end speech translation for code switched speech. *ArXiv Preprint arXiv:2204.05076*. (2022)
- [36] Hamed, I., Hussein, A., Chellah, O., Chowdhury, S., Mubarak, H., Sitaram, S., Habash, N. & Ali, A. Benchmarking evaluation metrics for code-switching automatic speech recognition. *2022 IEEE Spoken Language Technology Workshop (SLT)*. pp. 999-1005 (2023)
- [37] Lyu, D., Tan, T., Chng, E. & Li, H. SEAME: a Mandarin-English code-switching speech corpus in south-east asia. *Interspeech*. **10** pp. 1986-1989 (2010)
- [38] Ye, S., Chen, S., Hu, X. & Xu, X. SC-MoE: Switch Conformer Mixture of Experts for Unified Streaming and Non-streaming Code-Switching ASR. *ArXiv Preprint arXiv:2406.18021*. (2024)
- [39] Yang, T., Wang, H., Wang, Y., Lin, C. & Chen, B. An Effective Mixture-Of-Experts Approach For Code-Switching Speech Recognition Leveraging Encoder Disentanglement. *ICASSP 2024-2024 IEEE International Conference On Acoustics, Speech And Signal Processing (ICASSP)*. pp. 11226-11230 (2024)
- [40] Timothy J. Boerner, Stephen Deems, Thomas R. Furlani, Shelley L. Knuth, and John Towns. 2023. ACCESS: Advancing Innovation: NSF's Advanced Cyberinfrastructure Coordination Ecosystem: Services & Support. *Practice and Experience in Advanced Research Computing (PEARC '23)*". (2023)