

Amortized Bayesian Mixture Models

Šimon Kucharský^{ID} and Paul Christian Bürkner^{ID}

Department of Computational Statistics, TU Dortmund University, Dortmund,
Germany

Abstract

Finite mixtures are a broad class of models useful in scenarios where observed data is generated by multiple distinct processes but without explicit information about the responsible process for each data point. Estimating Bayesian mixture models is computationally challenging due to issues such as high-dimensional posterior inference and label switching. Furthermore, traditional methods such as MCMC are applicable only if the likelihoods for each mixture component are analytically tractable.

Amortized Bayesian Inference (ABI) is a simulation-based framework for estimating Bayesian models using generative neural networks. This allows the fitting of models without explicit likelihoods, and provides fast inference. ABI is therefore an attractive framework for estimating mixture models. This paper introduces a novel extension of ABI tailored to mixture models. We factorize the posterior into a distribution of the parameters and a distribution of (categorical) mixture indicators, which allows us to use a combination of generative neural networks for parameter inference, and classification networks for mixture membership identification. The proposed framework accommodates both independent and dependent mixture models, enabling filtering and smoothing. We validate and demonstrate our approach through synthetic and real-world datasets.

Keywords: Finite Mixture Models, Bayesian inference, Simulation based inference, Amortized inference

1 Introduction

Fast and accurate estimation of statistical quantities is an ongoing problem in statistical research (Cranmer, Brehmer, & Louppe, 2020; Hermans, Delaunoy, Rozet, Wehenkel, & Louppe, 2022). One major difficulty arises when the observed data is generated by multiple distinct processes, but the specific process responsible for each data point is unknown. Mixture models are commonly used to address this issue (Frühwirth-Schnatter, 2006; McLachlan & Basford, 1988; Scrucca, Fraley, Murphy, & Raftery, 2023; Visser & Speekenbrink, 2022; Zucchini, MacDonald, & Langrock, 2016).

Although mixture models have been useful across a wide range applications (e.g., Hadj-Amar, Jewson, & Fiecas, 2023; Kucharský, Tran, Veldkamp, Raijmakers, & Visser, 2021; Schaaf, Jepma, Visser, & Huizenga, 2019; Zavadskiy, Zantedeschi, & Jank, 2024, to name a few), estimating mixture models can be challenging for several reasons. In practice, the most relevant obstacles are: (1) obtaining full Bayesian inference for mixtures can be computationally demanding, (2) fitting Bayesian mixtures using standard methods (such as MCMC) requires the model likelihood to be analytically tractable, and (3) label switching issues.

Given these challenges, there is a need for methods that can perform fast and accurate inference for mixture models while removing limitations of traditional methods. A promising candidate for resolving these issues is Amortized Bayesian Inference (ABI, Gershman & Goodman, 2014; Radev, Mertens, Voss, Ardizzone, & Kothe, 2022; Ritchie, Horsfall, & Goodman, 2016), which offers fast approximation of the posterior distributions even for models that are otherwise not analytically tractable. However, these methods have yet to be fully adapted to handle mixture models, in particular, when we desire estimating the parameters of the mixture model and the categorical latent mixture indicators as a joint probability distribution. This gap motivates the development of a new approach that uses modern deep learning techniques to enable scalable ABI for mixture models.

Our work provides the following contributions:

- We develop a deep learning architecture that takes advantage of a factorization of mixture models where parameter posteriors can be estimated directly from data, and mixture membership classification is estimated based on data and the parameter estimates. This allows full Bayesian inference providing the joint posterior distribution of all quantities of interest.
- The implementation is amortized, meaning that the inference is considerably faster than traditional – non-amortized – methods, such as MCMC or other Approximate Bayesian Computation methods.
- The amortized mixture implementation introduces a new possibility for extending amortized posterior estimation, which is typically limited to continuous quantities, with the amortized estimation of categorical latent variables with bounded cardinality.
- The proposed framework is able to handle independent mixture models as well as dependent mixtures. Our method is able to perform both filtering and smoothing in the case of dependent mixtures.
- We validate our method on a battery of toy and real world examples. Where possible, we compare our results to that of Stan (Carpenter et al., 2017) as a gold standard for MCMC estimation.
- The method is implemented in a Python (Rossum & Drake, 2010) library BayesFlow (Radev et al., 2022) that provides user-friendly interface for ABI.

The article is organized as follows. Section 2 describes the methods used and developed in this article. Section 2.1 explains Bayesian mixture models and describes challenges when fitting them with traditional methods. Section 2.2 and Section 2.3 provide a primer explaining existing methods for simulation-based amortized inference that our approach is built upon. Section 2.4 describes methods developed in this article that implement amortized estimation of mixture models, and Section 2.5 discusses possible alternative approaches. Section 3 presents applications of our method in three examples. We summarize our work in Section 4.

2 Methods

In this section, we introduce our proposed ABI framework for Bayesian mixture models. First, we will define Bayesian mixture models and highlight challenges that arise when fitting them with traditional, non-amortized methods. Second, we will explain the general idea behind simulation based inference and ABI. Then, we will explain how ABI can be extended to provide amortized inference for mixture models.

2.1 Bayesian mixture models

We define Bayesian mixture models as a joint distribution $p(y, z, \theta)$: $y \in \mathcal{Y}$ represents all relevant observable variables, whereas $z \in \mathbb{N}$ and $\theta \in \mathcal{R}$ represent typically latent (unobservable) quantities; z represents the latent mixture indicators, while θ represents parameters of the mixture model. We focus on situations where the model is assumed (or known) to consist of a mixture of K populations (or processes), each with their own model $p(y_i | z_i, \theta)$ for the observable data $y_{1, \dots, N}$, each associated with a latent mixture membership indicator $z_{1, \dots, N} \in \{1, \dots, K\}$.

We assume that a generative model can be created by factorizing the joint distribution of the mixture model into a prior $p(z, \theta)$ and a likelihood $p(y | z, \theta)$: $p(y, z, \theta) = p(z, \theta)p(y | z, \theta)$. Further, we assume that it is possible to obtain random samples of $z^{(s)}$ and $\theta^{(s)}$ from the prior, and it is possible to obtain random samples of synthetic data $y^{(s)}$ from the likelihood, conditionally on $z^{(s)}$ and $\theta^{(s)}$. The generative model can be therefore implemented as a computer program which samples the triple $(z^{(s)}, \theta^{(s)}, y^{(s)})$ as follows:

$$\begin{aligned} z^{(s)}, \theta^{(s)} &\sim p(z, \theta) \\ y^{(s)} &\sim p(y | z^{(s)}, \theta^{(s)}). \end{aligned} \tag{1}$$

Typically, most mixture models used in practice can be cast as a special case of this factorization:

$$\begin{aligned} \theta^{(s)} &\sim p(\theta) \\ z^{(s)} &\sim p(z | \theta^{(s)}) \\ y^{(s)} &\sim p(y | z^{(s)}, \theta^{(s)}). \end{aligned} \tag{2}$$

The aim of Bayesian analysis is to estimate the joint posterior of all unobserved variables, $p(\theta, z | y)$. This joint posterior is notoriously too complex to calculate analytically (Diebolt & Robert, 1994). Thus, approximation methods are typically needed to estimate the posterior distribution (Frühwirth-Schnatter, 2001; Marin, Mengersen, & Robert, 2005).

The estimation of Bayesian mixture models is generally achieved using one of two common approaches, somewhat analogically to using “classification” vs. “mixture” likelihoods for fitting mixture models with maximum likelihood estimation (Ganesalingam, 1989; McLachlan, 1982).

Conceptually, the first approach samples from the joint posterior of the models parameters θ and latent indicators z directly:

$$p(\theta, z | y) \propto p(\theta) \prod_{i=1}^N p(z_i | \theta) p(y_i | z_i, \theta). \quad (3)$$

Such approach is typically implemented using MCMC with Gibbs sampling or its extensions (Celeux, Hurn, & Robert, 2000; Diebolt & Robert, 1994; Marin et al., 2005). The obvious computational obstacle is that given a set of N data points each generated from one of K processes, there is K^N possible mixture membership permutations and it may be extremely difficult to sample from this distribution (Marin et al., 2005). The MCMC sampler may venture into a set of “trapping states” from which it may take an enormous number of steps to escape from (Celeux et al., 2000; Diebolt & Robert, 1994; Marin et al., 2005). Although sampling from the full joint distribution is feasible for relatively small sample sizes and number of mixture components using MCMC samplers, such approach tends to scale badly with increasing sample size and with more mixture components.

Probabilistic programming languages such as Stan (Carpenter et al., 2017) do not allow such implementation in the first place, because gradient-based sampling methods like Hamiltonian Monte Carlo require continuous variables for evaluating the gradients, As such, using discrete parameters directly in the MCMC is not allowed. Instead, models with discrete parameters must be handled with alternative approaches. The most common alternative is to factorize the joint posterior as $p(\theta, z | y) = p(\theta | y) p(z | \theta, y)$; first we sample from the posterior distribution of θ with z marginalized out,

$$p(\theta | y) \propto p(\theta) \prod_{i=1}^N p(y_i | \theta), \quad (4)$$

where $p(y_i | \theta) = \sum_{k=1}^K p(z_i = k | \theta) p(y_i | z_i = k, \theta)$ is the likelihood of the observations with the mixture indicators being marginalized out. Subsequently, the distribution of $p(z | \theta, y)$ can be fully determined conditionally on the parameters θ and observations y :

$$p(z_i | y_i, \theta) = \frac{p(z_i | \theta) p(y_i | z_i, \theta)}{p(y_i | \theta)}. \quad (5)$$

Both factorizations described above are valid only if the latent indicators are independent and observations are conditionally independent given latent indicators (i.e., in the case of exchangeable data). In many cases, this assumption is not satisfied. For example, in hidden Markov models (HMMs; Rabiner, 1989), the observables are indeed independent conditionally on the latent indicators, but the latent indicators themselves form a Markov chain: the probability of the current state depends on the previous state(s). Other types of mixture models might exhibit other kinds of dependencies between observables or states – depending on the exact nature of these dependencies, other forms of factorizations might be possible (for examples, see Ambroise, Dang, & Govaert, 1997; Hadj-Amar et al., 2023; May, Finley, & Dubayah, 2024; Samé, 2020).

In any case, estimating mixture parameters and mixture memberships requires evaluating the likelihood density. As a result, the likelihood has to be analytically tractable under each mixture component for applicability of the above described density-based approaches.

2.2 Simulation-Based Inference

Statistical inference requires specifying the likelihood function $p(y | \theta)$ that describes the link between parameters and data. However, scientific models are often formulated only as a *simulation program* that may render the likelihood analytically intractable, for example, because the model involves differential equations without analytical solutions, or other complex generative procedures (Boelts, Lueckmann, Gao, & Macke, 2022; Brehmer, 2021; Cranmer et al., 2020; Lueckmann, Boelts, Greenberg, Goncalves, & Macke, 2021; Radev et al., 2022).

The Bayesian model is then available only as a probabilistic generative model of the triple of the prior $p(\theta)$ for model parameters θ , a stochastic model $p(\nu | \theta)$ for nuisance variables (i.e., noise) ν , and a *simulation program* $g : (\theta, \nu) \rightarrow y$ that generates synthetic data y . The complete forward model can be defined as

$$y = g(\theta, \nu) \text{ with } \nu \sim p(\nu | \theta), \theta \sim p(\theta). \tag{6}$$

We can sample from this stochastic model repeatedly to obtain the pairs of data-generating parameters θ along with the observable data y . The likelihood is implicitly defined as an integral over all possible execution paths of the generative model (represented by the stochastic variables ν),

$$p(y | \theta) = \int p(y, \nu | \theta) d\nu, \tag{7}$$

even though the analytic solution to that integral may be unknown and therefore an explicit analytic form of the likelihood $p(y | \theta)$ unavailable (Cranmer et al., 2020).

Estimating statistical models with intractable likelihoods is commonly referred to as *likelihood-free inference*, even though as presented in Equation 7, the likelihood function exists, albeit it may be implicit. A more apt designation of inference without explicit analytic likelihoods is *simulation-based inference* (SBI, Cranmer et al., 2020), since these approaches rely on using (oft extensive) Monte Carlo simulations from the generative model to perform inference on the model parameters.

SBI is applicable when the likelihood is tractable as well. However, density-based methods (e.g., MCMC) are often preferred over SBI in such use-cases, because using the likelihood directly typically requires less computational resources to achieve comparable accuracy (Brehmer, Louppe, Pavez, & Cranmer, 2020; Schmitt, Pratz, Köthe, Bürkner, & Radev, 2024; Zeghal, Lanusse, Boucaud, Remy, & Aubourg, 2022).

2.3 Amortized Bayesian Inference

Another challenge arises when posterior inference is required multiple times, such as when the model is applied to several datasets. Even in the case of a single dataset, multiple refits of the same model may be necessary, especially for model evaluation techniques like simulation-based calibration (Talts, Betancourt, Simpson, Vehtari, & Gelman, 2018) and cross-validation (see e.g., Bürkner, Gabry, & Vehtari, 2020; Vehtari, Gelman, & Gabry, 2017). In such scenarios, traditional methods may become prohibitively expensive and therefore impractical.

Amortized Bayesian Inference (Gershman & Goodman, 2014; Radev et al., 2022; Ritchie et al., 2016) is a solution to both the problem of implicit likelihoods, and the problem of computational demands for inference. ABI divides model fitting into two distinct stages. In the first — *training* — stage, neural networks learn the posterior based on simulated data from the generative model. In the second — *inference* — stage, given any observed data y^{obs} , samples from the posterior distribution

are obtained through a simple pass through the networks. Most of the computational resources are expended during the training stage, allowing us to *amortize* (pay upfront) the cost of inference, making subsequent fitting of the model during the inference stage substantially more effective.

Using neural networks to approximate posterior distributions is often referred to as neural posterior estimation (NPE). In this approach, the target posterior $p(\theta | y)$ is represented by a surrogate density $q_\phi(\theta | y)$, parametrized by a set of learnable network weights ϕ of an *inference network* f_ϕ . Such network is often implemented as a normalizing flow (Kobyzev, Prince, & Brubaker, 2020; Papamakarios, Nalisnick, Rezende, Mohamed, & Lakshminarayanan, 2021). Other ML generative models, such as diffusion models (Sharrock, Simons, Liu, & Beaumont, 2024), flow matching (Dax et al., 2023), consistency models (Schmitt, Pratz, et al., 2024), and others, can be used for this purpose, and would be compatible with the methods developed in this article. Given that normalizing flows have demonstrated strong performance across various disciplines (e.g., Schumacher, Schnuerch, Voss, & Radev, 2024; von Krause, Radev, & Voss, 2022), we focus on normalizing flows as one example of NPE.

Normalizing flows (Kobyzev et al., 2020) are implemented using conditional invertible neural networks (CINNs, Ardizzone, Lüth, Kruse, Rother, & Köthe, 2019). The flow serves as a learnable transformation f_ϕ between the posterior (target) distribution and a base distribution, conditioned on the data. The base distribution is typically chosen to be simple and tractable, for which both density evaluation and sampling are easy and efficient (e.g., a Gaussian).

To ensure that the network accurately captures the target posterior, it is trained to minimize the Kullback-Leibler (KL) divergence between the approximated posterior $q_\phi(\theta | y)$ and the true posterior $p(\theta | y)$,

$$\begin{aligned} \hat{\phi} &= \arg \min_{\phi} \mathbb{E}_{(\theta, y) \sim p(\theta, y)} \left[\text{KL} \left(p(\theta | y) \parallel q_\phi(\theta | y) \right) \right] \\ &\propto \arg \min_{\phi} \mathbb{E}_{(\theta, y) \sim p(\theta, y)} \left[-\log q_\phi(\theta | y) \right] \\ &\approx \arg \min_{\phi} \frac{1}{M} \sum_{m=1}^M -\log q_\phi(\theta^{(m)} | y^{(m)}). \end{aligned} \tag{8}$$

The true posterior density $p(\theta | y)$ can be dropped from the equation because it is constant with respect of the learnable network weights ϕ . The expectation is approximated using a Monte-Carlo estimate over M draws generated from the Bayesian model $(\theta^{(m)}, y^{(m)}) \sim p(\theta, y)$ — hence, NPE falls under the umbrella of SBI, since the networks are trained on simulated data.

In addition to the *inference network*, ABI approaches can be expanded with *summary networks*. A summary network compresses raw data y into summary statistics $h_\psi(y)$, i.e., a lower-dimensional representation of the data (embeddings). This simplifies the task of the *inference network* that is therefore concerned with an inference conditioned on a smaller number of informative inputs rather than on a (potentially large) number of individual data points. The architecture of the summary network needs to reflect the structure of the data; for example, permutation invariant networks are suitable to summarize exchangeable data, recurrent neural networks are suitable for time-series data, and so forth. These networks can typically also take input of various size but their output is of fixed length. This allows the ABI amortize over different designs (e.g., varying sample sizes). The inference and summary network are trained concurrently using the modified loss,

$$\hat{\phi}, \hat{\psi} = \arg \min_{\phi, \psi} \mathbb{E}_{(\theta, y) \sim p(\theta, y)} \left[-\log q_\phi(\theta | h_\psi(y)) \right]. \tag{9}$$

Given enough capacity of the summary network, the learned summary statistics are approximately sufficient with regards to the target of the posterior inference: Using the summary statistics does not alter the target posterior distribution, if swapped with the raw data: $p(\theta | y) = p(\theta | h(y))$ (Chen, Zhang, Gutmann, Courville, & Zhu, 2021; Radev et al., 2022). Optionally, we might use an additional penalty term that forces the summaries be distributed according to a specified distribution (e.g., a Gaussian). This regularizes the summary network and allows additional model checks, such as detecting *simulation gaps* (i.e., when the data used for inference differ significantly from the data seen during training; Schmitt, Bürkner, Köthe, & Radev, 2024).

Once trained, the networks can be used for inference, that is, for posterior estimation given any observed data set y^{obs} . First, the data is passed through the trained summary network to obtain its embedding $h_{\hat{\psi}}(y^{\text{obs}})$. Then, sample S draws from the base distribution $(\xi^{(1)}, \xi^{(2)}, \dots, \xi^{(S)})$. The posterior draws $(\theta^{(1)}, \theta^{(2)}, \dots, \theta^{(S)})$ are obtained via the *inverse pass* through the inference network,

$$\theta^{(s)} = f_{\hat{\phi}}^{-1}(\xi^{(s)}; h_{\hat{\psi}}(y^{\text{obs}})) \text{ for } s \in \{1, \dots, S\}. \quad (10)$$

Alternatively to posterior sampling, the approximate posterior density for any values of parameters θ is available by evaluating the corresponding density of the base distribution of the normalizing flow, adjusted for the transformation via the change-of-variables formula,

$$p(\theta | y^{\text{obs}}) \approx q_{\hat{\phi}}(\theta | h_{\hat{\psi}}(y^{\text{obs}})) = p\left(\xi = f_{\hat{\phi}}(\theta; h_{\hat{\psi}}(y^{\text{obs}}))\right) \left| \det \frac{\partial f_{\hat{\phi}}(\theta; h_{\hat{\psi}}(y^{\text{obs}}))}{\partial \theta} \right|. \quad (11)$$

In normalizing flows, the networks are set up such that the jacobian adjustment is simple and fast to evaluate which makes posterior density evaluation (which is also used in training, see Eq. 9) computationally efficient.

Since sampling from the posterior distribution using ABI only requires generating samples from the base distribution and passing the data through the trained networks, it is blazingly fast compared to non-amortized methods. Often times, models that take minutes, hours or even days to fit with non-amortized methods can take as little time as fractions of a second with amortized methods (Hermans et al., 2022; Radev et al., 2022). The efficiency of ABI during inference is particularly helpful in scenarios where data needs to be fit in real time, when many datasets need to be fit with the same model (e.g., von Krause et al., 2022), when the same data set needs to be fit many times (e.g., cross-validation, Bürkner, 2017) – sometimes under different assumptions or processing steps (e.g., for sensitivity analysis, Elsemüller et al., 2024), or for validating the model on a large number of simulations (e.g., simulation-based calibration, Talts et al., 2018). In many cases, such uses of Bayesian models are borderline unfeasible with non-amortized methods (Hermans et al., 2022). ABI makes these procedures within reach in a matter of seconds. Since at no point during training or inference the model likelihood or priors need to be evaluated, this approach is also applicable in scenarios with analytically intractable likelihoods or priors.

2.4 Neural estimation of Mixture Models

The goal is to estimate the joint posterior of the model parameters and the mixture indicators. In the following, we will work with the following factorization:

$$p(\theta, \{z_i\} | \{y_{ij}\}) = p(\theta | \{y_{ij}\})p(\{z_i\} | \{y_{ij}\}, \theta). \quad (12)$$

Here we used the set notation to highlight that the number of observational units in $i = 1, \dots, N$ and the number of observations per unit $j = 1, \dots, P_i$ can vary across different datasets.

Using the factorization above, we separate the problem in two parts, one of which entails estimating the parameter posterior $p(\theta \mid \{y_{ij}\})$ that was already described in Section 2.3. What remains is formulating a neural approximation of the second term $p(\{z_i\} \mid \{y_{ij}\}, \theta)$. Since this is essentially a classification problem, common network architectures, such as the multilayer perceptron (MLP, Baum, 1988; Murtagh, 1991; Rosenblatt, 1958), are adequate candidate architectures. However, because the number of observations per unit can vary, the input of the classification network must be brought into the same dimensions. For this reason, we introduce an (optional) summary network h_ω that creates summary embedding for each observational unit $\{h_\omega(y_i)\}_{i=1}^N$ (similar to the *local* summary network used in amortized multilevel models, Habermann et al., 2024).

The exact architecture of the classification network depends on structure of the data, which dictates how to factorize the joint distribution $p(z \mid y, \theta)$. Some examples of data structures are shown in Figure 1. In the case of exchangeable observational units, the joint distribution can be factorized as $p(z \mid y, \theta) = \prod_{i=1}^N p(z_i \mid y_i, \theta)$. This means that the probability distribution of each mixture indicator z_i can be approximated independently — conditioned on the parameters θ and observation y_i — with a *classification* network as follows,

$$p(z_i \mid y_i, \theta) \approx q_\alpha(z_i \mid y_i, \theta) = \text{softmax}\left(f_\alpha(h_\omega(y_i), \theta)\right) \text{ for } i \in \{1, \dots, N\}, \quad (13)$$

here f_α stands for a MLP with a series of hidden layers connected by learnable weights α followed by non-linear activations, and an output layer with K nodes. The final softmax activation converts the output into a set of mutually exclusive probabilities for each class, essentially implementing soft classification (Liu, Zhang, & Wu, 2011; Wahba, 2002). Soft classification refers to the calculation of class probabilities rather than producing classification labels directly, which is typical for hard categorical classification.

When the observational units are not exchangeable (e.g., ordered time series, spatial data), the joint distribution $p(z \mid y, \theta)$ may not be factorized easily due to dependencies across observational units. In such cases, directly modeling the joint probability distribution of all mixture indicators could require complex and computationally expensive architectures (Mark et al., 2018). In this article, we address this problem using *local decoding*: we *assume* that the distribution can be factorized by conditioning on other observational units. Rather than modeling the full joint probability distribution of all mixture indicators (Lember, Gasbarra, Koloydenko, & Kuljus, 2019; Viterbi, 1967), we approximate each indicator’s probability distribution one at a time, significantly simplifying the computational process (Särkkä & Svensson, 2023).

One method of local decoding is *filtering* where the probability distribution of mixture indicator z_t is based on the sequence of observations up until the t^{th} data point, denoted as $\{y_i\}_{i=1}^t$,

$$p(z_t \mid \{y_i\}_{i=1}^t, \theta) \approx q_\alpha(z_t \mid \{y_i\}_{i=1}^t, \theta) = \text{softmax}\left(f_\alpha(\{h_\omega(y_i)\}_{i=1}^t, \theta)\right) \text{ for } t \in \{1, \dots, N\}, \quad (14)$$

where f_α is a *forward* network that takes the set of observations (or their embeddings) and outputs activation pertaining to the last element in the set. A forward network can be any network that captures dependencies between observations, such as recurrent neural networks (RNNs), gated recurrent units (GRUs), transformers, and so forth.

Both in the context of *classification* and in the context of *filtering*, the networks can be trained with realizations from the Bayesian generative model, where the tuple (y, θ) serves as an input, and z

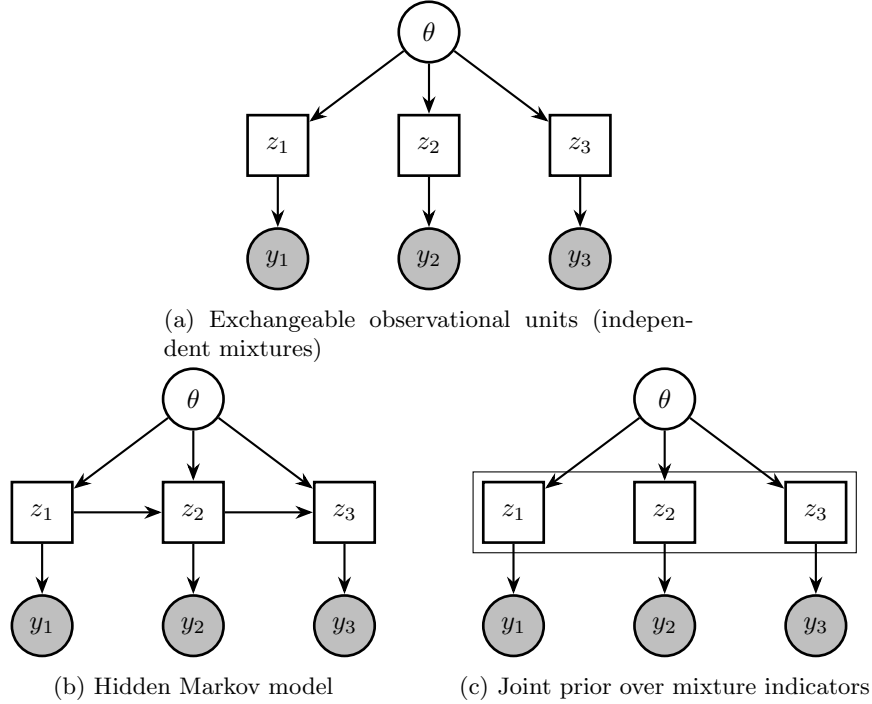


Figure 1: Examples of dependencies between observational units in mixture models. (a) Exchangeable observational units permit factorizing the distribution of mixture indicators as $p(z | y, \theta) = \prod_{i=1}^N p(z_i | y_i, \theta)$. For non-exchangeable observational units such as in (b) and (c), local decoding is used to factorize the joint distribution; *filtering* as $p(z | y, \theta) = \prod_{i=1}^N p(z_i | y_1, \dots, y_i, \theta)$, or *smoothing* as $p(z | y, \theta) = \prod_{i=1}^N p(z_i | y_1, \dots, y_N, \theta)$. Figure inspired by Bürkner et al. (2021).

is the predicted target. Traditional classification loss functions, such as categorical cross-entropy, are well-suited for this inference problem. Specifically, the following loss function can be used,

$$\hat{\alpha}, \hat{\omega} = \arg \min_{\alpha, \omega} \mathbb{E}_{(\theta, y, z) \sim p(\theta, y, z)} \left[-\log q_{\alpha}(\{z_i\} | \{h_{\omega}(y_i)\}, \theta) \right]. \quad (15)$$

An extension of *filtering* is *smoothing* (qv, Mark et al., 2018; Särkkä & Svensson, 2023), where the probability of a mixture indicator z_t is based on all available observations instead of only the observations that precede the current data point. To compute the smoothing estimate, we combine the output of the forward network with an output of a *backward* network f_{β} . The backward network is applied to the *remaining* observations after t , and processes them in the reversed order denoted as $\{y_i\}_{i=N}^{t+1}$,

$$p(z_t | \{y_i\}_{i=1}^N, \theta) \approx q_{\alpha, \beta}(z_t | \{y_i\}_{i=1}^N, \theta) = \text{softmax} \left(f_{\alpha}(\{h_{\omega}(y_i)\}_{i=1}^t, \theta) + f_{\beta}(\{h_{\omega}(y_i)\}_{i=N}^{t+1}, \theta) \right) \text{ for } t \in \{1, \dots, N\}. \quad (16)$$

Although the forward and backward networks are, in principle, separate, in many cases it is justified for them to share the same weights such that $\alpha = \beta$. This is because both networks process the same

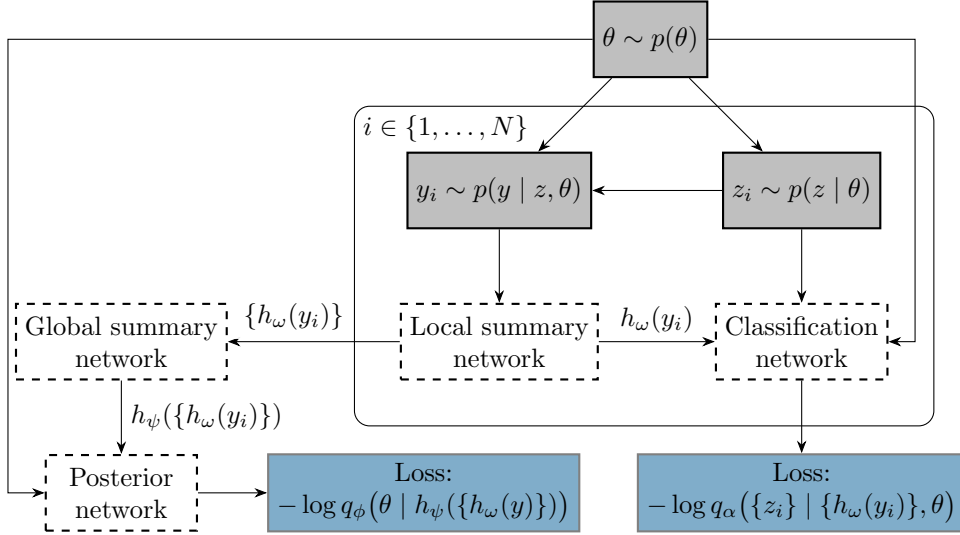


Figure 2: Schematic representation of training amortized mixture models. The boxes highlighted in gray represent the inputs (i.e., the training set) sampled from the Bayesian generative model. The observations y_i are individually passed through the local summary network. For parameter posterior training, the complete set of local summaries is further passed through the global summary network. The global summary is passed together with the true parameters θ to the posterior network to obtain the loss from Eq. 9. For classification training, the local summaries are concatenated with the true parameters θ , and together passed with the true mixture indicators z_i to the classification network, to obtain the loss from Eq. 15 (or in case of separate forward and backward networks, Eq. 17). Combining the two losses results in the joint loss in Eq. 18. The objective of training is to minimize the total loss by optimizing network weights $\phi, \psi, \omega, \alpha$.

type of information and have the same inferential target (the probability distribution of z). In some cases, the predictions from either the forward network or the backward network might systematically outperform the combined outputs of both networks. In that case, training the networks using the smoothed predictions in Eq. 16 could lead to a solution that effectively mimics the one network which performs better while ignoring the performance of the other network. To avoid such a scenario, instead of using the smoothed classification probabilities from Eq. 16, both networks are trained with their own loss, each based on the classification probabilities in the forward and backward direction, respectively,

$$\hat{\alpha}, \hat{\beta}, \hat{\omega} = \arg \min_{\alpha, \beta, \omega} \mathbb{E}_{(\theta, y, z) \sim p(\theta, y, z)} \left[-\log q_{\alpha}(\{z_i\} | \{h_{\omega}(y_i)\}, \theta) - \log q_{\beta}(\{z_i\} | \{h_{\omega}(y_i)\}, \theta) \right], \quad (17)$$

to ensure that both networks are optimized for the classification task on their own. The smoothing in Eq. 16 is applied only during inference, rather than in training.

The losses in Eq. 9 and Eq. 15 or Eq. 17 can be combined, and all networks trained concurrently on the same set of training examples generated from the Bayesian generative model. Concurrent training also offers an opportunity for weight sharing between the NPE and classification tasks. Figure 2 shows a

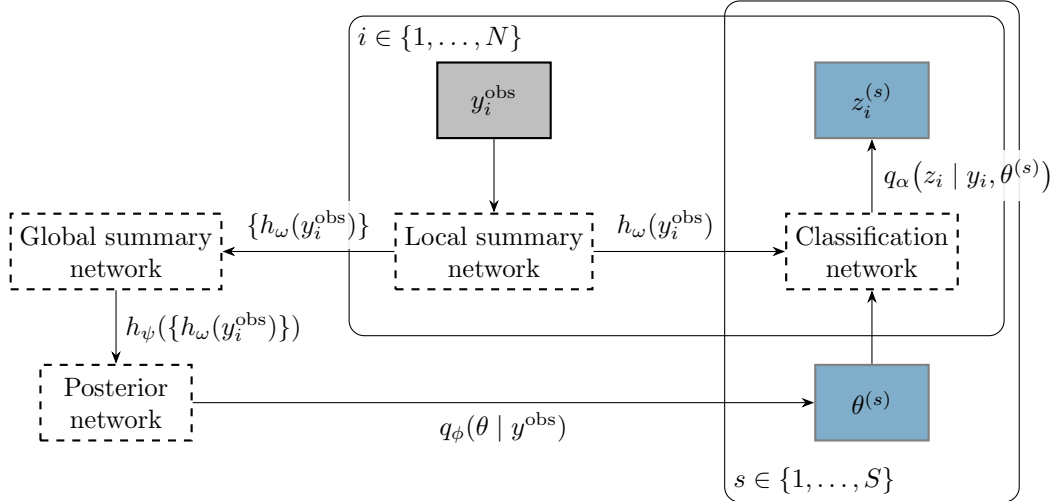


Figure 3: Schematic representation of the use of amortized mixture models for inference. The observations y_i are individually passed through the local summary network. For parameter posterior inference, the complete set of local summaries is further passed through the global summary network. The global summary is passed to the posterior network to generate samples $\theta^{(s)}$ from the approximate posterior distribution. For classification, the local summaries are concatenated with the parameter samples $\theta^{(s)}$ and passed through the classification network to obtain the approximate mixture membership probabilities. If desired, the mixture indicators z_i can be sampled from this approximate distribution.

schematic representation of joint training of the networks used for posterior and mixture inference. For example, the local summary network h_ω can also be used during NPE to compress each observational unit before the global summary network h_ψ is applied to compress the whole data set for posterior inference, leading to the following training objective:

$$\begin{aligned} \hat{\phi}, \hat{\psi}, \hat{\alpha}, \hat{\omega} = \arg \min_{\phi, \psi, \alpha, \omega} \mathbb{E}_{(\theta, y, z) \sim p(\theta, y, z)} \left[-\log q_\phi(\theta | h_\psi(\{h_\omega(y_i)\})) \right. \\ \left. -\log q_\alpha(\{z_i\} | \{h_\omega(y_i)\}, \theta) \right. \\ \left. -\log q_\beta(\{z_i\} | \{h_\omega(y_i)\}, \theta) \right]. \end{aligned} \quad (18)$$

Once the networks are trained, they can be used to make fast inferences from any data. Figure 3 shows a schematic representation of using the networks for inference. The parameter posteriors are sampled as explained in Eq. 10. For the mixture classification, each sample from the posterior, $\theta^{(s)}$, is subsequently used in the mixture membership classification, leading to variations in the classification network output that is a result of the variability in the parameter values. This way, the uncertainty in parameter values is propagated to express the resulting uncertainty in mixture classification.

2.5 Alternative factorizations

The factorization used in Eq. 12 reflects the approach described in Eq. 4 where parameter posteriors are estimated first with the latent mixture indicators marginalized out (and subsequently recomputed).

However, as explained in Section 2.1, this is not the only option to estimate mixture models. Instead, it would be possible to use an alternative factorization,

$$p(\theta, \{z_i\} | \{y_i\}) = p(\{z_i\} | \{y_i\}) p(\theta | \{z_i\}, \{y_i\}), \quad (19)$$

which would imply a different network architecture. Specifically, a classification network would need to predict mixture membership based on the (1) local and (2) global summary networks,

$$p_\alpha(z_i | \{y_j\}_{j=1}^N) \approx \text{softmax}\left(f_\alpha\left(h_\omega(y_i), h_\psi(\{h_\omega(y_j)_{j=1}^N\})\right)\right) \text{ for } i \in \{1, \dots, N\}, \quad (20)$$

which requires conditioning the classification network on the entire data set, as opposed to conditioning it on the parameters.

The mixture probability distribution $p(\{z_i\} | \{y_i\})$ by definition marginalizes out the parameter values, i.e., provides only the expectation of the probability distribution with respect to the parameter values, $p(\{z_i\} | \{y_i\}) = \mathbb{E}_{\theta|y}(p(\{z_i\} | \{y_i\}, \theta))$. In principle, estimating the distribution of $\{z_i\}$ on its own would also be suitable for application when parameter posteriors are not of interest, only mixture membership classification is. However, within the statistical modeling literature, this is rarely the case; at minimum, parameter posteriors are used to check model fit or misspecification. Other applications of mixture models involve more detailed analysis of the joint probability distribution of θ and $\{z_i\}$.

To estimate the joint distribution using the alternative factorization, the parameter posterior network would have to be informed by both the data and the latent indicators. One way how to achieve this is to introduce an additional global summary network h_ξ that would learn embeddings of the concatenation of the local summary embeddings and the latent indicators,

$$p(\theta | \{z_i\}, \{y_i\}) \approx q_\phi\left(\theta | h_\xi(\{h_\omega(y_i), z_i\})\right). \quad (21)$$

During inference, the mixture indicators would have to be sampled from a categorical distribution according to $\{z_i\} \sim p_\alpha(\{z_i\} | \{y_i\})$ for every sample s from the parameter posterior. In the currently used factorization, sampling from this distribution is not necessary. Another disadvantage of this approach is the need to use two global summary networks – one that is used for classification, and one that is used for posterior inference. For these reasons, we decided to use only the factorization described in our case studies in Section 2.4.

3 Case studies

We evaluate our proposed approach for amortized Bayesian mixture models on three case studies. The first two case studies present idealized synthetic examples that demonstrate the use of our approach in the case of independent and dependent mixture models, respectively. The last example shows an application on a real world data set. All applications are implemented using the `BayesFlow` software package (Radev et al., 2022) in Python (Rossum & Drake, 2010). Code associated with this article is accessible at osf.io/7wvyk/.

3.1 Evaluation

An implementation of any model needs to be validated in order to ascertain whether conclusions made using the model are not misleading (Hermans et al., 2022). For each application, we apply a range of

checks to validate the models we showcase in this article. We follow a principled Bayesian workflow (Gabry, Simpson, Vehtari, Betancourt, & Gelman, 2019; Gelman et al., 2020; Schad, Betancourt, & Vasisht, 2019). Simulation-based calibration (SBC, Modrák et al., 2023; Talts et al., 2018) is used to validate whether the parameter posterior approximation is well calibrated with respect to the *true* posterior. A failed SBC check indicates issues with computational validity of the parameter posterior approximation, which could be due to not sufficient training, or a lack of network expressiveness. Parameter recovery, posterior z -score, and posterior contraction are used to judge whether the data in combination with the statistical model lead to meaningful inferences. Poor results can indicate poor posterior calibration, but can also mean problems with parameter identifiability, or a lack of information provided by the data.

To detect model misspecification, we take several approaches. First, we take the approach coming from the neural network literature, where we apply tests to determine whether the observed data deviates from the typical data observed during training (i.e., *simulation gaps*; Schmitt, Bürkner, et al., 2024). From the Bayesian statistics perspective, we conduct *posterior predictive checks* (e.g., Gelman, Meng, & Stern, 1996). Since the first two case studies are demonstrations using synthetic data, the statistical models are by definition well-specified. Therefore, we conduct model misspecification checks only in the last case study.

As a last step, we investigate the accuracy of the neural inference by comparing it to results from state-of-the-art MCMC. To this end, models presented in our case studies were evaluated against the results using the probabilistic programming language `Stan` (Carpenter et al., 2017).

3.2 Parameter constraints

Some parameters in the current models are naturally constraint – for example, mixture proportions are bounded between zero and one and must sum to one. Across all experiments and applications, we ensured that all of the model parameters estimated by the amortized posterior estimator are trained on the unconstrained real space. Because the networks only see the unconstrained parameters during training, the parameter posterior network is subsequently making inferences on the unconstrained parameter space. Similarly, the classification networks are also conditioned on parameters in the unconstrained space. Where appropriate, we transform the parameters from the unconstrained space into the constrained space for easier interpretation of the results. Here we explain the parameter transformations used across the case studies.

Unit simplex

Unit simplex parameters π are constrained such that $0 \leq \pi_k \leq 1$ for $k \in \{1, \dots, K\}$ and $\sum_k^K \pi_k = 1$. Parameters constrained on the unit simplex in mixture models typically come in form of mixture proportions. Further, in hidden Markov models, each row of the latent state transition matrix is a unit simplex. To explain our notation,

$$\pi \sim \text{Dirichlet}(2, 2, 2) \tag{22}$$

indicates that the elements of the vector π are generated from a Dirichlet distribution with $K = 3$ parameters. By construction, only $K - 1$ parameters are needed to reconstruct the entire vector, since all values need to sum to one.

During training, the parameters are transformed into an unconstrained space $\theta \in \mathbb{R}^{K-1}$, defined

for $1 \leq k < K$,

$$\theta_k = \text{logit}^{-1} \left(\pi_k + \log \left(\frac{1}{K-k} \right) \right). \quad (23)$$

During inference, the posterior parameter network outputs the posterior distribution on the unconstrained space. To convert the parameters back to the constrained space, the following transformation is applied,

$$\pi_k = \begin{cases} (1 - \sum_{j=1}^{k-1} \theta_j) \theta_k & \text{if } 1 \leq k < K \\ 1 - \sum_{j=1}^{K-1} \pi_j & \text{if } k = K. \end{cases} \quad (24)$$

Ordered vector

A mixture model with the same distribution under each mixture component is identifiable up to the permutation of the mixture labels. To prevent label switching (see [Jasra, Holmes, & Stephens, 2005](#)), one simple solution is to impose order constraints on parameters. While this naive approach can suffer from several drawbacks if used in isolation to solve the label switching problem (e.g., [Celeux et al., 2000](#); [Marin et al., 2005](#)), we use order constraints in combination with (1) weakly informed priors (all case studies) and (2) differences between mixture components likelihoods (case study 3) to ensure model identifiability. To explain the notation,

$$(\mu_1, \mu_2, \mu_3) \sim \text{Normal} \left((-2, 0, 2), \mathbb{I} \right)_{\mu_1 < \mu_2 < \mu_3} \quad (25)$$

indicates an order constraint of the mean parameters in a $K = 3$ component mixture such that $\mu_1 < \mu_2 < \mu_3$. During sampling from the generative model, the order constraints are achieved by rejection sampling; first, we draw from the normal distribution, and if the draw does not satisfy the constraint the draw is repeated. In principle, rejection sampling is not an efficient way to draw from the constrained distribution. However, in our cases, the prior components are already relatively well separated, leading to low rejection rates. As a result, rejection sampling did not significantly slow down sampling from the Bayesian generative model.

During training, parameters are transformed to an unconstrained space, where

$$\theta_k = \begin{cases} \mu_1 & \text{if } k = 1 \\ \log(\mu_k - \mu_{k-1}) & \text{if } 1 < k < K. \end{cases} \quad (26)$$

During inference, the parameter posterior network returns the posterior distribution on the unconstrained space. To convert the parameters back into the constrained space, the following transformation is applied,

$$\mu_k = \begin{cases} \theta_1 & \text{if } k = 1 \\ \mu_{k-1} + \exp(\theta_k) & \text{if } 1 < k \leq K. \end{cases} \quad (27)$$

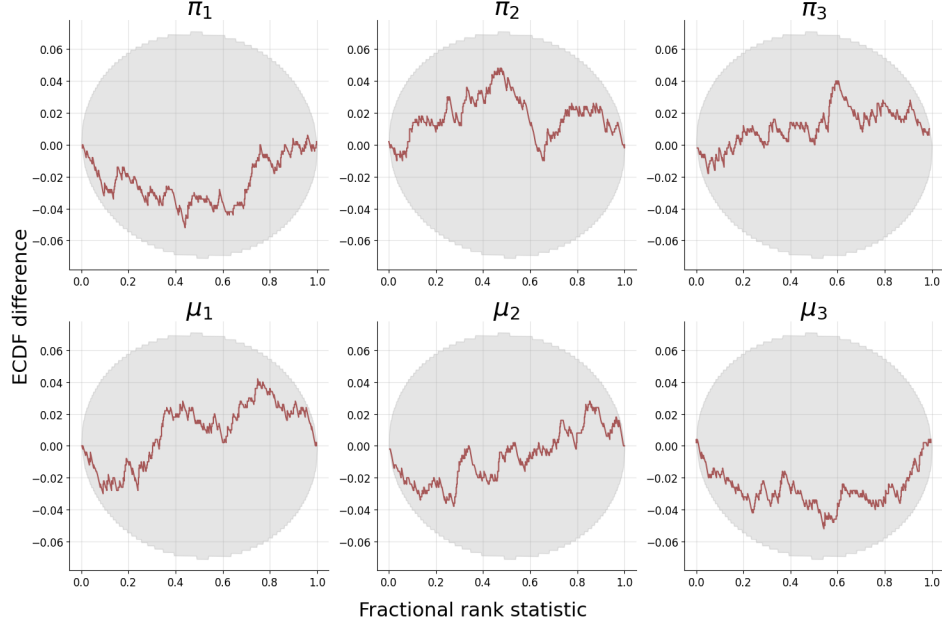


Figure 4: *Case Study 1: Gaussian mixture model.* Simulation-based calibration results displayed as difference between the empirical and expected cumulative distribution function of the fractional rank statistic. The shaded area corresponds to the 95% Confidence bands.

3.3 Case Study 1: Gaussian mixture model

The first experiment used as an example is a simple independent mixture model with three mixture components. The generative model is as follows:

$$\begin{aligned}
 N &\sim \text{Uniform}(150, 250) \\
 P &\sim \text{Uniform}(2, 4) \\
 (\mu_1, \mu_2, \mu_3) &\sim \text{Normal}\left((-2, 0, 2), \mathbb{I}\right)_{\mu_1 < \mu_2 < \mu_3} \\
 \pi &\sim \text{Dirichlet}(2, 2, 2) \\
 z_i &\sim \text{Categorical}(\pi) && \text{for } i \in \{1, \dots, N\} \\
 y_{ij} &\sim \text{Normal}(\mu_{z_i}, 1) && \text{for } i \in \{1, \dots, N\}; j \in \{1, \dots, P\}
 \end{aligned} \tag{28}$$

The context variables N and P (number of observational units and number of observations per unit, respectively) varied during training so that the networks learn to amortize over different dataset sizes.

The DeepSet architecture (Zaheer et al., 2017) produces embedding for exchangeable data, such that the summary embedding is identical for any permutation of the data points. We used a DeepSet network as the local summary network h_ω to obtain an embedding for each y_i individually, producing a set of embeddings $\{h_\omega(y_i)\}$. This approach compresses the data at the subject level, ensuring that the representation of each observational unit has a consistent dimensionality, regardless of the number of observations per unit p . In this case study, the local summary could be easily handcrafted (i.e.,

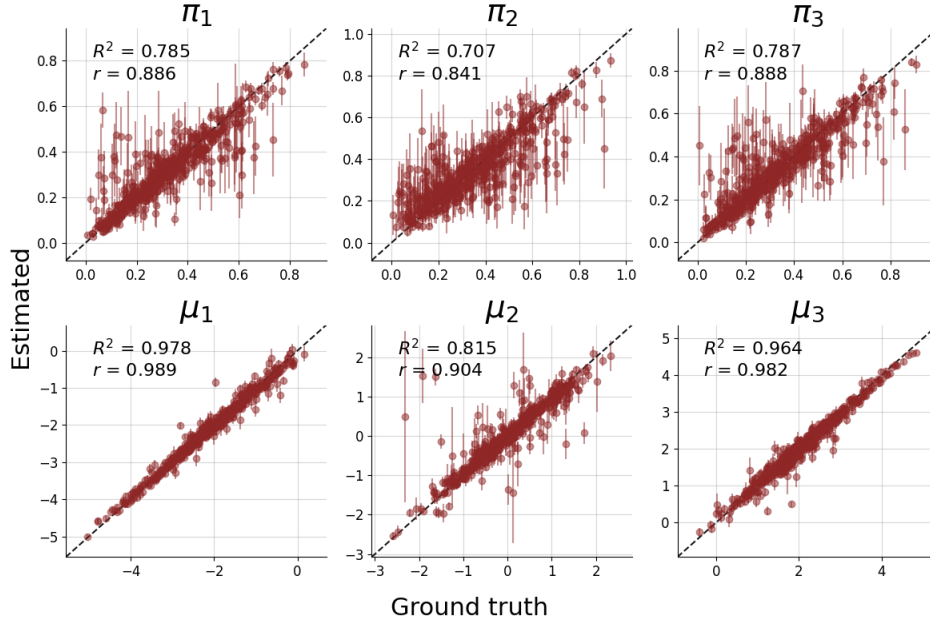


Figure 5: *Case Study 1: Gaussian mixture model.* Parameter recovery shown as scatter plot between the true data generating parameter values and the estimated parameter values. The point estimates are the median, whereas the lines depict the 95% central credible interval.

by computing the arithmetic mean). To showcase the capabilities of the framework in general, we still use a neural network, albeit it need not be complex: it contains two dense layers in the inner and outer function of the DeepSet, as well as two equivariant layers. The output size of the summary network was set to two: While in principle the summary network could capture all information with a single output (the minimal number of sufficient statistics is 1 in this case), giving the network more flexibility allowed it to learn the representation more easily.

The global summary network distills a fixed length embedding $h_\psi(\{h_\omega(y_i)\})$ from the set of individual local summaries, $\{h_\omega(y_i)\}$. The global embedding is used for parameter posterior inference, and so has a more demanding task than the local inference network; if only because it needs to extract summary statistics that relate to the five free parameters in the model. The global network also implemented as a DeepSet (Zaheer et al., 2017), but we let the network possess more expressive power; the number of dense layers in the inner and outer functions were doubled (i.e., four), while the number of equivariant layers was set to three.

The embedding from the global summary network is concatenated with the context variables n and p and passed to an invertible spline coupling network with 14 layers, implemented according to Radev et al. (2022). This network is used for parameter posterior inference. As a classification network, a multilayer perceptron model composed of 12 fully connected layers with the ReLU activation function was used.

All networks were trained jointly in an online training regime, for a total duration of 100 epochs, 2000 iterations each, with each iteration made of 128 sampled data sets from the Bayesian generative model. Figure 4 shows the results of the simulation-based calibration (Talts et al., 2018) of the

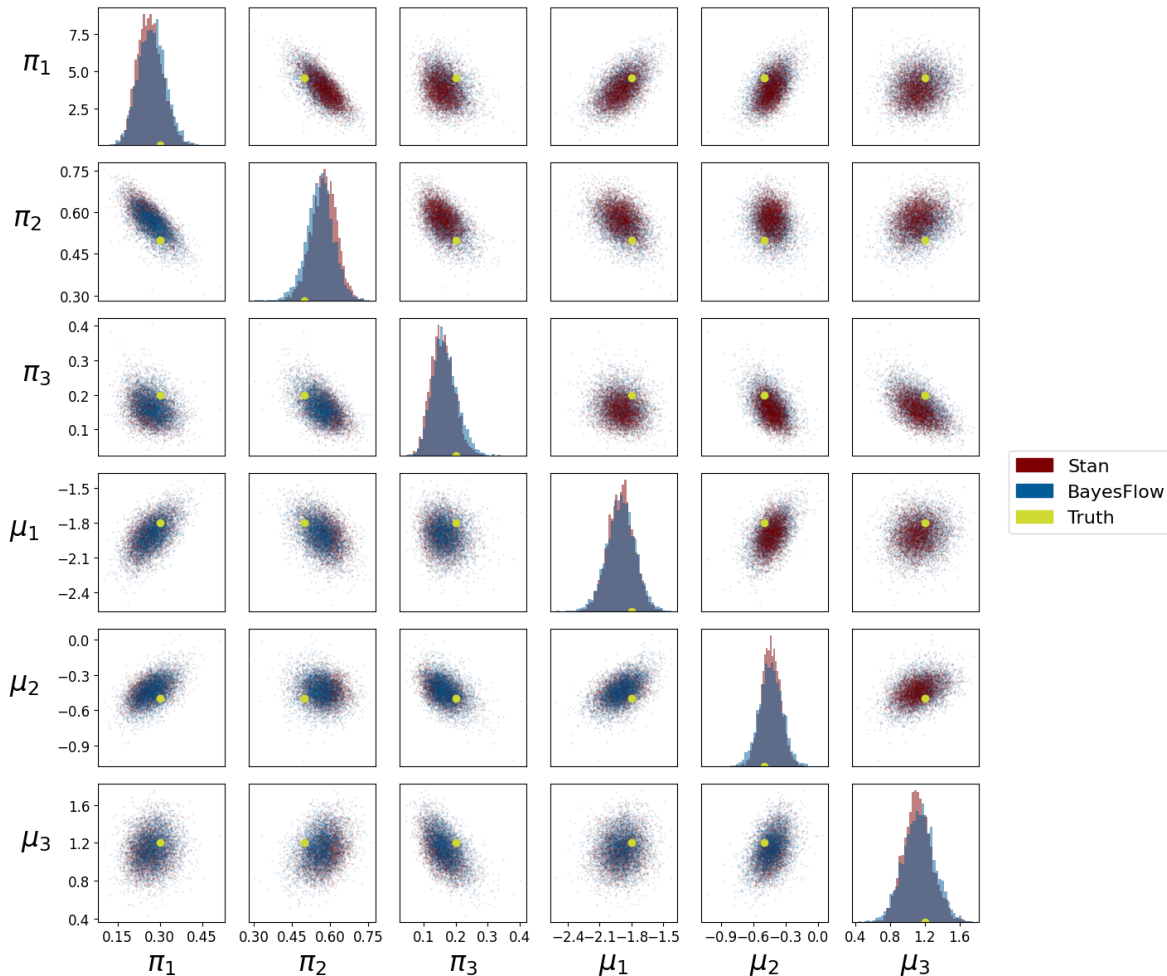


Figure 6: *Case Study 1: Gaussian mixture model.* Joint posterior distribution of the parameters using BayesFlow and Stan. Example using synthetic data. The diagonals show the marginal parameter posteriors, whereas off-diagonal elements show the pairwise scatter plots to display dependencies between parameters.

approximator of the parameter posteriors when the context variables were fixed at $N = 200, P = 3$. The results indicate good calibration of the estimated posteriors. Recovery of the parameters in general is relatively good, as shown in Figure 5.

Next, we show how the amortized inference compares to results obtained using MCMC with Stan (Carpenter et al., 2017). We simulated a single data set from the generative model, and fitted the mixture model on the simulated data with NPE and with MCMC. The true parameter values in this particular example are $\pi = (0.3, 0.5, 0.2)$, $\mu = (-1.8, -0.5, 1.2)$ and the context variables were set to $N = 200, P = 3$.

Figure 6 shows the joint posterior distribution of the parameters as estimated by BayesFlow and

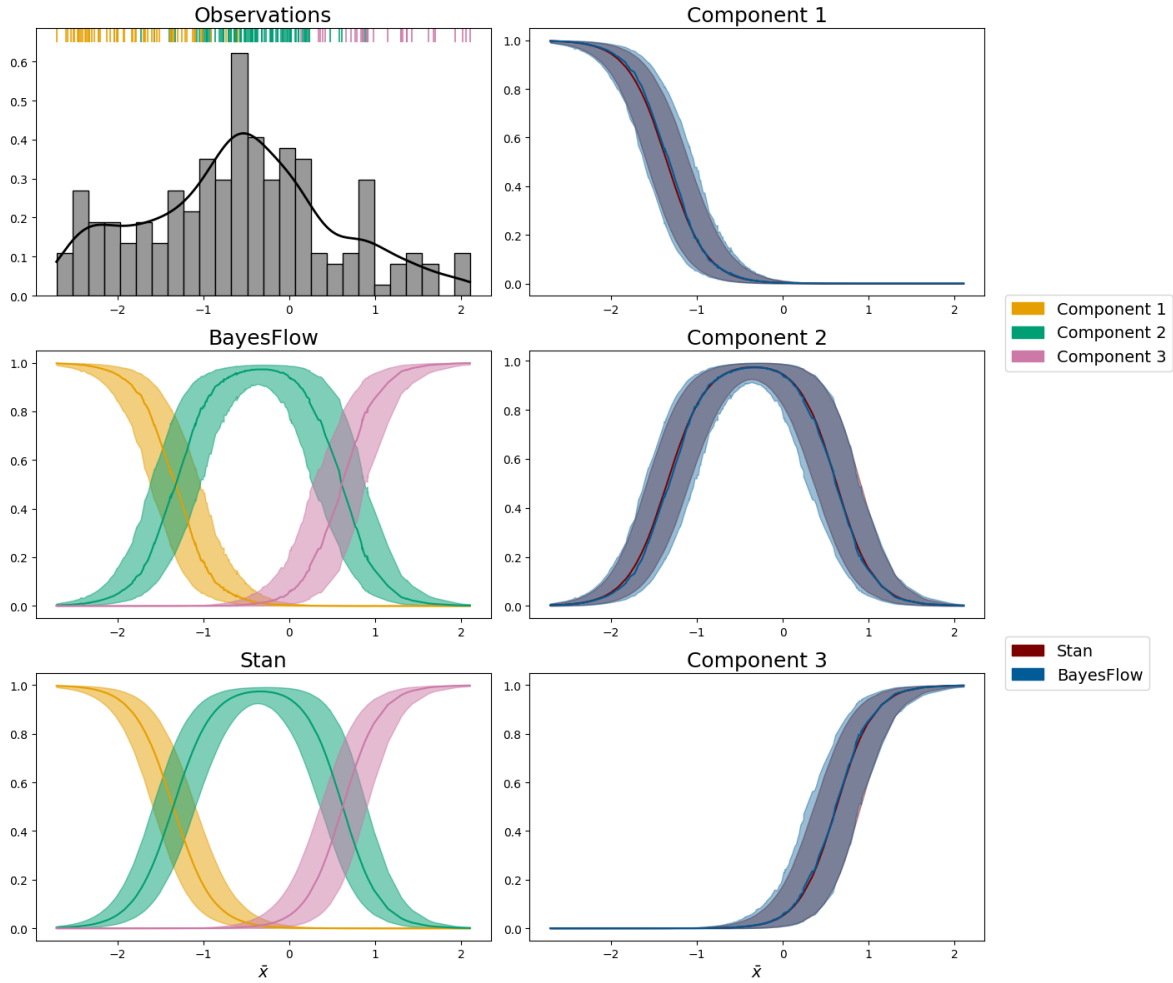


Figure 7: *Case Study 1: Gaussian mixture model.* Comparison of the classification based on the normal mixture model implemented in BayesFlow and in Stan. The data set was generated according to the model in Eq. 28 with $n = 200$ and $p = 3$. The x -axis displays the mean for each subject across the three observations. The lines show the median of the classification distribution, the confidence bands display the 95% central credible interval.

Stan. Visual inspection indicates that the distributions are almost identical, suggesting that both methods sample from the same distribution.

Figure 7 shows the results of the classification network when applied to a single data set drawn from the Bayesian generative model. The results indicate that the neural estimation of the classification probabilities are almost identical to the results calculated using the analytic likelihoods based on the parameter posteriors returned by **Stan**. The results suggest that the neural classifier is able to represent the mixture probabilities in a faithful manner. The 95% CI intervals also overlap for both methods,

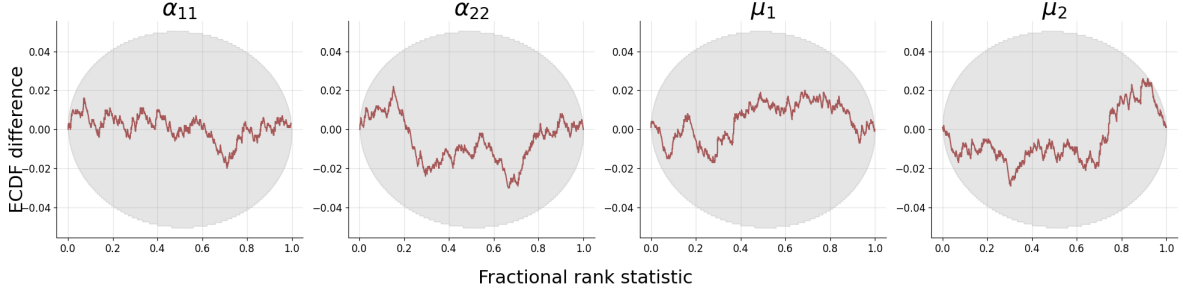


Figure 8: *Case Study 2: Gaussian hidden Markov model*. Simulation-based calibration results displayed as difference between the empirical and expected cumulative distribution function of the fractional rank statistic. The shaded area corresponds to the 95% Confidence bands.

suggesting that the neural classifier is able to accurately propagate the uncertainty of the parameter values into the uncertainty of the classification probabilities.

3.4 Case Study 2: Gaussian hidden Markov model

The second experiment builds on the first one, but introduces some changes. First, instead of the latent mixture indicators being sampled independently, they now follow a first-order Markov chain. The model can be therefore viewed as a hidden Markov model for evenly spaced time-series (Frühwirth-Schnatter, 2006; Visser & Speekenbrink, 2022; Zucchini et al., 2016). Second, each time point can consist of variable number of observations, instead of that being fixed for all time points. Lastly, the model is composed of only two mixture components (hidden states). The model can be written down as follows,

$$\begin{aligned}
 P_i &\sim \text{Uniform}(2, 5) && \text{for } i \in \{1, \dots, N\} \\
 \alpha_k &\sim \text{Dirichlet}(2, 2) && \text{for } k \in \{1, 2\} \\
 (\mu_1, \mu_2) &\sim \text{Normal}\left((-1.5, 1.5), \mathbb{I}\right)_{\mu_1 < \mu_2} && (29) \\
 z_1 &\sim \text{Categorical}(0.5, 0.5) \\
 z_i &\sim \text{Categorical}(\alpha_{z_{i-1}}) && \text{for } i \in \{2, \dots, N\} \\
 y_{ij} &\sim \text{Normal}(\mu_{z_i}, 1) && \text{for } i \in \{1, \dots, N\}; j \in \{1, \dots, P_i\},
 \end{aligned}$$

where $N = 100$ is the number of time points (observational units) and P_i is the number of observations per time point. The 2×2 transition matrix with elements α_{ij} gives the probability of transitioning from state i to state j . Since each row of the transition matrix sums up to one, we will only show the results for the diagonal elements of the matrix α_{11} and α_{22} , corresponding to the probability of staying at the current state 1 or 2, respectively.

For the same reasons as in the first case study, DeepSet architecture (Zaheer et al., 2017) was used as the local summary network h_ω . However, in order to extract information from the temporal dependencies between the data points, an LSTM network (Gers, Schmidhuber, & Cummins, 1999) was used as the global summary network.

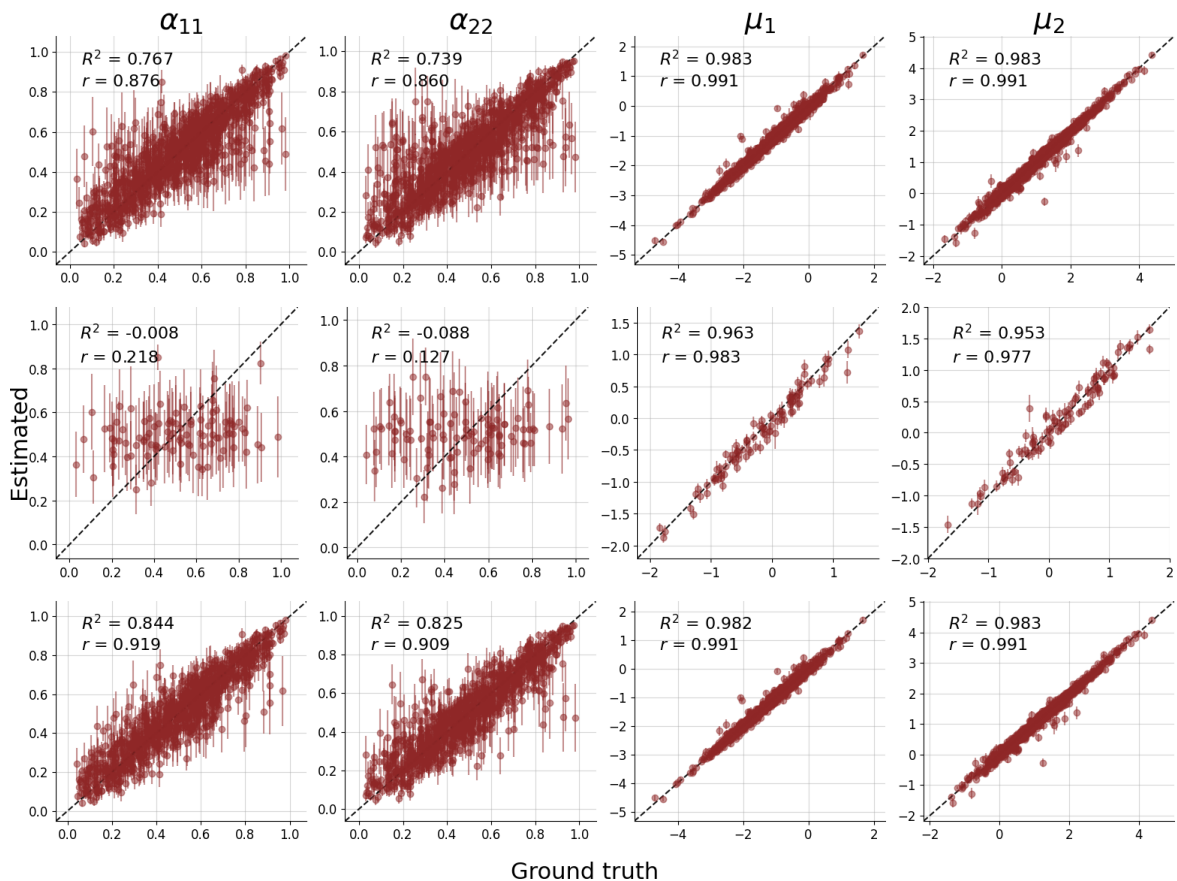


Figure 9: *Case Study 2: Gaussian hidden Markov model*. Parameter recovery shown as scatter plot between the true data generating parameter values and the estimated parameter values. The point estimates are the median, whereas the lines depict the 95% central credible interval. Top row: Recovery across all parameter space. Middle row: Recovery for a subset of the parameter space where $\mu_2 - \mu_1 < 2/3$. Bottom row: Recovery for a subset of the parameter space where $\mu_2 - \mu_1 \geq 2/3$.

The classification network f_α is implemented as an LSTM layer with 32 units, followed by series of fully connected dense layers with ReLU activation. The LSTM layer allows the network to take into account other observational units, whereas the dense layers increase the expressiveness of the network.

All networks were trained jointly in an online training regime, for a total duration of 50 epochs, 500 iterations each, with each iteration made of 512 sampled data sets from the Bayesian generative model.

For validation of the posterior approximator, we simulated 1000 data sets using the Bayesian generative model, and fitted them with the amortized posterior approximator by generating 1000 posterior samples for each data set. As shown in Figure 8, the SBC revealed no clear patterns of miscalibration of the posterior approximator. Figure 9 shows satisfactory parameter recovery results, especially for the mean parameters μ_1 and μ_2 . Recovery of the transition probabilities are slightly

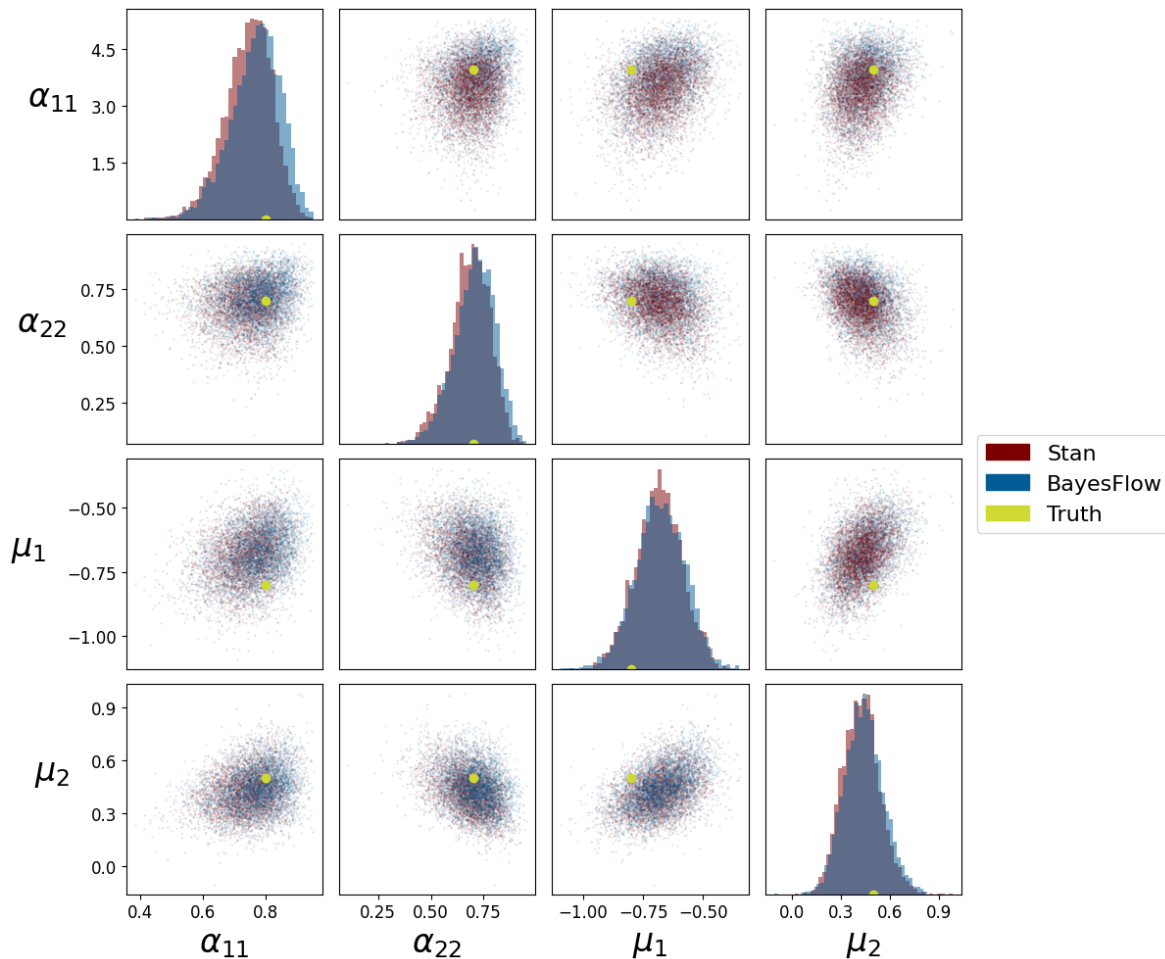


Figure 10: *Case Study 2: Gaussian hidden Markov model.* Comparison between parameter posterior approximations using `BayesFlow` and `Stan`. Example using synthetic data. The diagonals show the marginal parameter posteriors, whereas off-diagonal elements show the pairwise scatter plots to display dependencies between parameters. The two methods return nearly identical results, yielding almost perfectly overlapping distributions.

worse. A closer inspection reveals that the recovery of the transition probabilities is mostly suboptimal when the distance between the means is relatively small, as shown in the middle row of Figure 9. When the states are well separated, recovery of the transition probabilities improves, as shown in the bottom row of Figure 9. Such behavior is typical for mixture models and does not necessarily suggest problems with the network approximator. Overall, these results suggest that the amortized posterior approximator works well.

To showcase the application of the amortized HMM, we show the results applied to one synthetic example generated from the Bayesian generative model. Figure 10 shows the posterior distribution of

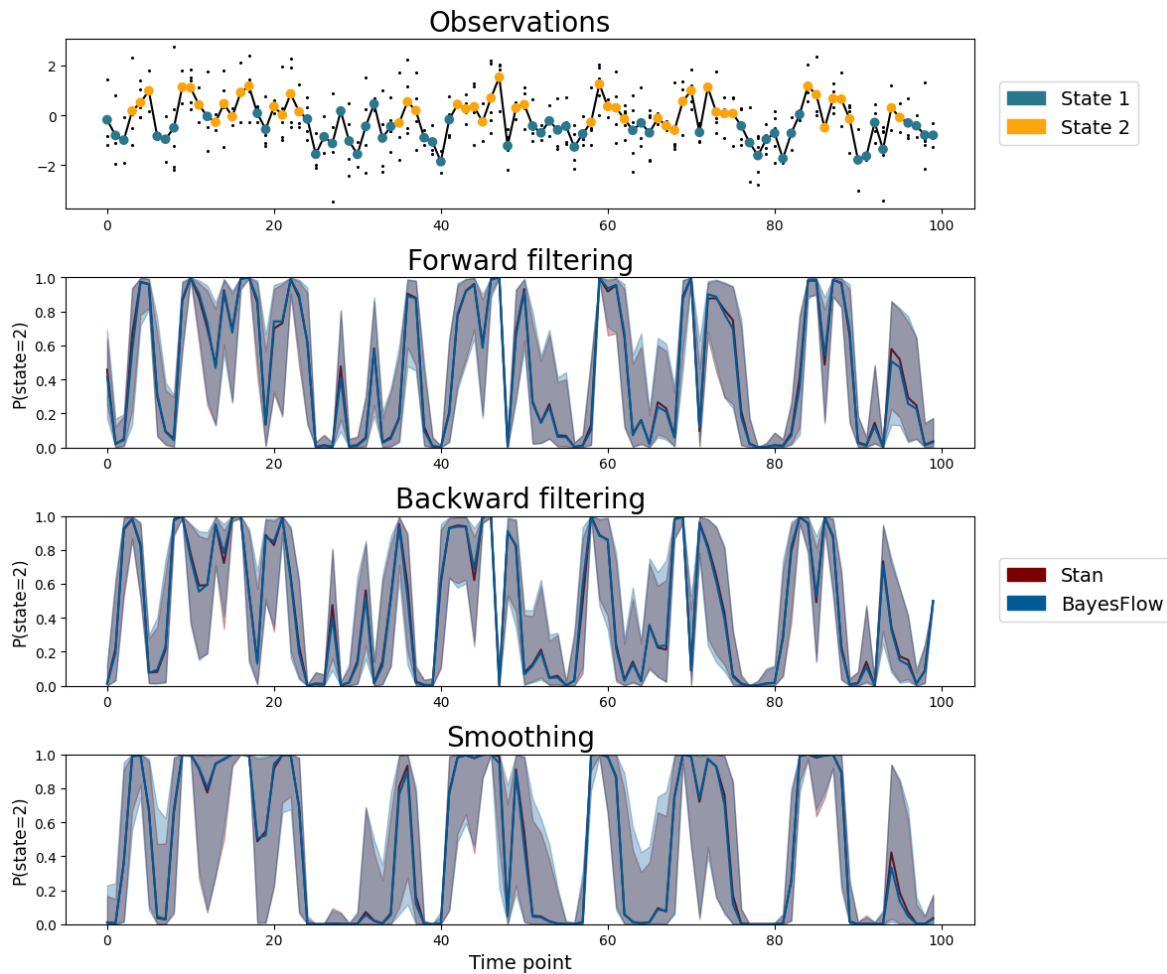


Figure 11: *Case Study 2: Gaussian hidden Markov model.* Comparison between **BayesFlow** and **Stan** in the predicted classification probabilities using forward and backward filtering, and smoothing, using the Gaussian hidden Markov model. In the top plot, individual observations are shown as black dots. Large colored dots depict the mean. In the classification plots, the solid lines show the posterior median, and the confidence bands display the 99% central credible interval. Example using synthetic data. The two methods return nearly identical results, yielding almost perfectly overlapping classification probabilities.

the parameters. Both **BayesFlow** and **Stan** estimates are very similar, suggesting that the amortized posterior approximator works correctly.

BayesFlow and **Stan** also agree on the classification probabilities based on forward filtering, backward filtering, and smoothing, as shown in Figure 11, suggesting that the classification network is well calibrated as well, including calibration of the classification uncertainty as demonstrated by overlapping confidence intervals.

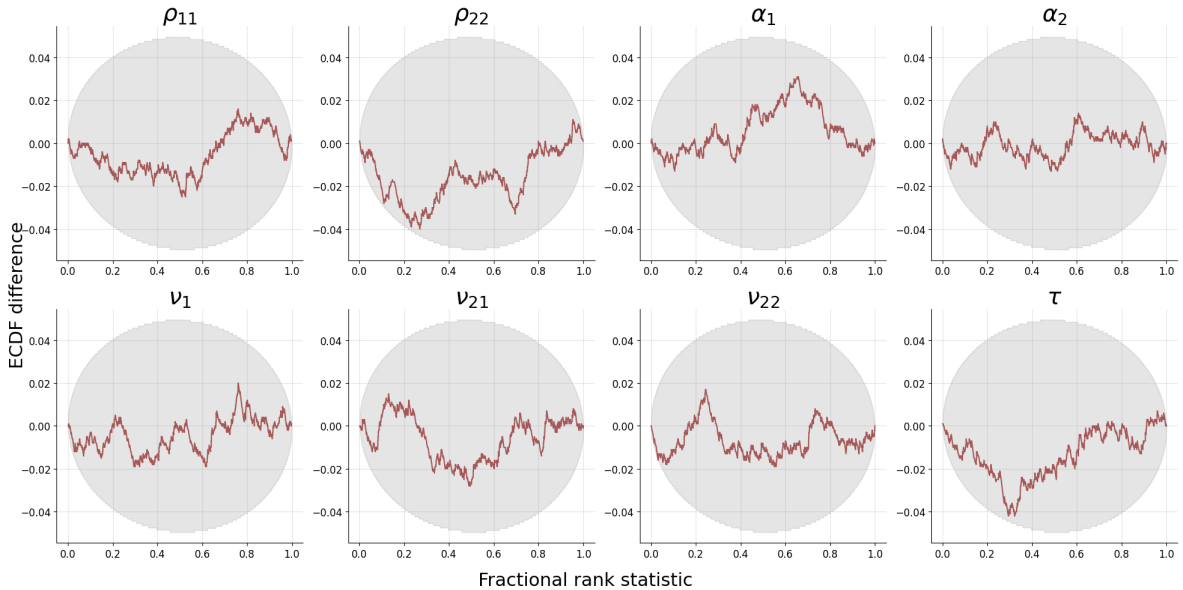


Figure 12: *Case Study 3: Latent switches in cognitive processing.* Simulation-based calibration results displayed as difference between the empirical and expected cumulative distribution function of the fractional rank statistic. The shaded area corresponds to the 95% Confidence bands.

3.5 Case Study 3: Latent switches in cognitive processing

The current application is based on the empirical study reported by [Dutilh, Wagenmakers, Visser, and van der Maas \(2011\)](#) that studied human decision making in speeded decision tasks. One prediction is that under different incentive conditions (i.e., varying reward for speed versus accuracy), participants are unable to control the speed-decision trade-off on a continuum, but rather switch between distinct modes of behavior — under one mode, participants tend to guess randomly in order to provide fast responses, and under another mode, provide slower responses for the sake of improving their accuracy. These modes can be represented as latent states in a mixture model. Since the incentives in the experiment between trials are adjusted continually, it is expected that there will be some temporal dependencies between the states; here, we will model these dependencies with a Hidden Markov model.

Under the guessing state, response times are modeled as simple response times ([Luce, 1991](#)); specifically, using a shifted Wald distribution ([Anders, Alario, & Van Maanen, 2016](#); [Chhikara & Folks, 2019](#)), and the choice response is generated from a categorical distribution. Under the controlled state, the responses are generated from a four-parameter Racing Diffusion model (RDM, [Tillman, Van Zandt, & Logan, 2020](#)), allowing a continuous speed-accuracy trade-off within the controlled state. The full

model can be summarized as follows,

$$\begin{aligned}
\rho_k &\sim \text{Dirichlet}(2, 2) && \text{for } k \in \{1, 2\} \\
z_1 &\sim \text{Categorical}(0.5, 0.5) \\
z_i &\sim \text{Categorical}(\rho_{z_{i-1}}) && \text{for } i \in \{2, \dots, N\} \\
\alpha_1 &\sim \text{Normal}(0.5, 0.3)_{T(0, \infty)} \\
\nu_1 &\sim \text{Normal}(5.5, 1.0)_{T(0, \infty)} \\
(\alpha_2 - \alpha_1) &\sim \text{Normal}(1.5, 0.5)_{T(0, \infty)} \\
\nu_{21} &\sim \text{Normal}(2.5, 0.5)_{T(0, \infty)} \\
(\nu_{22} - \nu_{21}) &\sim \text{Normal}(2.5, 1.0)_{T(0, \infty)} \\
\tau &\sim \text{Exponential}(5.0) \\
(rt_i, y_i) &\sim \begin{cases} (\text{Wald}(\alpha_1, \nu_1) + \tau, \text{Bernoulli}(0.5)) & \text{if } z_i = 1 \\ \text{RDM}(\alpha_2, \nu_{21}, \nu_{22}, \tau) & \text{if } z_i = 2 \end{cases} && \text{for } i \in \{1, \dots, N\},
\end{aligned} \tag{30}$$

where $N = 400$ is the number of trials in the experiment (observational units). The 2×2 transition matrix with elements ρ_{ij} gives the probability of transitioning from the latent state i to j . Since each row of the transition matrix sums up to one, we will only show the results for the diagonal elements of the matrix α_{11} and α_{22} , the probability of staying in the guessing and controlled state, respectively. The response model comprises of six parameters: the non-decision time τ , the decision boundary α_1 and the drift rate ν_1 , respectively, under the guessing state, the decision boundary α_2 , the drift rate for the incorrect response ν_{21} and the correct response ν_{22} under the controlled state. The parameter priors were selected through prior predictive simulations such that model generates realistic patterns of observed data under each state (Kucharský et al., 2021).

Since the observational units are always comprised only of one observation of response time rt_i and one observation of choice y_i , using a local summary network would be redundant. Thus, raw data is passed directly to the global summary network for posterior inference, as well as the classification network for the classification inference. As a global summary network, a series of four convolutional layers is followed by a bidirectional LSTM layer with 256 units. The final output layer with size of 32 units was regularized using the MMD loss so that the summary statistics are approximately normally distributed (Schmitt, Bürkner, et al., 2024). This will allow us later to compute diagnostics of model misspecification when the model is applied to empirical data.

The classification network f_α is implemented as an LSTM layer with 32 units, followed by a series of fully connected layers with ReLU activation. The LSTM layer allows the network to take the temporal dependencies in the data, while the dense layers further increase the expressiveness of the network. The classification network was trained both in the forward and backward regime, so that it can be used for both *filtering* and *smoothing*.

All networks were trained jointly in an online training regime, for a total duration of 100 epochs, 1000 iterations each epoch, with each iteration made of 256 sampled data sets from the Bayesian generative model.

For validating the posterior approximator, we simulated 1000 data sets from the Bayesian generative model, and fitted them with the amortized posterior approximator, obtaining 1000 posterior samples for each data set. As shown in Figure 12, SBC revealed no miscalibration of the posterior approximator. Figure 13 shows that parameters can also be recovered. Overall the results of the validation simulations suggested that the amortized posterior works well.

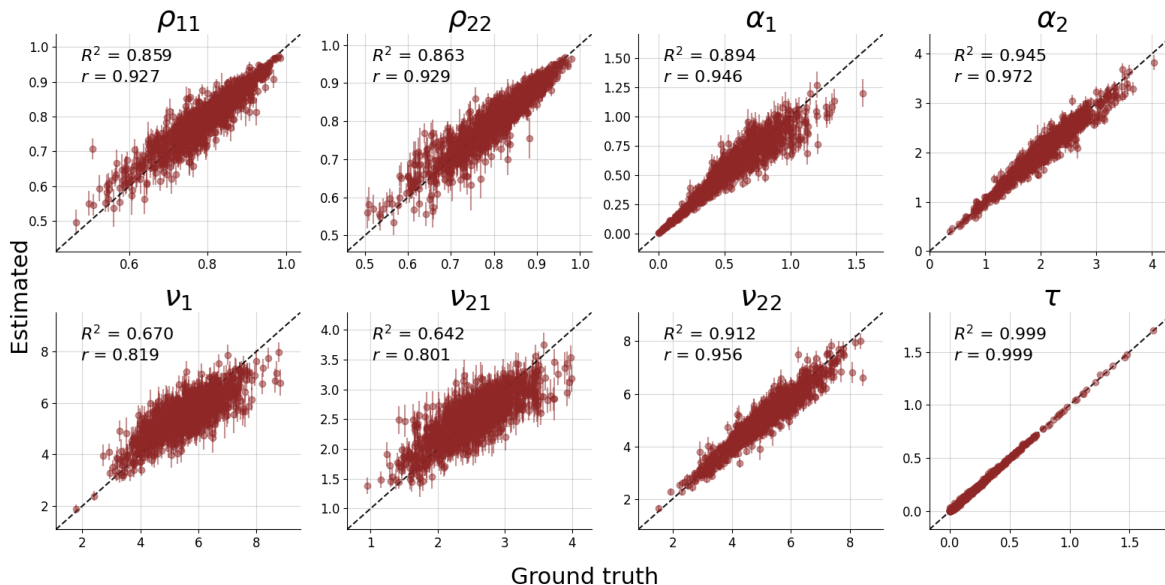


Figure 13: *Case Study 3: Latent switches in cognitive processing*. Parameter recovery shown as scatter plot between the true data generating parameter values and the estimated parameter values. The point estimates are the median, whereas the lines depict the 95% central credible interval.

To evaluate the model’s performance on real data, the model was fitted to data from 11 participants in an experiment reported by [Dutilh et al. \(2011\)](#). For reference, all data sets were fitted with `BayesFlow` and with `Stan`.

To check for model misspecification, we computed the MMD of the summary statistics returned by the global summary network, and compared it to the distribution of MMD statistics computed on prior predictive data sets. As shown in [Table 1](#), for seven out of the eleven data sets, the computed MMD did not exceed critical values that would identify model misspecification.

An example of a posterior associated with a typical value of MMD is shown in [Figure 14](#). The posterior approximations returned from `BayesFlow` and `Stan` almost perfectly overlap, both in terms of their marginal distributions, as well as the join distribution as inspected by pairwise scatter plots. This suggests that the amortized posterior returned from `BayesFlow` is able to correctly capture the values of the parameters as well as their correlations. The low value of MMD correctly identified that the amortized posterior is indeed well calibrated for this data set, and the estimate is therefore trustworthy.

For the rest four data sets, the parameter posteriors approximated by `BayesFlow` may not be trustworthy. For example, as shown for participant B in [Figure 15](#), it appears that `BayesFlow` slightly underestimates parameters α_1 and ν_1 .

Following the amortized Bayesian workflow ([Schmitt, Li, et al., 2024](#)), it is possible to correct the approximated posteriors using Pareto smoothed importance sampling (PSIS, [Vehtari et al., 2017](#); [Vehtari, Simpson, Gelman, Yao, & Gabry, 2024](#)). [Table 1](#) also shows the Pareto \hat{k} diagnostic. For the data set B, the importance weights can be used for correcting the posterior distribution obtained with `BayesFlow`.

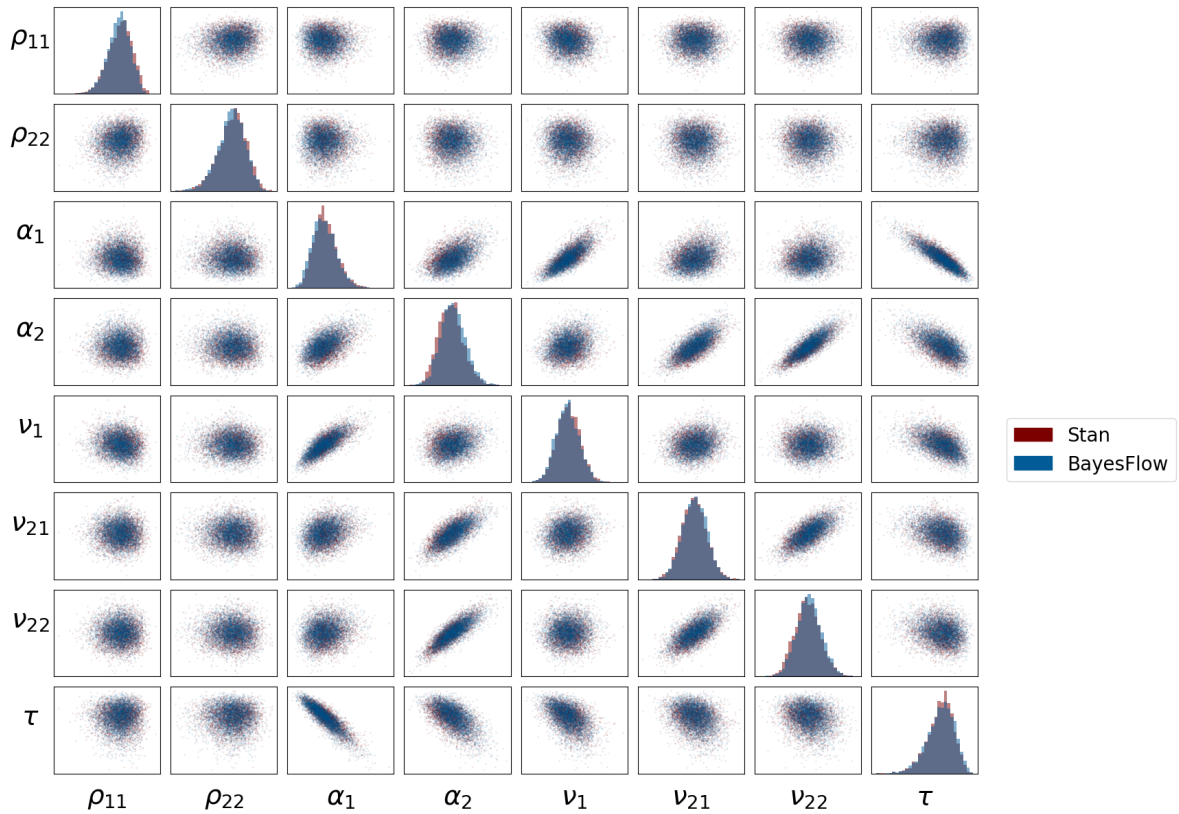


Figure 14: *Case Study 3: Latent switches in cognitive processing.* Comparison of the parameter posterior samples between BayesFlow and Stan for participant C reported by Dutilh et al. (2011). The diagonals show the marginal parameter posteriors, whereas off-diagonal elements show the pairwise scatter plots to display dependencies between parameters. The two methods return nearly identical results, yielding almost perfectly overlapping distributions.

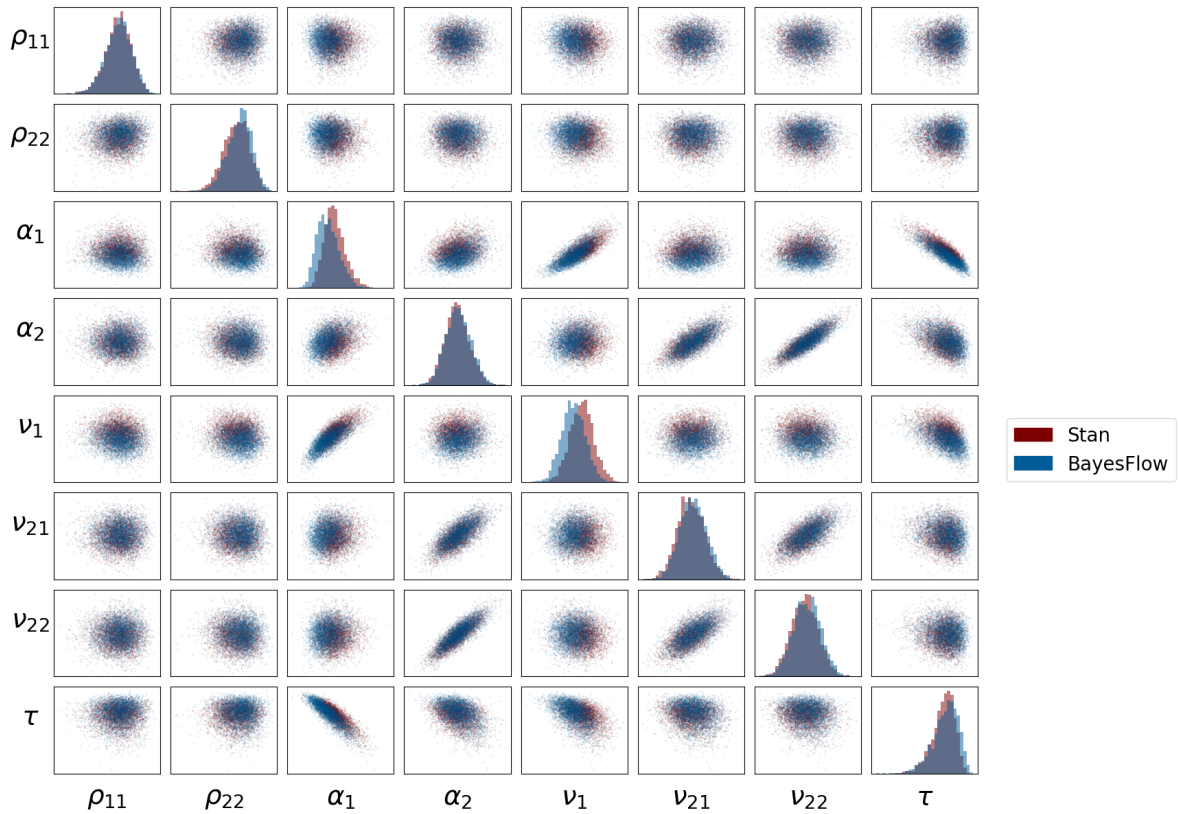


Figure 15: *Case Study 3: Latent switches in cognitive processing.* Comparison of the parameter priors and posterior samples between **BayesFlow** and **Stan** for participant B reported by [Dutilh et al. \(2011\)](#). The diagonals show the marginal parameter posteriors, whereas off-diagonal elements show the pairwise scatter plots to display correlations between parameters. The BayesFlow approximation is slightly biased but the estimates can be corrected by Pareto smoothed importance sampling.

Data set	MMD test		Pareto \hat{k}
	Statistic	p -value	
A	3.84	.025	3.81
B	3.75	.084	0.49
C	3.52	.664	0.46
D	3.68	.168	0.41
E	3.67	.192	0.53
F	3.44	.895	0.59
G	3.77	.072	1.61
H	3.67	.197	0.67
I	3.63	.282	0.32
J	3.72	.453	0.66
K	3.78	.060	0.76

Table 1: MMD test and Pareto \hat{k} diagnostic. Highlighted values indicate failed diagnostics. Failed MMD test ($\alpha = 0.1$) indicates a simulation gap and suggests that the amortized posterior may have a problem generalizing to the current data set and the posterior is therefore not trustworthy. Pareto $\hat{k} > 0.7$ usually indicates that Pareto smoothed importance sampling will not be effective in correcting the amortized posteriors.

However, for some data sets (mainly, A and G), the posteriors estimates from `BayesFlow` are too far from the true posterior to be corrected by importance sampling. For example, for data set A, the posterior returned by `Stan` lies on the tails of the prior for the parameters α_1 and ν_1 (Figure 16). Subsequently, `BayesFlow` poorly generalizes and substantially underestimates the parameters. This poor generalization is captured by the high MMD value and its p -value. Furthermore, the posterior estimated by `BayesFlow` is too far from the true posterior, rendering importance sampling inefficient and unreliable – which is captured by the high Pareto \hat{k} diagnostic in Table 1. This indicates that precise posterior inference for the data sets A and G is not available using the current networks. Data set K is a borderline case with marginally high $\hat{k} = 0.76$. For this data set, importance sampling will likely still work well given enough posterior samples.

However, even in the case where the parameter posterior is not estimated reliably using neural networks, the two states are separated well enough that even the biased parameter posteriors do not have a big influence on the resulting classification; as shown in Figure 17.

4 Conclusion

In this paper, we developed and evaluated a framework for amortized Bayesian mixture models based on deep learning. By decomposing mixture models into parameter posterior distributions and mixture membership distributions, we can represent these distributions through corresponding neural architectures. These neural networks can be trained simultaneously on the same training data generated from the Bayesian model. This allows flexible amortization over different design factors, such as the number of observational units. Once trained, the neural networks provide reliable estimates in a fraction of the time required by traditional methods such as MCMC.

We evaluated the proposed framework through three case studies, demonstrating its applicability

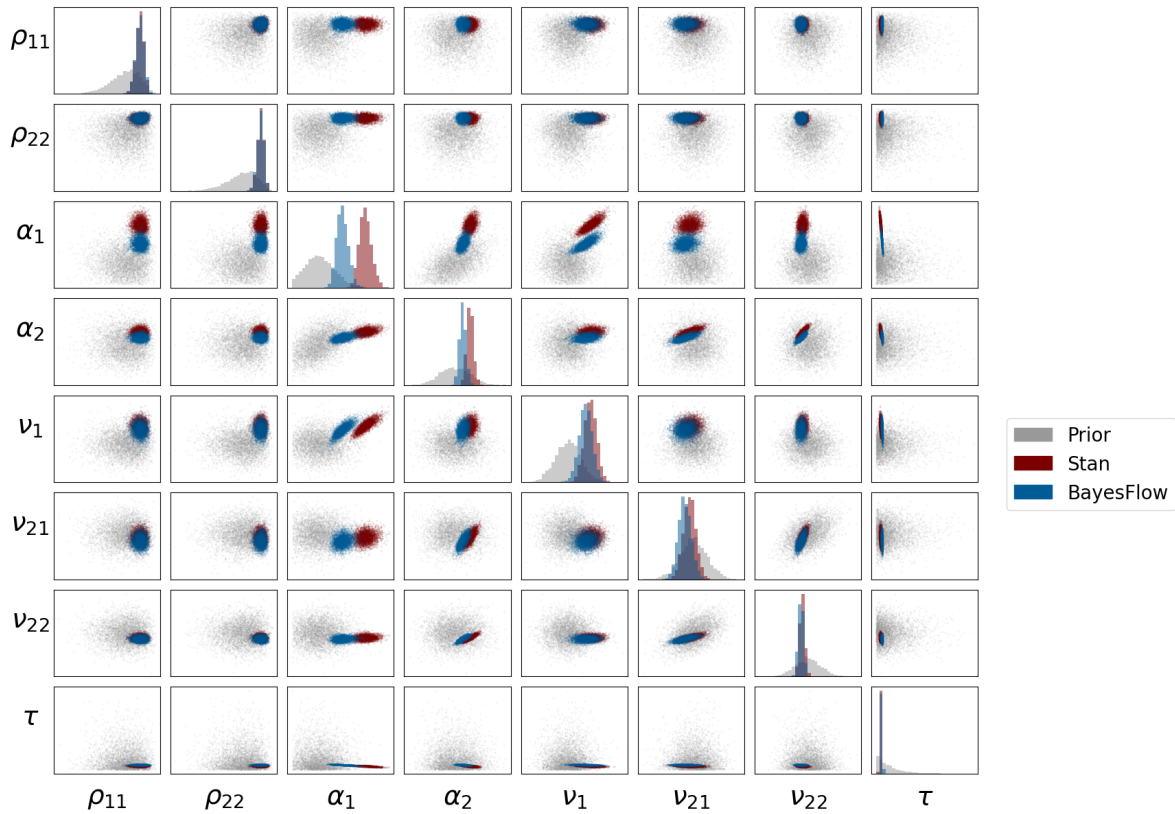


Figure 16: *Case Study 3: Latent switches in cognitive processing.* Comparison of the parameter priors and posterior samples between **BayesFlow** and **Stan** for participant A reported by [Dutilh et al. \(2011\)](#). The diagonals show the marginal parameter posteriors, whereas off-diagonal elements show the pairwise scatter plots to display dependencies between parameters. The BayesFlow approximation is severely biased and corrections using Pareto smoothed importance sampling will not be efficient.

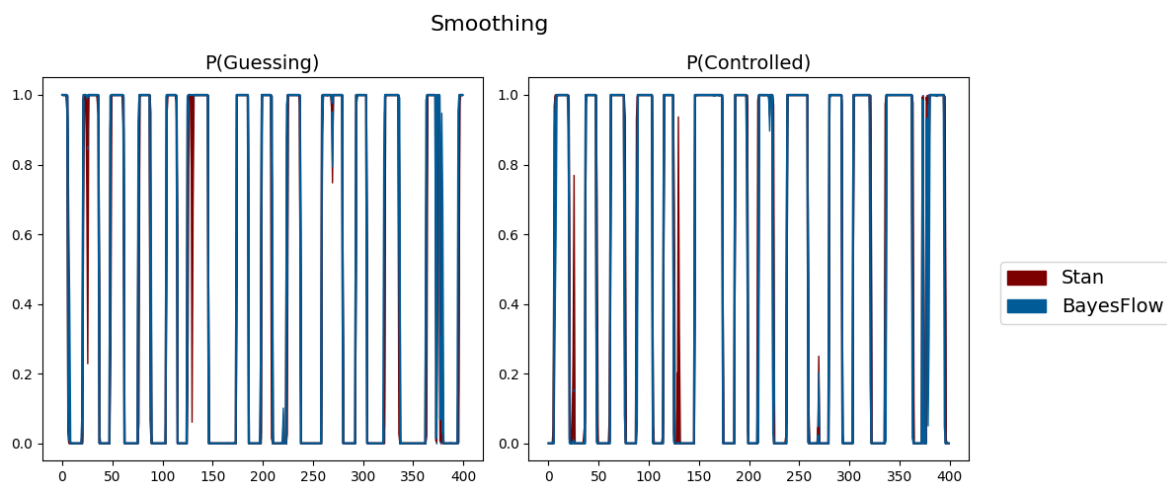


Figure 17: *Case Study 3: Latent switches in cognitive processing.* Comparison between smoothing classification probabilities between **BayesFlow** and **Stan** for participant A reported by Dutilh et al. (2011). The two methods return nearly identical results, yielding almost perfectly overlapping lines.

in realistic scenarios. The computational faithfulness of the neural networks was rigorously assessed through simulations. We also extensively compared the accuracy of the neural network outputs against state-of-the-art MCMC results obtained using **Stan** (Carpenter et al., 2017).

The methodology is implemented in the Python library **BayesFlow** (Radev et al., 2022), which is publicly accessible online at osf.io/7wvyk/.

References

- Ambrose, C., Dang, M., & Govaert, G. (1997). Clustering of Spatial Data by the EM Algorithm. In A. Soares, J. Gómez-Hernandez, & R. Froidevaux (Eds.), *geoENV I — Geostatistics for Environmental Applications* (pp. 493–504). Dordrecht: Springer Netherlands. doi: [10.1007/978-94-017-1675-8_40](https://doi.org/10.1007/978-94-017-1675-8_40)
- Anders, R., Alario, F.-X., & Van Maanen, L. (2016). The shifted Wald distribution for response time data analysis. *Psychological Methods*, *21*(3), 309–327. doi: [10.1037/met0000066](https://doi.org/10.1037/met0000066)
- Ardizzone, L., Lüth, C., Kruse, J., Rother, C., & Köthe, U. (2019). *Guided Image Generation with Conditional Invertible Neural Networks*. arXiv. doi: [10.48550/arXiv.1907.02392](https://doi.org/10.48550/arXiv.1907.02392)
- Baum, E. B. (1988). On the capabilities of multilayer perceptrons. *Journal of Complexity*, *4*(3), 193–215. doi: [10.1016/0885-064X\(88\)90020-9](https://doi.org/10.1016/0885-064X(88)90020-9)
- Boelts, J., Lueckmann, J.-M., Gao, R., & Macke, J. H. (2022). Flexible and efficient simulation-based inference for models of decision-making. *eLife*, *11*, e77220. doi: [10.7554/eLife.77220](https://doi.org/10.7554/eLife.77220)
- Brehmer, J. (2021). Simulation-based inference in particle physics. *Nature Reviews Physics*, *3*(5), 305–305. doi: [10.1038/s42254-021-00305-6](https://doi.org/10.1038/s42254-021-00305-6)
- Brehmer, J., Louppe, G., Pavez, J., & Cranmer, K. (2020). Mining gold from implicit models to improve likelihood-free inference. *Proceedings of the National Academy of Sciences*, *117*(10), 5242–5249. doi: [10.1073/pnas.1915980117](https://doi.org/10.1073/pnas.1915980117)

- Bürkner, P.-C. (2017). brms: An R package for Bayesian multilevel models Using Stan. *Journal of Statistical Software*, 80(1), 1–28. doi: [10.18637/jss.v080.i01](https://doi.org/10.18637/jss.v080.i01)
- Bürkner, P.-C., Gabry, J., & Vehtari, A. (2020). Approximate leave-future-out cross-validation for Bayesian time series models. *Journal of Statistical Computation and Simulation*, 90(14), 2499–2523. doi: [10.1080/00949655.2020.1783262](https://doi.org/10.1080/00949655.2020.1783262)
- Bürkner, P.-C., Gabry, J., & Vehtari, A. (2021). Efficient leave-one-out cross-validation for Bayesian non-factorized normal and Student-t models. *Computational Statistics*, 36(2), 1243–1261. doi: [10.1007/s00180-020-01045-4](https://doi.org/10.1007/s00180-020-01045-4)
- Carpenter, B., Gelman, A., Hoffman, M. D., Lee, D., Goodrich, B., Betancourt, M., ... Riddell, A. (2017). Stan: A probabilistic programming language. *Journal of Statistical Software*, 76(1), 1–32. doi: [10.18637/jss.v076.i01](https://doi.org/10.18637/jss.v076.i01)
- Celeux, G., Hurn, M., & Robert, C. P. (2000). Computational and Inferential Difficulties with Mixture Posterior Distributions. *Journal of the American Statistical Association*, 95(451), 957–970. doi: [10.1080/01621459.2000.10474285](https://doi.org/10.1080/01621459.2000.10474285)
- Chen, Y., Zhang, D., Gutmann, M., Courville, A., & Zhu, Z. (2021). *Neural Approximate Sufficient Statistics for Implicit Models*. arXiv. doi: [10.48550/arXiv.2010.10079](https://doi.org/10.48550/arXiv.2010.10079)
- Chhikara, R., & Folks, J. L. (2019). *The inverse Gaussian distribution: Theory, methodology, and applications* (No. 95). Boca Raton London New York: CRC Press, Taylor & Francis Group.
- Cranmer, K., Brehmer, J., & Louppe, G. (2020). The frontier of simulation-based Inference. *Proceedings of the National Academy of Sciences*, 117(48), 30055–30062. doi: [10.1073/pnas.1912789117](https://doi.org/10.1073/pnas.1912789117)
- Dax, M., Wildberger, J., Buchholz, S., Green, S. R., Macke, J. H., & Schölkopf, B. (2023). *Flow Matching for Scalable Simulation-Based Inference*. arXiv. doi: [10.48550/arXiv.2305.17161](https://doi.org/10.48550/arXiv.2305.17161)
- Diebolt, J., & Robert, C. P. (1994). Estimation of Finite Mixture Distributions Through Bayesian Sampling. *Journal of the Royal Statistical Society: Series B (Methodological)*, 56(2), 363–375. doi: [10.1111/j.2517-6161.1994.tb01985.x](https://doi.org/10.1111/j.2517-6161.1994.tb01985.x)
- Dutilh, G., Wagenmakers, E.-J., Visser, I., & van der Maas, H. L. J. (2011). A Phase Transition Model for the Speed-Accuracy Trade-Off in Response Time Experiments. *Cognitive Science*, 35(2), 211–250. doi: [10.1111/j.1551-6709.2010.01147.x](https://doi.org/10.1111/j.1551-6709.2010.01147.x)
- Elsemüller, L., Olischläger, H., Schmitt, M., Bürkner, P.-C., Köthe, U., & Radev, S. T. (2024). *Sensitivity-Aware Amortized Bayesian Inference*. arXiv. doi: [10.48550/arXiv.2310.11122](https://doi.org/10.48550/arXiv.2310.11122)
- Frühwirth-Schnatter, S. (2001). Markov chain Monte Carlo Estimation of Classical and Dynamic Switching and Mixture Models. *Journal of the American Statistical Association*, 96(453), 194–209. doi: [10.1198/016214501750333063](https://doi.org/10.1198/016214501750333063)
- Frühwirth-Schnatter, S. (2006). *Finite mixture and Markov switching models*. New York: Springer.
- Gabry, J., Simpson, D., Vehtari, A., Betancourt, M., & Gelman, A. (2019). Visualization in Bayesian Workflow. *Journal of the Royal Statistical Society Series A: Statistics in Society*, 182(2), 389–402. doi: [10.1111/rssa.12378](https://doi.org/10.1111/rssa.12378)
- Ganesalingam, S. (1989). Classification and Mixture Approaches to Clustering via Maximum Likelihood. *Applied Statistics*, 38(3), 455–466. doi: [10.2307/2347733](https://doi.org/10.2307/2347733)
- Gelman, A., Meng, X.-L., & Stern, H. (1996). Posterior Predictive Assessment of Model Fitness Via Realized Discrepancies. *Statistica Sinica*, 6(4), 733–760.
- Gelman, A., Vehtari, A., Simpson, D., Margossian, C. C., Carpenter, B., Yao, Y., ... Modrák, M. (2020). *Bayesian Workflow*. arXiv. doi: [10.48550/arXiv.2011.01808](https://doi.org/10.48550/arXiv.2011.01808)
- Gers, F., Schmidhuber, J., & Cummins, F. (1999). Learning to forget: Continual prediction with LSTM. In *1999 Ninth International Conference on Artificial Neural Networks ICANN 99. (Conf. Publ. No. 470)* (Vol. 2, pp. 850–855 vol.2). (ISSN: 0537-9989) doi: [10.1049/cp:19991218](https://doi.org/10.1049/cp:19991218)

- Gershman, S., & Goodman, N. (2014). Amortized Inference in Probabilistic Reasoning. *Proceedings of the Annual Meeting of the Cognitive Science Society*, 36(36).
- Habermann, D., Schmitt, M., Kühmichel, L., Bulling, A., Radev, S. T., & Bürkner, P.-C. (2024). *Amortized Bayesian Multilevel Models*. arXiv. doi: [10.48550/arXiv.2408.13230](https://doi.org/10.48550/arXiv.2408.13230)
- Hadj-Amar, B., Jewson, J., & Fiecas, M. (2023). Bayesian Approximations to Hidden Semi-Markov Models for Telemetric Monitoring of Physical Activity. *Bayesian Analysis*, 18(2), 547–577. doi: [10.1214/22-BA1318](https://doi.org/10.1214/22-BA1318)
- Hermans, J., Delaunoy, A., Rozet, F., Wehenkel, A., & Louppe, G. (2022). A Crisis In Simulation-Based Inference? Beware, Your Posterior Approximations Can Be Unfaithful. *Transactions on Machine Learning Research*. Retrieved from <https://hdl.handle.net/2268/265148>
- Jasra, A., Holmes, C. C., & Stephens, D. A. (2005). Markov Chain Monte Carlo Methods and the Label Switching Problem in Bayesian Mixture Modeling. *Statistical Science*, 20(1), 50–67. doi: [10.1214/088342305000000016](https://doi.org/10.1214/088342305000000016)
- Kobyzev, I., Prince, S. J. D., & Brubaker, M. A. (2020). *Normalizing Flows: An Introduction and Review of Current Methods*. arXiv. doi: [10.48550/arXiv.1908.09257](https://doi.org/10.48550/arXiv.1908.09257)
- Kucharský, v., Tran, N.-H., Veldkamp, K., Raijmakers, M., & Visser, I. (2021). Hidden Markov Models of Evidence Accumulation in Speeded Decision Tasks. *Computational Brain & Behavior*, 4(4), 416–441. doi: [10.1007/s42113-021-00115-0](https://doi.org/10.1007/s42113-021-00115-0)
- Lember, J., Gasbarra, D., Koloydenko, A., & Kuljus, K. (2019). Estimation of Viterbi path in Bayesian hidden Markov models. *METRON*, 77(2), 137–169. doi: [10.1007/s40300-019-00152-7](https://doi.org/10.1007/s40300-019-00152-7)
- Liu, Y., Zhang, H. H., & Wu, Y. (2011). Hard or Soft Classification? Large-margin Unified Machines. *Journal of the American Statistical Association*, 106(493), 166–177. doi: [10.1198/jasa.2011.tm10319](https://doi.org/10.1198/jasa.2011.tm10319)
- Luce, R. D. (1991). *Response Times: Their Role in Inferring Elementary Mental Organization*. Oxford, UK: Oxford University Press.
- Lueckmann, J.-M., Boelts, J., Greenberg, D., Goncalves, P., & Macke, J. (2021). Benchmarking Simulation-Based Inference. In A. Banerjee & K. Fukumizu (Eds.), *Proceedings of The 24th International Conference on Artificial Intelligence and Statistics* (Vol. 130, pp. 343–351).
- Marin, J.-M., Mengersen, K., & Robert, C. P. (2005). Bayesian Modelling and Inference on Mixtures of Distributions. In D. K. Dey & C. R. Rao (Eds.), *Handbook of Statistics* (Vol. 25, pp. 459–507). Elsevier. doi: [10.1016/S0169-7161\(05\)25016-2](https://doi.org/10.1016/S0169-7161(05)25016-2)
- Mark, C., Metzner, C., Lautscham, L., Strissel, P. L., Strick, R., & Fabry, B. (2018). Bayesian model selection for complex dynamic systems. *Nature Communications*, 9(1), 1803. doi: [10.1038/s41467-018-04241-5](https://doi.org/10.1038/s41467-018-04241-5)
- May, P. B., Finley, A. O., & Dubayah, R. O. (2024). A Spatial Mixture Model for Spaceborne Lidar Observations Over Mixed Forest and Non-forest Land Types. *Journal of Agricultural, Biological and Environmental Statistics*, 29(4), 671–694. doi: [10.1007/s13253-024-00600-6](https://doi.org/10.1007/s13253-024-00600-6)
- McLachlan, G. J. (1982). The classification and mixture maximum likelihood approaches to cluster analysis. In P. R. Krishnaiah & L. N. Kanal (Eds.), *Handbook of Statistics* (Vol. 2, pp. 199–208). Elsevier. doi: [10.1016/S0169-7161\(82\)02012-4](https://doi.org/10.1016/S0169-7161(82)02012-4)
- McLachlan, G. J., & Basford, K. E. (1988). *Mixture models: Inference and applications to clustering* (Vol. 84). New York, N.Y: Dekker.
- Modrák, M., Moon, A. H., Kim, S., Bürkner, P., Huurre, N., Faltejsková, K., . . . Vehtari, A. (2023). Simulation-Based Calibration Checking for Bayesian Computation: The Choice of Test Quantities Shapes Sensitivity. *Bayesian Analysis*. doi: [10.1214/23-BA1404](https://doi.org/10.1214/23-BA1404)
- Murtagh, F. (1991). Multilayer perceptrons for classification and regression. *Neurocomputing*, 2(5),

- 183–197. doi: [10.1016/0925-2312\(91\)90023-5](https://doi.org/10.1016/0925-2312(91)90023-5)
- Papamakarios, G., Nalisnick, E., Rezende, D. J., Mohamed, S., & Lakshminarayanan, B. (2021). Normalizing flows for probabilistic modeling and inference. *Journal of Machine Learning Research*, *22*(1), 57:2617–57:2680.
- Rabiner, L. (1989). A tutorial on hidden Markov models and selected applications in speech recognition. In *Proceedings of the IEEE* (Vol. 77, pp. 257–286). doi: [10.1109/5.18626](https://doi.org/10.1109/5.18626)
- Radev, S. T., Mertens, U. K., Voss, A., Ardizzone, L., & Kothe, U. (2022). BayesFlow: Learning Complex Stochastic Models With Invertible Neural Networks. In *IEEE Transactions on Neural Networks and Learning Systems* (Vol. 33, pp. 1452–1466). doi: [10.1109/TNNLS.2020.3042395](https://doi.org/10.1109/TNNLS.2020.3042395)
- Ritchie, D., Horsfall, P., & Goodman, N. D. (2016). *Deep Amortized Inference for Probabilistic Programs*. arXiv. doi: [10.48550/arXiv.1610.05735](https://doi.org/10.48550/arXiv.1610.05735)
- Rosenblatt, F. (1958). The perceptron: A probabilistic model for information storage and organization in the brain. *Psychological Review*, *65*(6), 386–408. doi: [10.1037/h0042519](https://doi.org/10.1037/h0042519)
- Rossum, G. v., & Drake, F. L. (2010). *The Python language reference* (Release 3.0.1 [Repr.] ed.) (No. Pt. 2). Hampton, NH: Python Software Foundation.
- Samé, A. (2020). Clustering Spatial Data via Mixture Models with Dynamic Weights. In W. Lu & K. Q. Zhu (Eds.), *Trends and Applications in Knowledge Discovery and Data Mining* (pp. 128–138). Cham: Springer International Publishing. doi: [10.1007/978-3-030-60470-7_13](https://doi.org/10.1007/978-3-030-60470-7_13)
- Schaaf, J. V., Jepma, M., Visser, I., & Huizenga, H. M. (2019). A hierarchical Bayesian approach to assess learning and guessing strategies in reinforcement learning. *Journal of Mathematical Psychology*, *93*, 102276. doi: [10.1016/j.jmp.2019.102276](https://doi.org/10.1016/j.jmp.2019.102276)
- Schad, D. J., Betancourt, M., & Vasishth, S. (2019). *Toward a principled Bayesian workflow in cognitive science*. arXiv. doi: [10.48550/arXiv.1904.12765](https://doi.org/10.48550/arXiv.1904.12765)
- Schmitt, M., Bürkner, P.-C., Köthe, U., & Radev, S. T. (2024). Detecting Model Misspecification in Amortized Bayesian Inference with Neural Networks. In U. Köthe & C. Rother (Eds.), *Pattern Recognition* (Vol. 14264, pp. 541–557). Cham: Springer Nature Switzerland. (Series Title: Lecture Notes in Computer Science) doi: [10.1007/978-3-031-54605-1_35](https://doi.org/10.1007/978-3-031-54605-1_35)
- Schmitt, M., Li, C., Vehtari, A., Acerbi, L., Bürkner, P.-C., & Radev, S. T. (2024). *Amortized Bayesian Workflow (Extended Abstract)*. arXiv. doi: [10.48550/arXiv.2409.04332](https://doi.org/10.48550/arXiv.2409.04332)
- Schmitt, M., Pratz, V., Köthe, U., Bürkner, P.-C., & Radev, S. T. (2024). *Consistency Models for Scalable and Fast Simulation-Based Inference*. arXiv. doi: [10.48550/arXiv.2312.05440](https://doi.org/10.48550/arXiv.2312.05440)
- Schumacher, L., Schnuerch, M., Voss, A., & Radev, S. T. (2024). Validation and Comparison of Non-stationary Cognitive Models: A Diffusion Model Application. *Computational Brain & Behavior*. doi: [10.1007/s42113-024-00218-4](https://doi.org/10.1007/s42113-024-00218-4)
- Scrucca, L., Fraley, C., Murphy, T. B., & Raftery, A. E. (2023). *Model-Based Clustering, Classification, and Density Estimation Using mclust in R*. New York: Chapman and Hall/CRC.
- Sharrock, L., Simons, J., Liu, S., & Beaumont, M. (2024). *Sequential Neural Score Estimation: Likelihood-Free Inference with Conditional Score Based Diffusion Models*. arXiv. doi: [10.48550/arXiv.2210.04872](https://doi.org/10.48550/arXiv.2210.04872)
- Särkkä, S., & Svensson, L. (2023). *Bayesian Filtering and Smoothing* (2nd ed.). Cambridge, UK: Cambridge University Press.
- Talts, S., Betancourt, M., Simpson, D., Vehtari, A., & Gelman, A. (2018). Validating Bayesian inference algorithms with simulation-based calibration. *arXiv*. doi: [10.48550/arXiv.1804.06788](https://doi.org/10.48550/arXiv.1804.06788)
- Tillman, G., Van Zandt, T., & Logan, G. D. (2020). Sequential sampling models without random between-trial variability: the racing diffusion model of speeded decision making. *Psychonomic Bulletin & Review*, *27*(5), 911–936. doi: [10.3758/s13423-020-01719-6](https://doi.org/10.3758/s13423-020-01719-6)

- Vehtari, A., Gelman, A., & Gabry, J. (2017). Practical Bayesian model evaluation using leave-one-out cross-validation and WAIC. *Statistics and Computing*, 27(5), 1413–1432. doi: [10.1007/s11222-016-9696-4](https://doi.org/10.1007/s11222-016-9696-4)
- Vehtari, A., Simpson, D., Gelman, A., Yao, Y., & Gabry, J. (2024). *Pareto Smoothed Importance Sampling*. arXiv. Retrieved from <http://arxiv.org/abs/1507.02646>
- Visser, I., & Speekenbrink, M. (2022). *Mixture and Hidden Markov Models with R*. Cham: Springer International Publishing.
- Viterbi, A. (1967). Error bounds for convolutional codes and an asymptotically optimum decoding algorithm. In *IEEE Transactions on Information Theory* (Vol. 13, pp. 260–269). doi: [10.1109/TIT.1967.1054010](https://doi.org/10.1109/TIT.1967.1054010)
- von Krause, M., Radev, S. T., & Voss, A. (2022). Mental speed is high until age 60 as revealed by analysis of over a million participants. *Nature Human Behaviour*, 6(5), 700–708. doi: [10.1038/s41562-021-01282-7](https://doi.org/10.1038/s41562-021-01282-7)
- Wahba, G. (2002). Soft and hard classification by reproducing kernel Hilbert space methods. *Proceedings of the National Academy of Sciences*, 99(26), 16524–16530. doi: [10.1073/pnas.242574899](https://doi.org/10.1073/pnas.242574899)
- Zaheer, M., Kottur, S., Ravanbakhsh, S., Póczos, B., Salakhutdinov, R. R., & Smola, A. J. (2017). Deep Sets. In *Advances in Neural Information Processing Systems* (Vol. 30).
- Zavadskiy, G., Zantedeschi, D., & Jank, W. (2024). A functional Hidden Markov Model to incorporate dynamics into Bayesian optimal stopping problems: Helping physicians manage traumatic brain injuries. *Decision Support Systems*, 177, 114078. doi: [10.1016/j.dss.2023.114078](https://doi.org/10.1016/j.dss.2023.114078)
- Zeghal, J., Lanusse, F., Boucaud, A., Remy, B., & Aubourg, E. (2022). *Neural Posterior Estimation with Differentiable Simulators*. arXiv. doi: [10.48550/arXiv.2207.05636](https://doi.org/10.48550/arXiv.2207.05636)
- Zucchini, W., MacDonald, I. L., & Langrock, R. (2016). *Hidden Markov Models for Time Series: An Introduction Using R, Second Edition* (2nd ed.). New York: Chapman and Hall/CRC. doi: [10.1201/b20790](https://doi.org/10.1201/b20790)