

# Multi-Stage Active Sequential Hypothesis Testing with Clustered Hypotheses

George Vershinin, Asaf Cohen, and Omer Gurewitz

The School of Electrical and Computer Engineering, Ben-Gurion University of the Negev, Israel

georgeve@post.bgu.ac.il, {coasaf, gurewitz}@bgu.ac.il

**Abstract**—We consider the problem where an active Decision-Maker (DM) is tasked to identify the true hypothesis using as few as possible observations while maintaining accuracy. The DM collects observations according to its determined actions and knows the distributions under each hypothesis. We propose a deterministic and adaptive multi-stage hypothesis-elimination algorithm where the DM selects an action, applies it repeatedly, and discards hypotheses in light of its obtained observations. The DM selects actions based on maximal separation expressed by the distance between the parameter vectors of each distribution under each hypothesis. Close distributions can be clustered, simplifying the search and significantly reducing the number of required observations.

Our algorithm achieves vanishing Average Bayes Risk (ABR) as the error probability approaches zero, i.e., the algorithm is asymptotically optimal. Furthermore, we show that the ABR cannot exceed the error probability when the number of hypotheses grows. Simulations are carried out to evaluate the algorithm’s performance compared to another multi-stage hypothesis-elimination algorithm, where an improvement of several orders of magnitude in the mean number of observations required is observed.

## I. INTRODUCTION

Hypothesis Testing (HT) is a statistical method used to evaluate competing hypotheses and determine which one best fits a sampled population based on sample data. HT has been in use for centuries, long before formal statistical methods were developed, and has been applied across highly diverse domains. For example, it has been used to identify the physical model that best fits a set of measurements, such as determining the Earth’s circumference or verifying a quantum mechanics hypothesis. HT is also an integral part of modern scientific practice, particularly in medical research where it’s used to evaluate the effectiveness of treatments and diagnose conditions based on clinical tests (e.g., testing for infectious diseases like COVID-19).

In recent years, HT has gained additional significance with the recent vast interest in Machine Learning (ML) and Artificial Intelligence (AI). Modern computing systems, including autonomous control systems, anomaly detection algorithms, quality control systems, and networked sensors, rely on various HT techniques to detect events of interest or classify specific occurrences. This detection or classification task is typically performed using a Decision-Maker (DM), which determines which hypothesis (from two or more alternatives) is best supported by the available data. In classic binary HT, this is often accomplished by computing the Log-Likelihood Ratio (LLR) or its non-logarithmic equivalent, comparing it

to a predetermined threshold, and selecting the corresponding hypothesis based on this comparison.

In many practical scenarios, the DM needs to collect and process data in real-time and often can select which samples or data sources to examine next. For example, a physician can determine which subsequent diagnostic tests a patient should undergo to identify their condition, or a network administrator can choose which routers to monitor to detect and classify potential cyber-attacks. This type of sequential decision-making about data collection allows for more efficient and targeted information gathering. In such settings, the DM must balance two central objectives: maximizing decision accuracy while minimizing the time delay (typically measured by the number of observations) until a decision is reached.

In his seminal work [1], Wald addressed the challenge of sequential data acquisition in a decision-making setup involving two competing hypotheses by introducing binary Sequential HT (SHT). The proposed scheme, which we term the Wald Test in the sequel, establishes two thresholds, each corresponding to one of the hypotheses. The DM sequentially collects observations and updates the LLR until it exceeds one of the thresholds, at which point the corresponding hypothesis is declared correct. Wald’s results demonstrated that SHT allows the DM to reach decisions more quickly than traditional fixed-sample hypothesis testing while maintaining the same level of accuracy.

The Wald test has been generalized and expanded over the years. Notably, the Armitage test [2], [3] extends the Wald test to sequential multi-hypothesis testing by conducting “tournaments” between hypotheses, where each drawn sample serves as part of a Wald test “contest” between any two hypotheses. In this context, the DM declares the tournament winner as the underlying hypothesis.

Chernoff [4] extended the Wald test setup to incorporate *actions*, leading to *active* binary SHT. In Chernoff’s model, the DM can choose from a set of actions, each yielding an observation that follows a specific known distribution. For example, to diagnose a patient’s illness, a doctor can select which examination the patient should undergo next, where the distribution of results for each possible illness depends on the chosen examination. Chernoff proposed a stochastic policy (i.e., actions are drawn according to some non-degenerate distribution) for selecting actions sequentially, allowing the DM to “shape” observations through chosen actions to optimize accuracy and detection delay. Other stochastic approaches can be found in the literature, including active multihypothesis

models like those considered in this work, e.g., [5]–[8].

Several deterministic policies have been explored in recent years. Novel examples include incorporating ML or Deep Learning with either the Wald Test, e.g., [9], [10]. Other learning approaches directly optimize the number of samples without invoking the Wald Test, e.g., [11], [12]. A prime example of non-learning action-selecting policy is the DGF policy used for anomaly detection in [13]–[16]. In the DGF policy, the DM tracks the gap between the highest and second-highest accumulated LLRs, and when it is sufficiently large, it delivers its decision. Although the DGF outperforms Chernoff’s approach, the main drawback of the DGF policy is that it is tailored for anomaly detection; that is, actions produce observations from only two possible distributions, and extension to multihypothesis models is not straightforward.

In this paper, we depart from the previously mentioned conventional approaches by employing an elimination strategy rather than a traditional search method. Instead of accumulating evidence to identify the correct hypothesis, we use observations to systematically eliminate hypotheses that are “almost surely” incorrect.

The rationale for preferring elimination over the search-for-winner strategy stems from a key limitation in the latter approach: in the search strategy, hypotheses compete against each other simultaneously, with the DM’s actions and sampling decisions being guided by the underlying hypothesis and its closest hypotheses. While this approach may be effective with few hypotheses, it becomes inefficient when handling multiple hypotheses because separating two close hypotheses requires an enormous number of samples.

In contrast, the elimination strategy efficiently discards incorrect hypotheses by focusing on those that are most distinctly different from each other, typically requiring far fewer samples. The strategy proceeds sequentially, with each new action determined by the remaining hypotheses. Once only two hypotheses remain, the DM must determine which of these candidates is correct, with the key advantage that one of them is almost surely the true hypothesis, rather than having to isolate an unknown correct hypothesis from among many possibilities.

To expedite the elimination process, we propose a clustering mechanism that discards multiple hypotheses at once rather than eliminating them sequentially. Specifically, for each possible action, the DM clusters the potential hypotheses based on their properties. It then selects the action that ensures sufficient separation between clusters by maximizing the minimum distance between them. The chosen action is used to draw samples and discard at least one entire cluster. Notably, cluster sizes vary—some may contain a single hypothesis, while others may include multiple hypotheses. Additionally, the number of clusters is not predetermined and can range from as few as two to as many as the total number of hypotheses. This process repeats: selecting an action that best separates the remaining hypotheses into clusters, using the action to collect samples, and discarding at least one cluster along with all its hypotheses. This continues until only a single hypothesis remains, which is then declared correct.

The closest work to our approach is the recently proposed

algorithm by Gan, Jia, and Li in [17, Algorithm 2], which we refer to as the GJL algorithm. In GJL, the action capable of minimizing the number of surviving hypotheses is selected in each stage, and the (fixed) number of observations is based on separating the two closest, yet not identical, observation distributions. This philosophy of minimal survivors directly contrasts our approach of fast elimination incited by the maximal separation policy.

Our contributions are the following: (i) We devise a multi-stage hypothesis-eliminating strategy and accordingly introduce two algorithms (one with and one without hypothesis clustering). (ii) We identify a necessary and sufficient criterion for successful hypothesis clustering. (iii) We bound the error probability, the mean number of samples required, and the Average Bayes Risk (ABR) as functions of the desired error probability and the number of hypotheses. (iv) We show that our strategy is asymptotically optimal in terms of vanishing ABR when the desired error probability approaches zero and is bounded when the number of hypotheses grows. (v) We analytically show that our strategy improves over GJL, and numerical evaluation shows improvement in several orders of magnitude for any desired error probability.

## II. SYSTEM MODEL

### A. Notation

All vectors in this manuscript are underlined (e.g.,  $\underline{x}$ ). The  $\ell_2$ -norm between two vectors  $\underline{x}$  and  $\underline{y}$  is denoted as  $\|\underline{x} - \underline{y}\|_2$ . For the Kullback-Leibler Divergence (KLD) between two distributions,  $f$  and  $g$ , we write  $\mathcal{D}_{KL}(f\|g)$ . Unless explicitly specified (e.g.,  $\ln$ ), all logarithms in this manuscript are in base two.

### B. Model

The system model consists of a single, active, DM capable of obtaining observations according to the actions taken. The DM is tasked with correctly identifying the underlying hypothesis out of a finite set of hypotheses  $\mathcal{H} = \{0, 1, \dots, H - 1\}$ . The prior probability of hypothesis  $i$  (or  $H_i$  for short) is  $\pi_i$ , where  $0 < \pi_i < 1$  for all  $i$  to avoid triviality.

Let  $\mathcal{A} \subset \mathbb{N}$  with  $|\mathcal{A}| < \infty$  be the set of all actions available to the DM. We assume that the observations are independent and follow the same distribution when action  $a_n$  is taken, with the distribution parameters depending on the underlying true hypothesis. Namely, assuming  $H_i$  is the underlying hypothesis and that action  $a_n \in \mathcal{A}$  is taken at time step  $n$ , the DM obtains  $X_n \sim f_{a_n}(\cdot; \underline{\theta}_i(a_n))$ , where  $\underline{\theta}_i(a_n) \in \mathbb{R}^{M_{a_n}}$  is the (vectorized) distribution parameter under  $H_i$  and  $f_{a_n}$  is its Probability Density Function (PDF). Extension to non-scalar samples is straightforward and will not be discussed in this paper. All distributions and their parameters under each and every hypothesis are assumed to be known by the DM. Figure 1 visualizes the model.

To simplify notation, we write  $\mathcal{D}_{KL}(H_i(a)\|H_j(a))$  instead of  $\mathcal{D}_{KL}(f_a(\cdot; \underline{\theta}_i(a))\|f_a(\cdot; \underline{\theta}_j(a)))$ . Similar to [17], we make three additional assumptions:

- (A1) (Separation) For any  $a \in \mathcal{A}$  and  $i, j \in \mathcal{H}$ ,  $\|\underline{\theta}_i(a) - \underline{\theta}_j(a)\|_2^2$  is either 0 or greater than some known  $\alpha > 0$ .

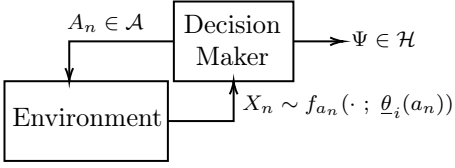


Fig. 1. System model. The DM is tasked to identify the correct hypothesis (say  $H_i$ ) out of  $H$  possible hypotheses. By taking action  $a_n$  at time step  $n$ , the DM obtains a sample  $x_n \sim f_{a_n}(\cdot; \theta_i(a_n))$ . The alphabet and size of  $x_n$  and  $\theta_i(a_n)$  may depend on the action  $a_n$ .

Furthermore, there is no  $a$  with  $\|\theta_i(a) - \theta_j(a)\|_2^2 = 0$  for all  $i, j \in \mathcal{H}$ . Note that  $\alpha$  can be very small.

- (A2) For any action  $a$  there are  $0 < c_1 \leq c_2$  such that  $c_1 \mathcal{D}_{KL}(H_i(a) \| H_j(a)) \leq \|\theta_i(a) - \theta_j(a)\|_2^2 \leq c_2 \mathcal{D}_{KL}(H_i(a) \| H_j(a)) \leq c_2 \beta$  for any  $i, j \in \mathcal{H}$  and some known  $\beta$ .
- (A3) (Validity) For all  $i, j \in \mathcal{H}$  with  $i \neq j$ , there is some  $a \in \mathcal{A}$  with  $\|\theta_i(a) - \theta_j(a)\|_2^2 > 0$ .

The first assumption ensures that there are no meaningless actions and that distribution parameters are separated in  $\mathbb{R}^{M_a}$ . The second is technical and allows us to simplify hypothesis comparison by using the  $\ell_2$ -norm on the parameters rather than computationally prohibitive metrics on distributions (e.g., Total Variation Distance [18, Chapter 13.1]). The third assumption assures that some multi-stage hypothesis-eliminating algorithms can stop.

Let  $\Phi$  be the source selection process generating the action sequence  $\{A_n\}_{n=1}^\infty$ . The source selection rule is *non-adaptive* if the actions do not depend on the gathered data for any time step and is *adaptive* otherwise. It may also be either deterministic or stochastic. The decision rule is given by  $\Psi \in \mathcal{H}$ , i.e.,  $\Psi = i$  implies that  $H_i$  is declared as true.

Like many other works in the literature, e.g., [4], [6], [13], [16], [19], we focus on the Bayesian approach. Namely, let  $\Gamma \triangleq (\Phi, \Psi)$  be an admissible strategy for the SHT aiming at minimizing the ABR,  $\delta \mathbb{E}[N] + H^2 \times p_e$ , where  $N$  is the number of observations upon algorithm termination (i.e., detection delay),  $\delta$  is the sample cost, and  $p_e$  is the error probability of the strategy  $\Gamma$ . Equivalently, it is a strategy minimizing

$$\frac{\delta}{H^2} \mathbb{E}[N] + p_e. \quad (1)$$

Notably, (1) weights two key components of the problem: the error probability,  $p_e$ , and the mean detection delay  $\mathbb{E}[N]$ . By increasing the number of samples, the DM can significantly reduce its error probability, but increasing it too much makes the first addend the dominant penalty. Conversely, taking too few samples will increase the error probability, making it the dominant penalty. Accordingly, the desired error probability and the mean detection delay must be balanced. The normalized cost,  $\frac{\delta}{H^2}$ , plays a role in damping the mean number of samples; Specifically, it vanishes in  $\delta$  only if the mean number of samples is sublinear in  $\frac{1}{\delta}$  and subquadratic in  $H$ .

### III. OBSERVATION ACQUISITION POLICY

In this section, we formalize the suggested strategy for observation acquisition to compute the underlying true hypoth-

esis. Our strategy consists of two flavors; without and with clustering, both of which enjoy vanishing ABR (Corollary 1), have vanishing error probability (Lemma 1) and more importantly, require a low mean number of samples (Theorem 1) as we show in the following section. Notably, the mean number of samples is lower than GJL's.

Like many works in literature, in order to identify which hypothesis is correct or not, the DM leverages the (two-threshold) Armitage Test, where the collected samples up to time step  $n$  are used to compute the accumulated LLR for any pair of hypotheses and each is compared to fixed thresholds  $\gamma > 0$  and  $-\gamma$ , to be discussed later. Namely, if the DM uses only action  $a$ , the pair-wise *per-action* accumulated LLR is:

$$L_{ij}(a, n) \triangleq \sum_{t=1}^n \log \frac{f_a(x_t; \theta_i(a))}{f_a(x_t; \theta_j(a))}.$$

For simplicity, we will drop  $a$  and  $n$  and write  $L_{ij}$  when they are clear from context. In our context,  $H_i$  wins against  $H_j$  if  $L_{ij} \geq \gamma$ , loses against  $H_j$  if  $L_{ij} < -\gamma$ , and competes against  $H_j$  otherwise.

Generally, identifying the underlying hypothesis has two distinct approaches. The first is the classic and straightforward approach common in literature where the DM collects observations and computes  $L_{ij}$  until some  $i^*$  wins against all other hypotheses (e.g., [2], [5]). While this approach is simple and fast, it may fail when the environment outputs observations with identical distributions under many different hypotheses, or in other words, the case we are interested in solving.

The second approach, tailored for the above case, is hypothesis eliminating where the DM identifies which hypotheses are inconsistent with the collected observations and discards them until a single hypothesis remains, which is declared as the underlying hypothesis. Notably, algorithms of the first approach can be converted to the second by discarding the losing hypotheses and retrying using a different set of actions, as we do in this work.

Once an action is selected, eliminating some hypothesis is straightforward by finding at least one hypothesis that wins against it. Thus, a multi-stage algorithm based on the Armitage Test is sufficient for one-by-one hypothesis elimination in our case since there is always some action capable of separating at least one hypothesis from the others due to assumption (A3). Naturally, one-by-one elimination is inefficient but can be improved by the action selection policy. Namely, at each stage, the DM can greedily pick the action capable of minimizing the number of winning hypotheses like in GJL [17, Algorithm 2]. However, such a policy may result in a large number of samples when not considering the observation distribution similarity under different hypotheses, and, accordingly, may result in large ABR.

Thus, in order to both efficiently eliminate hypotheses and achieve faster vanishing ABR, we suggest taking actions that maximize the separation, therefore minimizing the number of samples required to eliminate hypotheses. To further enhance the hypothesis elimination process, we suggest clustering hypotheses (per action) according to the sample distribution proximity. Here, the DM only needs to identify the correct

cluster rather than identical hypotheses and, accordingly, may use fewer samples.

### A. Preprocessing Step - Per-Action Hypothesis Clustering

In this subsection, we explain the hypothesis clustering concept in depth. The main purpose of the hypothesis clustering is to allow the DM to refine its “bad actions,” characterized by small KLD between some of their output distributions (e.g., either zero or very close to  $\alpha$  from assumption (A1)). Namely, to tell apart between two or more very close hypotheses, the DM would require, on average, a large number of observations. Therefore, since these hypotheses are very similar, the DM can significantly reduce the number of the collected observations by simply identifying the set of similar hypotheses (e.g., by identifying a single member of these hypotheses as we do in this work) and using a different action with better separation on the found set in the next stage. In other words, the DM can improve its performance in terms of mean detection delay (and, consequently, obtain lower ABR) by clustering hypotheses by their informational proximity defined by a proximity parameter  $\varepsilon$  set by the user.

Clustering hypotheses by their proximity (i.e., selecting  $\varepsilon$ ) and selecting a representative from each cluster is not trivial. Thus, we first discuss a key property of a good hypothesis clustering mechanism. Assume action  $a$  is repeatedly used and that  $H_i$  is the underlying hypothesis. Now, we observe the normalized accumulated LLR between  $H_k$  in  $H_i$ 's cluster against  $H_j$  that is not in  $H_i$ 's cluster satisfies

$$\begin{aligned} \frac{1}{n} L_{kj} &\rightarrow \Delta \mathcal{D}_{ijk}(a) \triangleq \mathbb{E} \left[ \log \frac{f_a(X; \underline{\theta}_k(a))}{f_a(X; \underline{\theta}_j(a))} \middle| H_i \right] \\ &= \mathcal{D}_{KL}(H_i(a) \| H_j(a)) - \mathcal{D}_{KL}(H_i(a) \| H_k(a)) \quad (2) \end{aligned}$$

by the Asymptotic Equipartition Property (AEP) [20, Theorem 11.8.1], when the convergence is in probability. Like before, we will drop  $a$  when it is clear from context. Since  $\frac{1}{n} \gamma \rightarrow 0$  for any fixed  $\gamma$ , we observe that  $H_i$  can be declared as true if and only if the difference in (2) is positive. Therefore, any  $H_k$  clustered with  $H_i$  should have  $\mathcal{D}_{KL}(H_i(a) \| H_k(a)) < \mathcal{D}_{KL}(H_i(a) \| H_j(a))$  for any  $H_j$  not clustered with  $H_i$ .

Since KLD is asymmetric,  $H_i$  can be in the same cluster as  $H_k$ , but not vice-versa. To circumvent this issue, we leverage assumption (A2) that bounds the KLD using a symmetric metric property, the  $\ell_2$ -norm between the output distribution parameters for appropriate  $c_1$  and  $c_2$ . Specifically, the use of the  $\ell_2$ -norm allows us to rewrite the property in (2) as  $c \|\underline{\theta}_i(a) - \underline{\theta}_j(a)\|_2^2 > \|\underline{\theta}_i(a) - \underline{\theta}_k(a)\|_2^2$  for any  $H_k$  in  $H_i$ 's cluster and for any  $H_j$  not in  $H_i$ 's cluster for some  $c$ .

Now, we can formalize the desired clustering on the hypotheses using their parameter space. Let  $\text{param}(a) \triangleq \{\underline{\theta}_i(a) : i \in \mathcal{H}\}$  be the set of distribution parameters under action  $a$ . Let  $\mathcal{B}_\varepsilon(\underline{\nu}) \triangleq \{\underline{\theta} \in \text{param}(a) : \|\underline{\theta} - \underline{\nu}\|_2^2 \leq \varepsilon\}$  be the  $\varepsilon$ -neighborhood of  $\underline{\nu}$  composed of points from  $\text{param}(a)$ . We say that  $\underline{y}$  is reachable from  $\underline{x}$  if there are  $\underline{x}_1, \underline{x}_2, \dots, \underline{x}_{r-1}$  such that  $\underline{x} = \underline{x}_1, \underline{x}_j \in \mathcal{B}_\varepsilon(\underline{x}_{j+1})$  (for  $1 \leq j \leq r-2$ ) and, additionally we have  $\underline{x}_{r-1} \in \mathcal{B}_\varepsilon(\underline{y})$ .

Thus, we define the cluster of  $H_i$  as  $\mathcal{C}_i(a, \varepsilon) \subseteq \text{param}(a)$  to be a non-empty subset such that for any  $\underline{\nu}$ , if  $\underline{\nu}$  is reachable from  $\underline{\theta}_i$  then  $\underline{\nu} \in \mathcal{C}_i(a, \varepsilon)$ . Now, we define

$$\begin{aligned} \text{equiv}(i, a) &\triangleq \{k \in \mathcal{H} : \underline{\theta}_k \in \mathcal{C}_i(a, \varepsilon)\} \\ \text{repr}(\mathcal{U}, a) &\triangleq \{\min\{\mathcal{U} \cap \text{equiv}(i, a)\} : i \in \mathcal{U}\} \end{aligned}$$

to be the set of equivalent hypotheses to  $H_i$  and the set of representatives taken from  $\mathcal{U} \subseteq \mathcal{H}$ , respectively. In each stage,  $\text{repr}(\mathcal{U}, a)$  would be the set of valid contestants. Note that the choice of the smallest indices is arbitrary. If no clustering is used, we define  $\text{equiv}(i, a) \triangleq \{j \in \mathcal{H} : \underline{\theta}_j(a) = \underline{\theta}_i(a)\}$  instead. *Remark: We assume that even after the clustering, assumption (A3) holds.*

The use of the  $\ell_2$ -norm allows us to use rich density-based clustering over  $\mathbb{R}^{M_a}$  (e.g., [21, Chapter 5]) to cluster hypotheses by proximity. Notably, the famous Density-Based Spatial Clustering of Applications with Noise (DBSCAN) algorithm [22] is tailored to our needs and is sufficient for clustering. DBSCAN groups together points with many shared neighbors (specified by the MinPts parameter) within their  $\varepsilon$ -neighborhood and labels all remaining points as noise or outliers. Furthermore, DBSCAN guarantees that clusters are  $\varepsilon$  apart from each other.

### B. Multi-Staged Algorithm

In this subsection, we present and describe our multi-stage algorithm. The procedure is given in Algorithm 1. In Line 1, we initialize the “alive” hypotheses,  $H_{\text{alive}}$ , to be the set of all hypotheses. The algorithm thins this set in each stage until one or no hypothesis remains. If a single hypothesis remains at the end of the procedure, it is declared as true.

We term Lines 3-11 as stages. In each stage, an action  $a$  is computed (Line 3). Specifically, each action is associated with a non-zero minimal distance between each two *alive* hypotheses, and the action with the maximal minimum distance is selected for the current round. Line 4 computes the cluster representatives out of the alive hypotheses. This set contains the contestants for the current stage. Now, we apply action  $a$  repeatedly until a winner against all hypotheses,  $i^*$ , is found (Lines 6-9). Then, we update  $H_{\text{alive}}$  to be the alive hypotheses in  $i^*$ 's cluster (Lines 10-11).

## IV. ANALYSIS

In this section, we analyze Algorithm 1 in terms of error probability, mean detection delay, and the scaling of the ABR as functions of  $\delta$  and  $H$ . Notably, previous results regarding the Armitage Test, e.g., vanishing error probability, do not trivially follow when clustering hypotheses, and accordingly, some computations must be modified. When no clustering is used, however, the previous results naturally follow. Due to brevity, all proofs appear in the Appendix in [23].

We start with stating the main result:

**Theorem 1.** *Let  $\tau_r$  be the number of observations used in stage  $r$  when using action  $a_r$ ,  $H_{\text{alive}}^{(r)}$  be the alive hypotheses in stage  $r$ , and  $k$  be the representative from  $H_i$ 's cluster. Then  $\mathbb{E}[\tau_r | H_i] = (1 + o(1)) \max_{j \in \text{repr}(H_{\text{alive}}^{(r)}, a_r) \setminus \{k\}} \left\{ \frac{\log \frac{H}{\delta}}{\Delta \mathcal{D}_{ijk}} \right\}$  for*

---

**Algorithm 1** Multi-Stage LLR-Based SHT
 

---

```

1:  $H_{\text{alive}} \leftarrow [0, H - 1]$   $\triangleright$  Initialize alive hypotheses
2: while  $|H_{\text{alive}}| \geq 2$  do
3:    $a \leftarrow \operatorname{argmax}_{b \in \mathcal{A}} \left\{ \min_{\substack{i, j \in H_{\text{alive}} \\ j \notin \operatorname{equiv}(i, b)}} \|\theta_i(b) - \theta_j(b)\|_2^2 \right\}$ 
4:    $\tilde{H} \leftarrow \operatorname{repr}(H_{\text{alive}}, a)$ 
5:    $L_{ij} \leftarrow 0 \forall i \neq j \in \tilde{H}$   $\triangleright$  Initialize LLRs
6:   while  $\nexists i \in \tilde{H}: L_{ij} \geq \log \frac{H}{\delta} \forall j \neq i$  do
7:     acquire  $x$  according to action  $a$ 
8:      $L_{ij} \leftarrow L_{ij} + \log \frac{f_a(x; \theta_i(a))}{f_a(x; \theta_j(a))}$  for all  $i \neq j \in \tilde{H}$ 
9:   end while
10:   $\hat{H} \leftarrow \operatorname{equiv}(i^*, a)$   $\triangleright i^*$  has  $L_{i^*j} \geq \log \frac{H}{\delta} \forall j$ 
11:   $H_{\text{alive}} \leftarrow H_{\text{alive}} \cap \hat{H}$   $\triangleright$  Update alive hypotheses
12: end while
13: return  $H_{\text{alive}}$ 

```

---

any  $i$  where the little- $O$  is with respect to  $\delta \rightarrow 0$ . Furthermore,  $\frac{1}{\beta} \log \frac{H}{\delta} \leq \mathbb{E}[N] \leq \frac{H}{\varepsilon} \log \frac{H}{\delta}$ .

*Proof:* See Appendix A-B.  $\blacksquare$

We argue that each stage in our strategy improves over GJL. Assume  $H_i$  is the true underlying hypothesis. Let  $\mathcal{G}\mathcal{J}(a) = \{(l, m) \in \mathcal{H}^2 : \mathcal{D}_{KL}(H_l(a) \| H_m(a)) > 0\}$  be the set of indices whose KLD under action  $a$  is not zero. Let  $\mathcal{D}_{\min}(a) = \operatorname{argmin}_{(l, m) \in \mathcal{G}\mathcal{J}(a)} \{\mathcal{D}_{KL}(H_l(a) \| H_m(a))\}$  be the smallest non-zero KLD under action  $a$ . Regardless of whether  $H_i$  is true or not, if GJL applies action  $a$ , it uses  $\frac{\log \frac{H}{\delta}}{\mathcal{D}_{\min}(a)}$  samples. Our strategy uses, on average, approximately  $\mathbb{E}[\tau_r | H_i]$  samples per stage.

Thus, if  $H_i$  is not part of the KLD minimizing pair, our strategy uses less than or equal number of samples on average compared to GJL regardless of clustering. If it does and the other hypothesis in the minimizing pair (say  $H_j$ ) lies in  $H_i$ 's cluster, then  $H_j$  is not tested against  $H_i$  in the current stage, saving samples. If  $H_j$  lies outside of  $H_i$ 's cluster, then  $H_i$  is represented by itself (i.e., isolated hypothesis), and the mean number of samples coincides with GJL's.

Now, we shift our focus to show asymptotic optimality. Accordingly, we bound the error probability of our strategy by first bounding the per-stage error probability. Since each stage is terminated when some hypothesis has all of its LLRs exceed  $\log \frac{H}{\delta}$ , we have the following bound:

**Lemma 1.** *For any action  $a$ , there exists some  $\eta_a \in [0, 1]$  such that  $\Delta \mathcal{D}_{ijk} > \eta_a$ , the current action still can distinguish between at least two hypotheses, and for any  $\varepsilon \leq \eta_a$ , the per-stage error probability cannot exceed  $\frac{\delta}{H}$ . Particularly,  $p_e \leq \delta$ .*

*Proof:* See Appendix A-A.  $\blacksquare$

**Corollary 1** (Asymptotic Optimality). *For a suitable choice of  $\varepsilon$ , Algorithm 1 has vanishing ABR when  $\delta \rightarrow 0$ . Furthermore, the ABR does not exceed  $\delta$  when  $H \rightarrow \infty$ .*

*Proof:* See Appendix A-C.  $\blacksquare$

## V. NUMERICAL RESULTS

In this section, we present numerical results illustrating the performance of our algorithms (with and without clustering) compared to GJL. To this end, we have conducted simulations. In the simulations, we have used uniform priors, i.e.,  $\pi_i = \frac{1}{H}$ . For a fair comparison, we picked distributions whose mean can distinguish between different hypotheses, namely, the exponential and unit-variance normal distributions. The number of hypotheses was set to  $H = 16$ , and the DM had  $|\mathcal{A}| = 17$  actions. The first  $H$  actions had a mean of 3 if  $H_{a-1}$  is true for  $1 \leq a \leq H$ , and a random mean drawn uniformly from  $[0, 1]$  otherwise. The last action had the means follow the equation  $0.5 + 0.01 \times i$  for  $0 \leq i \leq H$ . All random means were drawn only once. For the clustering algorithm, DBSCAN, we use  $\text{minPts} = 1$  and proximity parameter  $\varepsilon = 0.1$ .

In Figure 2, we present the results. The dashed lines present the ABR for the case where all actions produce normally distributed observations, whereas non-dashed lines present the ABR for the case where all actions produce exponentially distributed observations. The orange curves correspond to GJL, and the blue and green curves correspond to our algorithm without and with clustering, respectively. Each algorithm attains vanishing ABR as  $\delta \rightarrow 0$ , but the non-greedy selections made by each instance of our algorithm enjoy significantly lower ABR, attributed to lower mean detection delay.

Notably, the instances using clustering enjoy very accurate decisions while maintaining the lowest mean detection delay; for example, to achieve an error probability less than or equal to  $\delta = 10^{-5}$  in the normally distributed case, GJL requires  $\sim 100M$  observations on average, the non-clustering instance requires  $\sim 500k$  observations on average whereas the clustered instance requires  $\sim 430$  observations on average. In the exponential case, for the same error probability, GJL requires  $\sim 15M$  observations on average, the non-clustering instance requires  $\sim 152k$  observations on average, whereas the clustered instance requires  $\sim 125$  observations on average.

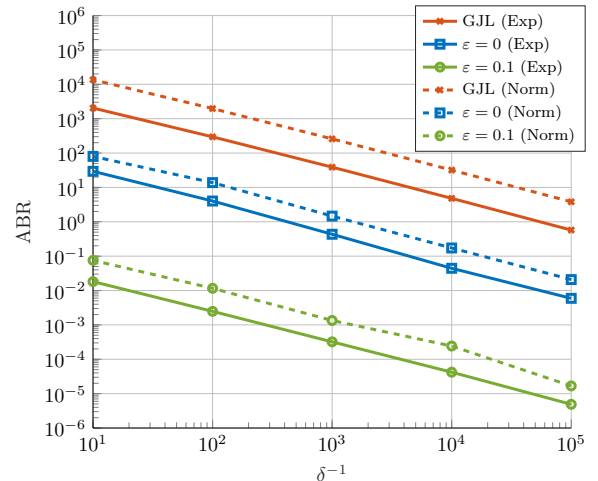


Fig. 2. Comparison of the ABR (equation (1)) for  $H = 16$  using our algorithm (with proximity parameter  $\varepsilon \in \{0, 0.1\}$ ) against GJL. The observations obtained are either normally distributed (dashed) or exponentially distributed (non-dashed). The ABR vanishes as  $\delta \rightarrow 0$  for all instances, but GJL's greedy selection has a slower decay.

## REFERENCES

- [1] A. Wald, "Sequential tests of statistical hypotheses," *The Annals of Mathematical Statistics*, vol. 16, no. 2, pp. 117–186, 1945. [Online]. Available: <http://www.jstor.org/stable/2235829>
- [2] P. Armitage, "Sequential analysis with more than two alternative hypotheses, and its relation to discriminant function analysis," *Journal of the Royal Statistical Society. Series B (Methodological)*, vol. 12, no. 1, pp. 137–144, 1950. [Online]. Available: <http://www.jstor.org/stable/2983839>
- [3] S. Bar and J. Tabrikian, "A sequential framework for composite hypothesis testing," *IEEE Transactions on Signal Processing*, vol. 66, no. 20, pp. 5484–5499, 2018.
- [4] H. Chernoff, "Sequential design of experiments," *The Annals of Mathematical Statistics*, vol. 30, no. 3, pp. 755 – 770, 1959. [Online]. Available: <https://doi.org/10.1214/aoms/1177706205>
- [5] S. A. Bessler, "Theory and applications of the sequential design of experiments, k-actions and infinitely many experiments: Part I–Theory," *Appl. Math. Statist. Lab., Stanford Univ., Stanford, CA, USA, Tech. Rep.*, vol. 55, 1960.
- [6] S. Nitinawarat, G. K. Atia, and V. V. Veeravalli, "Controlled sensing for multihypothesis testing," *IEEE Transactions on Automatic Control*, vol. 58, no. 10, pp. 2451–2464, 2013.
- [7] M. Naghshvar and T. Javidi, "Active sequential hypothesis testing," *The Annals of Statistics*, vol. 41, no. 6, pp. 2703–2738, 2013.
- [8] C.-Z. Bai, V. Katewa, V. Gupta, and Y.-F. Huang, "A stochastic sensor selection scheme for sequential hypothesis testing with multiple sensors," *IEEE Transactions on Signal Processing*, vol. 63, no. 14, pp. 3687–3699, 2015.
- [9] A. Gurevich, K. Cohen, and Q. Zhao, "Sequential anomaly detection under a nonlinear system cost," *IEEE Transactions on Signal Processing*, vol. 67, no. 14, pp. 3689–3703, 2019.
- [10] G. Joseph, C. Zhong, M. C. Gursoy, S. Velipasalar, and P. K. Varshney, "Anomaly detection via learning-based sequential controlled sensing," *IEEE Sensors Journal*, vol. 24, no. 13, pp. 21 025–21 037, 2024.
- [11] H. Szostak and K. Cohen, "Deep multi-agent reinforcement learning for decentralized active hypothesis testing," *IEEE Access*, pp. 1–1, 2024.
- [12] G. Stamatelis, A.-N. Kanatas, I. Asprogerakas, and G. C. Alexandropoulos, "Single- and multi-agent private active sensing: A deep neuroevolution approach," 2024. [Online]. Available: <https://arxiv.org/abs/2403.10112>
- [13] K. Cohen and Q. Zhao, "Active hypothesis testing for anomaly detection," *IEEE Transactions on Information Theory*, vol. 61, no. 3, pp. 1432–1450, 2015.
- [14] B. Huang, K. Cohen, and Q. Zhao, "Active anomaly detection in heterogeneous processes," *IEEE Transactions on Information Theory*, vol. 65, no. 4, pp. 2284–2301, 2019.
- [15] T. Lambez and K. Cohen, "Anomaly search with multiple plays under delay and switching costs," *IEEE Transactions on Signal Processing*, vol. 70, pp. 174–189, 2022.
- [16] L. Citron, K. Cohen, and Q. Zhao, "Anomaly search of a hidden markov model," in *IEEE International Symposium on Information Theory (ISIT)*, 2024, pp. 3684–3688.
- [17] K. Gan, S. Jia, and A. Li, "Greedy approximation algorithms for active sequential hypothesis testing," in *Advances in Neural Information Processing Systems*, M. Ranzato, A. Beygelzimer, Y. Dauphin, P. Liang, and J. W. Vaughan, Eds., vol. 34. Curran Associates, Inc., 2021, pp. 5012–5024. [Online]. Available: [https://proceedings.neurips.cc/paper\\_files/paper/2021/file/27e9661e033a73a6ad8cfcde965c54d-Paper.pdf](https://proceedings.neurips.cc/paper_files/paper/2021/file/27e9661e033a73a6ad8cfcde965c54d-Paper.pdf)
- [18] E. Lehmann and J. Romano, *Testing Statistical Hypotheses*, ser. Springer Texts in Statistics. Springer New York, 2006. [Online]. Available: <https://books.google.co.il/books?id=K6t5qn-SEp8C>
- [19] T. Gafni, B. Wolff, G. Revach, N. Shlezinger, and K. Cohen, "Anomaly search over discrete composite hypotheses in hierarchical statistical models," *IEEE Transactions on Signal Processing*, vol. 71, pp. 202–217, 2023.
- [20] T. M. Cover and J. A. Thomas, *Elements of Information Theory (Wiley Series in Telecommunications and Signal Processing)*. USA: Wiley-Interscience, 2006.
- [21] C. C. Aggarwal and C. K. Reddy, *Data Clustering: Algorithms and Applications*, 1st ed. Chapman & Hall/CRC, 2013.
- [22] M. Ester, H.-P. Kriegel, J. Sander, and X. Xu, "A density-based algorithm for discovering clusters in large spatial databases with noise," in *Proceedings of the Second International Conference on Knowledge Discovery and Data Mining*, ser. KDD'96. AAAI Press, 1996, p. 226–231.
- [23] G. Vershinin, A. Cohen, and O. Gurewitz, "Multi-stage active sequential hypothesis testing with clustered hypotheses," 2025. [Online]. Available: <https://arxiv.org/abs/2501.11459>
- [24] V. Draglia, A. Tartakovsky, and V. Veeravalli, "Multihypothesis sequential probability ratio tests .i. asymptotic optimality," *IEEE Transactions on Information Theory*, vol. 45, no. 7, pp. 2448–2461, 1999.

APPENDIX A  
MISCELLANEOUS PROOFS

## A. Proof of Lemma 1

At first glance, there are two possible error events; the first is that the stage winner (at some stage) is not the representative of the true hypothesis, and the second is the event when two different hypotheses win in the current round. We argue that the latter case never occurs in the following proposition:

**Proposition 1.** *Let  $i_r^*$  be the winner at stage  $r$ . Then,  $i_r^*$  is unique.*

*Proof:* Assume to the contradiction that there are two winners,  $i_r^*$  and  $j_r^*$ . Since  $i_r^*$  is a winner, then  $L_{i_r^* j_r^*} \geq \log \frac{H}{\delta}$ . Likewise,  $j_r^*$  is a winner so  $L_{j_r^* i_r^*} \geq \log \frac{H}{\delta}$ . However, due to symmetry, we have  $\log \frac{H}{\delta} \leq L_{i_r^* j_r^*} = -L_{j_r^* i_r^*} \leq -\log \frac{H}{\delta}$ , contradiction. ■

Now that we have established that there are no ties, we are ready to bound the former error probability. Since the number of alive hypotheses can only decrease in each stage, there can be no more than  $H$  stages. Consequently, we can compute the error probability of a single stage, and then, by the union bound, the error probability of the algorithm,  $p_e$ , is at most  $H$  times the error probability of a single stage. Hence, we will focus on computing the first stage's error probability for simplicity.

Here, we write  $\underline{X}_1^M$  as a shorthand notation for  $(X_1, X_2, \dots, X_M)^T$ , and, with slight abuse of notation,  $f_a(\underline{x}_1^M; \underline{\theta}_l(a))$  is their PDF (product distribution) for any  $l$  under action  $a$ . Let  $\mathbb{P}(j|i)$  be the probability that  $H_j$  erroneously survives a stage when  $H_i$  is the underlying hypothesis, and, consequently,  $H_i$  does not survive the current stage. Let  $a$  be the action the DM takes in the current stage. Let  $k$  be the representative from  $H_i$ 's cluster. Let  $\mathbb{1}\{A\}$  be the indicator for the event  $A$ . Let  $\mathcal{R}_j$  be the decision region of hypothesis  $H_j$ , i.e. if  $\tau$  is the stopping time of the stage (due to exceeded LLR), then the DM declares  $H_j$  as true if the observation sequence  $\underline{x}_1^\tau \in \mathcal{R}_j$ . Therefore, by definition,

$$\mathbb{P}(j|i) = \mathbb{E}[\mathbb{1}\{\underline{X}_1^\tau \in \mathcal{R}_j\} | H_i]. \quad (3)$$

Upon round termination, since  $H_j$  survives then for any  $l \in \text{repr}(H_{\text{alive}}, a)$ , and particularly for  $k$ , we have

$$\sum_{t=1}^{\tau} \log \frac{f_a(x_t; \underline{\theta}_j(a))}{f_a(x_t; \underline{\theta}_l(a))} \geq \log \frac{H}{\delta}$$

for any  $\underline{x}_1^\tau \in \mathcal{R}_j$ . Thus, for any  $\underline{x}_1^\tau \in \mathcal{R}_j$  we have

$$\prod_{t=1}^{\tau} f_a(x_t; \underline{\theta}_k(a)) \leq \frac{\delta}{H} \prod_{t=1}^{\tau} f_a(x_t; \underline{\theta}_j(a)). \quad (4)$$

Now we bound (3) as follows:

$$\begin{aligned}
\mathbb{P}(j|i) &= \mathbb{E}[\mathbf{1}\{\underline{X}_1^\tau \in \mathcal{R}_j\} | H_i] \\
&= \mathbb{E}\left[\mathbf{1}\{\underline{X}_1^\tau \in \mathcal{R}_j\} \frac{f_a(\underline{X}_1^\tau; \underline{\theta}_k(a))}{f_a(\underline{X}_1^\tau; \underline{\theta}_k(a))} \middle| H_i\right] \\
&\leq \frac{\delta}{H} \mathbb{E}\left[\mathbf{1}\{\underline{X}_1^\tau \in \mathcal{R}_j\} \frac{f_a(\underline{X}_1^\tau; \underline{\theta}_j(a))}{f_a(\underline{X}_1^\tau; \underline{\theta}_k(a))} \middle| H_i\right] \\
&\leq \frac{\delta}{H} \mathbb{E}\left[\frac{f_a(\underline{X}_1^\tau; \underline{\theta}_j(a))}{f_a(\underline{X}_1^\tau; \underline{\theta}_k(a))} \middle| H_i\right] \\
&= \frac{\delta}{H} \left(\mathbb{E}\left[\frac{f_a(X_1; \underline{\theta}_j(a))}{f_a(X_1; \underline{\theta}_k(a))} \middle| H_i\right]\right)^\tau.
\end{aligned}$$

The first inequality follows (4), and the second discards the indicator. The last transition follows the i.i.d. assumption on the obtained observations. We are left to show that the expectation powered by  $\tau$  is less than or equal to 1.

Now, instead of taking the expectation with respect to  $f_a(X_1; \underline{\theta}_i(a))$ , we take it with respect to  $f_a(X_1; \underline{\theta}_j(a))$  to obtain:

$$\mathbb{P}(j|i) \leq \frac{\delta}{H} \left(\mathbb{E}\left[\frac{f_a(X_1; \underline{\theta}_i(a))}{f_a(X_1; \underline{\theta}_k(a))} \middle| H_j\right]\right)^\tau.$$

Although the change of measure did not change the expectation powered by  $\tau$ , it is easier (conceptually) to bound the likelihood ratio between two PDFs of hypotheses in the same cluster rather than the likelihood ratio between two PDFs of hypotheses from different clusters. Observe that

$$\begin{aligned}
-\Delta\mathcal{D}_{ijk} &= \mathbb{E}\left[\log \frac{f_a(X; \underline{\theta}_j(a))}{f_a(X; \underline{\theta}_k(a))} \middle| H_i\right] \\
&\leq \frac{1}{\ln 2} \left(\mathbb{E}\left[\frac{f_a(X_1; \underline{\theta}_j(a))}{f_a(X_1; \underline{\theta}_k(a))} \middle| H_i\right] - 1\right) \\
&= \frac{1}{\ln 2} \left(\mathbb{E}\left[\frac{f_a(X_1; \underline{\theta}_i(a))}{f_a(X_1; \underline{\theta}_k(a))} \middle| H_j\right] - 1\right)
\end{aligned}$$

from the famous inequality  $\ln x \leq x - 1$ . Thus,

$$\Delta\mathcal{D}_{ijk} \geq \frac{1}{\ln 2} \left(1 - \mathbb{E}\left[\frac{f_a(X_1; \underline{\theta}_i(a))}{f_a(X_1; \underline{\theta}_k(a))} \middle| H_j\right]\right).$$

In order to have  $\Delta\mathcal{D}_{ijk} > \eta_{ai}$  for some  $\eta_{ai} \in [0, 1)$ , it is sufficient to show that there exists some  $\eta_{ai}$  such that

$$1 - \mathbb{E}\left[\frac{f_a(X_1; \underline{\theta}_i(a))}{f_a(X_1; \underline{\theta}_k(a))} \middle| H_j\right] \geq \eta_{ai}$$

for any  $H_k$  in  $H_i$ 's cluster and  $H_j$  not in  $H_i$ 's cluster. However, such  $\eta_{ai}$  always exists since  $H_i$  is allowed to be isolated and represented by itself, forcing  $\mathbb{E}\left[\frac{f_a(X_1; \underline{\theta}_i(a))}{f_a(X_1; \underline{\theta}_k(a))} \middle| H_j\right] = 1$ . Otherwise, if  $H_i$  is not isolated and we have

$$\mathbb{E}\left[\frac{f_a(X_1; \underline{\theta}_i(a))}{f_a(X_1; \underline{\theta}_k(a))} \middle| H_j\right] \leq 1 - \eta_{ai} \leq 1.$$

Thus,  $\eta_a = \min_i \eta_{ai}$  is sufficient and  $\mathbb{P}(j|i) \leq \frac{\delta}{H}$  as desired. Now, instead of using the conservative computation  $\mathbb{P}(\text{select } j \neq i|i) = \sum_{j \neq i} \mathbb{P}(j|i)$  in order to bound the per-stage error probability (cf. [2, Equation (4)]), we instead use the following observation:  $H_j$  is the stage winner only after winning against all other hypotheses in all  $\mathcal{O}(H^2)$  Wald Tests, so the error probability in the current stage is the

probability that  $H_j$  is accepted in the Wald Test composed of comparing  $H_j$  and  $H_i$ . Consequently,  $\frac{\delta}{H}$  bounds the per-stage error probability, and as the section preamble suggests, the error probability of the algorithm cannot exceed  $\frac{\delta}{H} \times H = \delta$ .

### B. Proof of Theorem 1

The proof of the theorem follows from applying Theorem 4.1 in [24] by replacing the KLDs with  $\Delta\mathcal{D}_{ijk}$ , and taking minimum (or maximum) over the set of possible hypotheses to participate in the Armitage Test against  $H_i$ 's representative (i.e.,  $H_k$ ), repr  $(H_{\text{alive}}^{(r)}, a_r) \setminus \{k\}$ , rather than the entire set of hypotheses. Notably, the theorem is applicable since  $\Delta\mathcal{D}_{ijk} > 0$ . Since  $H_i$  and  $H_j$  are not clustered together,  $\Delta\mathcal{D}_{ijk} \geq \varepsilon$ , so by averaging over the underlying hypothesis using the priors  $\{\pi_i\}_{i=0}^{H-1}$ , we obtain that

$$\frac{1}{\beta} \log \frac{H}{\delta} \leq \mathbb{E}[\tau_r] \leq \frac{1}{\varepsilon} \log \frac{H}{\delta}$$

as desired. All that remains is bounding the number of stages; There is at least one stage and at most  $H - 1$  stages, so

$$\frac{1}{\beta} \log \frac{H}{\delta} \leq \mathbb{E}[N] \leq \frac{H}{\varepsilon} \log \frac{H}{\delta}.$$

### C. Proof of Corollary 1

Combining Lemma 1 and Lemma 1 with (1) yields

$$\frac{\delta}{H^2} \mathbb{E}[N] + p_e \leq \frac{\delta}{H^2} \times \frac{H}{\varepsilon} \log \frac{H}{\delta} + \delta = \frac{1}{\varepsilon} \times \frac{1}{H} \log \frac{H}{\delta} + \delta$$

, which vanishes when  $\delta \rightarrow 0$ . When  $H \rightarrow \infty$ , only the first addend vanishes, and we are left with  $\delta$ .