

Enhancing Retrosynthesis with Conformer: A Template-Free Method

Jiaxi Zhuang, Qian Zhang, Ying Qian*

East China Normal University

51255901063@stu.ecnu.edu.cn, {qzhang, yqian}@cs.ecnu.edu.cn

Abstract

Retrosynthesis plays a crucial role in the fields of organic synthesis and drug development, where the goal is to identify suitable reactants that can yield a target product molecule. Although existing methods have achieved notable success, they typically overlook the 3D conformational details and internal spatial organization of molecules. This oversight makes it challenging to predict reactants that conform to genuine chemical principles, particularly when dealing with complex molecular structures, such as polycyclic and heteroaromatic compounds. In response to this challenge, we introduce a novel transformer-based, template-free approach that incorporates 3D conformer data and spatial information. Our approach includes an Atom-align Fusion module that integrates 3D positional data at the input stage, ensuring correct alignment between atom tokens and their respective 3D coordinates. Additionally, we propose a Distance-weighted Attention mechanism that refines the self-attention process, constricting the model’s focus to relevant atom pairs in 3D space. Extensive experiments on the USPTO-50K dataset demonstrate that our model outperforms previous template-free methods, setting a new benchmark for the field. A case study further highlights our method’s ability to predict reasonable and accurate reactants.

1 Introduction

Retrosynthesis, initially formulated by [Corey, 1991], stands as a fundamental problem within organic synthesis, aiming to discover and predict reactants given product molecules. This task presents a large chemical search space and myriad molecular combinations, posing significant challenges. Traditionally, researchers relied heavily on extensive knowledge of organic chemistry and reaction mechanisms, often resulting in inefficiency and heavy dependency on expertise. In recent years, with the significant impact of data-driven deep learning methods across various fields, computer-aided Retrosynthesis has gained increasing attention, especially the template-free methods.

Existing methods are categorized into three types based on reliance on template prior: template-based, semi-template, and template-free. Template-based methods [Chen and Jung, 2021; Coley *et al.*, 2017; Dai *et al.*, 2019] view Retrosynthesis as a template retrieval task and subsequently employ the retrieved templates (specific chemical changes) to transform the input product molecule into reactants using cheminformatics tools like `RDKit` [Landrum and others, 2013]. Semi-template methods [Shi *et al.*, 2020; Yan *et al.*, 2020] follow two steps: i) Reaction Center Identification: identifying the reaction centers of the product using product-reactant aligned atom mapping and then using `RDKit` to convert the product into synthons; ii) Synthons Completion: building another model to complete synthons into reactants. Template-free methods regard molecules as sequences, like the Simplified Molecular Input Line Entry System (SMILES) [Weininger, 1988], and frame Retrosynthesis prediction as machine translation. So that it can implicitly learn reaction rules and easily scale to larger data sets without relying on external template databases or molecular editing with `RDKit`.

Problem. In previous studies, the typical representation of molecules involves 1D sequences (*i.e.*, SMILES) and 2D graphs. They overlooked the perception and comprehension of 3D conformer information, which is crucial for understanding molecular stereochemistry, reaction centers, chirality, and other properties [Meng *et al.*, 2023; Dang *et al.*, 2018]. Especially in molecules with intricate 3D structures (*e.g.*, polychiral, heteroaromatic), the absence of 3D conformer information can lead to synthesis predictions that defy established chemical rules.

In this work, we focus on template-free Transformer for Retrosynthesis prediction. Incorporating 3D conformer information into this framework presents two challenges: i) integrating 3D features while maintaining alignment between atom tokens and corresponding 3D representations; ii) controlling receptive field of model based on spatial structure. To tackle these two challenges, we propose our method, a novel end-to-end Retrosynthesis Transformer that encodes both 1D SMILES sequences and 3D conformer information. We propose two modules, Atom-align Fusion and Distance-weighted Attention, to overcome the aforementioned challenges respectively. The model can jointly encode the 1D sequential and 3D positional information of molecules and redistribute attention weights based on 3D distances between

atoms. Moreover, data augmentation [Tetko *et al.*, 2020; Zhong *et al.*, 2022], like shuffling the atom order or aligning root atom between product and reactants, are employed to enhance the overall performance. Finally, we introduce SMILES alignment [Deshpande and Narasimhan, 2020; Wan *et al.*, 2022] by incorporating attention guidance loss during training. Our model introduces 3D conformer information, allowing it to generate reasonable synthesis predictions even for molecules with intricate 3D structures, and it does not rely on additional molecular editing. We conducted experiments using a widely recognized dataset USPTO-50k [Schneider *et al.*, 2016]. Results demonstrate that our model can enhance performance in terms of Top-k accuracy in both known and unknown reaction classes. Our proposed method achieves a new state-of-the-art for template-free methods, and it is also comparable to template-based and semi-template-based methods. Our contributions are summarized as follows:

- To the best of our knowledge, the proposed model our method is the first to integrate 3D conformer information into template-free method and train the model in an end-to-end manner.
- We propose i) Atom-align Fusion which integrates 1D and 3D representations while preserving their alignment. ii) Distance-weighted Attention which directs self-attention toward a more reasonable direction solely based on molecular 3D distance matrix.
- Experiments on the USPTO-50k dataset indicate that proposed model our method achieves state-of-the-art Retrosynthesis performance in template-free methods with a Top-1 accuracy of 55.5% and 67.2% without and with reaction class, respectively.

2 Related Work

Template-based methods utilize reaction templates from pre-constructed database to capture the rules of chemical changes and match input products with the templates. RetroSim [Coley *et al.*, 2017] is a similarity-based approach using molecular fingerprint similarity to rank candidate templates. GLN [Dai *et al.*, 2019] employs the Conditional Graph Logic Network to learn when rules from reaction templates should be applied, implicitly considering chemical feasibility and strategy. Inspired by the chemical intuition that molecular changes primarily occur locally during reactions, LocalRetro [Chen and Jung, 2021] is locally encoded and refined to accommodate non-local reactions. Although these methods perform the best among the three categories, their reliance on pre-defined templates limits their coverage and scalability, rendering them insufficient for real-world scenarios.

Semi-template methods do not directly use templates but instead combine chemical rules with generative models. Existing methods typically follow a two-stage procedure: i) reaction center identification; ii) synthons completion. Reaction center identification predicts the reaction center of the product and breaks the corresponding bond into incomplete molecules, called synthons. Synthons completion uses generative models to complete synthons into reactants. RetroX-

pert [Yan *et al.*, 2020] builds an Edge-enhanced Graph Attention Network (EGAT) that takes a molecule graph as input and predicts bond disconnection probabilities to obtain synthons. It then employs a seq2seq model to generate reactants in SMILES format. In contrast to the SMILES format, G2Gs [Shi *et al.*, 2020] completes synthons into reactants in graph format through node selection and edge labeling. GraphRetro [Somnath *et al.*, 2020] expands synthons into complete reactants by attaching relevant leaving groups. RetroPrime [Wang *et al.*, 2021] introduces a two-stage procedure by adding additional labels to SMILES. In contrast, MEGAN [Nijssen and Kok, 2004] and Graph2Edits [Zhong *et al.*, 2023] reframe the generative process as a series of graph edits executed by RDKit.

Template-free methods transform Retrosynthesis prediction (product→reactants) into a machine translation task (source language → target language) [Brown *et al.*, 1990], adapting advanced NLP models like LSTM [Graves and Graves, 2012] and Transformer [Vaswani *et al.*, 2017]. Besides translation, SCROP [Zheng *et al.*, 2019] builds an additional self-correction transformer to rectify the syntax errors of outputs. Augmented Transformer [Tetko *et al.*, 2020] trains the model with data augmentation via SMILES permutation. To ensure the permutation invariance of SMILES, Graph2SMILES [Tu and Coley, 2022] substitutes the original sequence encoder with a graph encoder. GET [Mao *et al.*, 2021] integrates graph and SMILES encoders in various ways to include graph topological information, while GTA [Seo *et al.*, 2021] masks the self-attention layer using the graph adjacency matrix. Retroformer [Wan *et al.*, 2022] suggests a local attention head that enables information exchange between the local reactive region and the global reaction context.

3 Preliminary

3.1 Template-free Retrosynthesis

Molecules can be represented as sequences of tokens in SMILES format. Following the SMILES tokenization of [Schwaller *et al.*, 2019] that separates each atom (*i.e.*, O, C, N, Cl) and non-atom tokens (*i.e.*, -, =, #), we let $S = [s_1, s_2, \dots, s_n]$ denote SMILES sequence with n number of tokens. In template-free Retrosynthesis, we obtain the product SMILES S_P and the reactants SMILES S_R , and attempt to find a method f_θ that can map S_P to S_R with autoregressive way: $S_R = f_\theta(s_{i+1}|s_0, \dots, s_i, S_P)$ in i step.

3.2 Molecular Conformer and ComENet

Molecule is a dynamic structure since atoms are in continual motion in 3D space. The local minima on the potential energy surface are called conformers. Generally, molecular conformer can be represented as $G_{3D} = (A, C)$, where $A = \{a_i\}_{i=1, \dots, n}$ is atoms list, $C = \{(x_i, y_i, z_i)\}_{i=1, \dots, n}$ is a 3D coordinate list. To fulfill the global completeness of 3D conformer information of a molecule, ComENet [Wang *et al.*, 2022] encodes rotation angles and spherical coordinates within the 1-hop neighborhood of atoms into the message passing scheme [Balcilar *et al.*, 2021].

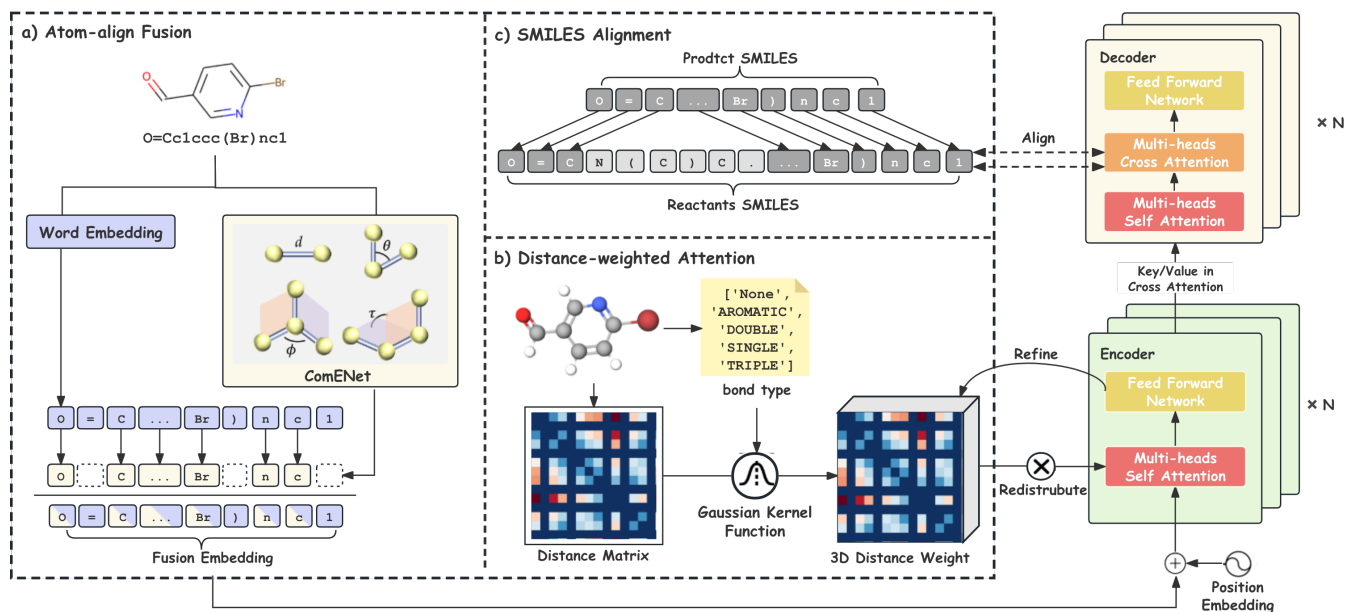


Figure 1: Architecture overview of our method based on Transformer. a) SMILES and molecular conformer are processed through Word Embedding and ComENet to yield SMILES sequence embedding and 3D position embedding. Following the Atom-align integration, fusion embedding is then input into the Encoder. b) In Encoder, 3D Distance weight is obtained for redistribution of self-attention by Gaussian Basis Kernel function, while also refined layer-by-layer. c) In Decoder, SMILES Alignment is employed as guidance to align the cross-attention between the product and reactants.

4 Method

In this section, we introduce our method, a novel transformer-based model that is capable of learning richer molecular representation through SMILES sequence and spatial conformer. An overview of the proposed method is shown in Figure 1.

Figure 1a illustrates Atom-align Fusion that incorporates both 1D SMILES tokens embedding and 3D position embedding to get fusion embedding as inputs for encoder-decoder model. By adopting this approach, the model is capable of integrating 3D positional information while preserving alignment (Section 4.1). Figure 1b illustrates Distance-weighted Attention, which directs self-attention to prioritize chemical relevant atoms within spatial structure (Section 4.2). Figure 1c illustrates SMILES alignment strategy for further bridging the mapping relationship between product SMILES and reactant SMILES in decoder cross-attention (Section 4.3). The overall training and inference process is conducted in an end-to-end manner, and it is a template-free method that does not rely on RDKit for molecular editing.

4.1 Atom-align Fusion

The most direct method of feature integration is concatenation, but this approach disrupts the alignment between 1D representations of atom tokens and their corresponding 3D representations. The challenge lies in how to integrate conformer information into the molecular representation while preserving alignment between them.

To address this issue, we introduced the Atom-align Fusion module. The purpose is to obtain fusion embedding $F_{3D} \in \mathbb{R}^{M \times D}$ by associating SMILES token embedding

$T \in \mathbb{R}^{M \times D}$ with 3D position embedding $P_{3D} \in \mathbb{R}^{N \times D}$, where D is model dimension, M is number of SMILES tokens, N is number of atoms.

Firstly, to obtain the complete 3D molecular representation, we extracted 3D position embedding P_{3D} from the molecular conformer using ComENet [Wang *et al.*, 2022]. ComENet proposes a novel message passing scheme [Balcilar *et al.*, 2021] that operates within a 1-hop neighborhood with radial distance d , polar angle θ , azimuthal angle ϕ and rotation angle τ , and then builds message passing scheme as

$$\mathbf{v}_i^{t+1} = g \left(\mathbf{v}_i^t, \sum_{j \in \mathcal{N}_i} f(\mathbf{v}_j, d_{ij}, \theta_{ij}, \phi_{ij}, \tau_{ij}) \right) \quad (1)$$

where $\mathbf{v}_i^t \rightarrow \mathbf{v}_i^{t+1}$ means update of atom (node) representation, g and f implemented by neural networks or mathematical operations, d_{ij} , θ_{ij} and ϕ_{ij} specify the 1-hop local neighborhood, τ_{ij} determines the orientation of the local neighborhood. We omit the final aggregation layer of ComENet to obtain the 3D representation corresponding to each atom $P_{3D} = \{\mathbf{v}_i\}_{i=1,2,\dots,N}$ rather than the entire molecular graph.

Subsequently, we input P_{3D} along with the SMILES tokens embedding T into the encoder. To facilitate a more comprehensive integration of SMILES and conformer, we aligned tokens embedding T and P_{3D} with atom index in the same vector space. We initially enlarge P_{3D} from N (number of atoms) length to M (number of tokens) length by padding 0 to the indexes of non-atom tokens. In model input stage, we blend the P_{3D} and T to get the fusion embedding F_{3D} , allowing effective integration of 3D positional and sequential

information at each atom position while preserving the alignment between them:

$$F_{3D} = \lambda_1 \times \text{pad}(P_{3D}) + \lambda_2 \times T \quad (2)$$

where λ_1 and λ_2 are trainable parameters that can adaptively adjust weights of 3D position embedding P_{3D} and SMILES tokens embedding T during training. Besides, we still use Sinusoidal Position Embedding [Vaswani *et al.*, 2017] for tagging position of tokens.

4.2 Distance-weighted Attention

According to [Li *et al.*, 2017; Wan *et al.*, 2022], multi-head attention calculation in vanilla transformer is insufficient and lacks chemical knowledge. Simultaneously, 3D distances between atoms within a molecule reflect the spatial relation between any pair of atoms in physical chemistry, such as bond energy, stability, electron affinity and interatomic force. Incorporating 3D distances into the multi-head attention calculation process enables the model to reschedule attention accordingly, which not only alleviates the redundancy in multi-head attention but also enables distance-based attention redistribution during the attention calculation.

Similar to the method of partitioning attention heads in [Wan *et al.*, 2022], we divide the multi-head attention into normal attention heads and spatial attention heads. Normal attention heads follow the traditional transformer manner to learn sequence-wide information, whereas spatial attention heads employ 3D distances as an external attention weight to enable attention redistributed based on 3D distances. The whole module can be formulated as two steps: 1) Construct 3D distance weight, 2) Attention Redistribute & Weight Refine.

Construct 3D Distance Weight First, we construct a distance matrix $\mathbf{D} \in \mathbb{R}^{N \times N}$ from molecular conformer of molecule as

$$\mathbf{D} = \{\mathbf{d}_{i,j}\}_{i,j=1,2,\dots,N} \quad \mathbf{d}_{ij} = \|\mathbf{c}_i - \mathbf{c}_j\|_2 \quad (3)$$

where N is number of atoms, i, j are index of atoms pair, \mathbf{c}_i is coordinate of i -th atom. To explore high-dimensional space, we employ Gaussian Basis Function to transform the distance \mathbf{d}_{ij} between each atom pair (i, j) into a higher dimension as

$$\psi_{(i,j)}^k = -\frac{1}{\sqrt{2\pi}|\sigma^k|} \exp\left(-\frac{1}{2}\left(\frac{\gamma_{(i,j)}\mathbf{d}_{ij} + \beta_{(i,j)} - \mu^k}{|\sigma^k|}\right)^2\right) \quad (4)$$

where $k=\{1, \dots, K\}$, K is the number of Gaussian Kernel kernels. μ^k and σ^k represent kernel center and scaling factor of k -th Gaussian Basis kernel. $\gamma_{(i,j)}$ and $\beta_{(i,j)}$ are learnable scalars related to bond type (*i.e.*, SINGLE, DOUBLE) of pair (i, j) . To obtain the 3D Distance weight $\Phi_{(i,j)}$, we use two layers of Non-Linear Layer with the activation function Gaussian Error Linear Units (GELU) [Hendrycks and Gimpel, 2016] to encode $\psi_{(i,j)}$ as

$$\Phi_{(i,j)} = \mathbf{W}_2(\text{GELU}(\mathbf{W}_1(\psi_{(i,j)}))) \quad (5)$$

where $\psi_{(i,j)} = \text{stack}([\psi_{(i,j)}^1; \dots; \psi_{(i,j)}^k])$, $\mathbf{W}_1, \mathbf{W}_2 \in \mathbb{R}^{K \times K}$ are learnable parameters and 3D Distance weight $\Phi_{(i,j)} \in \mathbb{R}^{N \times N \times K}$.

Attention Redistribute & Weight Refine Second, we leverage the previously obtained 3D Distance weight $\psi_{(i,j)}$ to guide the model in redistributing attention by the internal spatial structure, instead of directly calculating attention scores between each token like vanilla Transformer. We divide the attention heads into two halves: normal attention head and spatial attention head. The normal attention head still captures the context of the SMILES sequence like original attention computation. The spatial attention head, on the other hand, focuses more on the molecular internal 3D structure, limiting the receptive field of each atom and considering the 3D distance with other atoms. For the i -th token of the l -th encoder layer, the roll-out form of spatial attention head is formulated as:

$$x_{i,\text{spatial}}^{l+1} = \sum_{j \in N(i)} \text{softmax}\left(\Phi_{(i,j)}^l \odot \frac{q_i k_j^T}{\sqrt{d}}\right) v_j \quad (6)$$

$$[q_i, k_j, v_j] = [h_i^l \mathbf{W}^Q, h_j^l \mathbf{W}^K, h_j^l \mathbf{W}^V]$$

where $\Phi_{(i,j)}^l$ is almost the same as 3D Distance weight $\Phi_{(i,j)}$ but padding 0 in non-atom token for element-wise multiplication \odot , \mathbf{W}^Q , \mathbf{W}^K and \mathbf{W}^V are projection matrices for query q , key k , value v in self-attention. Computed representations of normal attention head and spatial attention head are concatenated along the hidden dimension and then processed through a linear layer, forming the updated context for the next layer h^{l+1} as:

$$h^{l+1} = \mathbf{W}_{\text{Linear}}\left(\left[x_{\text{normal}}^{l+1}; x_{\text{spatial}}^{l+1}\right]\right) \quad (7)$$

In addition, we perform Weight Refine to update our 3D Distance weight layer by layer. The Weight Refine module is a fully connected (FC) layer that takes concatenation of updated contexts of atoms pair (i, j) to refine the 3D attention weight among receptive field:

$$\Phi_{(i,j)}^{l+1} = \Phi_{(i,j)}^l + \text{FC}\left(\left[h_i^{l+1}; h_j^{l+1}\right]\right) \quad (8)$$

4.3 Training Strategy

SMILES Alignment During the occurrence of chemical reactions, the majority of atoms remain unchanged. We can utilize the atom-map to annotate the correspondence between atoms of product and reactants in reaction, which remains unchanged during the reaction. Furthermore, the correspondence of atoms can be readily transferred to the token correspondence in the SMILES sequence (see in Figure 1c) and construct SMILES Alignment Map (SAM) as:

$$SAM_{ij} = \begin{cases} 1 & \text{if } R_i \xleftrightarrow{\text{mapped}} P_j \\ 0 & \text{else} \end{cases} \quad (9)$$

Inspired by [Deshpande and Narasimhan, 2020], we similarly employed the guided attention approach by introducing guidance loss \mathcal{L}_{SA} to encourage alignment between the cross attention scores in the final layer of the decoder and SMILES Alignment Map, strengthening the attention weights between corresponding tokens.

Data Augmentation When molecules are converted into SMILES, different choices of root atoms can result in different SMILES representations, and this non-uniqueness may impede training of seq2seq models. Apart from unifying SMILES into a canonical form, another approach is to transform and enlarge the original SMILES sets through data augmentation. Drawing from some effective data augmentation tricks in prior research [Dai *et al.*, 2019; Tetko *et al.*, 2020; Zhong *et al.*, 2022], we explore two types of data augmentation approaches: Randomize SMILES and Root-align SMILES.

- **Randomize SMILES:** By shuffling the order of atoms in a molecule or altering the priority of side chains, different SMILES representations can be generated. There can be up to $n!$ (where n is the number of atoms in the molecule) possible SMILES to represent a molecule.
- **Root-align SMILES (R- SMILES):** First, a root atom is randomly selected from product, and then product R-SMILES is generated based on this root atom. Next, the same root atom in reactants is identified based on atom mapping or substructure matching between product and reactants and generate reactants R-SMILES. R-SMILES effectively reduces the editing distance between product and reactants, ensuring a high sequence similarity and simplifying the prediction problem.

R-product: Brc1ccc(C=O)cn1

R-reactants: Brc1ccc(Br)cn1.C(N(C)C)=O

In contrast to other methods that directly expand dataset, we employ an on-the-fly approach to progressively augment data during training iterations. The specific procedure involves transforming the input canonical SMILES into Randomize SMILES (or Root-align SMILES) with a 50% probability in each training iteration. As iterations increase, the model gradually gains a broader perspective on permuted SMILES. This dynamic augmentation approach allows the model to focus more on the standard form (canonical SMILES) while regularizing with the permuted form (permuted SMILES), thereby improving the accuracy, stability, and generalization of model.

4.4 Overall Loss

The overall loss is composed of the language modeling R-Drop loss [Wu *et al.*, 2021] \mathcal{L}_{LM} for Retrosynthesis, along with the SMILES Alignment guidance loss \mathcal{L}_{SA} . R-drop Loss builds upon cross-entropy loss enhancing prediction consistency and model robustness by minimizing bidirectional KL-divergence of output distributions of any pair of sub-models sampled from dropout in model training.

The objectives of overall loss: i) approximate target in retrosynthesis, ii) ensure the robustness under different dropout, iii) strengthen the alignment relationship in cross-attention. The formula is as follows:

$$\mathcal{L} = \mathcal{L}_{LM}^{(CE)} + \alpha \mathcal{L}_{LM}^{(KL)} + \mathcal{L}_{SA} \quad (10)$$

where $\mathcal{L}_{LM}^{(CE)}$ is Cross-Entropy loss to minimize prediction error against actual outputs, $\mathcal{L}_{LM}^{(KL)}$ is KL-divergence in R-Drop loss to strive for outputs of models with varying Dropout to

be as similar as possible, and we set α to 0.5. \mathcal{L}_{SA} is Cross-Entropy loss between cross-attention score of last decoder layer and SMILES Alignment Map that we mention in Section 4.3.

5 Experiments

Datasets We use the popular Retrosynthesis benchmark dataset USPTO-50K [Schneider *et al.*, 2016], which contains 50,016 atom-mapped reactions, to evaluate our model. The same data split as [Coley *et al.*, 2017] is applied to our experiments, resulting in 40,008, 5,001, and 5,007 reactions for the training, validation, and test sets, respectively. Conformers are generated using RDKit with the stochastic optimization algorithm Merck Molecular Force Field (MMFF). We then apply the same algorithm in [Wan *et al.*, 2022] to extract the ground truth SMILES Alignment Map.

Setting Our model is built on vanilla Transformer, consisting of 8 encoder layers and 8 decoder layers with 8 attention heads. The model dimension is set to 512. We employ the Adam optimizer [Kingma and Ba, 2014] with $(\beta_1, \beta_2) = (0.9, 0.98)$ and train the model with batch size of 16. During training, we set an early-stop of 7 epochs under a maximum of 1000 epochs to obtain the 7 best models and average their parameters. Finally, the whole training process took approximately 30 hours on a single NVIDIA GeForce RTX 4090 GPU.

Evaluation During inference, we use beam search [Tillmann and Ney, 2003] decode strategy with a beam size is 10. After that, we evaluate our model with **Top-k accuracy**, which considers it correct only if Top-k predicted reactants of the beam search results are the same as original test set. For molecule validity, we verify **Top-k validity** based on whether RDKit can recognize the Top-k predicted reactants.

Baseline We compare our proposed method, our method, with several strong baseline models from three types of Retrosynthesis method. We take RetroSim [Coley *et al.*, 2017], GLN [Dai *et al.*, 2019] and LocalRetro [Chen and Jung, 2021] to represent template-based methods. We take RetroXpert [Yan *et al.*, 2020], G2Gs [Shi *et al.*, 2020], GraphRetro [Somnath *et al.*, 2020], RetroPrime [Wang *et al.*, 2021], MEGAN [Nijssen and Kok, 2004] and Graph2Edits [Zhong *et al.*, 2023] to represent semi-template method. We take SCROP [Zheng *et al.*, 2019], Aug.Transformer [Tetko *et al.*, 2020], Graph2SMILES [Zhong *et al.*, 2023], GET [Mao *et al.*, 2021], GTA [Seo *et al.*, 2021] and Retroformer [Wan *et al.*, 2022] to represent template-free method. We did not choose pre-training methods for comparison as they are trained on larger datasets. We experimented with two training strategies for our proposed model: our method represents the model with Randomize SMILES data augmentation; our method+R represents the model with Root-align SMILES data augmentation.

5.1 Performance

Top-k Accuracy As shown in Table 1, for the model with random augmentation our method, when reaction class is known, Top-1/Top-10 accuracy is 65.3%/91.6%, exceeding

Model	Top-k accuracy (%)							
	Reaction class known				Reaction class unknown			
	1	3	5	10	1	3	5	10
Template-Based								
RetroSim	52.9	73.8	81.2	88.1	37.3	54.7	63.3	74.1
GLN	64.2	79.1	85.2	90.0	52.5	69.0	75.6	83.7
LocalRetro	63.9	86.8	92.4	96.3	53.4	77.5	85.9	92.4
Semi-Template-Based								
RetroXpert	62.1	75.8	78.5	80.9	50.4	61.1	62.3	63.4
G2G	61.0	81.3	86.0	88.7	48.9	67.6	72.5	75.5
GraphRetro	63.9	81.5	85.2	88.1	53.7	68.3	72.2	75.5
RetroPrime	64.8	81.6	85.0	86.9	51.4	70.8	74.0	76.1
MEGAN	60.7	82.0	87.5	91.6	48.1	70.7	78.4	86.1
Graph2Edits	67.1	87.5	91.5	93.6	55.1	77.3	83.4	89.4
Template-Free								
SCROP	59.0	74.8	78.1	81.1	43.7	60.0	65.2	68.7
GET	57.4	71.3	74.8	77.4	44.9	58.8	62.4	65.9
Aug. Transformer	-	-	-	-	48.3	-	73.4	77.4
GTA	-	-	-	-	51.1	67.6	74.8	81.6
Graph2SMILES	-	-	-	-	52.9	66.5	70.0	72.9
Retroformer	64.0	82.5	86.7	90.2	53.2	71.1	76.6	82.1
our method (Ours)	65.3	84.0	88.3	91.6	53.6	73.7	80.2	86.1
our method (Ours, +R)	67.2	87.0	91.4	94.4	55.5	76.3	82.8	88.8

Table 1: Top-k accuracy for Retrosynthesis prediction on USPTO-50K. +R indicates R-SMILES augmentation. The metric values of other models in the table are taken from their original papers. Best performance is in **bold**.

Model	Top-k validity (%)			
	1	3	5	10
Graph2SMILES	99.4	90.9	84.9	74.9
RetroPrime	98.9	98.2	97.1	92.5
Retroformer	99.2	98.5	97.4	96.7
our method (Ours)	99.8	99.6	99.1	97.0
our method (Ours, +R)	99.8	99.4	98.6	95.4

Table 2: Top-k SMILES validity for Retrosynthesis prediction on USPTO-50K with reaction class unknown.

previous state-of-the-art template-free methods. When reaction class is unknown, our model achieves Top-1/Top-10 accuracy at 53.6%/86.1% and also outperforms existing template-free methods. It’s worth noting that model demonstrates competitive performance in both template-based and semi-template methods, even though they rely on predefined templates or RDKit editing. For the model with R-SMILES augmentation our method+R, it is astonishingly found that by further aligning the root of product and reactants, our model not only greatly surpasses state-of-art template-free methods, but also essentially exceeds other template-based methods and semi-template methods on several metrics.

Top-k Validity We take three typical template-free methods Graph2SMILES, RetroPrime and Retroformer as baseline models to verify the predicted reactants SMILES validity of our model. We refrained from selecting template-based and semi-template methods, as SMILES constructed based on template information ensure validity. Conversely, template-free methods often struggle to generate valid SMILES with-

	(a)	(b)	Top-k accuracy (%)			
			1	3	5	10
①	-	-	50.9	71.2	78.1	83.7
②	✓	-	51.4	70.5	76.5	81.9
③	-	✓	52.8	72.1	78.2	84.0
④	✓	✓	53.6	73.7	80.2	86.1

Table 3: Ablation study of our method with reaction class unknown and random data augmentation. **Module (a)** is Atom-align Fusion; **Module (b)** is Distance-weighted Attention;

out extra chemical guidance. As shown in Table 2, our models are more capable of generating valid SMILES than other baseline models. Especially Top5-10 reactants, which are far ahead of other models. This indicates that incorporating 3D conformer information can assist the model in grasping the structures involved in chemical reactions, thus preventing the generation of SMILES that contravene chemical principles.

5.2 Ablation Study

To explore the impact of two modules, we design an ablation study under the settings of unknown reaction class and random SMILES data augmentation. The results are shown in Table 3 in the form of top-k accuracy and demonstrate necessity of each module for our method. The improvement in top-1 accuracy from ② to ① suggests that the model is able to use 3D positional information to infer the correct results with higher confidence after introducing module (a) Atom-align Fusion. Notably, the declines in top 3-10 accuracy is speculated on the reliance upon fixed 3D position embedding, which constrains the search space of model. Comparing ③

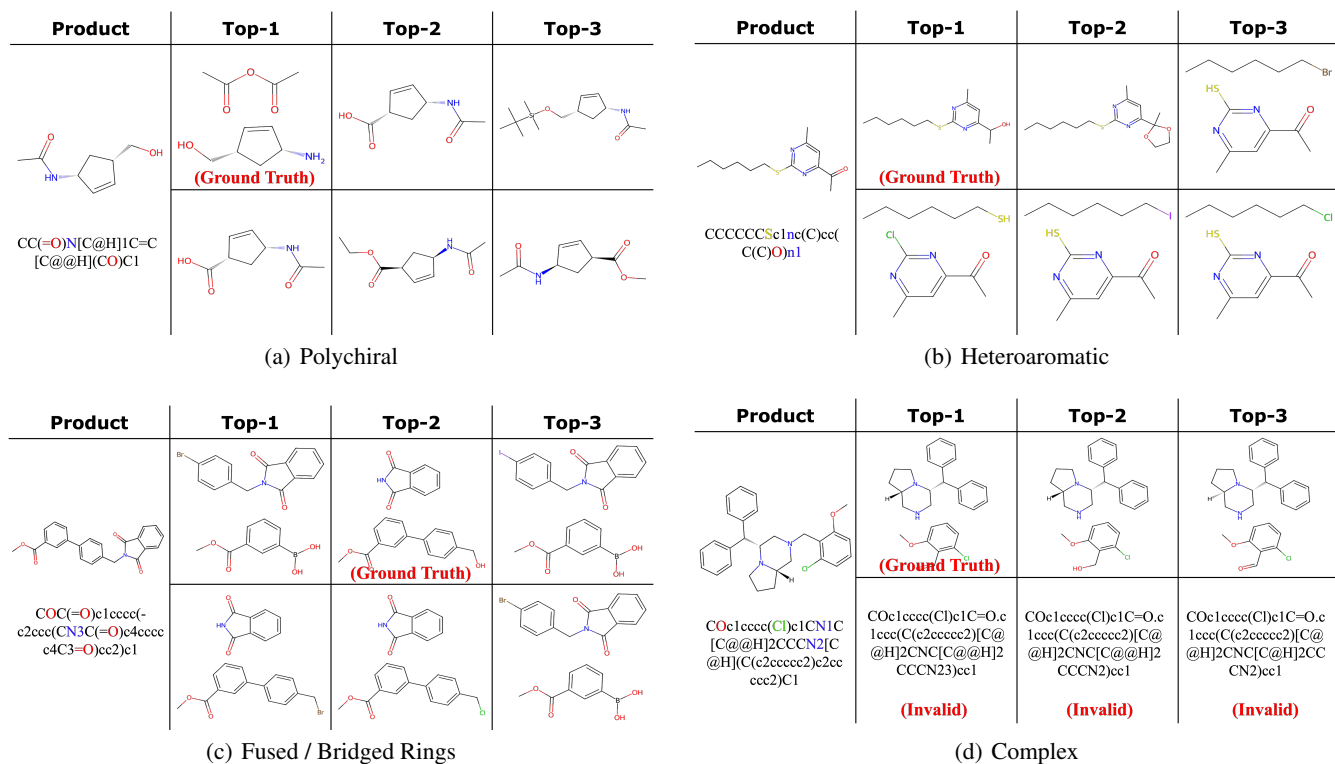


Figure 2: Case study for different structures. Each subfigure shows predictions of different methods: **our method (Top)**, **Transformer (Bottom)**.

and ①, it can be seen that employing (b) Distance-weighted Attention improves performance in all top-k accuracy, even for top 3-10. We conjecture that redistributing attention enables the model to focus on internal structure of molecules, while Gaussian Kernel Function grants the model a larger search space. The results of ④ show that the combination of (a) and (b) has achieved the best performance of model, enabling it to focus on internal spatial structures while maintaining an extensive search space based on comprehensive 3D positional information.

5.3 Case Study

To verify that the proposed method our method can handle molecules with more intricate spatial structures, we chose 4 types of products as representatives:

- Polychiral: a product with two or more chiral centers ('@/@@' in SMILES), leading to complex stereochemistry and multiple isomers.
- Heteroaromatic: a product containing at least one heteroatom as part of its aromatic ring structure.
- Fused / Bridged Rings: product features multiple ring structures joined together, either sharing common atoms or connected by bridge atoms.
- Complex: a product encompassing two or more features mentioned above.

Regarding the 4 types of products, we experiment on our method and a Transformer without 3D information and

choose the Top1-3 predictions for analysis, as shown in Figure 2. The rows of each subfigure correspond to our method and Transformer, respectively. Ground Truth and invalid SMILES are both highlighted in bold red.

The results show that when dealing with molecules of intricate spatial structures, our method can infer reasonable reactants with high confidence (often at top1, top2), while Transformer without 3D information finds it challenging to ascertain accurate results. Particularly in the case of *Complex* products, three predictions of our method could deduce skeleton and achieve the ground truth at top-1, whereas Transformer could not get any valid SMILES at top1-3. This further confirms the importance of introducing 3D information when dealing with molecules of intricate spatial structures.

6 Conclusion

We propose our method, an end-to-end Transformer that integrates 3D conformer for Retrosynthesis. With the proposed Atom-align Fusion module, we can adaptively integrate token and 3D position information ensuring the alignment between them. Next, we propose Distance-weighted Attention mechanism to guide the redistribution of self-attention with spatial distances and refine it across multiple layers. Our model achieves a new state-of-the-art in template-free methods and is also highly competitive with template-based and semi-template methods. In future work, we will attempt to introduce our method into multi-step synthesis route planning.

References

- [Balcilar *et al.*, 2021] Muhammet Balcilar, Pierre Héroux, Benoit Gauzere, Pascal Vasseur, Sébastien Adam, and Paul Honeine. Breaking the limits of message passing graph neural networks. In *International Conference on Machine Learning*, pages 599–608. PMLR, 2021.
- [Brown *et al.*, 1990] Peter F Brown, John Cocke, Stephen A Della Pietra, Vincent J Della Pietra, Frederick Jelinek, John Lafferty, Robert L Mercer, and Paul S Roossin. A statistical approach to machine translation. *Computational linguistics*, 16(2):79–85, 1990.
- [Chen and Jung, 2021] Shuan Chen and Yousung Jung. Deep retrosynthetic reaction prediction using local reactivity and global attention. *JACS Au*, 1(10):1612–1620, 2021.
- [Coley *et al.*, 2017] Connor W Coley, Luke Rogers, William H Green, and Klavs F Jensen. Computer-assisted retrosynthesis based on molecular similarity. *ACS central science*, 3(12):1237–1245, 2017.
- [Corey, 1991] Elias James Corey. *The logic of chemical synthesis*. Ripol Classic, 1991.
- [Dai *et al.*, 2019] Hanjun Dai, Chengtao Li, Connor Coley, Bo Dai, and Le Song. Retrosynthesis prediction with conditional graph logic network. *Advances in Neural Information Processing Systems*, 32, 2019.
- [Dang *et al.*, 2018] Johnny Dang, Brian Lin, Julia Yuan, Shawn T Schwartz, Rishabh M Shah, and Neil K Garg. Smart access to 3d structures. *Nature Reviews Chemistry*, 2(7):95–96, 2018.
- [Deshpande and Narasimhan, 2020] Ameet Deshpande and Karthik Narasimhan. Guiding attention for self-supervised learning with transformers. *arXiv preprint arXiv:2010.02399*, 2020.
- [Graves and Graves, 2012] Alex Graves and Alex Graves. Long short-term memory. *Supervised sequence labelling with recurrent neural networks*, pages 37–45, 2012.
- [Hendrycks and Gimpel, 2016] Dan Hendrycks and Kevin Gimpel. Gaussian error linear units (gelus). *arXiv preprint arXiv:1606.08415*, 2016.
- [Kingma and Ba, 2014] Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014.
- [Landrum and others, 2013] Greg Landrum et al. Rdkit: A software suite for cheminformatics, computational chemistry, and predictive modeling. *Greg Landrum*, 8:31, 2013.
- [Li *et al.*, 2017] Linghui Li, Sheng Tang, Lixi Deng, Yongdong Zhang, and Qi Tian. Image caption with global-local attention. In *Proceedings of the AAAI conference on artificial intelligence*, volume 31, 2017.
- [Mao *et al.*, 2021] Kelong Mao, Xi Xiao, Tingyang Xu, Yu Rong, Junzhou Huang, and Peilin Zhao. Molecular graph enhanced transformer for retrosynthesis prediction. *Neurocomputing*, 457:193–202, 2021.
- [Meng *et al.*, 2023] Ziqiao Meng, Peilin Zhao, Yang Yu, and Irwin King. A unified view of deep learning for reaction and retrosynthesis prediction: Current status and future challenges. In Edith Elkind, editor, *Proceedings of the Thirty-Second International Joint Conference on Artificial Intelligence, IJCAI-23*, pages 6723–6731. International Joint Conferences on Artificial Intelligence Organization, 8 2023. Survey Track.
- [Nijssen and Kok, 2004] Siegfried Nijssen and Joost N Kok. A quickstart in frequent structure mining can make a difference. In *Proceedings of the tenth ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 647–652, 2004.
- [Schneider *et al.*, 2016] Nadine Schneider, Nikolaus Stiefl, and Gregory A Landrum. What’s what: The (nearly) definitive guide to reaction role assignment. *Journal of chemical information and modeling*, 56(12):2336–2346, 2016.
- [Schwaller *et al.*, 2019] Philippe Schwaller, Teodoro Laino, Théophile Gaudin, Peter Bolgar, Christopher A Hunter, Costas Bekas, and Alpha A Lee. Molecular transformer: a model for uncertainty-calibrated chemical reaction prediction. *ACS central science*, 5(9):1572–1583, 2019.
- [Seo *et al.*, 2021] Seung-Woo Seo, You Young Song, June Yong Yang, Seohui Bae, Hankook Lee, Jinwoo Shin, Sung Ju Hwang, and Eunho Yang. Gta: Graph truncated attention for retrosynthesis. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35, pages 531–539, 2021.
- [Shi *et al.*, 2020] Chence Shi, Minkai Xu, Hongyu Guo, Ming Zhang, and Jian Tang. A graph to graphs framework for retrosynthesis prediction. In *International conference on machine learning*, pages 8818–8827. PMLR, 2020.
- [Somnath *et al.*, 2020] Vignesh Ram Somnath, Charlotte Bunne, Connor W Coley, Andreas Krause, and Regina Barzilay. Learning graph models for template-free retrosynthesis. *arXiv preprint arXiv:2006.07038*, 2020.
- [Tetko *et al.*, 2020] Igor V Tetko, Pavel Karpov, Ruud Van Deursen, and Guillaume Godin. State-of-the-art augmented nlp transformer models for direct and single-step retrosynthesis. *Nature communications*, 11(1):5575, 2020.
- [Tillmann and Ney, 2003] Christoph Tillmann and Hermann Ney. Word reordering and a dynamic programming beam search algorithm for statistical machine translation. *Computational linguistics*, 29(1):97–133, 2003.
- [Tu and Coley, 2022] Zhengkai Tu and Connor W Coley. Permutation invariant graph-to-sequence model for template-free retrosynthesis and reaction prediction. *Journal of chemical information and modeling*, 62(15):3503–3513, 2022.
- [Vaswani *et al.*, 2017] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.

- [Wan *et al.*, 2022] Yue Wan, Chang-Yu Hsieh, Ben Liao, and Shengyu Zhang. Retroformer: Pushing the limits of end-to-end retrosynthesis transformer. In *International Conference on Machine Learning*, pages 22475–22490. PMLR, 2022.
- [Wang *et al.*, 2021] Xiaorui Wang, Yuquan Li, Jiezhong Qiu, Guangyong Chen, Huanxiang Liu, Benben Liao, Chang-Yu Hsieh, and Xiaojun Yao. Retroprime: A diverse, plausible and transformer-based method for single-step retrosynthesis predictions. *Chemical Engineering Journal*, 420:129845, 2021.
- [Wang *et al.*, 2022] Limei Wang, Yi Liu, Yuchao Lin, Hao-ran Liu, and Shuiwang Ji. Comenet: Towards complete and efficient message passing for 3d molecular graphs. *Advances in Neural Information Processing Systems*, 35:650–664, 2022.
- [Weininger, 1988] David Weininger. Smiles, a chemical language and information system. 1. introduction to methodology and encoding rules. *Journal of chemical information and computer sciences*, 28(1):31–36, 1988.
- [Wu *et al.*, 2021] Lijun Wu, Juntao Li, Yue Wang, Qi Meng, Tao Qin, Wei Chen, Min Zhang, Tie-Yan Liu, et al. R-drop: Regularized dropout for neural networks. *Advances in Neural Information Processing Systems*, 34:10890–10905, 2021.
- [Yan *et al.*, 2020] Chaochao Yan, Qianggang Ding, Peilin Zhao, Shuangjia Zheng, Jinyu Yang, Yang Yu, and Junzhou Huang. Retroxpert: Decompose retrosynthesis prediction like a chemist. *Advances in Neural Information Processing Systems*, 33:11248–11258, 2020.
- [Zheng *et al.*, 2019] Shuangjia Zheng, Jiahua Rao, Zhongyue Zhang, Jun Xu, and Yuedong Yang. Predicting retrosynthetic reactions using self-corrected transformer neural networks. *Journal of chemical information and modeling*, 60(1):47–55, 2019.
- [Zhong *et al.*, 2022] Zipeng Zhong, Jie Song, Zunlei Feng, Tiantao Liu, Lingxiang Jia, Shaolun Yao, Min Wu, Tingjun Hou, and Mingli Song. Root-aligned smiles: a tight representation for chemical reaction prediction. *Chemical Science*, 13(31):9023–9034, 2022.
- [Zhong *et al.*, 2023] Weihe Zhong, Ziduo Yang, and Calvin Yu-Chian Chen. Retrosynthesis prediction using an end-to-end graph generative architecture for molecular graph editing. *Nature Communications*, 14(1):3009, 2023.