

---

# ON GENERALIZATION AND DISTRIBUTIONAL UPDATE FOR MIMICKING OBSERVATIONS WITH ADEQUATE EXPLORATION\*

---

A PREPRINT

Yirui Zhou, Xiaowei Liu, Xiaofeng Zhang, Yangchun Zhang

## ABSTRACT

This paper tackles the efficiency and stability issues in learning from observations (LfO). We commence by investigating how reward functions and policies generalize in LfO. Subsequently, the built-in reinforcement learning (RL) approach in generative adversarial imitation from observation (GAIfO) is replaced with distributional soft actor-critic (DSAC). This change results in a novel algorithm called Mimicking Observations through Distributional Update Learning with adequate Exploration (MODULE), which combines soft actor-critic’s superior efficiency with distributional RL’s robust stability.

*Keywords:* Learning from observations, Generalization properties, Distributional soft actor-critic

## 1 Introduction

Imitation learning (IL) (Pomerleau, 1991; Ng et al., 2000; Syed and Schapire, 2007; Ho and Ermon, 2016), a realm distinct from standard reinforcement learning (RL) (Puterman, 2014; Sutton and Barto, 2018), is independent on rewards provided by the environment. This characteristic makes IL particularly suited for numerous real-world applications (Bhattacharyya et al., 2018; Shi et al., 2019; Jabri, 2021). The general IL paradigm leverages the guidance from expert demonstrations with information of both states and actions to mimic an outstanding policy (Abbeel and Ng, 2004; Ho and Ermon, 2016; Kostrikov et al., 2020). According to the strategy of policy training, IL is divided into two main schemes based on policy training strategy: on-policy and off-policy training. The on-policy scheme (Ho and Ermon, 2016; Chen et al., 2020) is noted for its stability but requires a significant volume of samples. Conversely, the traditional off-policy scheme (Kostrikov et al., 2019; Zhou et al., 2022) is more sample-efficient but is at risk of higher training variance.

In numerous practical contexts, such as camera systems, obtaining expert actions (like knowing the angle of rotation from the source to the target point cloud in camera scenarios) can be costly or even impractical. A more feasible and distinctive approach is gathering observational data without explicit action signals, known as learning from observations (LfO) (Torabi et al., 2018b; Yang et al., 2019a; Torabi et al., 2019; Zhu et al., 2020; Lee et al., 2021). One feature of LfO is that it focuses on observing outcomes rather than replicating specific actions. This situation differs from the aforementioned learning from demonstrations (LfD) paradigm, which includes action information from experts.

We find that the direct application of the two primary LfD policy training schemes in LfO tends to magnify their adverse effects.

- Sample inefficiency problem in the on-policy scheme worsens with LfO. Since only state information is contained in the expert dataset, the learned reward is only able to distinguish whether the pair of the state and its next state  $(s, s')$  is from the expert or the agent, which poses a forced wastage of the action information stored in the replay buffer (Lin, 1992), thereby decreasing the sample efficiency.
- Instability issue in the traditional off-policy scheme worsens with LfO. There exists a lack of training compatibility between the learned reward (depend on  $s, s'$ ) and the agent (depend on  $s$ , action  $a$ ) in LfO. For instance (Fig. 1), the sequences  $(s, a_i, s'), i = 1, \dots, n$  generated by the agent will be uniformly recognized

---

\*This work was supported in part by the National Natural Science Foundation of China under Grant 12301351. Corresponding author: Yangchun Zhang. Email: zycstatis@shu.edu.cn.

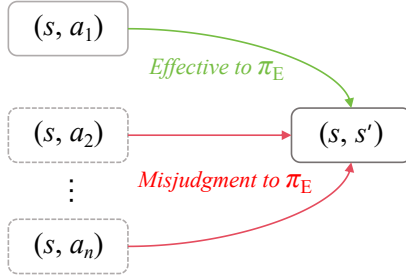


Figure 1: An example exhibits the misjudgment by the learned reward.  $s$  and  $s'$  denote the expert state and its next state, respectively. Assume  $a_1$  be the expert action in the scenario of LfD, where  $(s, a_1)$  induces the same optimal policy as  $(s, s')$  in LfO. However, the agent may execute another action  $a_i$  ( $i = 2, \dots, n$ ) but still output  $s'$  acting on the transition dynamics. This results in the misjudgment.

as approaching expert. This increases the risk of misjudgment by the learned reward, leading to training instability.

Therefore, only relying on on-policy or traditional off-policy training schemes hardly meets the requirements of satisfactory imitation performance (high sample efficiency with strong stability) for LfO.

This paper starts by laying the theoretical foundation for computation in LfO. Specifically, we explore the generalization capabilities of both reward function and policy within the LfO problem (Torabi et al., 2018b):

$$\min_{\pi \in \Pi} \max_{r \in \mathcal{R}} \mathbb{E}_{(s, s') \sim \mu_{\pi_E}} [r(s, s')] - \mathbb{E}_{(s, s') \sim \mu_{\pi}} [r(s, s')], \quad (1)$$

where  $\Pi$  and  $\mathcal{R}$  represent the policy class and the reward function class, respectively.  $\pi_E$  denotes the expert policy and  $\mu_{\pi}$  is the state transition distribution induced by the policy  $\pi$  (Yang et al., 2019a; Zhu et al., 2020). Consequently, we establish that the generalization results of Eq. (1) align with the findings for generative adversarial imitation learning (GAIL) in (Xu et al., 2020, Lemma 2) and (Zhou et al., 2023, Theorem 1). This alignment allows us to adapt GAIL’s computational strategy for addressing the LfO computation. Particularly, we modify the policy optimization method in generative adversarial imitation from observation (GAIfo) (Torabi et al., 2018b) with distributional soft actor-critic (DSAC) (Ma et al., 2020; Duan et al., 2022), referred to as the Mimicking Observations through Distributional Update Learning with adequate Exploration (MODULE) algorithm. The benefit of MODULE is two-fold:

- To enhance sample efficiency and operational simplicity (the insensitivity of the hyperparameter), MODULE incorporates the idea of a stochastic off-policy algorithm - soft actor-critic (SAC) (Haarnoja et al., 2018a,b), simultaneously avoiding the problem of drastic gradient changes in deterministic policies under GAN-based adversarial learning frameworks (Wang et al., 2024). Moreover, SAC employs a maximum entropy objective to ensure adequate exploration, which augments the robustness during the training process (Haarnoja et al., 2017, 2018a).
- To reduce the instability issue associated with the traditional off-policy training scheme, MODULE also leverages the technique of distributional RL. This approach is chosen for its superior ability to handle randomness (gain stability) and augment the detail in value function estimates through the modeling of return distributions (Bellemare et al., 2017).

In short, the MODULE algorithm is capable of efficiently addressing the problem of Eq. (1) in LfO.

The remainder of this paper is arranged as outlined below. Section 2 provides a brief overview of the related work. Section 3 describes the background on LfO and DSAC. The main generalization results for LfO are discussed in Section 4. Section 5 presents the MODULE algorithm as a solution to the LfO problem. Section 6 offers a detailed evaluation of MODULE’s performance. Finally, Section 7 provides a summary and some discussions of this paper.

## 2 Literature review

Our goal is to leverage methodologies for investigating LfD generalization properties to explore counterpart properties in LfO. Subsequently, we incorporate distributional RL into LfO to more accurately mimic expert observations. To this

end, we review the existing literature on methodologies for analyzing LfD generalization properties (Section 2.1) and advancements in LfO research (Section 2.2).

## 2.1 Generalization properties for learning from demonstrations

A body of research has delved into the generalization capability within the context of LfD (Chen et al., 2020; Xu et al., 2020; Zhou et al., 2023, 2024). Specifically, Chen et al. (2020) showed that it is practicable to ensure the generalization of  $\mathcal{R}$ -distance by properly controlling the reward function in GAIL with parameterized rewards. In the follow-up study, under the metric of the neural network distance (Arora et al., 2017), the connection between generalization capabilities and expected return is established by analyzing the linear span of the discriminator class (Xu et al., 2020). Zhou et al. (2023) contributed insights into the policy class, leveraging the state-action distribution error to analyze the generalization of GAIL. Furthermore, (Zhou et al., 2024) investigates the behavior of the generalization error bound within the reward transfer paradigm in transfer imitation learning (TIL), where state-action demonstration data is available exclusively in the source environment. In contrast to prior research, this paper explores LfO generalization with respect to the reward function class and the policy class, analyzing each respectively within a single environment.

## 2.2 Learning from observations

The LfO framework (Torabi et al., 2018b; Yang et al., 2019a; Torabi et al., 2019; Zhu et al., 2020; Lee et al., 2021) tasks an agent to master tasks by learning solely from observational data, without access to the corresponding actions performed by the expert. This setup diverges from the general IL paradigm (Pomerleau, 1991; Ng et al., 2000; Syed and Schapire, 2007; Ho and Ermon, 2016) by omitting the guidance of expert interventions, thereby escalating the difficulty for the agent to decipher and replicate the demonstrated behaviors.

One effective strategy for tackling LfO is to estimate proxy rewards from the states encountered by both the learning agent and the expert, and then integrate these into a RL framework to guide the agent toward improving its performance by maximizing the total accumulated reward (Torabi et al., 2018b; Yang et al., 2019a; Lee et al., 2021; Jaegle et al., 2021; Liu et al., 2024). The majority of methods that can derive proxy rewards include those employing the adversarial training mechanism (Torabi et al., 2018b; Yang et al., 2019a; Sikchi et al., 2023), optimal transport (OT) (Villani et al., 2009) based approaches (Liu et al., 2024; Chang et al., 2024), and techniques focused on estimating goal proximity (Lee et al., 2021; Bruce et al., 2023).

**Adversarial training.** A broad spectrum of studies adopt the mechanism of adversarial training to gain insights from expert observations (Torabi et al., 2018b; Sun et al., 2019; Yang et al., 2019a; Gangwani and Peng, 2020; Karnan et al., 2022; Huang et al., 2024). Expanding on the work of GAIL (Ho and Ermon, 2016), Torabi et al. (2018b) developed a model-free algorithm termed GAIfo and highlighted its role as a particular implementation within the general LfO framework. Forward adversarial imitation learning (FAIL) (Sun et al., 2019) transforms the LfO sequential learning issues into a series of independent two-player min-max games, which are resolved by employing no-regret online learning techniques. Besides, Yang et al. (2019a) presented inverse-dynamics-disagreement-minimization (IDDM) to enhance LfO by better aligning the inverse dynamics models of the agent and the expert, effectively closing the divide towards LfD. Unlike direct imitation methods like GAIL and adversarial inverse reinforcement learning (AIRL) (Fu et al., 2018), indirect imitation learning (I2L) (Gangwani and Peng, 2020) utilizes an intermediary distribution to train a policy in a different MDP with distinct transition dynamics, based solely on expert states. In response to the challenge of high sample complexity partly stemming from the high-dimensional characteristic of video data, visual generative adversarial imitation from observation using a state observer (VGAIfo-SO) (Karnan et al., 2022) leverages a self-supervised state observer to distill high-dimensional visual information into lower-dimensional state representations. Further, Huang et al. (2024) introduced diffusion imitation from observation (DIFO) that embeds a diffusion model within an adversarial imitation learning from observation setup to serve as a discriminator, customizing rewards for policy optimization.

**OT based approaches.** Recently, the concept of OT (Villani et al., 2009) has been incorporated into the field of IL to label the proxy rewards (Liu et al., 2024; Chang et al., 2024). Liu et al. (2024) designed the automatic discount scheduling (ADS) mechanism to dynamically adjust the discount factor in RL, focusing on earlier rewards and progressively emphasizing later rewards. Observational off-policy Sinkhorn (OOPS) (Chang et al., 2024), an LfO method that optimizes a reward function by reducing the discrepancy between the state trajectories of experts and learners, quantified through the Wasserstein distance.

**Goal proximity estimation.** Lee et al. (2021) utilized the information of task progress readily and intuitively available in demonstration data, i.e., goal proximity, to derive a generalizable reward. In addition, (Bruce et al., 2023) introduces

the explore like experts (ELE) method, which employs expert data to approximate the monotonically increasing progress function through the temporal difference between frames that serves as an exploration reward, aiding the agent in efficiently navigating sparse-reward environments.

Among these methods, our MODULE algorithm hinges on adversarial training as its foundational methodology. This process develops a function capable of distinguishing the data between the expert and the agent effectively, thereby constructing the proxy reward.

In a distinct area of LfO research, a number of approaches concentrate on model-based techniques, where the agent learns an inverse dynamics model (IDM) to infer the missing action information for the expert (Torabi et al., 2018a; Zhu et al., 2020; Cândido Ramos et al., 2024). Behavioral cloning from observation (BCO) (Torabi et al., 2018a) enables the immediate acquisition of imitation policies by leveraging an IDM learned from state trajectories alone, without requiring access to demonstrator actions or post-demonstration interaction with the environment. Off-policy learning from observations (OPOLO) (Zhu et al., 2020) uses principled off-policy improvement and accelerates the learning process by employing an inverse action model to guide policy updates, thereby promoting distribution matching in the mode-covering perspective. Mimicking better by matching the approximate action distribution (MAAD) (Cândido Ramos et al., 2024) incorporates an IDM within the framework of on-policy LfO. Our MODULE algorithm stands distinct from model-based approaches, yet it has the potential to augment stability when incorporating the distributional update strategy with model-based components.

### 3 Preliminaries

The model of how the agent interacts with the environment is captured using a Markov decision process (MDP) characterized by the tuple  $(\mathcal{S}, \mathcal{A}, \mathcal{P}, r_{gt}, \gamma)$  with the finite state space  $\mathcal{S}$  and the action space  $\mathcal{A}$ .  $\mathcal{P} : \mathcal{S} \times \mathcal{A} \times \mathcal{S} \rightarrow [0, 1]$  is the transition dynamics,  $r_{gt} : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$  denotes the ground truth reward, and  $\gamma$  represents the discount factor. A stochastic policy  $\pi(a|s)$  assigns probabilities to actions  $a \in \mathcal{A}$  based on the current state  $s \in \mathcal{S}$ . Following previous works (Xu et al., 2020; Yang et al., 2019a; Zhu et al., 2020), we use three notations for the stationary distributions associated with  $\pi$ :  $d_\pi(s)$  for the state,  $\rho_\pi(s, a)$  for the state-action pair and  $\mu_\pi(s, s')$  for the state transition. Their definitions are listed in Table 1.

Table 1: Different stationary distributions.

Stationary distribution	Notation	Support	Definition
State distribution	$d_\pi(s)$	$\mathcal{S}$	$(1 - \gamma) \sum_{t=0}^{\infty} \gamma^t \Pr(s_t = s; \pi)$
State-action distribution	$\rho_\pi(s, a)$	$\mathcal{S} \times \mathcal{A}$	$(1 - \gamma) \sum_{t=0}^{\infty} \gamma^t \Pr(s_t = s, a_t = a; \pi)$
State transition distribution	$\mu_\pi(s, s')$	$\mathcal{S} \times \mathcal{S}$	$\int_{\mathcal{A}} \rho_\pi(s, a) \mathcal{P}(s' s, a) da$

#### 3.1 Adversarial training in learning from observations

In comparison to LfD, the challenge in LfO increases due to the fact that only states, rather than state-action pairs, are provided as expert guidance. The adversarial training problem in LfO is formulated as the min-max optimization problem in Eq. (1). The objective is to find a policy within the policy class  $\Pi$  that recovers the expert policy  $\pi_E$  using expert observation data. The learned reward is designed to distinguish between state transition pairs from expert observations and those produced by the agent. Simultaneously, the policy aims to generate interaction data that challenges the learned reward’s ability to make this distinction, which corresponds to solving the following problem

$$\max_{\pi \in \Pi} \mathbb{E}_{(s, s') \sim \mu_\pi} [r(s, s')]$$

under a fixed reward  $r \in \mathcal{R}$ .

#### 3.2 Distributional soft actor-critic

DSAC updates the policy by a maximum entropy RL objective under the reward function  $r$  with the entropy temperature parameter  $\alpha$ :

$$\pi^* = \arg \max_{\pi} \mathbb{E}_{\pi} \left[ \sum_t \gamma^t (r(s_t, a_t) + \alpha \mathbb{H}(\pi(\cdot|s_t))) \right].$$

It is established on distributional soft policy iteration, which consists of distributional soft policy evaluation and distributional soft policy improvement (Ma et al., 2020; Duan et al., 2022). During the distributional soft policy evaluation stage, the distributional soft Bellman operator with respect to a fixed policy and the corresponding soft action-value distribution is denoted as follows:

$$\mathcal{T}_{DS}^\pi Z(s, a) \stackrel{D}{=} r(s, a) + \gamma [Z(s', a') - \alpha \log \pi(a'|s')], s' \sim p(\cdot|s, a), a' \sim \pi(\cdot|s'),$$

where  $U \stackrel{D}{=} V$  specifies identical probability distributions for random variables  $U$  and  $V$ . Subsequently, the distributional soft policy improvement stage minimizes the Kullback-Leibler (KL) divergence between the policy distribution and the exponential representation of the soft action-value function:

$$\pi_{new} = \arg \min_{\pi' \in \Pi} D_{KL} \left( \pi'(\cdot|s_t) \left\| \frac{\exp\left(\frac{1}{\alpha} Q_{soft}^{\pi_{old}}(s_t, \cdot)\right)}{\Delta^{\pi_{old}}(s_t)} \right. \right), \quad (2)$$

where  $\Delta^{\pi_{old}}$  is the normalization factor for the distribution. By iteratively applying distributional soft policy evaluation and distributional soft policy improvement, DSAC converges toward optimality.

## 4 Generalization properties of LfO

In this section, we analyze the generalization capability for the reward function and the policy learned by the problem of Eq. (1) in LfO, respectively.

### 4.1 Generalization for the reward function

Analogous to the  $\mathcal{R}$ -distance over  $s, a$  in (Chen et al., 2020, Definition 2), we first define the LfO version - the LfO reward distance and its empirical version.

**Definition 1** (LfO reward distance). *For a class of reward functions  $\mathcal{R}$  with respect to  $s, s'$ , there exists  $r \in \mathcal{R}$  such that  $r(s, s') \equiv 0$ . The LfO reward distance between two state transition distributions  $\mu_\pi$  and  $\mu_{\pi'}$  is defined as*

$$d_{\mathcal{R}}^{\text{LfO}}(\mu_\pi, \mu_{\pi'}) = \sup_{r \in \mathcal{R}} \left\{ \mathbb{E}_{(s, s') \sim \mu_\pi} [r(s, s')] - \mathbb{E}_{(s, s') \sim \mu_{\pi'}} [r(s, s')] \right\}.$$

To make sure that the LfO reward distance remains non-negative, the zero function is assumed to be incorporated into the function class  $\mathcal{R}$ , as described in Definition 1. This concept of distance is referred to as an integral probability metric (IPM) (Müller, 1997) over state transition distributions.

We denote  $d_{\mathcal{R}}^{\text{LfO}}(\hat{\mu}_\pi, \hat{\mu}_{\pi'})$  as the empirical LfO reward distance, where  $\hat{\mu}_\pi$  and  $\hat{\mu}_{\pi'}$  are the empirical counterparts of  $\mu_\pi$  and  $\mu_{\pi'}$ , respectively, estimated from  $n$  samples. In practice, Eq. (1) achieves the minimization of the empirical LfO reward distance between  $\hat{\mu}_{\pi_E}$  and  $\hat{\mu}_\pi$ . We now introduce a theorem that elucidates the generalization capability for the reward function of LfO, which is similar to the result for GAIL in (Xu et al., 2020, Lemma 2).

**Theorem 1** (LfO generalization for the reward function). *For a uniformly bounded reward function class  $\mathcal{R}$  with respect to  $s, s'$ , i.e., for any  $r \in \mathcal{R}$ ,  $\max_{s, s'} |r(s, s')| \leq B_r$ , and the policy  $\pi_1$  learned by Eq. (1) satisfies*

$$d_{\mathcal{R}}^{\text{LfO}}(\hat{\mu}_{\pi_E}, \hat{\mu}_{\pi_1}) \leq \inf_{\pi \in \Pi} d_{\mathcal{R}}^{\text{LfO}}(\hat{\mu}_{\pi_E}, \hat{\mu}_\pi) + \hat{\epsilon}_r,$$

then for all  $\delta \in (0, 1)$ , with probability at least  $1 - \delta$ , we have that

$$d_{\mathcal{R}}^{\text{LfO}}(\mu_{\pi_E}, \mu_{\pi_1}) \leq \inf_{\pi \in \Pi} d_{\mathcal{R}}^{\text{LfO}}(\hat{\mu}_{\pi_E}, \hat{\mu}_\pi) + 2\hat{\mathfrak{R}}_{\mu_{\pi_E}}^{(n)}(\mathcal{R}) + 2\hat{\mathfrak{R}}_{\mu_{\pi_1}}^{(n)}(\mathcal{R}) + 12B_r \sqrt{\frac{\log(4/\delta)}{2n}} + \hat{\epsilon}_r.$$

For detailed proof, please refer to Appendix A.1. Theorem 1 suggests that a well-controlled reward function class  $\mathcal{R}$  ensures the generalization of the LfO reward distance, and subsequently guarantees the generalization of problem Eq. (1) throughout the training phase. It is worth noting that (Xu et al., 2020, Theorem 2) extends the generalization results under the ground truth reward  $r_{gt}$  (the evaluation phase) by establishing its connection with the linear span of the trained function class. However, it is not reasonable to connect the state-action ground truth reward with the reward function class  $\mathcal{R}$  regarding the state transition in LfO. We will explore this issue in the future.

## 4.2 Generalization for the policy

Followed by the definition of state-action distribution error in (Zhou et al., 2023, Definition 1), we characterize the state transition distribution error as follows.

**Definition 2** (State transition distribution error). *For a class of policies  $\Pi$ , an expert policy  $\pi_E$  and a fixed non-negative reward  $r$ , the state transition distribution error is defined as*

$$e(C_r \mu_{\pi_E}, C_r \mu_{\Pi}) = C_r \inf_{\pi \in \Pi} \left\{ \mathbb{E}_{(s,s') \sim \mathbb{R}} [\mu_{\pi_E}(s, s') - \mu_{\pi}(s, s')] \right\},$$

where  $\mu_{\Pi}$  represents the functional class of state transition distributions induced by  $\Pi$ ,  $C_r = \sum_{(s,s') \in \mathcal{S} \times \mathcal{S}} r(s, s')$  is the state transition reward coefficient and  $\mathbb{R}(s, s') = r(s, s')/C_r$  is the state transition distribution normalized by the reward  $r(s, s')$ .

**Remark 1.** *In practice, the shape of the learned reward  $r$  is diverse, with possible value ranges including  $(-\infty, +\infty)$ ,  $[0, +\infty)$ ,  $(-\infty, 0]$ ,  $[0, 1]$ , etc (Wang and Li, 2021). Here we use a non-negative  $r$  as a representative example to investigate the generalization property for the policy in LfO.*

Note that

$$C_r \mathbb{E}_{(s,s') \sim \mathbb{R}} [\mu_{\pi}(s, s')] = \mathbb{E}_{(s,s') \sim \mu_{\pi}} [r(s, s')].$$

Hence, Definition 2 fundamentally quantifies the minimum error in expected return between the expert policy and the policy class:

$$e(C_r \mu_{\pi_E}, C_r \mu_{\Pi}) = \mathbb{E}_{(s,s') \sim \mu_{\pi_E}} [r(s, s')] - \sup_{\pi \in \Pi} \left\{ \mathbb{E}_{(s,s') \sim \mu_{\pi}} [r(s, s')] \right\},$$

In practice, Eq. (1) maximizes the empirical state transition distribution error

$$e(\hat{c}_r^{(m)} \mu_{\pi_E}, \hat{c}_r^{(m)} \mu_{\Pi}) = \hat{c}_r^{(m)} \inf_{\pi \in \Pi} \left\{ \mathbb{E}_{(s,s') \sim \hat{\mathbb{R}}} [\mu_{\pi_E}(s, s') - \mu_{\pi}(s, s')] \right\},$$

where  $\hat{c}_r^{(m)} = \sum_{i=1}^m r(s^{(i)}, s'^{(i)})$  is the empirical state transition reward coefficient and  $\hat{\mathbb{R}}(s^{(i)}, s'^{(i)}) = r(s^{(i)}, s'^{(i)})/\hat{c}_r^{(m)}$  denotes the empirical counterpart of  $\mathbb{R}$  with  $m$  samples. Next, we provide the generalization capability for the policy of LfO, which is similar to the consequence of GAIL in (Zhou et al., 2023, Theorem 1).

**Theorem 2** (LfO generalization for the policy). *Given the reward  $r_1$  learned by Eq. (1) and a policy class  $\Pi$ , which satisfies for all  $\pi \in \Pi$ ,*

$$\max_{s,s'} \{C_{r_1} \mu_{\pi}(s, s'), C_{r_1} \mu_{\pi_E}(s, s')\} \leq B_{\Pi}.$$

Assume

$$e(\hat{c}_{r_1}^{(m)} \mu_{\pi_E}, \hat{c}_{r_1}^{(m)} \mu_{\Pi}) \geq \sup_{r \in \mathcal{R}} \left\{ e(\hat{c}_r^{(m)} \mu_{\pi_E}, \hat{c}_r^{(m)} \mu_{\Pi}) \right\} - \hat{\epsilon}_{\pi} \geq 0,$$

then for all  $\delta \in (0, 1)$ , with probability at least  $1 - \delta$ , we have that

$$e(C_{r_1} \mu_{\pi_E}, C_{r_1} \mu_{\Pi}) \geq \sup_{r \in \mathcal{R}} \left\{ e(\hat{c}_r^{(m)} \mu_{\pi_E}, \hat{c}_r^{(m)} \mu_{\Pi}) \right\} - 2\mathfrak{R}_{\mathbb{R}_1}^{(m)}(C_{r_1} \mu_{\Pi}) - 8B_{\Pi} \sqrt{\frac{\log(3/\delta)}{2m}} - \hat{\epsilon}_{\pi}.$$

For detailed proof, please refer to Appendix A.2. Theorem 2 implies that with effective control over the class of policies  $\Pi$ , there is an assurance of generalization in the state transition distribution error, consequently ensuring the generalization of problem Eq. (1) during the training process.

Building upon Theorem 1 and Theorem 2, the generalization of LfO with adversarial learning (as presented in problem Eq. (1)) is possessed. Subsequently, in the following section, we will introduce a specific computational methodology for LfO - the MODULE algorithm.

## 5 MODULE algorithm

By the generalization of the reward function and the policy, we are able to explore the LfO computational properties (Eq. (1)) via approximating them with the parameterizations  $r_{\phi}$  and  $\pi_{\theta}$ . Specifically,  $\mathcal{R}$  and  $\Pi$  can be assigned by

specific function classes (Chen et al., 2020; Zhou et al., 2023), e.g., reproducing kernel Hilbert space (Ormoneit and Sen, 2002) or neural networks (LeCun et al., 2015). Then the LfO problem Eq. (1) evolves into

$$\min_{\theta} \max_{\phi} \mathbb{E}_{(s,s') \sim \mu_{\pi_{\theta}}} [r_{\phi}(s, s')] - \mathbb{E}_{(s,s') \sim \mu_{\pi_{\theta}}} [r_{\phi}(s, s')], \quad (3)$$

Owing to the fact that the problem in Eq. (3) does not possess a convex-concave structure, motivated by (Chen et al., 2020; Zhou et al., 2023), the min-max optimization problem is slightly modified by

$$\min_{\theta} \max_{\phi} \mathbb{E}_{(s,s') \sim \mu_{\pi_{\theta}}} [r_{\phi}(s, s')] - \mathbb{E}_{(s,s') \sim \mu_{\pi_{\theta}}} [r_{\phi}(s, s')] - \alpha \mathbb{H}(\pi_{\theta}) - \frac{\mu}{2} \|\phi\|_2^2, \quad (4)$$

where  $\mathbb{H}(\pi_{\theta})$  is the entropy of the policy  $\pi_{\theta}$ , and  $\alpha, \mu$  are tuning parameters. This modification maximizes the entropy of the policy as much as possible, which encourages adequate exploration of the agent and enhances the policy training.

To solve the problem in Eq. (4), our MODULE algorithm alternates between updating the policy parameter  $\theta$  and the reward function parameter  $\phi$ . For the update of the reward function parameter  $\phi$ , the gradient descent method is directly applied with the loss function

$$L_r(\phi) = -\mathbb{E}_{(s,s') \sim \mathcal{D}^E} [r_{\phi}(s, s')] + \mathbb{E}_{(s,s') \sim \mathcal{D}^I} [r_{\phi}(s, s')] + \frac{\mu}{2} \|\phi\|_2^2, \quad (5)$$

where  $\mathcal{D}^E$  is the set of expert observations and  $\mathcal{D}^I$  denotes the replay buffer (Lin, 1992). For the update of the policy parameter  $\theta$ , its optimization problem aims to maximize both expected return under  $r_{\phi}$  and the policy entropy, i.e.,

$$\max_{\theta} \mathbb{E}_{(s,s') \sim \mu_{\pi_{\theta}}} [r_{\phi}(s, s')] + \alpha \mathbb{H}(\pi_{\theta}),$$

which is essentially the objective of maximum entropy RL. On this basis, our MODULE algorithm is designed to combine SAC (adjusting entropy automatically) with the technique of distributional RL during policy updates. Particularly, (1) SAC, grounded in the principle of maximum entropy RL, guarantees that the learned policy accounts for all beneficial actions (Haarnoja et al., 2018b). (2) Distributional RL, known for its powerful ability to model the distribution over returns and capture randomness, improves computational stability (Bellemare et al., 2017).

Regarding (1), the value function network parameter  $w$ , the policy network parameter  $\theta$  and the entropy temperature parameter  $\alpha$  are updated in turns. Specifically,

- **The objective of the value function network parameter  $w$**  is to minimize the soft Bellman residual (Haarnoja et al., 2018a,b), i.e., minimizing

$$J_Q(w) = \mathbb{E}_{(s_t, a_t) \sim \mathcal{D}^I} \left[ \frac{1}{2} (Q_w^{\text{soft}}(s_t, a_t) - (r_{\phi}(s_t, s_{t+1}) + \gamma \mathbb{E}_{s_{t+1} \sim p(\cdot | s_t, a_t)} [V_{\bar{w}}^{\text{soft}}(s_{t+1})]))^2 \right],$$

where  $\bar{w}$  is employed to compute the target value for training stability (Mnih et al., 2015), and

$$V_{\bar{w}}^{\text{soft}}(s_t) = \mathbb{E}_{a_t \sim \pi_{\theta}} [Q_{\bar{w}}^{\text{soft}}(s_t, a_t) - \alpha \log(\pi_{\theta}(a_t | s_t))].$$

In practice, two value function networks with parameters  $w_1, w_2$  are used to relieve the overestimation problem (Fujimoto et al., 2018).

- **The objective of the policy network parameter  $\theta$**  is to minimize the expected KL divergence in Eq. (2) (Haarnoja et al., 2018a,b), i.e., minimizing

$$J_{\pi}(\theta) = \mathbb{E}_{s_t \sim \mathcal{D}^I} [\mathbb{E}_{a_t \sim \pi_{\theta}} [\alpha \log \pi_{\theta}(a_t | s_t) - Q_w^{\text{soft}}(s_t, a_t)]]. \quad (6)$$

- **The objective of the entropy temperature parameter  $\alpha$**  is to minimize the following objective:

$$J(\alpha) = \mathbb{E}_{a_t \sim \pi_{\theta}} [-\alpha \log \pi_{\theta}(a_t | s_t) - \alpha H_0], \quad (7)$$

where  $H_0$  represents the desired minimum expected entropy, often set as the negative dimensionality of the action space  $\mathcal{A}$  (Haarnoja et al., 2018b).

Regarding (2), we integrate the distributional RL technique into SAC, i.e., DSAC (Ma et al., 2020; Duan et al., 2022), as the policy optimization method in our MODULE algorithm. Two quantile value networks operate in place of the original two value function networks while still utilizing  $w_1$  and  $w_2$  as parameters. We detail the update of the quantile value network parameters and the computation of the risk soft action-value (used in Eq. (6)) as follows. Specifically,

- **The objective of the quantile value network parameters**  $w_1, w_2$  is to minimize the weighted pairwise Huber regression loss across various quantile fractions (Ma et al., 2020)

$$J_Z(w) = \sum_{i=0}^{M-1} \sum_{j=0}^{M-1} (\tau_{i+1} - \tau_i) \rho_{\hat{\tau}_j}^{\kappa}(\delta_{ij}^t), \quad (8)$$

where  $M$  is the size of the quantile fraction ensemble,  $\{\tau_i\}_{i=1}^M$  and  $\{\tau_j\}_{i=1}^M$  are the quantile fraction ensembles, which can be generated by quantile regression DQN (QR-DQN) (Dabney et al., 2018b), implicit quantile networks (IQN) (Dabney et al., 2018a) or fully parameterized quantile function (FQF) (Yang et al., 2019b).  $\hat{\tau}_i = (\tau_i + \tau_{i+1})/2$ ,  $\hat{\tau}_j = (\tau_j + \tau_{j+1})/2$ ,

$$\delta_{ij}^t = r_{t+1} + \gamma [Z_{\hat{\tau}_i, \bar{w}}(s_{t+1}, a_{t+1}) - \alpha \log \pi_{\bar{\theta}}(a_{t+1} | s_{t+1})] - Z_{\hat{\tau}_j, w}(s_t, a_t),$$

$\bar{\theta}$  is the target policy network parameter, and

$$\rho_{\tau}^{\kappa}(\delta_{ij}) = |\tau - \mathbb{I}\{\delta_{ij} < 0\}| \frac{\mathcal{L}_{\kappa}(\delta_{ij})}{\kappa},$$

$$\mathcal{L}_{\kappa}(\delta_{ij}) = \begin{cases} \frac{1}{2} \delta_{ij}^2, & \text{if } |\delta_{ij}| \leq \kappa, \\ \kappa (|\delta_{ij}| - \frac{1}{2} \kappa), & \text{otherwise,} \end{cases}$$

where  $\kappa$  is the threshold of the Huber quantile regression loss (Huber, 1964).

- **The computation of the risk soft action-value** (Ma et al., 2020) is performed by

$$Q_w^{\text{soft}}(s, a) = \min_{i=1,2} Q_{w_i}^{\text{soft}}(s, a), Q_{w_i}^{\text{soft}}(s, a) = \Psi [Z_{\tau, w_i}(s, a)], \quad (9)$$

where  $\Psi : \mathcal{Z} \rightarrow \mathbb{R}$  is the risk measure function. Except for risk-neutral, common risk measures with parameter  $\beta$ , such as mean-variance (Sobel, 1982; Tamar et al., 2012; Prashanth and Ghavamzadeh, 2016), value-at-risk (VaR) (Prashanth L and Fu, 2018) and distorted expectation (Ma et al., 2020), are listed in Table 2. Particularly, popular distorted expectations, including cumulative probability weighting parameterization (CPW) (Tversky and Kahneman, 1992), Wang’s approach (Wang, 2000) and conditional value at risk (CVaR) (Chow et al., 2015), are detailed in Table 3, where  $\Phi$  is the standard Normal cumulative distribution function (CDF).

Table 2: Function shapes of risk measures.

Risk measure	Function shape
Risk-neutral	$\Psi(\cdot) = \mathbb{E}[\cdot]$
Mean-variance	$\Psi(Z) = \mathbb{E}[Z] - \beta \sqrt{\mathbb{V}[Z]}$
VaR	$\text{VaR}_{\beta}(Z) = \min_z \{z   F_Z(z) > \beta\}$
Distorted expectation	$\Psi(Z) = \int_0^1 F_Z^{-1}(\tau) dg(\tau)$

Table 3: Function shapes of common distorted expectations.

Distorted expectation	Function shape of $g(\tau)$
CPW	$\tau^{\beta} / (\tau^{\beta} + (1 - \tau)^{\beta})^{1/\beta}$
Wang	$\Phi(\Phi^{-1}(\tau) + \beta)$
CVaR	$\min \{\tau/\beta, 1\}$

Overall, the procedure of our MODULE algorithm is organized in Algorithm 1.

## 6 Evaluation

In this section, we perform experiments in three MuJoCo environments (Todorov et al., 2012): Hopper-v2, Walker2d-v2 and HalfCheetah-v2. These experiments aim to validate MODULE’s performance, with a detailed experimental setup provided in Section 6.1. Furthermore, Section 6.2 compares MODULE with various advanced LfO methods, while Section 6.3 examines the impact of different quantile fraction generation methods and risk measure functions on MODULE.



---

**Algorithm 1** Mimicking Observations through Distributional Update Learning with adequate Exploration (MODULE)

---

- 1: **Input:** Expert observations  $\mathcal{D}^E$ ,  $\phi$ ,  $\alpha$ ,  $w_1, w_2$ ,  $\theta$ , learning rates  $\eta_\phi, \eta_w, \eta_\theta, \eta_\alpha$  and  $\iota$
  - 2: Initialize the target networks:  $\bar{w}_1 = w_1, \bar{w}_2 = w_2, \bar{\theta} = \theta$
  - 3: Initialize an empty replay buffer  $\mathcal{D}^I \leftarrow \emptyset$
  - 4: **for** each iteration **do**
  - 5:     Collect samples with the policy  $\pi_\theta$ , and then store the transitions in the replay buffer  $\mathcal{D}^I$
  - 6:     **for** each reward updating step **do**
  - 7:         Update  $\phi$  by Eq. (5) with samples from  $\mathcal{D}^E$  and  $\mathcal{D}^I$ :  $\phi \leftarrow \phi - \eta_\phi \nabla_\phi L_r(\phi)$
  - 8:     **end for**
  - 9:     **for** each policy updating step **do**
  - 10:         Sample the transitions from  $\mathcal{D}^I$
  - 11:         Update  $w_1, w_2$  by Eq. (8) with the sampled transitions:  $w_i \leftarrow w_i - \eta_w \nabla_w J_Z(w_i)$  for  $i \in \{1, 2\}$
  - 12:         Compute the risk soft action-value by Eq. (9)
  - 13:         Update  $\theta$  by Eq. (6) with the sampled transitions:  $\theta \leftarrow \theta - \eta_\theta J_\pi(\theta)$
  - 14:         Update  $\alpha$  by Eq. (7) with the sampled transitions:  $\alpha \leftarrow \alpha - \eta_\alpha \nabla_\alpha J(\alpha)$
  - 15:         Update target network weights:  $\bar{w}_i \leftarrow \iota w_i + (1 - \iota)\bar{w}_i$  for  $i \in \{1, 2\}$ ,  $\bar{\theta} \leftarrow \iota \theta + (1 - \iota)\bar{\theta}$
  - 16:     **end for**
  - 17: **end for**
- 

## 6.1 Experimental setup

Following the conventions of commonly used IL experiments (Zhou et al., 2022, 2023; Wang et al., 2024), we generate the expert dataset for each environment using an expert policy trained with a specific model-free algorithm - SAC (Haarnoja et al., 2018b). The observation data, obtained from this expert policy with a 0.01 standard deviation, comprises  $10^6$  state-action pairs. The average returns of the expert observation data are 3433, 3509 and 9890 for Hopper-v2, Walker2d-v2 and HalfCheetah-v2, respectively. In the forthcoming experiments, we replicate our trials 10 times with a uniform training configuration, varying only the random seeds.

## 6.2 Comparative experiments

For the MODULE algorithm, we utilize the multi-layer perceptron (MLP) with two hidden layers to build all networks. Additionally, two independent quantile value networks are employed to mitigate the issue of overestimation. Specifically, in this subsection, IQN is adopted to generate quantile fractions. In our comparisons, we assess MODULE with three LfO baseline methods. To examine whether the distributional RL technique in MODULE mitigates the instability associated with the traditional off-policy scheme, we first implement SAC as the policy training strategy for LfO with adversarial learning, denoted as ‘‘SAC-GAILLfO’’ in Fig. 2. Additionally, the comparative methodologies include the following algorithms: BCO (Torabi et al., 2018a), GAIfo (Torabi et al., 2018b), OPOLO (Zhu et al., 2020) and RANK-RAL (Sikchi et al., 2023).

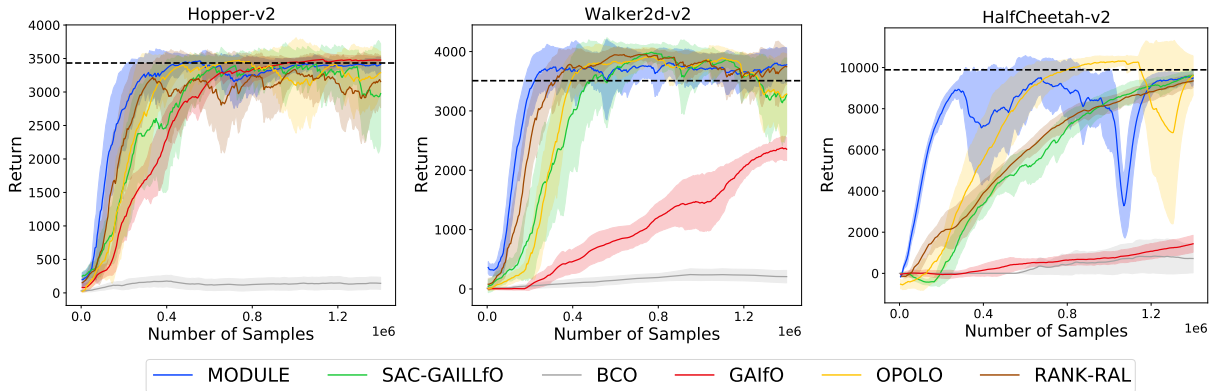


Figure 2: Comparison of MODULE against advanced LfO methods in three MuJoCo environments.

Fig. 2 exhibits the performance of MODULE and all comparative LfO baseline algorithms. We use a dashed line to represent the average return of the expert observation data. The solid line illustrates the mean return of each method,

while the shaded area signifies the corresponding standard deviation. Notably, the MODULE algorithm exhibits greater efficiency and stability in learning from expert observations compared to other methods. We attribute this superior performance to two primary factors: (1) the extensive exploration facilitated by the maximum entropy objective, and (2) the stability provided by distributional RL.

### 6.3 Impact of quantile fraction generation methods and risk measures

Next, we evaluate the impact of various quantile fraction generation methods and risk measure functions on the performance of MODULE.

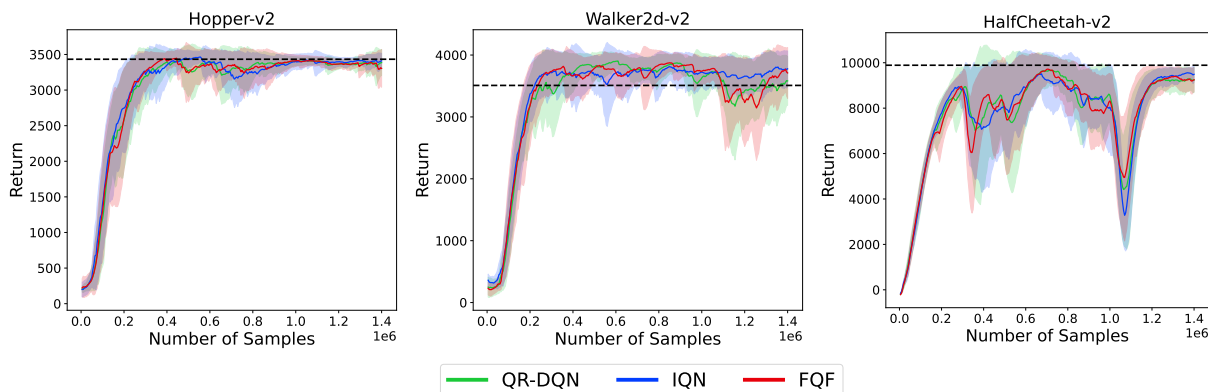


Figure 3: Performance of three quantile fraction generation methods under the MODULE algorithm in three MuJoCo environments.

Within the MODULE algorithm, we employ three quantile fraction generation methods: QR-DQN, IQN and FQF. Specifically, the quantile proposal network in FQF is a two-layer fully connected network with 128 units and a learning rate of  $1e-5$  (Ma et al., 2020). Regarding the relationship between the quantile value function and the soft Q-function, we employ the risk-neutral measure function. As shown in Fig. 3, all three methods exhibit relative stability in the context of MODULE.

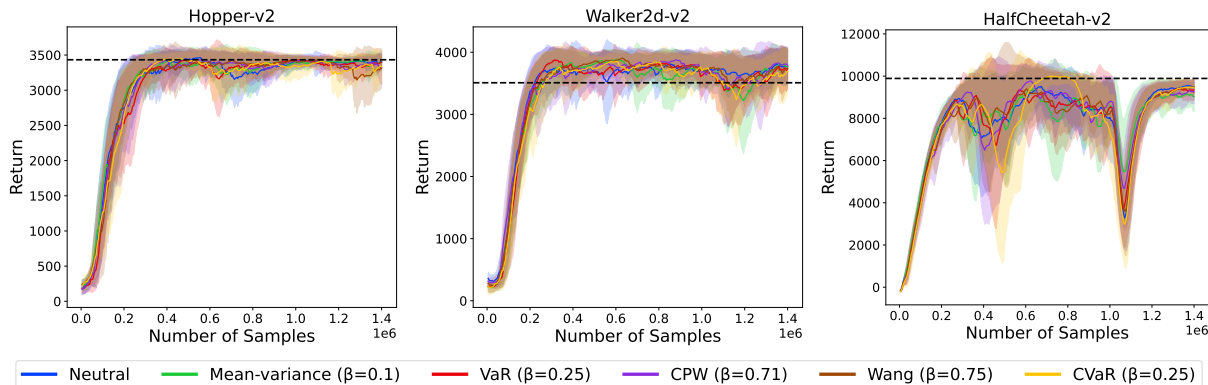


Figure 4: Performance of five risk-averse measure functions, together with the risk-neutral measure function under the MODULE algorithm in three MuJoCo environments.

For the risk measure functions, we consider the approaches mentioned in Section 5 under the MODULE algorithm. Particularly, we adopt identical distributional RL configurations for each risk measure function as outlined in (Dabney et al., 2018a; Ma et al., 2020).

- Five risk-averse learned policies are accessed. For mean-variance,  $\beta$  is set as 0.1. For VaR,  $\beta$  is set as 0.25. For CPW,  $\beta$  is set as 0.71. For Wang,  $\beta$  is set as 0.75. For CVaR,  $\beta$  is set as 0.25.
- Three risk-seeking learned policies are accessed. For mean-variance,  $\beta$  is set as -0.1. For VaR,  $\beta$  is set as 0.75. For Wang,  $\beta$  is set as -0.75.

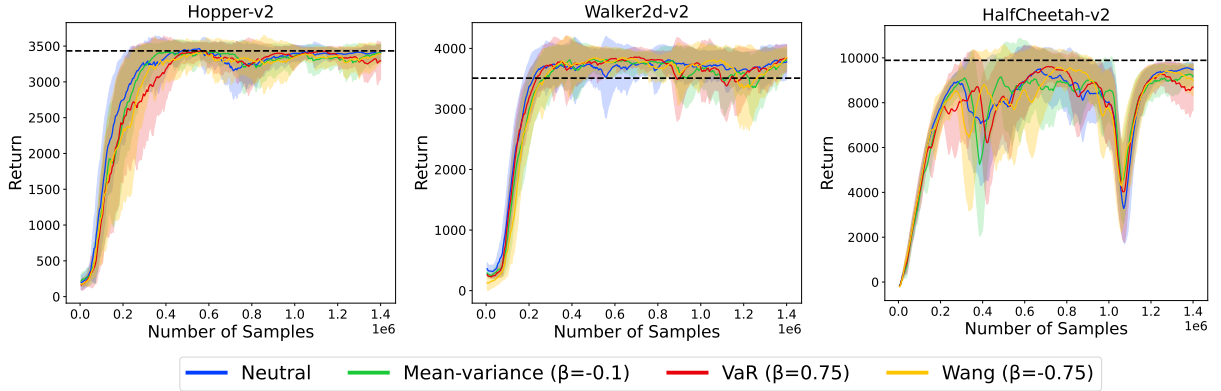


Figure 5: Performance of three risk-seeking measure functions, together with the risk-neutral measure function under the MODULE algorithm in three MuJoCo environments.

As exhibited in Figs. 4 and 5, MODULE demonstrates relatively stable performance, indicating that the risk measure functions are insensitive within the MODULE algorithm.

## 7 Conclusion and discussion

This paper investigates the generalization and computational properties of the LfO problem. We begin by examining the generalization capabilities of the reward function and policy in LfO. Subsequently, we introduce the MODULE algorithm, which leverages the strengths of SAC and distributional RL. Particularly, the SAC component of MODULE enhances sample efficiency and training robustness, while the distributional RL component improves training stability. Extensive experiments in MuJoCo environments demonstrate that MODULE excels at imitating observational data without explicit action signals.

In addition to adversarial training, OT is also commonly employed for reward calculation (Arjovsky et al., 2017; Papagiannis and Li, 2022; Luo et al., 2023; Liu et al., 2024). By integrating distributional RL with OT methods, modeling the uncertainty in the reward distribution has the potential to enhance the robustness of solutions, especially in environments characterized by sparse or noisy reward signals. This is an area we intend to explore in the future.

## A Proofs for LfO generalization properties

### A.1 Proof of Theorem 1

*Proof.* Recall the definition of the LfO reward distance (Definition 1), we have that

$$\begin{aligned}
& d_{\mathcal{R}}^{\text{LfO}}(\mu_{\pi_E}, \mu_{\pi_I}) - d_{\mathcal{R}}^{\text{LfO}}(\hat{\mu}_{\pi_E}, \hat{\mu}_{\pi_I}) \\
&= \sup_{r \in \mathcal{R}} \left\{ \mathbb{E}_{(s,s') \sim \mu_{\pi_E}} [r(s, s')] - \mathbb{E}_{(s,s') \sim \mu_{\pi_I}} [r(s, s')] \right\} - \sup_{r \in \mathcal{R}} \left\{ \mathbb{E}_{(s,s') \sim \hat{\mu}_{\pi_E}} [r(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mu}_{\pi_I}} [r(s, s')] \right\} \\
&\leq \sup_{r \in \mathcal{R}} \left\{ (\mathbb{E}_{(s,s') \sim \mu_{\pi_E}} [r(s, s')] - \mathbb{E}_{(s,s') \sim \mu_{\pi_I}} [r(s, s')]) - (\mathbb{E}_{(s,s') \sim \hat{\mu}_{\pi_E}} [r(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mu}_{\pi_I}} [r(s, s')]) \right\} \\
&\leq \sup_{r \in \mathcal{R}} \left\{ \mathbb{E}_{(s,s') \sim \mu_{\pi_E}} [r(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mu}_{\pi_E}} [r(s, s')] \right\} + \sup_{r \in \mathcal{R}} \left\{ \mathbb{E}_{(s,s') \sim \hat{\mu}_{\pi_I}} [r(s, s')] - \mathbb{E}_{(s,s') \sim \mu_{\pi_I}} [r(s, s')] \right\} \\
&\leq \sup_{r \in \mathcal{R}} \left| \mathbb{E}_{(s,s') \sim \mu_{\pi_E}} [r(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mu}_{\pi_E}} [r(s, s')] \right| + \sup_{r \in \mathcal{R}} \left| \mathbb{E}_{(s,s') \sim \mu_{\pi_I}} [r(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mu}_{\pi_I}} [r(s, s')] \right|. \quad (\text{A.1})
\end{aligned}$$

We first focus on the boundedness of  $\sup_{r \in \mathcal{R}} \left| \mathbb{E}_{(s,s') \sim \mu_{\pi_E}} [r(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mu}_{\pi_E}} [r(s, s')] \right|$ . Employing McDiarmid's inequality (Mohri et al., 2018), then with probability at least  $1 - \delta/4$ , we obtain that

$$\begin{aligned}
& \sup_{r \in \mathcal{R}} \left| \mathbb{E}_{(s,s') \sim \mu_{\pi_E}} [r(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mu}_{\pi_E}} [r(s, s')] \right| \\
&\leq \mathbb{E} \left[ \sup_{r \in \mathcal{R}} \left| \mathbb{E}_{(s,s') \sim \mu_{\pi_E}} [r(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mu}_{\pi_E}} [r(s, s')] \right| \right] + 2B_r \sqrt{\frac{\log(4/\delta)}{2n}}, \quad (\text{A.2})
\end{aligned}$$

where the external expectation is over the random sampling of  $\hat{\mu}_{\pi_E}$  with  $n$  state transition pairs. Based on the Rademacher complexity theory (Mohri et al., 2018), the first term in Eq. (A.2) can be bounded by

$$\begin{aligned}
& \mathbb{E} \left[ \sup_{r \in \mathcal{R}} \left| \mathbb{E}_{(s,s') \sim \mu_{\pi_E}} [r(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mu}_{\pi_E}} [r(s, s')] \right| \right] \\
&\leq 2\mathbb{E}_{\sigma, \mu_{\pi_E}} \left[ \sup_{r \in \mathcal{R}} \sum_{i=1}^n \frac{1}{n} \sigma_i r(s^{(i)}, s'^{(i)}) \right] \\
&= 2\mathfrak{R}_{\mu_{\pi_E}}^{(n)}(\mathcal{R}). \quad (\text{A.3})
\end{aligned}$$

Connecting the Rademacher complexity to its empirical version, then with probability at least  $1 - \delta/4$ , we get that

$$\mathfrak{R}_{\mu_{\pi_E}}^{(n)}(\mathcal{R}) \leq \hat{\mathfrak{R}}_{\mu_{\pi_E}}^{(n)}(\mathcal{R}) + 2B_r \sqrt{\frac{\log(4/\delta)}{2n}}, \quad (\text{A.4})$$

where

$$\hat{\mathfrak{R}}_{\mu_{\pi_E}}^{(n)}(\mathcal{R}) = \mathbb{E}_{\sigma} \left[ \sup_{r \in \mathcal{R}} \sum_{i=1}^n \frac{1}{n} \sigma_i r(s^{(i)}, s'^{(i)}) \right].$$

Combining Eq. (A.2) with Eqs. (A.3) and (A.4), with probability at least  $1 - \delta/2$ , we obtain that

$$\sup_{r \in \mathcal{R}} \left| \mathbb{E}_{(s,s') \sim \mu_{\pi_E}} [r(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mu}_{\pi_E}} [r(s, s')] \right| \leq 2\hat{\mathfrak{R}}_{\mu_{\pi_E}}^{(n)}(\mathcal{R}) + 6B_r \sqrt{\frac{\log(4/\delta)}{2n}}. \quad (\text{A.5})$$

Similarly, for the boundedness of

$$\sup_{r \in \mathcal{R}} \left| \mathbb{E}_{(s,s') \sim \mu_{\pi_I}} [r(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mu}_{\pi_I}} [r(s, s')] \right|,$$

we have that

$$\sup_{r \in \mathcal{R}} \left| \mathbb{E}_{(s,s') \sim \mu_{\pi_I}} [r(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mu}_{\pi_I}} [r(s, s')] \right| \leq 2\hat{\mathfrak{R}}_{\mu_{\pi_I}}^{(n)}(\mathcal{R}) + 6B_r \sqrt{\frac{\log(4/\delta)}{2n}}. \quad (\text{A.6})$$

Combining Eq. (A.1) with Eqs. (A.5) and (A.6) completes the proof.  $\square$

## A.2 Proof of Theorem 2

*Proof.* Recall the definition of the state transition distribution error (Definition 2), we have that

$$\begin{aligned}
& e(C_{r_1}\mu_{\pi_E}, C_{r_1}\mu_{\Pi}) - e(\hat{c}_{r_1}^{(m)}\mu_{\pi_E}, \hat{c}_{r_1}^{(m)}\mu_{\Pi}) \\
&= C_{r_1} \inf_{\pi \in \Pi} \left\{ \mathbb{E}_{(s,s') \sim \mathbb{R}_I} [\mu_{\pi_E}(s, s') - \mu_{\pi}(s, s')] \right\} - \hat{c}_{r_1}^{(m)} \inf_{\pi \in \Pi} \left\{ \mathbb{E}_{(s,s') \sim \hat{\mathbb{R}}_I} [\mu_{\pi_E}(s, s') - \mu_{\pi}(s, s')] \right\} \\
&\stackrel{(i)}{\geq} C_{r_1} \inf_{\pi \in \Pi} \left\{ \mathbb{E}_{(s,s') \sim \mathbb{R}_I} [\mu_{\pi_E}(s, s') - \mu_{\pi}(s, s')] \right\} - C_{r_1} \inf_{\pi \in \Pi} \left\{ \mathbb{E}_{(s,s') \sim \hat{\mathbb{R}}_I} [\mu_{\pi_E}(s, s') - \mu_{\pi}(s, s')] \right\} \\
&\geq C_{r_1} \inf_{\pi \in \Pi} \left\{ \mathbb{E}_{(s,s') \sim \mathbb{R}_I} [\mu_{\pi_E}(s, s') - \mu_{\pi}(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mathbb{R}}_I} [\mu_{\pi_E}(s, s') - \mu_{\pi}(s, s')] \right\} \\
&\geq C_{r_1} \inf_{\pi \in \Pi} \left\{ \mathbb{E}_{(s,s') \sim \mathbb{R}_I} [\mu_{\pi_E}(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mathbb{R}}_I} [\mu_{\pi_E}(s, s')] \right\} + C_{r_1} \inf_{\pi \in \Pi} \left\{ \mathbb{E}_{(s,s') \sim \mathbb{R}_I} [\mu_{\pi}(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mathbb{R}}_I} [\mu_{\pi}(s, s')] \right\} \\
&= \left( \mathbb{E}_{(s,s') \sim \mathbb{R}_I} [C_{r_1}\mu_{\pi_E}(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mathbb{R}}_I} [C_{r_1}\mu_{\pi_E}(s, s')] \right) - \sup_{\pi \in \Pi} \left\{ \mathbb{E}_{(s,s') \sim \mathbb{R}_I} [C_{r_1}\mu_{\pi}(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mathbb{R}}_I} [C_{r_1}\mu_{\pi}(s, s')] \right\}, \tag{A.7}
\end{aligned}$$

where (i) comes from  $\hat{c}_{r_1}^{(m)} \leq C_{r_1}$  and the non-negative property of  $e(\hat{c}_{r_1}^{(m)}\mu_{\pi_E}, \hat{c}_{r_1}^{(m)}\mu_{\Pi})$ .

We first focus on the boundedness of  $\mathbb{E}_{(s,s') \sim \mathbb{R}_I} [C_{r_1}\mu_{\pi_E}(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mathbb{R}}_I} [C_{r_1}\mu_{\pi_E}(s, s')]$ . Employing McDiarmid's inequality, then with probability at least  $1 - \delta/3$ , we have that

$$\begin{aligned}
& \mathbb{E}_{(s,s') \sim \hat{\mathbb{R}}_I} [C_{r_1}\mu_{\pi_E}(s, s')] \\
&\leq \mathbb{E} \left[ \mathbb{E}_{(s,s') \sim \hat{\mathbb{R}}_I} [C_{r_1}\mu_{\pi_E}(s, s')] \right] + 2B_{\Pi} \sqrt{\frac{\log(3/\delta)}{2m}} \\
&= \mathbb{E}_{(s,s') \sim \mathbb{R}_I} [C_{r_1}\mu_{\pi_E}(s, s')] + 2B_{\Pi} \sqrt{\frac{\log(3/\delta)}{2m}},
\end{aligned}$$

i.e.,

$$\mathbb{E}_{(s,s') \sim \mathbb{R}_I} [C_{r_1}\mu_{\pi_E}(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mathbb{R}}_I} [C_{r_1}\mu_{\pi_E}(s, s')] \geq -2B_{\Pi} \sqrt{\frac{\log(3/\delta)}{2m}}. \tag{A.8}$$

We then investigate the boundedness of  $\sup_{\pi \in \Pi} \left\{ \mathbb{E}_{(s,s') \sim \mathbb{R}_I} [C_{r_1}\mu_{\pi}(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mathbb{R}}_I} [C_{r_1}\mu_{\pi}(s, s')] \right\}$ . By McDiarmid's inequality, then with probability at least  $1 - \delta/3$ , we obtain that

$$\begin{aligned}
& \sup_{\pi \in \Pi} \left\{ \mathbb{E}_{(s,s') \sim \mathbb{R}_I} [C_{r_1}\mu_{\pi}(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mathbb{R}}_I} [C_{r_1}\mu_{\pi}(s, s')] \right\} \\
&\leq \mathbb{E} \left[ \sup_{\pi \in \Pi} \left\{ \mathbb{E}_{(s,s') \sim \mathbb{R}_I} [C_{r_1}\mu_{\pi}(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mathbb{R}}_I} [C_{r_1}\mu_{\pi}(s, s')] \right\} \right] + 2B_{\Pi} \sqrt{\frac{\log(3/\delta)}{2m}}, \tag{A.9}
\end{aligned}$$

where the external expectation is over the random sampling of the distribution  $\hat{\mathbb{R}}_I$  with  $m$  state-transition pairs. Based on the Rademacher complexity theory, the first term in Eq. (A.9) can be bounded by

$$\begin{aligned}
& \mathbb{E} \left[ \sup_{\pi \in \Pi} \left\{ \mathbb{E}_{(s,s') \sim \mathbb{R}_I} [C_{r_1}\mu_{\pi}(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mathbb{R}}_I} [C_{r_1}\mu_{\pi}(s, s')] \right\} \right] \\
&\leq 2\mathbb{E}_{\sigma, \mathbb{R}_I} \left[ \sup_{\pi \in \Pi} \sum_{j=1}^m \frac{1}{m} \sigma_j C_{r_1} \mu_{\pi}(s^{(j)}, s'^{(j)}) \right] \\
&= 2\mathfrak{R}_{\mathbb{R}_I}^{(m)}(C_{r_1}\mu_{\Pi}). \tag{A.10}
\end{aligned}$$

Connecting the Rademacher complexity to its empirical version, then with probability at least  $1 - \delta/3$ , we get that

$$\mathfrak{R}_{\mathbb{R}_I}^{(m)}(C_{r_1}\mu_{\Pi}) \leq \hat{\mathfrak{R}}_{\mathbb{R}_I}^{(m)}(C_{r_1}\mu_{\Pi}) + 2B_{\Pi} \sqrt{\frac{\log(3/\delta)}{2m}}, \tag{A.11}$$

where

$$\hat{\mathfrak{R}}_{\mathbb{R}_I}^{(m)}(C_{r_I}\mu_{\Pi}) = \mathbb{E}_{\sigma} \left[ \sup_{\pi \in \Pi} \sum_{j=1}^m \frac{1}{m} \sigma_j C_{r_I} \mu_{\pi}(s^{(j)}, s'^{(j)}) \right].$$

Combining Eq. (A.9) with Eqs. (A.10) and (A.11), with probability at least  $1 - 2\delta/3$ , we obtain that

$$\sup_{\pi \in \Pi} \left\{ \mathbb{E}_{(s,s') \sim \mathbb{R}_I} [C_{r_I} \mu_{\pi}(s, s')] - \mathbb{E}_{(s,s') \sim \hat{\mathbb{R}}_I} [C_{r_I} \mu_{\pi}(s, s')] \right\} \leq 2\hat{\mathfrak{R}}_{\mathbb{R}_I}^{(m)}(C_{r_I}\mu_{\Pi}) + 6B_{\Pi} \sqrt{\frac{\log(3/\delta)}{2m}}. \quad (\text{A.12})$$

Combining Eq. (A.7) with Eqs. (A.8) and (A.12) completes the proof.  $\square$

## References

- Abbeel, P. and Ng, A. Y. (2004). Apprenticeship learning via inverse reinforcement learning. In *International Conference on Machine Learning*, pages 1–8.
- Arjovsky, M., Chintala, S., and Bottou, L. (2017). Wasserstein generative adversarial networks. In *International Conference on Machine Learning*, pages 214–223.
- Arora, S., Ge, R., Liang, Y., Ma, T., and Zhang, Y. (2017). Generalization and equilibrium in generative adversarial nets (GANs). In *International Conference on Machine Learning*, pages 224–232.
- Bellemare, M. G., Dabney, W., and Munos, R. (2017). A distributional perspective on reinforcement learning. In *International Conference on Machine Learning*, pages 449–458.
- Bhattacharyya, R. P., Phillips, D. J., Wulfe, B., Morton, J., Kuefler, A., and Kochenderfer, M. J. (2018). Multi-agent imitation learning for driving simulation. In *2018 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 1534–1539. IEEE.
- Bruce, J., Anand, A., Mazouze, B., and Fergus, R. (2023). Learning about progress from experts. In *International Conference on Learning Representations (ICLR)*.
- Cândido Ramos, J. A., Blondé, L., Takeishi, N., and Kalousis, A. (2024). Mimicking better by matching the approximate action distribution. In *International Conference on Machine Learning*, pages 5513–5532.
- Chang, W.-D., Fujimoto, S., Meger, D., and Dudek, G. (2024). Imitation learning from observation through optimal transport. *Reinforcement Learning Journal (RLJ)*, 4:1911–1923.
- Chen, M., Wang, Y., Liu, T., Yang, Z., Li, X., Wang, Z., and Zhao, T. (2020). On computation and generalization of generative adversarial imitation learning. In *International Conference on Learning Representations (ICLR)*. Preprint retrieved from [arXiv:2001.02792](https://arxiv.org/abs/2001.02792).
- Chow, Y., Tamar, A., Mannor, S., and Pavone, M. (2015). Risk-sensitive and robust decision-making: A CVaR optimization approach. In *Advances in Neural Information Processing Systems*, volume 28, pages 1522–1530.
- Dabney, W., Ostrovski, G., Silver, D., and Munos, R. (2018a). Implicit quantile networks for distributional reinforcement learning. In *International Conference on Machine Learning*, pages 1096–1105.
- Dabney, W., Rowland, M., Bellemare, M., and Munos, R. (2018b). Distributional reinforcement learning with quantile regression. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 32, pages 2892–2910.
- Duan, J., Guan, Y., Li, S. E., Ren, Y., Sun, Q., and Cheng, B. (2022). Distributional soft actor-critic: Off-policy reinforcement learning for addressing value estimation errors. *IEEE Transactions on Neural Networks and Learning Systems*, 33(11):6584–6598.
- Fu, J., Luo, K., and Levine, S. (2018). Learning robust rewards with adversarial inverse reinforcement learning. In *International Conference on Learning Representations (ICLR)*. Preprint retrieved from [arXiv:1710.11248](https://arxiv.org/abs/1710.11248).
- Fujimoto, S., Hoof, H., and Meger, D. (2018). Addressing function approximation error in actor-critic methods. In *International Conference on Machine Learning*, pages 1582–1591.
- Gangwani, T. and Peng, J. (2020). State-only imitation with transition dynamics mismatch. In *International Conference on Learning Representations (ICLR)*. Preprint retrieved from [arXiv:2002.11879](https://arxiv.org/abs/2002.11879).
- Haarnoja, T., Tang, H., Abbeel, P., and Levine, S. (2017). Reinforcement learning with deep energy-based policies. In *International Conference on Machine Learning*, pages 1352–1361.
- Haarnoja, T., Zhou, A., Abbeel, P., and Levine, S. (2018a). Soft actor-critic: Off-policy maximum entropy deep reinforcement learning with a stochastic actor. In *International Conference on Machine Learning*, pages 1861–1870.

- Haarnoja, T., Zhou, A., Hartikainen, K., Tucker, G., Ha, S., Tan, J., Kumar, V., Zhu, H., Gupta, A., Abbeel, P., et al. (2018b). Soft actor-critic algorithms and applications. *arXiv preprint arXiv:1812.05905*.
- Ho, J. and Ermon, S. (2016). Generative adversarial imitation learning. In *Advances in Neural Information Processing Systems*, volume 29, pages 4565–4573.
- Huang, B.-R., Yang, C.-K., Lai, C.-M., Wu, D.-J., and Sun, S.-H. (2024). Diffusion imitation from observation. In *Advances in Neural Information Processing Systems*. Preprint retrieved from arXiv:2410.05429.
- Huber, P. J. (1964). Robust estimation of a location parameter. *Annals of Mathematical Statistics*, 35(1):73–101.
- Jabri, M. K. (2021). Robot manipulation learning using generative adversarial imitation learning. In *Proceedings of the Thirtieth International Joint Conference on Artificial Intelligence, IJCAI 2021*, pages 4893–4894.
- Jaegle, A., Sulsky, Y., Ahuja, A., Bruce, J., Fergus, R., and Wayne, G. (2021). Imitation by predicting observations. In *International Conference on Machine Learning*, pages 4665–4676.
- Karnan, H., Torabi, F., Warnell, G., and Stone, P. (2022). Adversarial imitation learning from video using a state observer. In *International Conference on Robotics and Automation (ICRA)*, pages 2452–2458. IEEE.
- Kostrikov, I., Agrawal, K. K., Dwibedi, D., Levine, S., and Tompson, J. (2019). Discriminator-actor-critic: Addressing sample inefficiency and reward bias in adversarial imitation learning. In *International Conference on Learning Representations (ICLR)*. Preprint retrieved from arXiv:1809.02925.
- Kostrikov, I., Nachum, O., and Tompson, J. (2020). Imitation learning via off-policy distribution matching. In *International Conference on Learning Representations (ICLR)*. Preprint retrieved from arXiv:1912.05032.
- LeCun, Y., Bengio, Y., and Hinton, G. (2015). Deep learning. *Nature*, 521(7553):436–444.
- Lee, Y., Szot, A., Sun, S.-H., and Lim, J. J. (2021). Generalizable imitation learning from observation via inferring goal proximity. In *Advances in Neural Information Processing Systems*, volume 34, pages 16118–16130.
- Lin, L.-J. (1992). Self-improving reactive agents based on reinforcement learning, planning and teaching. *Machine Learning*, 8(3-4):293–321.
- Liu, Y., Dong, W., Hu, Y., Wen, C., Yin, Z.-H., Zhang, C., and Gao, Y. (2024). Imitation learning from observation with automatic discount scheduling. In *International Conference on Learning Representations (ICLR)*. Preprint retrieved from arXiv:2310.07433.
- Luo, Y., Jiang, Z., Cohen, S., Grefenstette, E., and Deisenroth, M. P. (2023). Optimal transport for offline imitation learning. In *International Conference on Learning Representations (ICLR)*. Preprint retrieved from arXiv:2303.13971.
- Ma, X., Xia, L., Zhou, Z., Yang, J., and Zhao, Q. (2020). DSAC: Distributional soft actor critic for risk-sensitive reinforcement learning. *arXiv preprint arXiv:2004.14547*.
- Mnih, V., Kavukcuoglu, K., Silver, D., Rusu, A. A., Veness, J., Bellemare, M. G., Graves, A., Riedmiller, M., Fidjeland, A. K., Ostrovski, G., et al. (2015). Human-level control through deep reinforcement learning. *Nature*, 518(7540):529–533.
- Mohri, M., Rostamizadeh, A., and Talwalkar, A. (2018). *Foundations of Machine Learning*. MIT Press.
- Müller, A. (1997). Integral probability metrics and their generating classes of functions. *Advances in Applied Probability*, 29(2):429–443.
- Ng, A. Y., Russell, S. J., et al. (2000). Algorithms for inverse reinforcement learning. In *International Conference on Machine Learning*, pages 663–670.
- Ormoneit, D. and Sen, Š. (2002). Kernel-based reinforcement learning. *Machine Learning*, 49(2):161–178.
- Papagiannis, G. and Li, Y. (2022). Imitation learning with sinkhorn distances. In *Joint European Conference on Machine Learning and Knowledge Discovery in Databases*, pages 116–131. Springer.
- Pomerleau, D. A. (1991). Efficient training of artificial neural networks for autonomous navigation. *Neural Computation*, 3(1):88–97.
- Prashanth, L. and Ghavamzadeh, M. (2016). Variance-constrained actor-critic algorithms for discounted and average reward MDPs. *Machine Learning*, 105(3):367–417.
- Prashanth L, A. and Fu, M. (2018). Risk-sensitive reinforcement learning: A constrained optimization viewpoint. *arXiv preprint arXiv:1810.09126*.
- Puterman, M. L. (2014). *Markov Decision Processes: Discrete Stochastic Dynamic Programming*. John Wiley & Sons.
- Shi, J.-C., Yu, Y., Da, Q., Chen, S.-Y., and Zeng, A.-X. (2019). Virtual-taobao: Virtualizing real-world online retail environment for reinforcement learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, pages 4902–4909.

- Sikchi, H., Saran, A., Goo, W., and Niekum, S. (2023). A ranking game for imitation learning. *Transactions on machine learning research*.
- Sobel, M. J. (1982). The variance of discounted Markov decision processes. *Journal of Applied Probability*, 19(4):794–802.
- Sun, W., Vemula, A., Boots, B., and Bagnell, D. (2019). Provably efficient imitation learning from observation alone. In *International conference on machine learning*, pages 6036–6045.
- Sutton, R. S. and Barto, A. G. (2018). *Reinforcement Learning: An Introduction*. Cambridge, MA, USA: MIT Press.
- Syed, U. and Schapire, R. E. (2007). A game-theoretic approach to apprenticeship learning. In *Advances in Neural Information Processing Systems*, volume 20, pages 1449–1456.
- Tamar, A., Di Castro, D., and Mannor, S. (2012). Policy gradients with variance related risk criteria. In *International Conference on Machine Learning*, pages 1651—1658.
- Todorov, E., Erez, T., and Tassa, Y. (2012). MuJoCo: A physics engine for model-based control. In *2012 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 5026–5033. IEEE.
- Torabi, F., Warnell, G., and Stone, P. (2018a). Behavioral cloning from observation. In *Proceedings of the Twenty-seventh International Joint Conference on Artificial Intelligence, IJCAI 2018*, pages 4950–4957.
- Torabi, F., Warnell, G., and Stone, P. (2018b). Generative adversarial imitation from observation. *arXiv preprint arXiv:1807.06158*.
- Torabi, F., Warnell, G., and Stone, P. (2019). Recent advances in imitation learning from observation. In *Proceedings of the Twenty-eighth International Joint Conference on Artificial Intelligence, IJCAI 2019*, pages 6325–6331.
- Tversky, A. and Kahneman, D. (1992). Advances in prospect theory: Cumulative representation of uncertainty. *Journal of Risk and uncertainty*, 5(4):297–323.
- Villani, C. et al. (2009). *Optimal Transport: Old and New*, volume 338. Springer.
- Wang, S. S. (2000). A class of distortion operators for pricing financial and insurance risks. *Journal of risk and insurance*, pages 15–36.
- Wang, W., Zhu, Y., Zhou, Y., Shen, C., Tang, J., Xu, Z., Peng, Y., and Zhang, Y. (2024). Exploring gradient explosion in generative adversarial imitation learning: A probabilistic perspective. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 15625–15633.
- Wang, Y. and Li, X. (2021). Reward function shape exploration in adversarial imitation learning: An empirical study. In *IEEE International Conference on Artificial Intelligence and Computer Applications*, pages 52–57.
- Xu, T., Li, Z., and Yu, Y. (2020). Error bounds of imitating policies and environments. In *Advances in Neural Information Processing Systems*, volume 33, pages 15737–15749.
- Yang, C., Ma, X., Huang, W., Sun, F., Liu, H., Huang, J., and Gan, C. (2019a). Imitation learning from observations by minimizing inverse dynamics disagreement. In *Advances in Neural Information Processing Systems*, volume 32, pages 239—249.
- Yang, D., Zhao, L., Lin, Z., Qin, T., Bian, J., and Liu, T.-Y. (2019b). Fully parameterized quantile function for distributional reinforcement learning. In *Advances in Neural Information Processing Systems*, volume 32, pages 6190–6199.
- Zhou, Y., Lu, M., Liu, X., Che, Z., Xu, Z., Tang, J., Zhang, Y., Peng, Y., and Peng, Y. (2023). Distributional generative adversarial imitation learning with reproducing kernel generalization. *Neural Networks*, 165:43–59.
- Zhou, Y., Wang, L., Lu, M., Xu, Z., Tang, J., Zhang, Y., and Peng, Y. (2024). Generalization error for portable rewards in transfer imitation learning. *Knowledge-Based Systems*, 300:112230.
- Zhou, Y., Zhang, Y., Liu, X., Wang, W., Che, Z., Xu, Z., Tang, J., and Peng, Y. (2022). Generalization and computation for policy classes of generative adversarial imitation learning. In *International Conference on Parallel Problem Solving from Nature*, pages 385–399. Springer.
- Zhu, Z., Lin, K., Dai, B., and Zhou, J. (2020). Off-policy imitation learning from observations. In *Advances in Neural Information Processing Systems*, volume 33, pages 12402–12413.