

---

# ROBUST AMORTIZED BAYESIAN INFERENCE WITH SELF-CONSISTENCY LOSSES ON UNLABELED DATA

---

**Aayush Mishra**

Department of Statistics  
TU Dortmund University, Germany  
*equal contribution*

**Daniel Habermann**

Department of Statistics  
TU Dortmund University, Germany  
*equal contribution*

**Marvin Schmitt**

Independent Scientist

**Stefan T. Radev**

Department of Cognitive Science  
Rensselaer Polytechnic Institute, USA  
Email: radevs@rpi.edu

**Paul-Christian Bürkner**

Department of Statistics  
TU Dortmund University, Germany  
Email: paul.buerkner@gmail.com

## ABSTRACT

Neural amortized Bayesian inference (ABI) can solve probabilistic inverse problems orders of magnitude faster than classical methods. However, neural ABI is not yet sufficiently robust for widespread and safe applicability. In particular, when performing inference on observations outside of the scope of the simulated data seen during training, for example, because of model misspecification, the posterior approximations are likely to become highly biased. Due to the bad pre-asymptotic behavior of current neural posterior estimators in the out-of-simulation regime, the resulting estimation biases cannot be fixed in acceptable time by just simulating more training data. In this proof-of-concept paper, we propose a semi-supervised approach that enables training not only on (labeled) simulated data generated from the model, but also on unlabeled data originating from any source, including real-world data. To achieve the latter, we exploit Bayesian self-consistency properties that can be transformed into strictly proper losses without requiring knowledge of true parameter values, that is, without requiring data labels. The results of our initial experiments show remarkable improvements in the robustness of ABI on out-of-simulation data. Even if the observed data is far away from both labeled and unlabeled training data, inference remains highly accurate. If our findings also generalize to other scenarios and model classes, we believe that our new method represents a major breakthrough in neural ABI.

**Keywords** Bayesian models, amortized inference, robust inference, self-consistency, semi-supervised learning

This paper is still work in progress. In the full version, we will provide further experiments where we will verify our results, among others, for several different model classes from common benchmarks, posteriors with challenging geometries (e.g., high correlations, funnels, or multi-modality), and very high-dimensional scenarios.

## 1 Introduction

Theory-driven computational models (i.e., process, simulation, or mechanistic models) are highly influential across numerous branches of science [25]. The utility of computational models largely stems from their ability to fit real data  $x$  and extract information about hidden parameters  $\theta$ . Bayesian methods have been instrumental for this task, providing a principled framework for uncertainty quantification and inference [14]. However, gold-standard Bayesian methods, such as Gibbs or Hamiltonian Monte Carlo samplers [2], remain notoriously slow. Moreover, these methods are rarely feasible for fitting complex models [4] or even simpler models in big data settings with many thousands of data points in a single dataset [1], or when thousands of independent datasets require repeated model re-fits [36].

In recent years, deep learning methods have helped address some of these efficiency challenges [3]. In particular, *amortized Bayesian inference* [ABI; 8, 15, 16, 18, 26, 32, 40] has received considerable attention for its potential to automate Bayesian workflows by training generative neural networks on model simulations, subsequently enabling near-instant downstream inference on real data. However, due to the reliance on pre-trained neural networks, ABI methods can become unreliable when applied to data that is unseen or sparsely encountered during training. In particular, posterior samples from amortized methods may deviate significantly from samples obtained with gold-standard MCMC samplers when there is a mismatch between the simulator used in training and the real data [16, 33, 35, 37]. This lack of robustness limits the widespread and safe applicability of ABI methods.

In this work, we propose an approach that incorporates both supervised and unsupervised components to robustify ABI on out-of-simulation data. The supervised part learns from a “labeled” set of parameters and corresponding synthetic (simulated) observations,  $\{\theta, x\}$ , while the unsupervised part leverages an “unlabeled” data set of real observations  $\{x^*\}$  without requiring the explicit parameters. Combining these two components leads to a *semi-supervised approach*, which contributes to an emerging stream of research concerned with increasing the robustness of ABI. Our approach can be understood as a form of meta-learning [9, 20], where the objective is to optimize for a set of tasks utilizing minimal data. In the context of ABI, inference on data from different distributions (simulated and real-world data) constitutes such a set of tasks. By incorporating multiple data sources, we can quickly adapt to new and unseen data, improving the ability to generalize even when training data is scarce.

In contrast to other methods build to robustifying ABI, our approach does not require ground-truth parameters  $\theta^*$  [38], post hoc corrections [35, 37], specific adversarial defenses [16], nor does it entail a loss of amortization [21, 37] or generalized Bayesian inference [12, 30]. To achieve this, we expand on previous work on *self-consistency losses* [22, 34], demonstrating notable robustness gains even for as few as four real-world observations.

## 2 Methods

### 2.1 Bayesian Self-Consistency

Self-consistency leverages a simple symmetry in Bayes’ rule to enforce more accurate posterior estimation even in regions with sparse data [22, 34]. Crucially, it incorporates likelihood (when available) or a surrogate likelihood during training, thereby providing the networks with *additional information* beyond the standard simulation-based loss typically employed in neural ABI (see below).

Following [34], we will focus on the marginal likelihood based on neural posterior or likelihood approximation. Under exact inference, the marginal likelihood is independent of the parameters  $\theta$ . That is, the Bayesian self-consistency ratio of likelihood-prior product and posterior is constant across any set of parameter values  $\theta^{(1)}, \dots, \theta^{(L)}$ ,

$$p(x) = \frac{p(x | \theta^{(1)}) p(\theta^{(1)})}{p(\theta^{(1)} | x)} = \dots = \frac{p(x | \theta^{(L)}) p(\theta^{(L)})}{p(\theta^{(L)} | x)}. \quad (1)$$

However, replacing  $p(\theta | x)$  with a neural estimator  $q(\theta | x)$  (likewise for the likelihood) leads to undesired variance in the marginal likelihood estimates across different parameter values on the right-hand-side [34]. Since this variance is a proxy for *approximation error*, we can directly minimize it via backpropagation along with any other ABI loss to provide further training signal and reduce errors guided by density information. Correspondingly, our proposed self-supervised formulation builds on these advantageous properties.

### 2.2 Semi-Supervised Amortized Bayesian Inference

The formulation in Eq. (1) is straightforward, but practically never used in traditional sampling-based methods (e.g., MCMC) because these methods do not provide a closed-form for the approximate posterior density  $q(\theta | x)$ . In contrast, we can readily evaluate  $q(\theta | x)$  in ABI when using a neural density estimator that allows efficient density

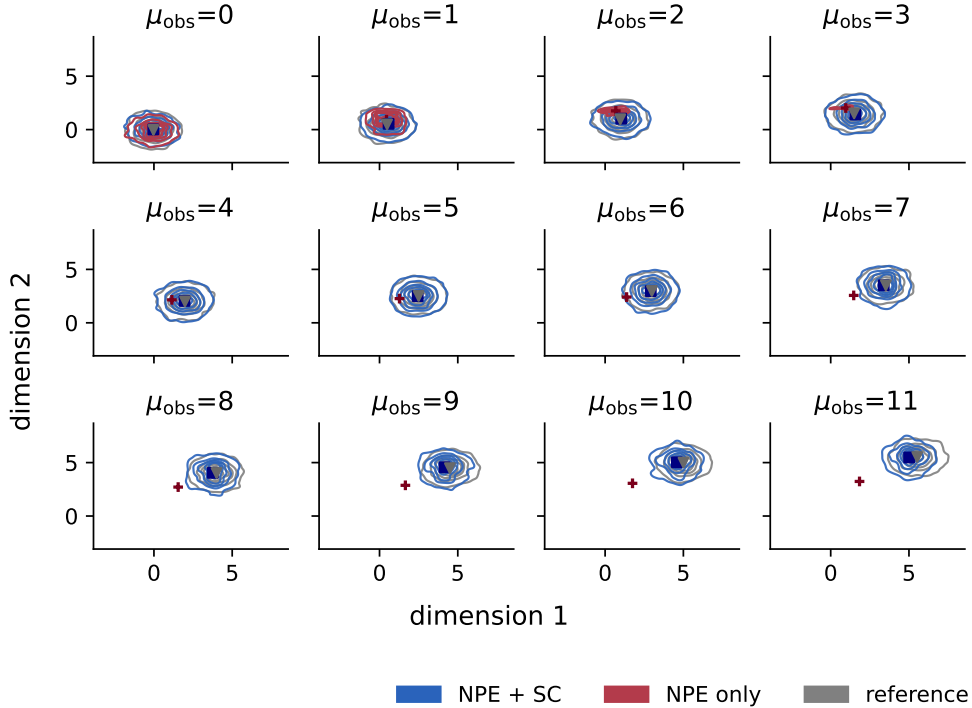


Figure 1: Contour plot of posterior samples for the normal means problem, obtained by either standard NPE trained on the simulation-based loss only (NPE only, red) or our proposed semi-supervised approach (NPE + SC, blue). Contours of samples from the analytic posterior are shown in grey (reference). Symbols indicate the posterior mean of the respective method (red cross: NPE only; blue square: NPE + SC; grey triangle: reference). Each subplot shows posterior inference on observed data that are increasingly farther away from the labeled training data ( $\mu_{\text{prior}} = 0$ ). Training was performed for the default configuration highlighted in Section 4: Parameter dimensionality  $D = 10$ , number of labeled observations for the standard simulation-based loss  $N = 1024$ , number of unlabeled observations for the self-consistency loss  $M = 32$ , mean of the unlabeled observations  $\mu^* = 3$ , number of data points per observation  $K = 1$ . For plotting, only the first two dimensions of the 10-dimensional posterior are shown. While NPE without the self-consistency loss is able to recover the true posterior for data that are slightly out-of-distribution from the labeled training data ( $\mu_{\text{obs}} \leq 1$ ), the posterior standard deviation quickly collapses to 0 for larger deviations from the labeled training data ( $\mu_{\text{obs}} \geq 2$ ), while bias in the posterior mean continues to increase. Adding the self-consistency loss achieves accurate posterior estimation far beyond the both training spaces ( $\mu_{\text{obs}} > 3$ ).

computation (e.g., normalizing flows, [24]). Thus, we can formulate a family of *semi-supervised losses* of the form:

$$(q^*, h^*) = \operatorname{argmin}_{q, h} \mathbb{E}_{(\theta, x) \sim p(\theta, x)} [S(q(\theta | h(x)), \theta)] + \lambda \cdot \mathbb{E}_{x^* \sim p^*(x)} \left[ C \left( \frac{p(x^* | \theta) p(\theta)}{q(\theta | h(x^*))} \right) \right], \quad (2)$$

where  $S$  is a strictly proper score [17] and  $C$  is a self-consistency score [34]. The neural networks to be optimized are a generative model  $q$  and (potentially) a summary network  $h$  extracting lower dimensional sufficient statistics from the data. We will call the first loss component,  $\mathbb{E}_{(\theta, x) \sim p(\theta, x)} [S(q(\theta | h(x)), \theta)]$ , the (standard) simulation-based loss, as it forms the basis for standard ABI approaches using simulation-based learning. For example, this is the maximum likelihood loss for normalizing flows [24, 31] or a vector-field loss for flow matching [27, 28]. We will refer to the second loss component as the (Bayesian) self-consistency loss.

In practice, we approximate the expectations in Eq. (2) with finite amounts of simulated and real training data. That is, for  $N$  instances  $(\theta_n, x_n) \sim p(\theta, x)$  and  $M$  instances  $x_m^* \sim p^*(x)$ , we employ

$$(q^*, h^*) = \operatorname{argmin}_{q, h} \frac{1}{N} \sum_{n=1}^N [S(q(\theta_n | h(x_n)), \theta_n)] + \lambda \cdot \frac{1}{M} \sum_{m=1}^M \left[ C \left( \frac{p(x_m^* | \theta) p(\theta)}{q(\theta | h(x_m^*))} \right) \right]. \quad (3)$$

Asymptotically for  $N \rightarrow \infty$ , that is, for infinite training data generated from the simulator  $p(\theta, x)$ , a universal density estimator [6] minimizing a strictly proper simulation-based loss [17] is sufficient to ensure perfect posterior approxi-

mation for any data. By this, we mean that the posterior approximation becomes identical to the posterior we would obtain if we could analytically solve Bayes' Theorem  $p(\theta | x) = p(x | \theta)p(\theta)/p(x)$ . This *analytic posterior* is sometimes also referred to as true or correct posterior. In practice, the posterior is rarely analytic, but we can still verify the accuracy of an approximation by comparing it with the results of a gold-standard approach (if available), such as a sufficiently long, converged MCMC run [29].

While neural posterior approximation is perfect asymptotically, its pre-asymptotic performance, that is, when training  $q(\theta | h(x))$  only on a finite amount of simulated data, can become arbitrarily bad. In other words, for any kind of atypical data  $x^*$  that is outside the typical data space implied by  $p(\theta, x)$ , for instance, when the model is misspecified, the posterior approximation  $q(\theta | h(x^*))$  may be arbitrarily far away from the analytical posterior  $p(\theta | x^*)$  [33]. As a result, in practice, a simulation-based loss is insufficient to achieve robust ABI. This is where the self-consistency loss comes in: As we will show, adding the latter during training can greatly improve generalization to atypical data at inference time, rendering ABI much more robust.

One particular choice for  $C$  is the variance over parameters on the log scale of the Bayesian self-consistency ratio [34]:

$$C \left( \frac{p(x^* | \theta) p(\theta)}{q(\theta | h(x^*))} \right) = \text{Var}_{\theta \sim p_C(\theta)} [\log p(x^* | \theta) + \log p(\theta) - \log q(\theta | h(x^*))], \quad (4)$$

where  $p_C(\theta)$  can be any proposal distribution over the parameter space, for example, the prior  $p(\theta)$  or even the current approximate posterior  $q_t(\theta | h(x^*))$  as given in a training iteration or snapshot  $t$ . Notably, the choice of  $p_C(\theta)$  can influence training dynamics considerably, with the empirical consequences being difficult to anticipate [34]. In practice, we approximate the variance  $\text{Var}_{\theta \sim p_C(\theta)}$  by the empirical variance  $\text{Var}_{l=1}^L$  computed over  $L$  samples  $\theta^{(l)} \sim p_C(\theta)$ .

### 2.3 Self-Consistency Losses Are Strictly Proper

Below, we prove the strict properness of Bayesian self-consistency losses, which underline their widespread usefulness. To simplify the notation, we denote posterior approximators simply as  $q(\theta | x)$  without considering architectural details such as the use of summary networks  $h(x)$ . All theoretical results and their proofs remain the same if  $x$  is replaced by  $h(x)$  as long as the summary network is expressive enough to learn sufficient statistics from  $x$ .

**Proposition 1.** *Let  $C$  be a score that is globally minimized if and only if its functional argument is constant across the support of the posterior  $p(\theta | x)$  almost everywhere. Then,  $C$  applied to the Bayesian self-consistency ratio with known likelihood*

$$C \left( \frac{p(x | \theta) p(\theta)}{q(\theta | x)} \right) \quad (5)$$

*is a strictly proper loss. That is, it is globally minimized if and only if  $q(\theta | x) = p(\theta | x)$  almost everywhere.*

*Proof.* By assumption,  $C$  is globally minimized if and only if

$$\frac{p(x | \theta) p(\theta)}{q(\theta | x)} = A \quad (6)$$

for some constant  $A$  (independent of  $\theta$ ) almost everywhere over the posterior's support. Accordingly, any approximate posterior solution  $q(\theta | x)$  that attains this global minimum has to be of the form

$$q(\theta | x) = p(x | \theta) p(\theta) / A. \quad (7)$$

By construction,  $q(\theta | x)$  is a proper probability density function, so it integrates to 1. It follows that

$$1 = \int q(\theta | x) d\theta = \int p(x | \theta) p(\theta) d\theta / A = p(x) / A. \quad (8)$$

Rearranging the equation yields  $A = p(x)$  and thus

$$q(\theta | x) = p(x | \theta) p(\theta) / p(x) = p(\theta | x) \quad (9)$$

almost everywhere.  $\square$

In particular, the variance loss (4) fulfills the assumptions of Proposition 1.

**Proposition 2.** *The loss (4) based on the variance of the log Bayesian self-consistency ratio is strictly proper if the support of  $p_C(\theta)$  encompasses the support of  $p(\theta | x)$ .*

*Proof.* The variance over a distribution  $p_C(\theta)$  reaches its global minimum (i.e., zero), if and only if its argument is constant across the support of  $p_C(\theta)$ . Because the log is a strictly monotonic transform,

$$\log p(x^* | \theta) + \log p(\theta) - \log q(\theta | x^*) = \log A \quad (10)$$

for some constant  $A$  implies

$$\frac{p(x | \theta) p(\theta)}{q(\theta | x)} = A, \quad (11)$$

which is sufficient to satisfy the assumptions of Proposition 1.  $\square$

The strict properness extends to semi-supervised losses of the form (2), which combine standard simulation-based losses with self-consistency losses.

**Proposition 3.** *Under the assumptions of Proposition 1, the semi-supervised loss (2) is strictly proper for any choice of  $p^*(x)$ .*

The proof of Proposition 3 follows immediately from the fact the sum of strictly proper losses is strictly proper. Importantly, since Proposition 3 holds independently of  $p^*(x)$ , it holds both in the case of a well-specified model, where  $p^*(x) = p(x)$ , and also in case of any model misspecification or domain shift where  $p^*(x) \neq p(x)$ . That is, there is *no trade-off* in the semi-supervised loss (2) between the standard simulation-based loss and the self-consistency loss, since they are both globally minimized for the same target.

Lastly, for completeness, we can also define strictly proper self-consistency losses for likelihood instead of posterior approximations.

**Proposition 4.** *Consider the case where the posterior  $p(\theta | x)$  is known and the likelihood is estimated by  $q(x | \theta)$ . Then, under the assumptions of Proposition 1, Bayesian self-consistency ratio losses of the form*

$$C \left( \frac{q(x | \theta) p(\theta)}{p(\theta | x)} \right) \quad (12)$$

*are strictly proper as well. That is, they are globally minimized if and only if  $q(x | \theta) = p(x | \theta)$  almost everywhere.*

The proof of Proposition 4 proceeds in the same manner as for Proposition 1, just exchanging likelihood and posterior.

Clearly, strict properness does not necessarily hold if *both* posterior and likelihood are unknown or approximate. This is because any pair of approximators  $q(\theta | x)$  and  $q(x | \theta)$  that satisfy  $q(\theta | x) \propto q(x | \theta) p(\theta)$  minimize the self-consistency loss regardless of their relation to the accurate posterior  $p(\theta | x)$  and likelihood  $p(x | \theta)$ . For example, the choices  $q(\theta | x) = p(\theta)$  and  $q(x | \theta) \propto 1$  minimize the self-consistency loss, but may be arbitrarily far away from their actual target distributions.

In other words, if both likelihood and posterior are unknown, the self-consistency loss needs to be coupled with another loss component, such as the maximum likelihood loss, to enable joint learning of both approximators  $q(\theta | x)$  and  $q(x | \theta)$  [34]. Nevertheless, the self-consistency loss still yields significant improvements: as demonstrated in our experiments, the semi-supervised loss (2) significantly enhances the robustness of ABI *even when both the posterior and likelihood are unknown*.

### 3 Related Work

The robustness of ABI and simulation-based inference methods more generally has been the focus of multiple recent studies [e.g., 5, 10, 11, 12, 16, 21, 23, 30, 33, 35, 37, 38]. These efforts can be broadly classified into two categories: (a) analyzing or detecting simulation gaps and (b) mitigating the impact of simulation gaps on posterior estimates. Since our work falls into the latter category, we briefly discuss methods aimed at increasing the robustness of fully amortized approaches. For instance, Gloeckler et al. [16] explore efficient regularization techniques that trade off some posterior accuracy to enhance the robustness of posterior estimators against adversarial attacks. Ward et al. [37] and Siahkoobi et al. [35] apply *post hoc* corrections based on real data, utilizing MCMC and the reverse Kullback-Leibler divergence, respectively. Differently, Gao et al. [12] propose a departure from standard Bayesian inference by minimizing the expected distance between simulations and observed data, akin to generalized Bayesian inference with scoring rules [30]. Perhaps the closest work in spirit to ours is Wehenkel et al. [38], which introduces the use of additional training information in the form of a (labeled) calibration set  $(x^*, \theta^*)$  which contains observables from the real data distribution as well as the corresponding ground-truth parameters.

In contrast to the methods above, our approach (a) avoids trade-offs between accuracy and robustness, (b) requires no modifications to the neural estimator after training, therefore fully maintaining inference speed, (c) affords proper

Bayesian inference, and (d) does not assume known ground truth parameters for a calibration set. Thus, it can be viewed as one of the first instantiations of *semi-supervised ABI*.

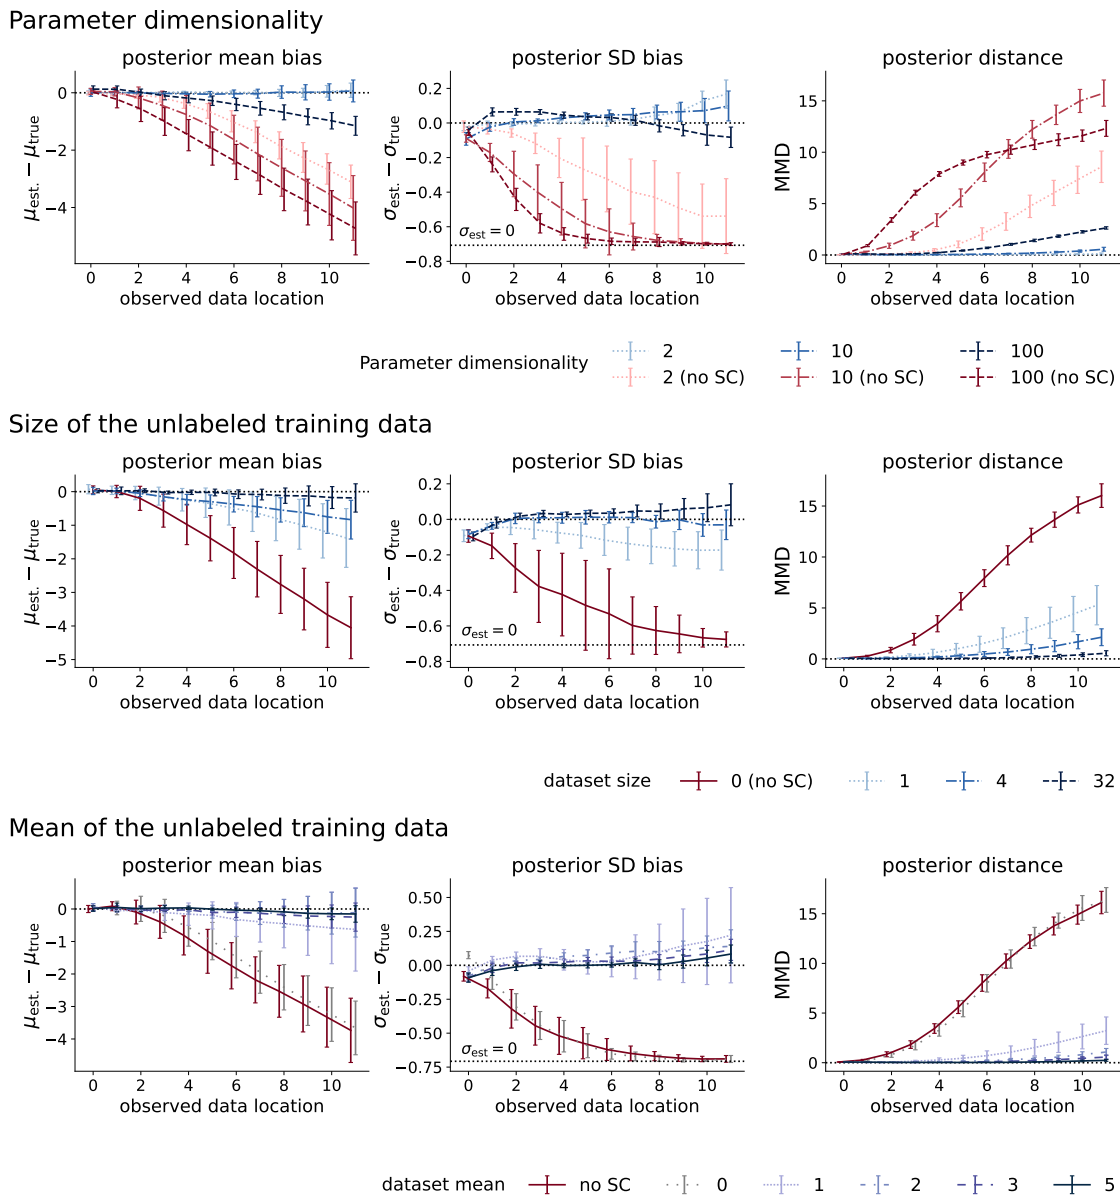


Figure 2: Bias of posterior mean, bias of posterior standard deviation [13] and posterior distance quantified by maximum mean discrepancy [19] to the analytic posterior for variations of the default configuration outlined in Section 4. NPE approximators with the added self-consistency loss component are shown in blue, NPE approximators using just the standard simulation-based loss are shown in red. Irrespective of the varied factor and for all metrics, adding the self-consistency loss component is always a drastic improvement over the standard simulation-based loss alone. The plots show that adding the self-consistency loss component provides strong robustness gains even in high-dimensional spaces (top row) or when the self-consistency loss is evaluated on little data (center row). Variation of the mean of the unlabeled training data show that adding the self-consistency loss drastically improves posterior estimation as long as data used for evaluating the self-consistency loss is at least slightly out-of-distribution compared to the original training data ( $\mu^* \geq 1$ ).



## 4 Case Study: Multivariate Gaussian Models

We illustrate the usefulness of our proposed self-consistency loss on the following multivariate Gaussian model, also known as the normal means problem. This model has also been considered in previous studies investigating the robustness of neural ABI [33]. It allows us to explore the behavior of NPE trained with the semi-supervised loss (2) in a simple, controlled setting where the true posterior is available in closed-form. The prior and likelihood are given by

$$\theta \sim \text{Normal}(\mu_{\text{prior}}, \sigma_{\text{prior}}^2 I_D), \quad x^{(k)} \sim \text{Normal}(\theta, \sigma_{\text{lik}}^2 I_D) \quad (13)$$

The parameters  $\theta \in \mathbb{R}^D$  are sampled from a  $D$ -dimensional multivariate Gaussian distribution with mean vector  $\mu_{\text{prior}}$  and diagonal covariance matrix  $\sigma_{\text{prior}}^2 I_D$ . Here, we fix  $\mu_{\text{prior}} = 0$  and  $\sigma_{\text{prior}}^2 = 1$ . On this basis,  $K$  independent, synthetic data points  $x^{(k)} \in \mathbb{R}^D$  are sampled from a  $D$ -dimensional multivariate Gaussian distribution with mean vector  $\theta$  and diagonal covariance matrix  $\sigma_{\text{lik}}^2 I_D$ . We fix  $\sigma_{\text{lik}}^2 = K$  such that the total information in  $x$  remains constant, independent of  $K$ , which simplifies comparisons across observations of varying number of data points.

From this model, we simulate a *labeled* training dataset with a budget of  $N = 1024$ , that is,  $N$  independent instances of  $\theta_n$  (the "labels") with corresponding observations  $x_n = \{x_n^{(k)}\}_{k=1}^K$ , each consisting of  $K$  data points. This labeled training dataset  $\{(\theta_n, x_n)\}_{n=1}^N$  is used for optimizing the standard simulation-based loss component. The self-consistency loss component is optimized on an additional *unlabeled* dataset  $\{x_m^*\}_{m=1}^M$  of  $M = 32$  independent sequences  $x_m^* = \{x_m^{*(k)}\}_{k=1}^K$ , which, for the purpose of this case study, are simulated from

$$x_m^{*(k)} \sim \text{Normal}(\mu^*, I_D). \quad (14)$$

Since the self-consistency loss does not need labels (i.e., the true parameters having generated  $x_m^*$ ), we could have also chosen any other source for  $x^*$ , for example, real-world data. Within each training iteration  $t$ , the variance term within the self-consistency loss was computed from  $L = 32$  samples  $\theta^{(l)} \sim q_t(\theta | x_m^*)$  from the current posterior approximation.

To evaluate the accuracy and robustness of the NPEs, we perform posterior inference on completely new observations  $x_{\text{obs}} = \{x_{\text{obs}}^{(k)}\}_{k=1}^K$ , each consisting of  $K$  independent data points sampled from

$$x_{\text{obs}}^{(k)} \sim \text{Normal}(\mu_{\text{obs}}, \sigma_{\text{obs}}^2 = 0.01 I_D). \quad (15)$$

The mean values  $\mu_{\text{obs}} \in \{0, 1, \dots, 11\}$  are progressively farther away from the training data. While conceptually simple and synthetic, this setting is already extremely challenging for simulation-based inference algorithms because of the large simulation gap [33]: standard NPEs are only trained on (labeled) training data that are several standard deviations away from the observed data the model sees at inference time.

The faithfulness of the approximated posteriors  $q(\theta | x_{\text{obs}})$  are assessed by computing the bias in posterior mean and standard deviation as well as the maximum mean discrepancy (MMD) with a Gaussian kernel [19] between the approximate and true (analytic) posterior. Mathematical details of the analytic posterior can be found in Appendix A.

In our numerical experiments, we study the influence of several aspects of the normal model on the performance of NPE. To prevent combinatorial explosion, we vary the factors below separately, with all other factors fixed to their default configuration (highlighted in **bold**):

- parameter dimensionality ( $D = 2$ , **10**, 100)
- number of unlabeled observations for the self-consistency loss  $\{x_m^*\}_{m=1}^M$  ( $M = 1, 4$ , **32**)
- mean  $\mu^*$  of the unlabeled observations  $x_m^*$  ( $\mu^* = 0, 1, 2$ , **3**, 5)
- inclusion of a summary network ( $K = 10$ ) or **not** ( **$K = 1$** )
- likelihood function (**known**, estimated)

For the neural posterior estimators  $q(\theta | x)$ , we use a neural spline flow [7] with 5 coupling layers of 128 units each utilizing ReLU activation functions, L2 weight regularization with factor  $\gamma = 10^{-3}$ , 5% dropout and a multivariate unit Gaussian latent space. The network is trained using the Adam optimizer for 100 epochs with a batch size of 32 and a learning rate of  $5 \times 10^{-4}$ . These settings were the same for both the standard simulation-based loss and our proposed semi-supervised loss. For the conditions involving an estimated likelihood  $q(x | \theta)$ , we use the same configuration for the likelihood network as for the posterior network. For the summary network  $h(x)$  (if included), we use a deep set architecture [39] with 30 summary dimensions and mean pooling, 2 equivariant layers each consisting of 2 dense layers with 64 units and a ReLU activation function. The inner and outer pooling functions also use 2 dense layers with the same configuration. The likelihood network as well as the summary network are jointly trained with the inference network using the Adam optimizer for 100 epochs with a batch size of 32 and a learning rate of  $5 \times 10^{-4}$ .

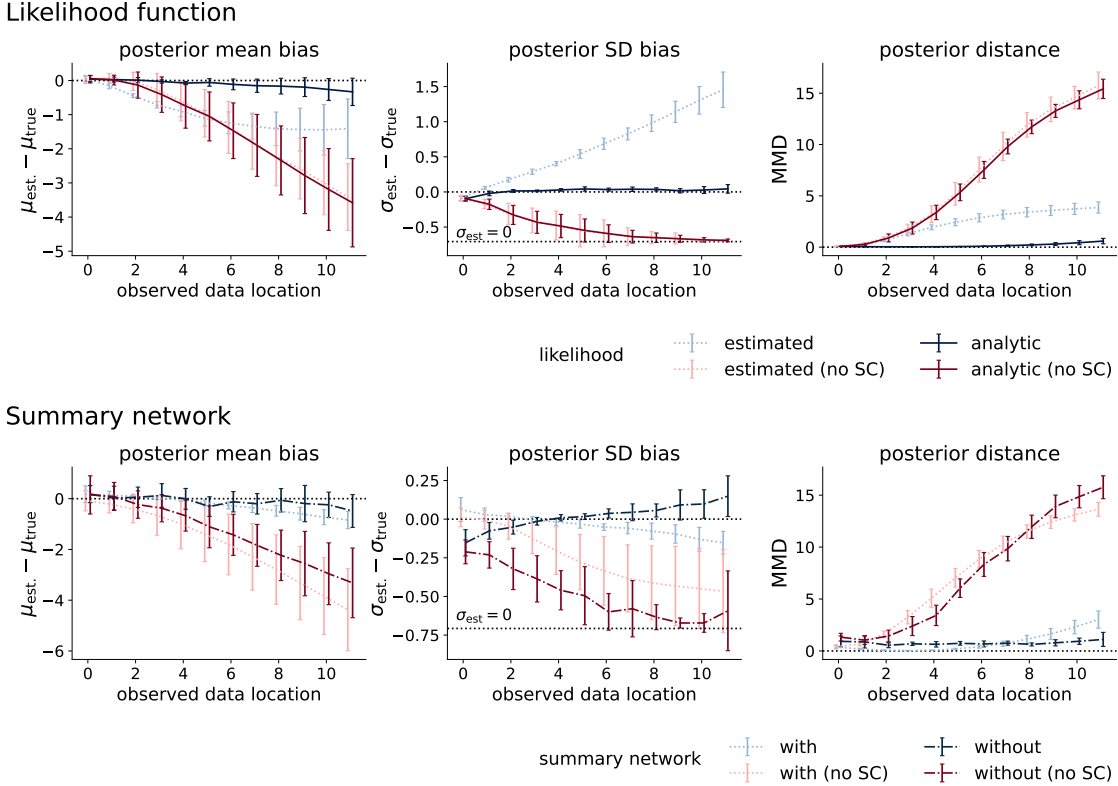


Figure 3: Bias of posterior mean, bias of posterior standard deviation and posterior distance quantified by maximum mean discrepancy to the analytic posterior when the likelihood is estimated (top row) and in presence of a summary network ( $K = 10$  data points; bottom row). In the setting where the likelihood function is estimated, we observe a lower bias of the posterior mean and lower maximum mean discrepancy to the true posterior when the self-consistency loss component is added compared to the standard simulation-based loss alone. However, we do see some bias of the posterior standard deviation, although with reversed signed compared to the standard loss. The self-consistency loss provides strong robustness gains in the presence of a summary network (and known likelihood) in terms of all metrics.

#### 4.1 Results

In Figure 1, we depict the results obtained from (a) standard NPE (trained on the simulation-based loss only), (b) our semi-supervised NPE (adding the self-consistency loss with known likelihood) and, (c) the gold-standard (analytic) reference. We see that standard NPE already completely fails for  $x_{\text{obs}} \sim N(\mu_{\text{obs}} = 2, 0.01I_D)$ , and subsequently also for any larger values  $\mu_{\text{obs}} > 2$ . In contrast, adding the self-consistency loss component to obtain our semi-supervised loss achieves almost perfect posterior estimation. This holds true even in cases where  $x_{\text{obs}}$  is multiple standard deviations away from *all* the training data, that is, from both the labeled dataset  $\{(\theta_n, x_n)\}_{n=1}^N$  and the unlabeled dataset  $\{x_m^*\}_{m=1}^M$ . These results indicate that the self-consistency criterion can provide strong robustness gains even far outside the typical space of the training data.

In Figure 2, we show posterior mean and standard deviation bias as well as the MMD between the approximate and true posterior for each of the above five factors. When varying the parameter dimensionality, the results indicate that including the self-consistency loss component achieves almost perfect posterior approximation for up to 10 dimensions even in the presence of extreme deviations from the initial training data. While we do see larger discrepancies from the true posterior for 100 dimensions, adding the self-consistency loss still considerably improves estimates. The dataset size factor shows strong robustness gains even when few data are used to evaluate the self-consistency loss (4 unlabeled vs. 1024 labeled training observations). We already see clear improvements over the standard simulation-based loss when only a single unlabeled observation is seen during training. Varying the mean  $\mu_{\text{obs}}$  of the new observations shows that, as long as the data used for evaluation the self-consistency loss is not identical to the training data (i.e., as long as  $\mu_{\text{obs}} \neq 0$ ), including the self-consistency loss component enables accurate posterior approximation far outside the typical space of the training data.



In Figure 3, we see that the benefits of self-consistency persist when the posterior is conditioned on more than one data point per observation (i.e., when  $K = 10$ ), that is, in the presence of a summary network. Further, we still see clear benefits of adding the self-consistency loss even when the likelihood is estimated via by a neural likelihood approximator  $q(x | \theta)$ , trained jointly with the neural posterior approximator  $q(\theta | x)$  on the same training data. However, with an estimated likelihood, posterior bias, especially bias in the posterior standard deviation, and MMD distance to the true posterior are larger than in the known likelihood case.

## 5 Discussion

In this proof-of-concept paper, we demonstrated that Bayesian self-consistency losses can drastically improve the robustness of neural amortized Bayesian inference (ABI) on out-of-simulation data. Performing accurate inference on such data – outside of the space seen during simulation-based training (e.g., because of model misspecification) – has been one of the major challenges of ABI since its inception: conventional ABI approaches are known to dramatically fail in such cases [16, 21, 33], as we also illustrated in our experiments. In contrast, when adding the self-consistency loss and training it on *unlabeled* out-of-simulation data, we obtained near-unbiased posterior estimation far beyond the training data spaces. That is, ABI became highly accurate even for data sets far away from any data seen during training by either of the two loss components – the standard simulation-based loss and the self-consistency loss. Importantly, because the self-consistency loss does not require data labels (i.e., knowledge of true parameter values), we can also use any amount of *real data* during training to improve the robustness of ABI.

**We believe that the self-consistency loss trained on out-of-simulation data is a major breakthrough in neural ABI.** We had originally proposed this loss to improve training efficiency for models with slow simulators [22, 34], but had not considered it in combination with (potentially real) out-of-simulation data. To the best of our knowledge, no existing ABI approach achieves similar degrees of robustness as our method presented here. The strong robustness gains persisted even in relatively high dimensional models (we tested a model with up to 100 parameters), suggesting no major curse of dimensionality.

Also, when using a learned rather than known likelihood function, robustness was clearly improved. However, the resulting amortized inference with a learned likelihood did not (yet) achieve the same level of accuracy on out-of-simulation data as the known likelihood case. Additionally, our variance-based self-consistency loss relies on fast density evaluations during training to maintain competitive training times. This currently makes free-form methods, such as flow matching [27], less practical due to their reliance on numerical integration for density estimation. As a result, the joint learning of posteriors and likelihoods, along with the development of efficient self-consistency losses for free-form flows, remains an open area for future research.

## 6 Acknowledgments

Daniel Habermann, Stefan Radev, and Paul Bürkner acknowledge support of the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) Projects 508399956 and 528702768. Paul Bürkner further acknowledges support of the DFG Collaborative Research Center 391 (Spatio-Temporal Statistics for the Transition of Energy and Transport) – 520388526.

## References

- [1] David M Blei, Alp Kucukelbir, and Jon D McAuliffe. Variational inference: A review for statisticians. *Journal of the American statistical Association*, 112(518):859–877, 2017.
- [2] Steve Brooks, Andrew Gelman, Galin Jones, and Xiao-Li Meng. *Handbook of markov chain monte carlo*. CRC press, 2011.
- [3] Kyle Cranmer, Johann Brehmer, and Gilles Louppe. The frontier of simulation-based inference. *Proceedings of the National Academy of Sciences*, 117(48):30055–30062, 2020.
- [4] Maximilian Dax, Stephen R Green, Jonathan Gair, Jakob H Macke, Alessandra Buonanno, and Bernhard Schölkopf. Real-time gravitational wave science with neural posterior estimation. *Physical review letters*, 127(24):241103, 2021.
- [5] Charita Dellaporta, Jeremias Knoblauch, Theodoros Damoulas, and François-Xavier Briol. Robust bayesian inference for simulator-based models via the mmd posterior bootstrap. In *International Conference on Artificial Intelligence and Statistics*, pages 943–970. PMLR, 2022.
- [6] Felix Draxler, Stefan Wahl, Christoph Schnörr, and Ullrich Köthe. On the universality of coupling-based normalizing flows. *arXiv preprint arXiv:2402.06578*, 2024.
- [7] Conor Durkan, Artur Bekasov, Iain Murray, and George Papamakarios. Neural spline flows. *Advances in neural information processing systems*, 32, 2019.
- [8] Lasse Elsemüller, Hans Olischläger, Marvin Schmitt, Paul-Christian Bürkner, Ullrich Köthe, and Stefan T Radev. Sensitivity-aware amortized Bayesian inference. *Transactions on Machine Learning Research (TMLR)*, 2024.
- [9] Chelsea Finn, Pieter Abbeel, and Sergey Levine. Model-agnostic meta-learning for fast adaptation of deep networks. In *International conference on machine learning*, pages 1126–1135. PMLR, 2017.
- [10] David T. Frazier and Christopher Drovandi. Robust Approximate Bayesian Inference With Synthetic Likelihood. *Journal of Computational and Graphical Statistics*, 30(4):958–976, October 2021. doi: 10.1080/10618600.2021.1875839.
- [11] David T. Frazier, Christian P. Robert, and Judith Rousseau. Model misspecification in approximate Bayesian computation: consequences and diagnostics. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)*, 82(2):421–444, April 2020. doi: 10.1111/rssb.12356.
- [12] Richard Gao, Michael Deistler, and Jakob H Macke. Generalized bayesian inference for scientific simulators via amortized cost estimation. *Advances in Neural Information Processing Systems*, 36:80191–80219, 2023.
- [13] Andrew Gelman, John B Carlin, Hal S Stern, and Donald B Rubin. *Bayesian data analysis*. Chapman and Hall/CRC, 1995.
- [14] Andrew Gelman, John B Carlin, Hal S Stern, David B Dunson, Aki Vehtari, and Donald B Rubin. *Bayesian Data Analysis*. CRC Press, 2013.
- [15] Samuel Gershman and Noah Goodman. Amortized inference in probabilistic reasoning. In *Proceedings of the annual meeting of the cognitive science society*, volume 36, 2014.
- [16] Manuel Gloeckler, Michael Deistler, and Jakob H Macke. Adversarial robustness of amortized bayesian inference. In *Proceedings of the 40th International Conference on Machine Learning*, pages 11493–11524, 2023.
- [17] Tilmann Gneiting and Adrian E Raftery. Strictly proper scoring rules, prediction, and estimation. *Journal of the American statistical Association*, 102(477):359–378, 2007.
- [18] Pedro J Gonçalves, Jan-Matthis Lueckmann, Michael Deistler, Marcel Nonnenmacher, Kaan Öcal, Giacomo Bassetto, Chaitanya Chintaluri, William F Podlaski, Sara A Haddad, Tim P Vogels, et al. Training deep neural density estimators to identify mechanistic models of neural dynamics. *Elife*, 9:e56261, 2020.
- [19] A Gretton, K. Borgwardt, Malte Rasch, Bernhard Schölkopf, and AJ Smola. A Kernel Two-Sample Test. *The Journal of Machine Learning Research*, 2012.
- [20] Timothy Hospedales, Antreas Antoniou, Paul Micaelli, and Amos Storkey. Meta-learning in neural networks: A survey. *IEEE transactions on pattern analysis and machine intelligence*, 44(9):5149–5169, 2021.
- [21] Daolang Huang, Ayush Bharti, Amauri Souza, Luigi Acerbi, and Samuel Kaski. Learning robust statistics for simulation-based inference under model misspecification. *Advances in Neural Information Processing Systems*, 36:7289–7310, 2023.
- [22] Desi R Ivanova, Marvin Schmitt, and Stefan T Radev. Data-efficient variational mutual information estimation via Bayesian self-consistency. In *NeurIPS 2024 Workshop on Bayesian Decision-making and Uncertainty*, 2024.

- [23] Ryan Kelly, David J Nott, David T Frazier, David Warne, and Chris Drovandi. Misspecification-robust sequential neural likelihood for simulation-based inference. *Transactions on Machine Learning Research*, 2024(June): Article–number, 2024.
- [24] Ivan Kobyzev, Simon JD Prince, and Marcus A Brubaker. Normalizing flows: An introduction and review of current methods. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 43(11):3964–3979, 2020.
- [25] Alexander Lavin, David Krakauer, Hector Zenil, Justin Gottschlich, Tim Mattson, Johann Brehmer, Anima Anandkumar, Sanjay Choudry, Kamil Rocki, Atılım Güneş Baydin, et al. Simulation intelligence: Towards a new generation of scientific methods. *arXiv preprint arXiv:2112.03235*, 2021.
- [26] Tuan Anh Le, Atılım Gunes Baydin, and Frank Wood. Inference compilation and universal probabilistic programming. In *Artificial Intelligence and Statistics*, pages 1338–1348. PMLR, 2017.
- [27] Yaron Lipman, Ricky TQ Chen, Heli Ben-Hamu, Maximilian Nickel, and Matthew Le. Flow matching for generative modeling. In *The Eleventh International Conference on Learning Representations*, 2023.
- [28] Xingchao Liu, Chengyue Gong, and Qiang Liu. Flow straight and fast: Learning to generate and transfer data with rectified flow. In *The Eleventh International Conference on Learning Representations (ICLR)*, 2023.
- [29] Måns Magnusson, Jakob Torgander, Paul-Christian Bürkner, Lu Zhang, Bob Carpenter, and Aki Vehtari. posterodb: Testing, Benchmarking and Developing Bayesian Inference Algorithms. *arXiv preprint*, 2024. doi: 10.48550/arXiv.2407.04967.
- [30] Lorenzo Pacchiardi, Sherman Khoo, and Ritabrata Dutta. Generalized bayesian likelihood-free inference. *Electronic Journal of Statistics*, 18(2):3628–3686, 2024.
- [31] George Papamakarios, Eric Nalisnick, Danilo Jimenez Rezende, Shakir Mohamed, and Balaji Lakshminarayanan. Normalizing flows for probabilistic modeling and inference. *Journal of Machine Learning Research*, 22(57):1–64, 2021.
- [32] Stefan T Radev, Marvin Schmitt, Valentin Pratz, Umberto Picchini, Ullrich Köthe, and Paul-Christian Bürkner. Jana: Jointly amortized neural approximation of complex bayesian models. In *Uncertainty in Artificial Intelligence*, pages 1695–1706. PMLR, 2023.
- [33] Marvin Schmitt, Paul-Christian Bürkner, Ullrich Köthe, and Stefan T Radev. Detecting model misspecification in amortized bayesian inference with neural networks. In *DAGM German Conference on Pattern Recognition*, pages 541–557. Springer, 2023.
- [34] Marvin Schmitt, Desi Ivanova, Daniel Habermann, Paul-Christian Bürkner, Ullrich Köthe, and Stefan T Radev. Leveraging self-consistency for data-efficient amortized Bayesian inference. In *Proceedings of the 41st International Conference on Machine Learning*, pages 43723–43741. PMLR, 2024.
- [35] Ali Siahkoohi, Gabrio Rizzuti, Rafael Orozco, and Felix J Herrmann. Reliable amortized variational inference with physics-based latent distribution correction. *Geophysics*, 88(3):R297–R322, 2023.
- [36] Mischa von Krause, Stefan T Radev, and Andreas Voss. Mental speed is high until age 60 as revealed by analysis of over a million participants. *Nature human behaviour*, 6(5):700–708, 2022.
- [37] Daniel Ward, Patrick Cannon, Mark Beaumont, Matteo Fasiolo, and Sebastian Schmon. Robust neural posterior estimation and statistical model criticism. *Advances in Neural Information Processing Systems*, 35:33845–33859, 2022.
- [38] Antoine Wehenkel, Juan L Gamella, Ozan Sener, Jens Behrman, Guillermo Sapiro, Marco Cuturi, and Jörn-Henrik Jacobsen. Addressing misspecification in simulation-based inference through data-driven calibration. *arXiv preprint arXiv:2405.08719*, 2024.
- [39] Manzil Zaheer, Satwik Kottur, Siamak Ravanbakhsh, Barnabas Poczos, Russ R Salakhutdinov, and Alexander J Smola. Deep sets. In *Advances in Neural Information Processing Systems*, 2017.
- [40] Andrew Zammit-Mangion, Matthew Sainsbury-Dale, and Raphaël Huser. Neural methods for amortized inference. *Annual Review of Statistics and Its Application*, 12, 2024.

## Appendix

### Appendix A: Analytic posterior of the normal means problem

The analytic posterior for the for the normal means problem introduced in Section 4 is a conjugate normal distribution

$$p(\theta \mid x_{\text{obs}}) = \text{Normal}(\mu_{\text{post}}, \sigma_{\text{post}}^2 I_D), \quad (16)$$

where  $\mu_{\text{post}}$  is a  $D$ -dimensional posterior mean vector with elements

$$(\mu_{\text{post}})_d = \sigma_{\text{post}}^2 \left( \frac{\mu_{\text{prior}}}{\sigma_{\text{prior}}^2} + \frac{K(\bar{x}_{\text{obs}})_d}{\sigma_{\text{lik}}^2} \right), \quad (17)$$

$\sigma_{\text{post}}^2$  is the posterior variance (constant across dimensions) given by

$$\sigma_{\text{post}}^2 = \left( \frac{1}{\sigma_{\text{prior}}^2} + \frac{K}{\sigma_{\text{lik}}^2} \right)^{-1}, \quad (18)$$

and  $(\bar{x}_{\text{obs}})_d$  is the mean over the  $D$ th dimension of the  $K$  new data points  $\{x_{\text{obs}}^{(k)}\}_{k=1}^K$ .