

Exploring Finetuned Audio-LLM on Heart Murmur Features

Adrian Florea
anf2143@columbia.edu
Columbia University
New York, New York, USA

Nima Mesgarani
nima@ee.columbia.edu
Columbia University
New York, New York, USA

Xilin Jiang
xj2289@columbia.edu
Columbia University
New York, New York, USA

Xiaofan Jiang
jiang@ee.columbia.edu
Columbia University
New York, New York, USA

ABSTRACT

Large language models (LLMs) for audio have excelled in recognizing and analyzing human speech, music, and environmental sounds. However, their potential for understanding other types of sounds, particularly biomedical sounds, remains largely underexplored despite significant scientific interest. In this study, we focus on diagnosing cardiovascular diseases using phonocardiograms, i.e., heart sounds. Most existing deep neural network (DNN) paradigms are restricted to heart murmur classification (healthy vs unhealthy) and do not predict other acoustic features of the murmur such as timing, grading, harshness, pitch, and quality, which are important in helping physicians diagnose the underlying heart conditions. We propose to finetune an audio LLM, Qwen2-Audio, on the PhysioNet CirCor DigiScope phonocardiogram (PCG) dataset and evaluate its performance in classifying 11 expert-labeled murmur features. Additionally, we aim to achieve more noise-robust and generalizable system by exploring a preprocessing segmentation algorithm using an audio representation model, SSAMBA. Our results indicate that the LLM-based model outperforms state-of-the-art methods in 8 of the 11 features and performs comparably in the remaining 3. Moreover, the LLM successfully classifies long-tail murmur features with limited training data, a task that all previous methods have failed to classify. These findings underscore the potential of audio LLMs as assistants to human cardiologists in enhancing heart disease diagnosis.

1 INTRODUCTION

Cardiovascular diseases are the leading cause of death worldwide, claiming a life every 33 seconds in the USA [27]. Auscultation, performed with a stethoscope, is a key practice for examining the circulatory system, allowing physicians to detect abnormal heart and breathing functions by listening to blood flow and heart valve activity. A thorough cardiovascular exam is essential for identifying heart murmurs and associated diseases [30, 31]. Murmurs are important diagnostic observations, since many conditions present with characteristic murmurs. Distinctive features of phonocardiogram (PCG) can be very helpful in narrowing a differential diagnosis. Physicians describe murmurs by evaluating their timing in the cardiac cycle, intensity, location, duration, configuration, pitch, and quality [30, 31]. The careful auscultation allows a very close diagnosis, which is the basis for better care.

Recent advancements in large language models (LLMs) for health-care [23, 26, 38, 42] enhance tasks like medical QA, record analysis, and licensing exam preparation. While some models [4, 42, 48]

provide diagnostic insights directly to patients, they risk harm without medical oversight. Conversely, others works support the use of LLMs as supportive tools to physicians who can validate and safely implement the conclusions these models generate [3, 46]. In the medical domain, multimodal LLMs have been studied in time-series contexts such as electrocardiograms (ECG) [22], MRI [18], and radiology [33]. These assistive models support clinicians by synthesizing large volumes of information, generating detailed medical summaries, and aiding in clinical decision-making.

Moreover, significant advances have been made in the development of audio LLMs [6, 20, 39], demonstrating remarkable achievements in understanding diverse speech signals, complex acoustic and semantic reasoning, and performing speech signal analysis. However, to the best of our knowledge, audio LLMs have not yet been adapted for acoustic health tasks such as PCG analysis [17]. This is the first work that systemically assesses the potential of a state-of-the-art audio LLM as a physician tool for analyzing PCGs. We first leverage the unique repeatative and segmentable nature of PCGs and use a state-space audio representation model, SSAMBA [37], to segment the PCGs. We then employ Qwen2-Audio [5] for PCG encoding and medical reasoning. Our key contribution is finetuning and evaluating the audio LLM to predict a comprehensive set of 11 physiological PCG features, achieving performance that matches or surpasses traditional methods across all of them. Additionally, the inclusion of a segmentation model enhances robustness, enabling our approach to perform effectively on unseen datasets where PCGs are collected using varied methods.

2 BACKGROUND

2.1 Heart Sounds

A normal cardiac cycle includes S1, the first heart sound, caused by the closure of the mitral and tricuspid valves at systole’s start, and S2, the second heart sound, caused by the closure of the aortic and pulmonary valves between systole and diastole [2]. Additionally, extra heart sounds, i. e., the third heart sound S3 and the fourth heart sound S4, can occur in both normal and pathological conditions [41]. Murmurs, caused by turbulent blood flow in the heart system, are identified as abnormal sounds, and are crucial for diagnosing cardiovascular diseases. Clinically, murmurs consist of two types: systolic murmurs and diastolic murmurs. Aortic stenosis, mitral regurgitation, and tricuspid regurgitation occur during systole, while mitral stenosis and tricuspid stenosis occur during diastole [29].

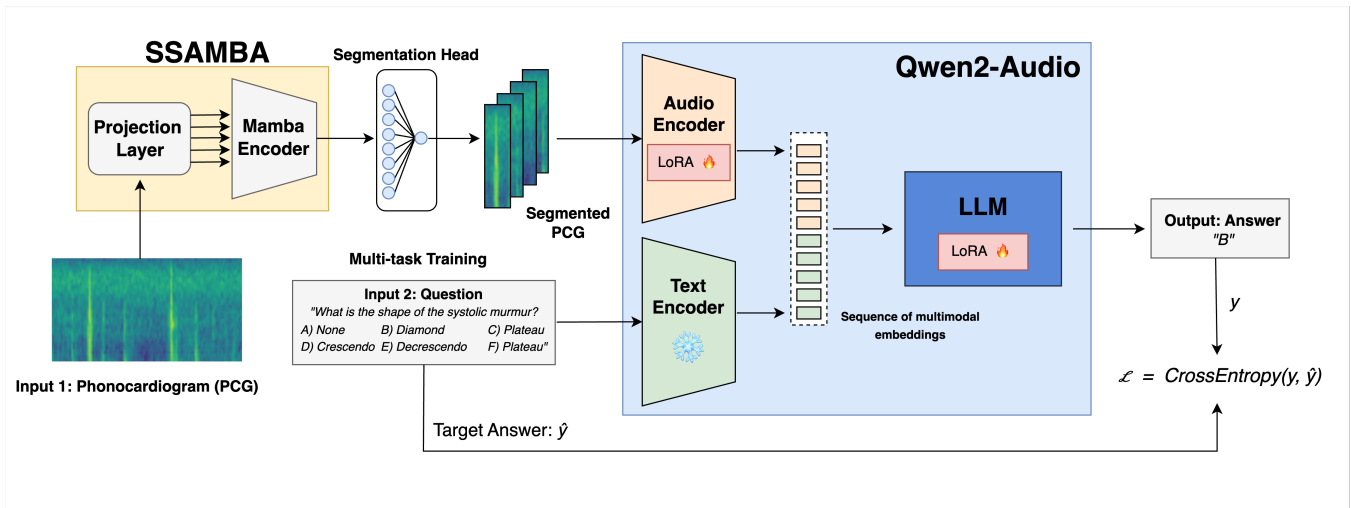


Figure 1: Proposed PCG system incorporating a finetuned audio LLM Qwen2-Audio model with a front-end segmentation network

2.2 Related Works

Classifying PCG signals using discriminative machine learning (ML) models has become standard practice, relying on features like time-domain characteristics (e.g., envelope, energy, amplitude) and spectral attributes to identify pathological conditions [21, 34, 41]. Other approaches delve into deeper representations, including graph-based features [40], autoencoder-derived features [16], and sparse coefficients [43]. Recently, end-to-end ML methods, such as 1D CNNs, TCNs, and GRU-RNNs, have emerged, operating directly on raw audio or mel spectrograms to eliminate the need for manual feature engineering [14, 45]. These models show significant potential in detecting subtle cardiac anomalies, such as early indicators of heart failure [9], by learning relevant patterns directly from data. The complexity of feature selection and end-to-end architectures demands robust frameworks that can truly make use of such diversified signal properties. Furthermore, ML models aim to achieve more noise-robust results by employing a segmentation preprocessing step that splits an entire PCG into smaller segments (S1, systole, S2, and diastole) [34]. Studies have shown that segmentation of S1 and S2 phases improve classification performance [8] and reduce the need for labeled data [15].

Another important achievement in this regard is the use of transfer learning to overcome the limitation of small annotated datasets. Transfer learning involves finetuning models trained on a large generic dataset for specific tasks. In some studies [1, 19, 28, 35], pre-trained models are primarily learnt on an image dataset (ImageNet) [7] and an audio dataset (AudioSet) [10]. Finetuned models have even outperformed pretrained models as they adapt to the data distribution of heart sound datasets. Transfer learning is highly effective because finetuning pretrained models enables strong generalization to new data. Consequently, transfer learning reduces the data scarcity problem and improves model accuracy, hence is a crucial approach for developing robust PCG classification systems [34].

While most ML research in heart sound analysis has focused on binary classification of heart murmurs as either healthy or unhealthy, other murmur characteristics, such as timing, grading, shape, quality, and pitch, have received comparatively limited attention; evident by works that focus on these features for systolic murmurs [12, 44]. These characteristics are clinically significant as they provide deeper insights into the underlying pathophysiology of cardiac abnormalities. A notable study introduced models incorporating feature attention modules to tackle these nuanced classifications, achieving state-of-the-art performance [12]. Despite these advancements, research exploring these additional features – especially diastolic features – remains sparse, underscoring the need for more comprehensive investigations into the diverse attributes of heart murmurs.

3 METHODS

3.1 Models

Our proposed PCG multi-feature classification system effectively utilizes an Audio LLM finetuned for PCG for feature extraction and medical reasoning, along with a PCG segmentation front-end to separate heartbeats and non-heartbeats. The entire system is shown in Figure 1.

3.1.1 PCG Segmentation Model. Mamba state space models (SSMs) have demonstrated an exceptional capacity in capturing temporal dependencies across local and global scales [11]. Building on this, Mamba-based audio encoding models like SSAMBA [37] further enhance temporal modeling by dividing audio spectrograms into patches and processing them in both forward and backward directions. This modeling approach, combined with the audio representations learned from the AudioSet [10], can be effectively adapted to PCG signals. To achieve this, we added a linear head on top of SSAMBA for segmenting heartbeats into occurrences and silences and finetuned the entire model using only one-third of the training set:

Table 1: Comparison of systolic feature classification accuracy between our model and state-of-the-art methods. NS denotes no segmentation, while W.S indicates the use of a segmentation front-end.

Features (% accuracy)	Systolic Phase Feature				
	Timing	Shape	Grading	Pitch	Quality
Deep CardioSound [12]	96.6	96.3	96.6	96.6	96.5
This Work N.S	100	99.7	33.4	99.7	99.2
This Work W.S	100	100	33.4	100	100

$$L = -\frac{1}{T} \sum_{t=1}^T [y_t \log(\hat{y}_t) + (1 - y_t) \log(1 - \hat{y}_t)] \quad (1)$$

We optimize the binary cross-entropy loss between the predicted probabilities (\hat{y}_t) and the ground truth (y_t) segmentation labels at each time step in the sequence. This formulation incentivizes the model to assign higher probabilities to time segments corresponding to the onset and offset of each heartbeat ($y_t = 1$) and lower probabilities to other segments ($y_t = 0$).

3.1.2 Audio LLM Adapted for PCGs. The model architecture of Qwen2-Audio [5] contains an audio encoder based on the Whisper [32] speech recognition model and a large language model Qwen-7B [47], which encompasses a total of 8.2B parameters. Given the paired data (a, x), where a and x denote the audio sequences and text sequences respectively, the training objective is to maximize the probability of the next text token. This is expressed as:

$$P_{\theta}(x_t | x_{<t}, \text{AudioEncoder}_{\phi}(a)),$$

conditioning on the audio representations and the preceding text tokens $x_{<t}$. Here, θ represents the trainable parameters of the LLM, and ϕ represents the trainable parameters of the audio encoder. Qwen2-Audio is the state-of-the-art in various speech and audio understanding benchmarks like AIR-Bench, MMAU, and S2TT [5]. We finetuned Qwen2-Audio with full low-rank approximation (LoRA) [13], which adds low-rank matrices (learnable) to the original weight matrices (frozen) in the audio encoder and the LLM.

3.2 Data

The PhysioNet CirCor DigiScope dataset is currently the largest collection of pediatric heart sound recordings [36]. It includes 5,282 recordings captured from the four primary auscultation sites across 1,568 patients, amounting to over 312 hours of heart sound data sampled at 4 kHz. The patient ages span from 0.1 to 356.1 months. Recording durations range from 4.8 to 80.4 seconds, averaging 22.9 seconds with a standard deviation of 7.4 seconds. Using a semi-supervised annotation process, experts meticulously annotated the dataset, detailing characteristics such as the timing, shape, pitch, grading, quality, and location (aortic, pulmonic, tricuspid, or mitral), and heart beat segmentation (systolic, diastolic, S1, and S2 timings) of each murmur. The dataset comprises 74% murmur-absent cases, 19% murmur-present cases, and 7% uncertain cases due to background noise or interference.

3.3 Dataset

We stratify patients by class (Present/Absent/Unknown), resample to 16,000 kHz, and create a 75/25% split for training and testing. We selected 11 classification tasks based on the expert-annotated labels provided in the PhysioNet dataset. These tasks encompass a comprehensive set of murmur characteristics, including both systolic and diastolic features. Specifically, they include murmur weighted accuracy $W.acc$ as defined in [36], systolic murmur attributes such as timing, shape, grading, pitch, and quality, as well as corresponding diastolic timing, shape, grading, pitch, and quality features. Each of these tasks reflects clinically significant dimensions of heart sound analysis, as identified by domain experts. In order to account for model overfitting on the question input, each question in training and testing set is selected randomly from three options with slight variations in how the question is phrased (prior to the presentation of the multiple choices).

To optimize model performance, we finetuned our framework using a multiple-choice (MC), single-answer approach. This design allows the model to focus on selecting the most appropriate label from a predefined set of options for each classification task, aligning with the structured nature of the annotated data. In some cases, the classification task contained less possible features than 6, so the MC distractor solutions were padded with additional instances of incorrect answers.

4 RESULTS

We evaluate our system’s performance across 11 MC tasks on the PhysioNet CirCor DigiScope test split. Table 1 compares our performance with the systolic phase feature classification reported in [12]. The performance of our model without the frontend segmentation (N.S.) step is comparable to its performance with the frontend segmentation step (W.S), while both obtained optimal classification accuracy for timing, shape, pitch and quality. The classification for both systolic and diastolic grading features exhibits poor performance in classifying between the grading labels i/vi, ii/vi, and iii/vi. This is likely due to the model’s limited understanding of Roman numerals, compounded by the fact that the text encoder was frozen during fine-tuning, restricting its ability to adapt to these specific labels. Though, the segmentation preprocessing step does improve diastolic grading performance above chance level.

Table 2 compares our performance for weighted murmur classification accuracy to results reported by [28]. Diastolic phase features are long-tail murmur characteristics with limited representation in both the training and test datasets. Consequently, these features have not been extensively studied or incorporated into previous murmur models. We observe murmur classification increase with

Table 2: Comparison of diastolic features classification and weighed murmur classification accuracy between our model and state-of-the-art methods

Features (% accuracy)	Diastolic Phase Feature					Murmur W.acc
	Timing	Shape	Grading	Pitch	Quality	
M2D + AST [28]	–	–	–	–	–	83.2
This Work N.S	100.0	99.9	39.5	100.0	100.0	63.7
This Work W.S	100.0	100.0	42.7	100.0	100.0	75.6

the use of the segmentation frontend, achieving better performance may be possible through extra training with additional *murmur present* examples.

Table 3 evaluates the zero-shot normal/abnormal PCG classification performance on the PhysioNet/CinC 2016 PCG dataset (training sets *a* through *f*) [25] and Pascal dataset (set A and B) [24]. Our results demonstrate that our system can effectively differentiate between normal and abnormal PCGs when utilizing the segmentation frontend. This demonstrates that our system is versatile and is capable of effectively handling variations in audio quality, recording conditions, and patient demographics.

Since our system is the first of its kind, there are no existing models capable of interpreting PCG audio and jointly classifying multiple relevant features in the systolic and diastolic phase as we do. By expanding beyond the 11 features in our benchmark, we hope to inspire further advancements in the use of audio LLMs for comprehensive cardiac sound analysis and improve diagnostic capabilities in cardiovascular care.

Table 3: Zero-shot murmur classification across different benchmark datasets.

Dataset	PhysioNet CirCor 2016 [25]	Pascal Set A [24]	Pascal Set B [24]
Metric	% Accuracy	Normal / Abnormal	Precision
This Work N.S	19.63%	48.7 / 0.0 %	73.7 / 40.0 %
This Work W.S	66.33%	48.3 / 100.0 %	75.3 / 62.5 %

5 CONCLUSION

We demonstrate the potential of audio LLMs in advancing the analysis of phonocardiograms for cardiovascular disease diagnosis. By finetuning Qwen2-Audio on the PhysioNet CirCor DigiScope dataset, we show that the proposed system outperforms state-of-the-art models in most key murmur features. The incorporation of a segmentation preprocessing step enhanced the model’s robustness and generalizability across diverse datasets. Our findings highlight the ability of audio LLMs to capture nuanced cardiac characteristics, offering valuable support for cardiologists in diagnosing heart conditions with greater precision. By expanding the set of tasks

our system can handle in our benchmark, we aim to drive further innovation in using audio LLMs for comprehensive cardiac sound analysis, ultimately enhancing diagnostic tools in cardiovascular care. While LLMs can assist in medical data analysis, human cardiologists remain essential for clinical decision-making, as it requires expert judgment and patient interaction.

REFERENCES

- [1] Haya Alaskar, Nada Alzhrani, Abir Hussain, and Fatma Almarshed. 2019. The implementation of pretrained AlexNet on PCG classification. In *Intelligent Computing Methodologies: 15th International Conference, ICIC 2019, Nanchang, China, August 3–6, 2019, Proceedings, Part III 15*. Springer, 784–794.
- [2] Abdelhamid Bourouhou, Abdelilah Jilbab, Chafik Nacir, and Ahmed Hammouch. 2020. Heart sound signals segmentation and multiclass classification. (2020).
- [3] Junying Chen, Chi Gui, Anningzhe Gao, Ke Ji, Xidong Wang, Xiang Wan, and Benyou Wang. 2024. CoD, Towards an Interpretable Medical Agent using Chain of Diagnosis. arXiv:2407.13301 [cs.CL] <https://arxiv.org/abs/2407.13301>
- [4] Junying Chen, Xidong Wang, Ke Ji, Anningzhe Gao, Feng Jiang, Shunian Chen, Hongbo Zhang, Song Dingjie, Wenya Xie, Chuyi Kong, Jianquan Li, Xiang Wan, Haizhou Li, and Benyou Wang. 2024. HuatuoGPT-II, One-stage Training for Medical Adaption of LLMs. In *First Conference on Language Modeling*. <https://openreview.net/forum?id=eJ3cHNu7ss>
- [5] Yunfei Chu, Jin Xu, Qian Yang, Haojie Wei, Xipin Wei, Zhifang Guo, Yichong Leng, Yuanjun Lv, Jinzheng He, Junyang Lin, et al. 2024. Qwen2-audio technical report. *arXiv preprint arXiv:2407.10759* (2024).
- [6] Yunfei Chu, Jin Xu, Xiaohuan Zhou, Qian Yang, Shiliang Zhang, Zhijie Yan, Chang Zhou, and Jingren Zhou. 2023. Qwen-Audio: Advancing Universal Audio Understanding via Unified Large-Scale Audio-Language Models. arXiv:2311.07919 [eess.AS] <https://arxiv.org/abs/2311.07919>
- [7] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. 2009. Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition*. Ieee, 248–255.
- [8] Theekshana Dissanayake, Tharindu Fernando, Simon Denman, Sridha Sridharan, Houman Ghaemmaghami, and Clinton Fookes. 2020. A robust interpretable deep learning classifier for heart anomaly detection without segmentation. *IEEE Journal of Biomedical and Health Informatics* 25, 6 (2020), 2162–2171.
- [9] Shan Gao, Yineng Zheng, and Xingming Guo. 2020. Gated recurrent unit-based heart sound analysis for heart failure screening. *Biomedical engineering online* 19 (2020), 1–17.
- [10] Jort F Gemmeke, Daniel PW Ellis, Dylan Freedman, Aren Jansen, Wade Lawrence, R Channing Moore, Manoj Plakal, and Marvin Ritter. 2017. Audio set: An ontology and human-labeled dataset for audio events. In *2017 IEEE international conference on acoustics, speech and signal processing (ICASSP)*. IEEE, 776–780.
- [11] Albert Gu and Tri Dao. 2024. Mamba: Linear-Time Sequence Modeling with Selective State Spaces. arXiv:2312.00752 [cs.LG] <https://arxiv.org/abs/2312.00752>
- [12] Li Guo, Steven Davenport, and Yonghong Peng. 2022. Deep CardioSound-An Ensembled Deep Learning Model for Heart Sound MultiLabelling. *arXiv preprint arXiv:2204.07420* (2022).
- [13] Edward J Hu, yelong shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2022. LoRA: Low-Rank Adaptation of Large Language Models. In *International Conference on Learning Representations*. <https://openreview.net/forum?id=nZevKeeFYf9>
- [14] Qingli Hu, Jianqiang Hu, Xiaoyan Yu, and Yang Liu. 2021. Automatic heart sound classification using one dimension deep neural network. In *Security, Privacy, and Anonymity in Computation, Communication, and Storage: SpaCCS 2020 International Workshops, Nanjing, China, December 18–20, 2020, Proceedings 13*. Springer, 200–208.
- [15] Qijia Huang, Huanrui Yang, Eric Zeng, and Yiran Chen. 2024. A Deep-Learning-Based Multi-modal ECG and PCG Processing Framework for Label Efficient Heart Sound Segmentation. In *2024 IEEE/ACM Conference on Connected Health:*

- Applications, Systems and Engineering Technologies (CHASE)*. 109–119. <https://doi.org/10.1109/CHASE60773.2024.00020>
- [16] Ahmed Imtiaz Humayun, Md Tauhiduzzaman Khan, Shabnam Ghaffarzadegan, Zhe Feng, and Taufiq Hasan. 2018. An ensemble of transfer, semi-supervised and supervised learning methods for pathological heart sound classification. *arXiv preprint arXiv:1806.06506* (2018).
- [17] Ming Jin, Qingsong Wen, Yuxuan Liang, Chaoli Zhang, Siqiao Xue, Xue Wang, James Zhang, Yi Wang, Haifeng Chen, Xiaoli Li, Shirui Pan, Vincent S. Tseng, Yu Zheng, Lei Chen, and Hui Xiong. 2023. Large Models for Time Series and Spatio-Temporal Data: A Survey and Outlook. *arXiv:2310.10196 [cs.LG]* <https://arxiv.org/abs/2310.10196>
- [18] Jun Kanzawa, Koichiro Yasaka, Nana Fujita, Shin Fujiwara, and Osamu Abe. 2024. Automated classification of brain MRI reports using fine-tuned large language models. *Neuroradiology* (2024), 1–7.
- [19] Tomoya Koike, Kun Qian, Qiuqiang Kong, Mark D Plumbley, Björn W Schuller, and Yoshiharu Yamamoto. 2020. Audio for audio is better? An investigation on transfer learning models for heart sound classification. In *2020 42nd Annual International Conference of the IEEE Engineering in Medicine & Biology Society (EMBC)*. IEEE, 74–77.
- [20] Zhifeng Kong, Arushi Goel, Rohan Badlani, Wei Ping, Rafael Valle, and Bryan Catanzaro. 2024. Audio Flamingo: A Novel Audio Language Model with Few-Shot Learning and Dialogue Abilities. *arXiv:2402.01831 [cs.SD]* <https://arxiv.org/abs/2402.01831>
- [21] Philip Langley and Alan Murray. 2017. Heart sound classification from unsegmented phonocardiograms. *Physiological measurement* 38, 8 (2017), 1658.
- [22] Jun Li, Che Liu, Sibo Cheng, Rossella Arcucci, and Shenda Hong. 2023. Frozen Language Model Helps ECG Zero-Shot Learning. *arXiv:2303.12311 [cs.LG]* <https://arxiv.org/abs/2303.12311>
- [23] Yunxiang Li, Zihan Li, Kai Zhang, Ruilong Dan, Steve Jiang, and You Zhang. 2023. ChatDoctor: A Medical Chat Model Fine-Tuned on a Large Language Model Meta-AI (LLaMA) Using Medical Domain Knowledge. *arXiv:2303.14070 [cs.CL]* <https://arxiv.org/abs/2303.14070>
- [24] Chengyu Liu, David Springer, Qiao Li, Benjamin Moody, Ricardo Abad Juan, Francisco J Chorro, Francisco Castells, José Millet Roig, Ikaro Silva, Alistair EW Johnson, et al. 2016. An open access database for the evaluation of heart sound algorithms. *Physiological measurement* 37, 12 (2016), 2181.
- [25] Chengyu Liu, David Springer, Benjamin Moody, Ikaro Silva, Alistair Johnson, Maryam Samieinasab, Reza Sameni, Roger Mark, and Gari D Clifford. 2016. Classification of heart sound recordings—the physionet computing in cardiology challenge 2016. *PhysioNet* (2016).
- [26] Renqian Luo, Liai Sun, Yingce Xia, Tao Qin, Sheng Zhang, Hoifung Poon, and Tie-Yan Liu. 2022. BioGPT: generative pre-trained transformer for biomedical text generation and mining. *Briefings in Bioinformatics* 23, 6 (Sept. 2022). <https://doi.org/10.1093/bib/bbac409>
- [27] National Vital Statistics System. 2024. Mortality 2018–2022 on CDC WONDER Online Database. *CDC WONDER* (jan 2024). <https://wonder.cdc.gov> Released in 2024.
- [28] Daisuke Niizumi, Daiki Takeuchi, Yasunori Ohishi, Noboru Harada, and Kunio Kashino. 2024. Exploring Pre-trained General-purpose Audio Representations for Heart Murmur Detection. *arXiv preprint arXiv:2404.17107* (2024).
- [29] Anas Mohd Noor and Mohd Faiz Shadi. 2013. The heart auscultation. From sound to graphical. *Journal of Engineering and Technology (JET)* 4, 2 (2013), 73–84.
- [30] Andrew N Pelech. 2004. The physiology of cardiac auscultation. *Pediatric Clinics* 51, 6 (2004), 1515–1535.
- [31] JE Power, LEB Toft, and M Barrett. 2020. The Murmur Online Learning Experience (MOLE) Curriculum Improves Medical Students’ Ability to Correctly Identify Cardiac Murmurs. *MedEdPORTAL* 16 (may 2020), 10904. https://doi.org/10.15766/mep_2374-8265.10904
- [32] Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine McLeavey, and Ilya Sutskever. 2023. Robust speech recognition via large-scale weak supervision. In *International conference on machine learning*. PMLR, 28492–28518.
- [33] Partha Pratim Ray. 2024. Integrating AI in radiology: insights from GPT-generated reports and multimodal LLM performance on European Board of Radiology examinations. *Japanese Journal of Radiology* (2024), 1–2.
- [34] Zhao Ren, Yi Chang, Thanh Tam Nguyen, Yang Tan, Kun Qian, and Björn W Schuller. 2024. A comprehensive survey on heart sound analysis in the deep learning era. *IEEE Computational Intelligence Magazine* 19, 3 (2024), 42–57.
- [35] Zhao Ren, Nicholas Cummins, Vedhas Pandit, Jing Han, Kun Qian, and Björn W Schuller. 2018. Learning image-based representations for heart sound classification. In *Proceedings of the 2018 international conference on digital health*. 143–147.
- [36] Matthew A Reyna, Yashar Kiarashi, Andoni Elola, Jorge Oliveira, Francesco Renna, Annie Gu, Erick A Perez Alday, Nadi Sadr, Ashish Sharma, Jacques Kpodonu, et al. 2023. Heart murmur detection from phonocardiogram recordings: The George b. moody physionet challenge 2022. *PLOS Digital Health* 2, 9 (2023), e0000324.
- [37] Siavash Shams, Sukru Samet Dindar, Xilin Jiang, and Nima Mesgarani. 2024. SSAMBA: Self-Supervised Audio Representation Learning with Mamba State Space Model. *arXiv:2405.11831 [eess.AS]* <https://arxiv.org/abs/2405.11831>
- [38] Karan Singhal, Tao Tu, Juraj Gottweis, Rory Sayres, Ellery Wulczyn, Le Hou, Kevin Clark, Stephen Pfohl, Heather Cole-Lewis, Darlene Neal, Mike Schaeckermann, Amy Wang, Mohamed Amin, Sami Lachgar, Philip Mansfield, Sushant Prakash, Bradley Green, Ewa Dominowska, Blaise Aguera y Arcas, Nenad Tomasev, Yun Liu, Renee Wong, Christopher Semturs, S. Sara Mahdavi, Joelle Barral, Dale Webster, Greg S. Corrado, Yossi Matias, Shekoofeh Azizi, Alan Karthikesalingam, and Vivek Natarajan. 2023. Towards Expert-Level Medical Question Answering with Large Language Models. *arXiv:2305.09617 [cs.CL]* <https://arxiv.org/abs/2305.09617>
- [39] Changli Tang, Wenyi Yu, Guangzhi Sun, Xianzhao Chen, Tian Tan, Wei Li, Lu Lu, Zejun Ma, and Chao Zhang. 2024. SALMONN: Towards Generic Hearing Abilities for Large Language Models. *arXiv:2310.13289 [cs.SD]* <https://arxiv.org/abs/2310.13289>
- [40] Turker Tuncer, Sengul Dogan, Ru-San Tan, and U Rajendra Acharya. 2021. Application of Petersen graph pattern technique for automated detection of heart valve diseases with PCG signals. *Information Sciences* 565 (2021), 91–104.
- [41] V Nivitha Varghees and KI Ramachandran. 2017. Effective heart sound segmentation and murmur classification using empirical wavelet transform and instantaneous phase for electronic stethoscope. *IEEE Sensors Journal* 17, 12 (2017), 3861–3872.
- [42] Guangyu Wang, Guoxing Yang, Zongxin Du, Longjun Fan, and Xiaohu Li. 2023. ClinicalGPT: Large Language Models Finetuned with Diverse Medical Data and Comprehensive Evaluation. *arXiv:2306.09968 [cs.CL]* <https://arxiv.org/abs/2306.09968>
- [43] Bradley M Whitaker, Pradyumna B Suresha, Chengyu Liu, Gari D Clifford, and David V Anderson. 2017. Combining sparse coding and time-domain features for heart sound classification. *Physiological measurement* 38, 8 (2017), 1701.
- [44] Tingwei Wu, Zhaohan Huang, Shilong Li, Qijun Zhao, and Fan Pan. 2024. Heart Murmur Quality Detection Using Deep Neural Networks with Attention Mechanism. *Applied Sciences* 14, 15 (2024), 6825.
- [45] Bin Xiao, Yunqiu Xu, Xiuli Bi, Junhui Zhang, and Xu Ma. 2020. Heart sounds classification using a novel 1-D convolutional neural network with extremely low parameter consumption. *Neurocomputing* 392 (2020), 153–159.
- [46] Wenyua Xie, Qingying Xiao, Yu Zheng, Xidong Wang, Junying Chen, Ke Ji, Anningzhe Gao, Xiang Wan, Feng Jiang, and Benyou Wang. 2024. LLMs for doctors: Leveraging medical llms to assist doctors, not replace them. *arXiv preprint arXiv:2406.18034* (2024).
- [47] An Yang, Baosong Yang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Zhou, Chengpeng Li, Chengyuan Li, Dayiheng Liu, Fei Huang, et al. 2024. Qwen2 technical report. *arXiv preprint arXiv:2407.10671* (2024).
- [48] Hongbo Zhang, Junying Chen, Feng Jiang, Fei Yu, Zhihong Chen, Jianquan Li, Guiming Chen, Xiangbo Wu, Zhiyi Zhang, Qingying Xiao, Xiang Wan, Benyou Wang, and Haizhou Li. 2023. HuatuoGPT, towards Taming Language Model to Be a Doctor. *arXiv:2305.15075 [cs.CL]* <https://arxiv.org/abs/2305.15075>