

# TRIPLET SYNTHESIS FOR ENHANCING COMPOSED IMAGE RETRIEVAL VIA COUNTERFACTUAL IMAGE GENERATION

*Kenta Uesugi, Naoki Saito, Keisuke Maeda, Takahiro Ogawa, Miki Haseyama*

Hokkaido University, Japan

E-mail: {uesugi, saito, maeda, ogawa, mhaseyama}@lmd.ist.hokudai.ac.jp

## ABSTRACT

Composed Image Retrieval (CIR) provides an effective way to manage and access large-scale visual data. Construction of the CIR model utilizes triplets that consist of a reference image, modification text describing desired changes, and a target image that reflects these changes. For effectively training CIR models, extensive manual annotation to construct high-quality training datasets, which can be time-consuming and labor-intensive, is required. To deal with this problem, this paper proposes a novel triplet synthesis method by leveraging counterfactual image generation. By controlling visual feature modifications via counterfactual image generation, our approach automatically generates diverse training triplets without any manual intervention. This approach facilitates the creation of larger and more expressive datasets, leading to the improvement of CIR model’s performance.

*Index Terms*— Composed image retrieval, triplet synthesis, counterfactual image generation.

## 1. INTRODUCTION

The explosion of digital content has made the efficient access to and management of vast amounts of visual information increasingly essential. As the volume of visual information grows, users are seeking more advanced tools to find their desired information. Recently, there has been a growing demand for image retrieval that can interpret and identify desired images based on human visual instructions.

In response to the growing demand, various image retrieval methods have been proposed in previous studies [1–8]. Traditional image retrieval methods [1, 2] solely rely on images as input, which limits their effectiveness in handling complex queries. Specifically, these methods often struggle to distinguish visually similar items with distinct attributes. They also have difficulty adapting to specific modifications. Since instructions with images are difficult to align with user’s intentions, the utility is restricted in scenarios that need more precise and flexible retrievals. To address these limitations, Composed Image Retrieval (CIR) [3–8] has been proposed. CIR allows users to start with a reference image and then refine the retrieval results by specifying modifications or additional details in textual form. Since this dual-input approach enhances retrieval with flexibility, it is especially valuable in industries such as e-commerce, where users often seek products with specific characteristics [9–11].


While CIR shows great potential for improving image retrieval experiences, there are still significant challenges in applying it to real-world applications. One of the most critical issues is the difficulty in collecting training data to construct CIR models. Specif-

ically, the construction of them requires large-scale datasets composed of the following three components: a reference image, modification text, and a target image, known as triplets. The collection of these triplets is typically costly and traditionally relies on manual annotation [12, 13], which makes it difficult to gather the large-scale datasets necessary for practical CIR model training. To deal with this issue, Ventura et al. have proposed an automatic method to select image pairs for triplets from captions previously assigned to the large-scale image dataset [14]. However, this automatic triplet collection method has several critical issues. This method focuses solely on collecting similar images based on their captions, which may obtain low-quality triplets. That is, the pairs of images for triplets differ significantly in aspects not described by the modification text. In the training data for CIR, high-quality triplets that accurately reflect only the modified parts are required. Furthermore, when the image set is limited, finding appropriate image pairs becomes much more difficult. Namely, it is difficult to collect image pairs that reflect only the desired modifications, leading to inadequate triplet construction. Consequently, it is necessary to develop a method that can construct high-quality triplets in data-scarce scenarios.

In this paper, we present a new triplet synthesis method for enhancing CIR performance. Our method focuses on counterfactual image generation models [15–17] as a solution to the challenges in triplet construction. Counterfactual image generation models incorporate the concept of counterfactual reasoning, which involves assuming a situation that did not actually occur to gain a deeper understanding of the current one. These models make slight edits to the input image to reflect a hypothetical scenario and generate a counterfactual image. They can generate a new image with different attributes while maintaining certain relationships between this image and the input image. By using counterfactual image generation, it is possible to synthesize triplets that were not initially present in the dataset, thereby enhancing the diversity of the dataset. Furthermore, although the generated images are semantically different from the original ones, they still retain some relevance, which helps the training CIR models better learn the difference between the two images. In addition, by focusing on the visual differences caused by local changes, the retrieval model becomes more sensitive to the details of the subject. As a result, it can detect minute semantic changes that cannot be captured by conventional methods and is expected to improve retrieval performance.

In summary, the key contribution of this paper is the introduction of the counterfactual image generation. The proposed method enables the synthesis of high-quality triplets based on slight modifications without any manual annotation. Even with limited image pools, our method preserves both the quality and quantity of reference and target images, and it generates diverse triplets from the restricted data pool. Consequently, the proposed method can overcome

This work was partly supported by JSPS KAKENHI Grant Numbers JP24K02942, JP23K21676 and JP23K11211.

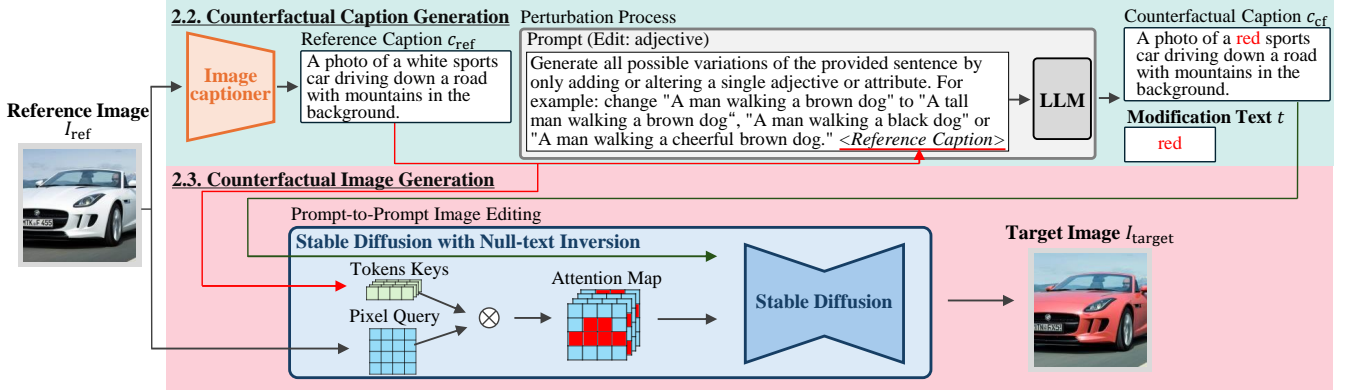

**Fig. 1.** Overview of the proposed triplet synthesis method for enhancing CIR performance. This figure shows the process of synthesizing triplets. It involves modifying the reference caption  $c_{ref}$  to create a counterfactual caption  $c_{cf}$  and generating its corresponding image.

traditional challenges in automatic triplet synthesis for CIR and facilitate the generation of practical and large-scale CIR datasets. The main contributions of this paper are shown as follows.

- We introduce a novel triplet synthesis method for CIR using the counterfactual image generation, which enhances the high-quality and diversity of triplets.
- We demonstrate that this method can significantly improve CIR model performance even when only a small-scale dataset is available.

## 2. TRIPLET SYNTHESIS USING COUNTERFACTUAL IMAGE GENERATION

### 2.1. Overview of our method

The overview of our triplet synthesis method is presented in Fig. 1. The objective of this task is to acquire a triplet  $\langle I_{ref}, t, I_{target} \rangle$ , which serves as the training data for CIR. Here,  $I_{ref}$  represents a reference image,  $t$  denotes modification text, and  $I_{target}$  is a target image. The target image  $I_{target}$  is generated by applying the modification text  $t$  to the reference image  $I_{ref}$ .

The proposed method utilizes Language-guided Counterfactual Image (LANCE) [15] to generate the counterfactual image as the target image  $I_{target}$ . While LANCE was originally designed to generate images to evaluate classification models, we have extended this model to support the triplet synthesis. The triplet synthesis using LANCE involves two primary steps: counterfactual caption generation and its image generation. First, LANCE generates a counterfactual caption  $c_{cf}$  describing hypothetical situations for the reference image  $I_{ref}$ . Then, based on the counterfactual caption and reference image, a counterfactual image that serves as the target image  $I_{target}$  is generated. The target image  $I_{target}$  undergoes minimal modifications while maintaining its relevance to the reference image  $I_{ref}$ , and these modifications correspond to the modification text  $t$ .

Even if the number of training images is limited, our method enables the synthesis of the necessary triplets for the model training. Generating image pairs with small changes helps the CIR model better understand the relationships between the images. Through the comprehensive process illustrated in Fig. 1, our method synthesizes triplets that could not have existed in the original dataset and allows for the construction of more diverse and high-quality triplets for training the CIR model.

### 2.2. Counterfactual Caption Generation

This stage requires the sufficiently meaningful caption  $c_{ref}$  to explain the reference image  $I_{ref}$ . Thus, to generate the reference caption  $c_{ref}$ , the proposed method utilizes BLIP-2 [18], a model to provide rich and descriptive captions that capture essential details in the same manner as LANCE’s caption generation process.

After generating the reference caption  $c_{ref}$ , our method applies targeted perturbations to specific components of the reference caption  $c_{ref}$ . These elements include crucial parts that define the visual content of the reference image  $I_{ref}$ , such as the subject, object, background, adjectives, and domain. For example, suppose the reference caption  $c_{ref}$  describes “a photo of a white sports car driving down a road with mountains in the background.” In this case, the perturbation might change “white” to “red” or “mountains” to “buildings.” This perturbation process uses a fine-tuned LLM that is designed to change only a part of the input sentence. When the reference caption  $c_{ref}$  is input into this fine-tuned LLM, it outputs the modification text  $t$  along with the counterfactual caption  $c_{cf}$  after the perturbation has been applied. Importantly, these modifications adjust only a part of the caption, which results in changes to only that part of the image. This level of control is crucial for maintaining the integrity of the triplets used for training CIR models.

### 2.3. Counterfactual Image Generation

The counterfactual caption  $c_{cf}$  obtained in the previous subsection is used as input to a text-to-image generation model, *i.e.*, Stable Diffusion [19], to generate the counterfactual image. Stable Diffusion is a latent diffusion model known for generating high-quality images based on text input. However, even minor modifications in the prompt can cause significant, often undesirable, alterations in the generated image. To deal with this issue, our method leverages the prompt-to-prompt image editing technique [20], which enables targeted adjustments by injecting cross-attention maps corresponding to the caption edits at certain stages of the diffusion process. Additionally, since applying this technique to authentic images requires accurate inversion to the latent space, we utilize the null-text inversion method [21], which enables precise reconstruction of the original image in the latent space. This process reverses the diffusion trajectory while maintaining close alignment with the original image encoding. By employing these techniques, our method ensures that the counterfactual image remains faithful to the original visual content, accurately reflecting the intended textual perturbation with-

**Table 1.** Summary of dataset statistics. The training data of CIRR and FashionIQ datasets were reduced to 30% of their original number of images to simulate data-scarce scenarios.

Dataset	Images		Triplets	
	Train	Test	Train / Synthetic Data	Test
CIRR	5,082	2,265	1,392 / 5,000	4,148
FashionIQ	13,623	15,415	1,487 / 3,000	6,016

out introducing unwanted artifacts or distortions.

There is an advantage to using counterfactual image generation models for triplet synthesis in CIR. Specifically, triplets based on authentic images often contain a lot of unnecessary information beyond the intended changes. This excess information can make it difficult for the CIR model to learn the necessary information effectively. Additionally, there is a higher risk that the model might pick up on unintended patterns or correlations from these extra features. In contrast, by using triplets made up of image pairs generated from counterfactual image generation models, the CIR model can focus on learning the specific changes intended by the user. This allows the CIR model to filter out unnecessary changes and focus on the intended modifications, which is expected to improve the performance of the CIR model.

### 3. EXPERIMENTAL RESULTS

#### 3.1. Settings

To verify the effectiveness of our method, we utilized two datasets: Composed Image Retrieval with Reasoning (CIRR) dataset [13], which includes complex query images in natural scenes, and FashionIQ [12] dataset, which focuses on fashion items. Each dataset is intended to verify the ability to handle complex queries. CIRR dataset, derived from the NLVR2 [22], challenges models to reason about complex visual relationships. FashionIQ dataset composes images of various clothing items, *i.e.*, shirts, dresses, and tops/tees. We synthesized 5,000 triplets from CIRR dataset, and 3,000 triplets from FashionIQ dataset using 1,500 training images from each dataset, respectively.

This experiment evaluated the performance of our method through a series of image retrieval tasks. To evaluate image retrieval performance, we used Recall@ $k$  ( $R@k$ ), a standard metric for retrieval tasks that measures the percentage of relevant items found in the top- $k$  retrieved results. In addition, this experiment used LLAMA-7B [23] with LoRA fine-tuning [24] for structured caption perturbations. In this experiment, we employed two kinds of evaluations: comparisons of different retrieval methods under the condition of a small amount of data in subsection 3.2, and an ablation study by varying the number of original training images in subsection 3.3.

#### 3.2. Evaluation of Composed Image Retrieval Performance

This subsection verifies the effectiveness of the proposed method by comparing the image retrieval performance of the previous CIR methods. The number of images and triplets of the CIRR and FashionIQ datasets using this evaluation is shown in Table 1. This evaluation performed CIR with a limited dataset, and we conducted this experiment with a reduced dataset, where the number of images was decreased to 30% of the original training dataset. Then, the triplets were constructed from these limited images. Note that CIRR dataset

used test data, and FashionIQ dataset used validation data to obtain retrieval results. This choice, along with the values of  $R@k$  for each dataset, was made to maintain consistency with the evaluation methods used in prior research [14]. In this evaluation, we used fine-tuned BLIP model [14] and Combiner [7] as CIR models. In addition, to compare the performance improvement across different CIR methods, this evaluation utilized several comparative methods. Specifically, as zero-shot CIR methods, we utilized Pic2Word [3], SEARLE [4], CompoDiff [5], and LinCIR [6]. Furthermore, this evaluation used the proposed method without synthetic triplets to verify the effectiveness of our method.

Table 2 presents the CIR results on the CIRR and FashionIQ datasets. These experimental results show that the use of synthetic triplets consistently enhances the performance of the CIR models. Our results indicate that the proposed method significantly improves retrieval accuracy in data-scarce scenarios, highlighting its effectiveness in enhancing model performance when original data is limited.

The qualitative retrieval results are shown in Fig. 2. It is evident that the model without counterfactual image generation (bottom) struggles to accurately capture the characteristics of the subject. On the other hand, the proposed method, which incorporates high-quality triplets with localized changes into the training process, can capture object characteristics more precisely. As a result, the retrieval performance is improved, and these results are more appropriate for the user’s input query.

Figure 3 illustrates examples of synthetic triplets by our method with the CIRR dataset. These examples show how the method accurately modifies reference images based on modification text to produce target images that reflect specified changes. In the first example, the substitution of “brown” with “white” demonstrates the model’s capability to target and alter specific objects without affecting the surrounding environment. This is essential for CIR, where users often seek to refine retrieval based on detailed modification text. The examples also demonstrate that the synthetic triplets maintain consistency in unaltered elements, such as the background, while introducing localized changes. This consistency helps the model distinguish between subtle and significant changes, enhancing its ability to retrieve images that closely match complex and user-specified criteria. Thus, the triplets synthesized by our method are ideal for training CIR models, as they provide diverse yet controlled examples that challenge the model to understand and apply nuanced visual distinctions.


#### 3.3. Ablation Study with Variable Training Data

In this subsection, we conducted an ablation study by modifying the reduction proportion of the number of images in the original training dataset, which was fixed at 30% in the previous experiment, as shown in Table 1. In this evaluation, we demonstrated how our triplet synthesis method improves CIR performance. This evaluation was conducted using the test set of the CIRR dataset. We utilized fine-tuned BLIP model as the CIR model proposed in the previous research [14]. Specifically, this evaluation was conducted by fixing the number of synthetic triplets at 5,000 and varying the ratio of the number of original images of training set in the CIRR dataset. Note that the number of original images is 16,939, and the number of manually constructed triplets from all of these images is 28,225 in this evaluation. We evaluated the effectiveness of these synthetic triplets for CIR by comparing the image retrieval results with and without the inclusion of these 5,000 synthetic triplets.


As depicted in Fig. 4, these results strongly reflect the effectiveness of the proposed method. Specifically, the addition of

**Table 2.** Recall (%) of retrieval results on CIRR and FashionIQ datasets. When the retrieval performance improves with our method in each retrieval model, the result of R@k is shown in **bold**.


	Retrieval method	CIRR				FashionIQ	
		R@1	R@5	R@10	R@50	R@10	R@50
Zero-shot	Pic2Word (Saito '23) [3]	23.90	51.70	65.30	87.80	24.70	43.70
	SEARLE (Baldrati '23) [4]	24.24	52.48	66.29	88.84	25.56	46.23
	CompoDiff (Gu '23) [5]	19.37	53.81	72.02	90.85	37.36	50.85
	LinCIR (Gu '24) [6]	30.89	60.75	73.88	92.84	26.39	46.71
Baseline (w/o synthetic triplets)	Combiner (Baldrati '23) [7]	32.65	63.78	75.59	93.28	31.93	54.20
	BLIP (Ventura '24) [14]	39.66	68.07	78.17	93.01	36.34	58.27
Our method	Combiner (Baldrati '23) [7]	32.58	63.78	<b>75.60</b>	<b>94.12</b>	31.92	<b>54.40</b>
	BLIP (Ventura '24) [14]	<b>40.75</b>	<b>69.83</b>	<b>81.04</b>	<b>94.80</b>	<b>39.13</b>	<b>60.61</b>

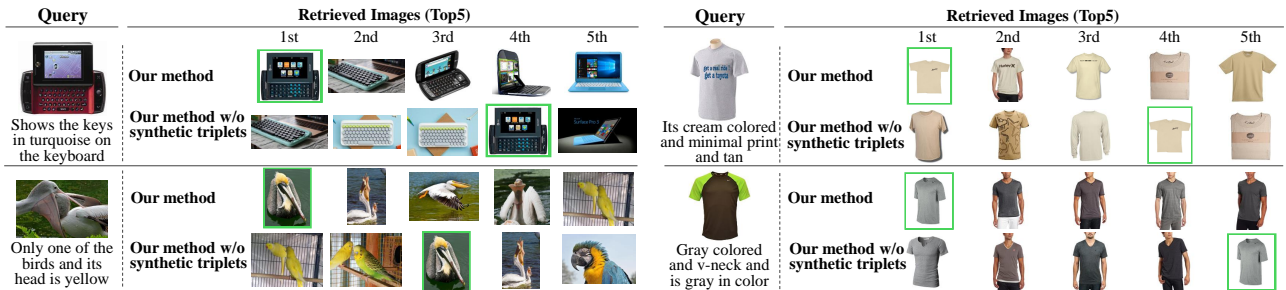

**Fig. 2.** Retrieved results on the CIRR and FashionIQ datasets. It highlights that the proposed synthetic triplet method enables the acquisition of essential characteristics of images. Note that the ground truth image is indicated by a green box.

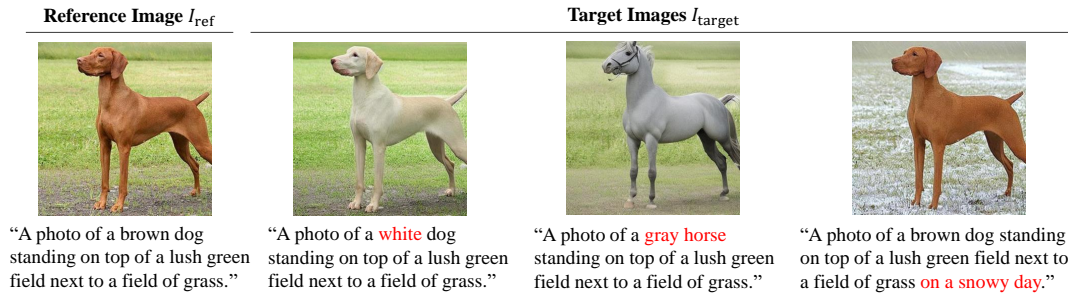

**Fig. 3.** Examples of triplets synthesized by the proposed method. This figure shows an example of target image generation modified by the modification text shown in red. The global structure remains intact, while only local changes are reflected in the synthesized images.

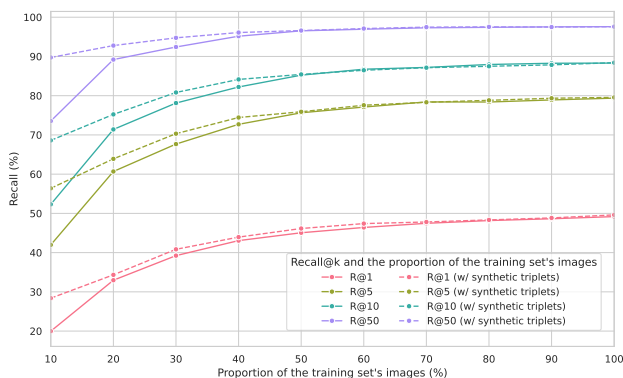

**Fig. 4.** Comparison of R@k across different training image proportions and synthetic triplets. This figure shows R@1, R@5, R@10, and R@50 for different numbers of training images, with and without the addition of 5,000 synthetic triplets.

5,000 synthetic triplets consistently boosted the recall at any different levels ( $k \in \{1, 5, 10, 50\}$ ) compared to using the original training triplets alone. This effect was particularly noticeable in scenarios with smaller training images, where triplet synthesis significantly improved retrieval performance. These results indicate that even with limited data, triplet synthesis can help the model capture essential attributes that might be otherwise overlooked.

#### 4. CONCLUSIONS

In this paper, we have proposed a method to improve the performance of CIR through automatic triplet synthesis using counterfactual image generation. Our method enhances the ability to generate diverse and high-quality training examples, advancing the capabilities of the CIR model. Experimental results using CIRR and FashionIQ datasets confirmed that our method effectively created the diverse and high-quality triplets, including the counterfactual images that accurately reflect intended modifications.

## 5. REFERENCES

- [1] Alaaeldin El-Nouby, Natalia Neverova, Ivan Laptev, and Hervé Jégou, “Training vision transformers for image retrieval,” *arXiv preprint arXiv:2102.05644*, 2021.
- [2] Chull Hwan Song, Jooyoung Yoon, Shunghyun Choi, and Yannis Avrithis, “Boosting vision transformers for image retrieval,” in *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, 2023, pp. 107–117.
- [3] Kuniaki Saito, Kihyuk Sohn, Xiang Zhang, Chun-Liang Li, Chen-Yu Lee, Kate Saenko, and Tomas Pfister, “Pic2Word: Mapping pictures to words for zero-shot composed image retrieval,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 19305–19314.
- [4] Alberto Baldrati, Lorenzo Agnolucci, Marco Bertini, and Alberto Del Bimbo, “Zero-shot composed image retrieval with textual inversion,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023, pp. 15338–15347.
- [5] Geonmo Gu, Sanghyuk Chun, Wonjae Kim, HeeJae Jun, Yoohoon Kang, and Sangdoo Yun, “CompoDiff: Versatile composed image retrieval with latent diffusion,” *Transactions on Machine Learning Research*, 2024.
- [6] Geonmo Gu, Sanghyuk Chun, Wonjae Kim, Yoohoon Kang, and Sangdoo Yun, “Language-only training of zero-shot composed image retrieval,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024, pp. 13225–13234.
- [7] Alberto Baldrati, Marco Bertini, Tiberio Uricchio, and Alberto Del Bimbo, “Composed image retrieval using contrastive learning and task-oriented clip-based features,” *ACM Transactions on Multimedia Computing, Communications and Applications*, vol. 20, no. 3, pp. 1–24, 2023.
- [8] Huaying Zhang, Rintaro Yanagi, Ren Togo, Takahiro Ogawa, and Miki Haseyama, “Zero-shot composed image retrieval considering query-target relationship leveraging masked image-text pairs,” in *Proceedings of the International Conference on Image Processing*. IEEE, 2024, pp. 2431–2437.
- [9] Yanzhe Chen, Jiahuan Zhou, and Yuxin Peng, “SPIRIT: Style-guided patch interaction for fashion image retrieval with text feedback,” *ACM Transactions on Multimedia Computing, Communications and Applications*, vol. 20, no. 6, pp. 1–17, 2024.
- [10] Yanzhe Chen, Huasong Zhong, Xiangteng He, Yuxin Peng, and Lele Cheng, “Real20m: A large-scale e-commerce dataset for cross-domain retrieval,” in *Proceedings of the ACM International Conference on Multimedia*, 2023, pp. 4939–4948.
- [11] Zhanghui Kuang, Yiming Gao, Guanbin Li, Ping Luo, Yimin Chen, Liang Lin, and Wayne Zhang, “Fashion retrieval via graph reasoning networks on a similarity pyramid,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2019, pp. 3066–3075.
- [12] Hui Wu, Yupeng Gao, Xiaoxiao Guo, Ziad Al-Halah, Steven Rennie, Kristen Grauman, and Rogerio Feris, “Fashion IQ: A new dataset towards retrieving images by natural language feedback,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2021, pp. 11307–11317.
- [13] Zheyuan Liu, Cristian Rodriguez-Opazo, Damien Teney, and Stephen Gould, “Image retrieval on real-life images with pre-trained vision-and-language models,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2021, pp. 2125–2134.
- [14] Lucas Ventura, Antoine Yang, Cordelia Schmid, and Gül Varol, “CoVR: Learning composed video retrieval from web video captions,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, 2024, pp. 5270–5279.
- [15] Viraj Prabhu, Sriram Yenamandra, Prithvijit Chattopadhyay, and Judy Hoffman, “LANCE: Stress-testing visual models by generating language-guided counterfactual images,” in *Proceedings of the Neural Information Processing Systems*, 2023, pp. 25165–25184.
- [16] Xiang Li, Ren Togo, Keisuke Maeda, Takahiro Ogawa, and Miki Haseyama, “Reinforcing pre-trained models using counterfactual images,” in *Proceedings of the International Conference on Image Processing*. IEEE, 2024, pp. 486–492.
- [17] Tiep Le, Vasudev Lal, and Phillip Howard, “COCO-counterfactuals: Automatically constructed counterfactual examples for image-text pairs,” in *Advances in Neural Information Processing Systems*, 2023, vol. 36, pp. 71195–71221.
- [18] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi, “BLIP-2: Bootstrapping language-image pre-training with frozen image encoders and large language models,” in *Proceedings of the International Conference on Machine Learning*, 2023, pp. 19730–19742.
- [19] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer, “High-resolution image synthesis with latent diffusion models,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022, pp. 10684–10695.
- [20] Amir Hertz, Ron Mokady, Jay Tenenbaum, Kfir Aberman, Yael Pritch, and Daniel Cohen-Or, “Prompt-to-prompt image editing with cross-attention control,” in *Proceedings of the International Conference on Learning Representations*, 2023.
- [21] Ron Mokady, Amir Hertz, Kfir Aberman, Yael Pritch, and Daniel Cohen-Or, “Null-text inversion for editing real images using guided diffusion models,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 6038–6047.
- [22] Alane Suhr, Stephanie Zhou, Ally Zhang, Iris Zhang, Huajun Bai, and Yoav Artzi, “A corpus for reasoning about natural language grounded in photographs,” in *Proceedings of the Annual Meeting of the Association for Computational Linguistics*, 2019, pp. 6418–6428.
- [23] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al., “LLaMA: Open and efficient foundation language models,” *arXiv preprint arXiv:2302.13971*, 2023.
- [24] Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen, “LoRA: Low-rank adaptation of large language models,” *arXiv preprint arXiv:2106.09685*, 2021.