

Whether a quantum computation employs nonlocal resources is operationally undecidable

Chris Fields¹, James F. Glazebrook², Antonino Marcianò³ and Emanuele Zappala⁴

¹ *Allen Discovery Center
Tufts University, Medford, MA 02155 USA
fieldsres@gmail.com
ORCID: 0000-0002-4812-0744*

² *Department of Mathematics and Computer Science,
Eastern Illinois University, Charleston, IL 61920 USA
and*

*Adjunct Faculty, Department of Mathematics,
University of Illinois at Urbana-Champaign, Urbana, IL 61801 USA
jfglazebrook@eiu.edu
ORCID: 0000-0001-8335-221X*

³ *Center for Field Theory and Particle Physics & Department of Physics
Fudan University, Shanghai, CHINA
and*

*Laboratori Nazionali di Frascati INFN, Frascati (Rome), ITALY
marciano@fudan.edu.cn
ORCID: 0000-0003-4719-110X*

⁴ *Department of Mathematics and Statistics,
Idaho State University, Pocatello, ID 83209, USA
emanuelezappala@isu.edu
ORCID: 0000-0002-9684-9441*

January 27, 2025

Abstract

Computational complexity characterizes the usage of spatial and temporal resources by computational processes. In the classical theory of computation, e.g. in the Turing Machine model, computational processes employ only local space and time resources, and their resource usage can be accurately measured by us as users. General relativity and quantum theory, however, introduce the possibility of computational processes that employ nonlocal spatial or temporal resources. While the space and time complexity of classical computing can be given a clear operational meaning, this is no longer the case in any setting involving nonlocal resources. In such settings, theoretical analyses of resource usage cease to be reliable indicators of practical computational capability. We prove that the verifier (C) in a multiple interactive provers with shared entanglement (MIP*) protocol cannot operationally demonstrate that the “multiple” provers are independent, i.e. cannot operationally distinguish a MIP* machine from a monolithic quantum computer. Thus C cannot operationally distinguish a MIP* machine from a quantum TM, and hence cannot operationally demonstrate the solution to arbitrary problems in RE. Any claim that a MIP* machine has solved a TM-undecidable problem is, therefore, circular, as the problem of deciding whether a physical system is a MIP* machine is itself TM-undecidable. Consequently, despite the space and time complexity of classical computing having a clear operational meaning, this is no longer the case in any setting involving nonlocal resources. In such settings, theoretical analyses of resource usage cease to be reliable indicators of practical computational capability. This has practical consequences when assessing newly proposed computational frameworks based on quantum theories.

Keywords: Closed timelike curve; Computational complexity; LOCC protocol; MIP* = RE; Nonlocal games

1 Introduction

Computational complexity characterizes the usage of spatial and temporal resources by computational processes. As users of such processes, we are interested in their resource requirements as measured by us. For example, we want to know whether a computation will halt in polynomial time as measured by our clocks. In the classical theory of computation, e.g. in the Turing Machine (TM) model, computational processes employ only local space and time resources, and their resource usage can be accurately measured by us as users. General relativity and quantum theory, however, introduce the possibility of computational processes that employ nonlocal spatial or temporal resources. One notable example is the use of closed timelike curves (CTCs), which enable even otherwise-classical computers to employ arbitrary temporal resources as measured in their reference frames, and hence to

solve problems that are exponential in time (class NEXP) for TMs [14, 7, 1]. A second example is the ability of multiple, otherwise-independent, interactive provers (MIP) that share entanglement as a resource (MIP*) to solve, with probability approaching unity, TM-undecidable problems such as the Halting Problem (class RE). This is the celebrated result stating that $\text{MIP}^* = \text{RE}$ [29].

We show in what follows that whether physically-implemented computational processes, i.e. physical computers, employ such nonlocal resources is operationally undecidable. In the equivalent game-theoretic language, we show that whether players in a nonlocal game employ nonlocal strategies is undecidable by the referee of the game. We demonstrate these results in the generic context of a *local operations, classical communication* (LOCC) protocol [8], in which quantum systems, interpretable as “agents” or “processes” or “players” Alice (A) and Bob (B) communicate via both quantum and classical channels traversing an environment (E), and in which the classical communication channel is via a third quantum system, interpretable as a “user” or “verifier” or “referee” Charlie (C), who is able to turn on, or off, an interaction that decoheres the quantum channel between A and B . Canonical Bell/EPR experiments in which C both controls the source of entangled pairs observed by A and B , and tests the observations recorded by A and B for violations of the Clauser-Horne-Shimony-Holt (CHSH) inequality [10] have this form [17].

Following a brief review of the relevant background in §2, we begin by showing in §3 that C cannot operationally demonstrate, using just data received from A and B , that the joint state $|AB\rangle$ is separable. From this it immediately follows that the verifier (C) in a multiple interactive provers with shared entanglement (MIP*) protocol cannot operationally demonstrate that the “multiple” provers are independent, i.e. cannot operationally distinguish MIP* machines from monolithic quantum computers. As the latter are known to be TM-equivalent [13], this shows that C cannot operationally distinguish a MIP* machine from a quantum TM, and hence cannot operationally demonstrate the solution to arbitrary problems in RE. Expressed in the language of *constraint satisfaction problems* (CSPs) [12], C cannot operationally demonstrate independence between constraints, and hence cannot operationally identify partial solutions. We then employ the limit as $C \rightarrow E$ to show, in §4, that a channel from A to B that is classical, and therefore causal, in the spacetime coordinates employed by C may be a CTC in the coordinates employed by the joint system AB . Hence C cannot operationally determine whether computations implemented by AB employ CTCs as a resource. We conclude in §5 that while the space and time complexity of classical computing can be given a clear operational meaning, this is no longer the case in any setting involving nonlocal resources. In such settings, therefore, theoretical analyses of resource usage cease to be reliable indicators of practical computational capability.

2 Background

2.1 Nonlocal games

We commence by recalling what is meant by a *nonlocal game*, a concept commanding a special status in quantum information theory. A nonlocal game, in its basic form, unfolds via the interaction of three parties: two noncommuting *players* or *provers* A and B and a *verifier* or *referee* C . The players A and B are allowed to communicate classically before the start of play, but not after; they are also allowed to share an arbitrary, bipartite state. A verifier C samples a pair of questions from some distribution, and then sends one of them to each of A and B separately. Each of A and B answers *classically* to the verifier. They win the game if the questions and answers satisfy a given predicate. Each of A and B knows the distribution of the questions and the predicate. The *quantum value* is the supremum of the probability that the players win the game (for generalizations to fully nonlocal quantum games with allowable noise and further details, see e.g. [29, 42, 38]).


The above description can be extended from two provers to multiple provers. In a *multiple interactive prover* (MIP) game, first introduced in [6], we have multiple provers who are able to communicate with each other prior to a problem being posed but not after, that try to convince a polynomial time verifier that a string x belongs to some language \mathcal{L} . The class $\text{MIP}(p, k)$ indicates p players with k rounds. It has been shown that considering two provers, i.e. $p = 2$ is always seen as sufficient; hence all such games can be represented in $\text{MIP}(2, k)$ (often with $k = 1$) [6, 16]. If shared entanglement is permitted, then we arrive at the class MIP^* introduced in [9]. As pointed out in [12] for the case of CSPs, entanglement permits provers to execute correlations that cannot be sampled by classical provers, i.e. to violate the CHSH inequality. This improved ability on the part of the provers encourages the verifier to set harder tasks. A one-round MIP or MIP^* is equivalent to a family of nonlocal games¹.

The ground-breaking result of Ji et al. [29] is that $\text{MIP}^* = \text{RE}$, the latter being the *class of recursively enumerable languages*, i.e. the class of languages \mathcal{L} equivalent to the Halting problem [28]. In terms of quantum values, as noted in [38], a consequence of the result of [29] is that approximating the quantum value of a fully nonlocal game is undecidable. Crucially, the operational configuration that is employed in [29] to define a MIP^* machine is a LOCC protocol: the two independent, and therefore separable, provers (A and B) communicate classically via a TM (or user) verifier C that poses problems and checks answers while sharing an entangled pair as a quantum communication channel Q . Effectively, it is sufficient to prove the main result for $\text{MIP}^*(2,1)$, i.e. for two provers in one round.

¹In [30] it is shown how a large class of multiprover, nonlocal games, can be recompiled/reduced to a single-prover interactive game. In the presence of a TM, without loss of generality, the game in question can be the one generated by the TM. A large class of such games are known to be undecidable (as discussed in [23] and references therein).

2.2 LOCC protocols

The canonical LOCC protocol is a Bell/EPR experiment, where A and B must agree, via classical communication, to employ specified detectors in specified ways, and must later exchange their accumulated data (or transfer to the 3rd party C) in the form of classical records. We showed in [20] that sequentially-repeated state preparations and/or measurements that employ mutually commuting QRFs (for instance, the sequentially repeated preparations and/or measurements of position and spin during a Bell/EPR experiment), are representable, without loss of generality, by topological quantum field theories (TQFTs) [2]. We then showed in [17] that any LOCC protocol can be represented by Diagram (1), in which A and B are mutually separable and are separated from their joint environment E by a holographic screen \mathcal{B} , implement read/write quantum reference frames (QRFs) Q_A and Q_B , respectively, and communicate via classical and quantum channels implemented by E .

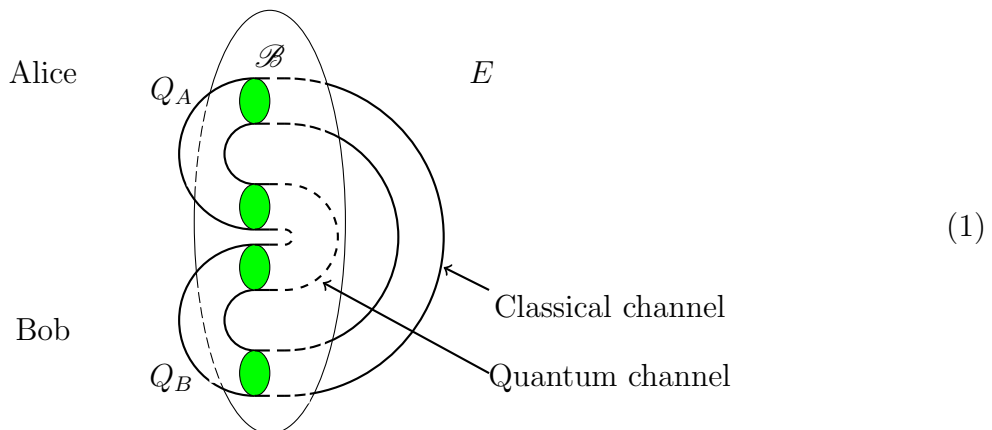

Note both that A and B being mutually separable is required for the assumption of classical communication via a causal channel in E , and that this assumption renders Q_A and Q_B noncommutative and hence subject to quantum contextuality [19, 22].

Two defining characteristics of LOCC protocols are worth emphasizing [18]:

- (1) A and B both perform only *local* operations. They must, therefore, each employ spatial quantum reference frames (QRFs [4]), which we will denote X_A and X_B , respectively, with respect to which they specify the position of the quantum degrees of freedom that they manipulate, e.g. the positions of the detectors in a Bell/EPR experiment. These spatial QRFs must commute with the QRFs Q_A and Q_B that they, respectively, employ to manipulate the quantum channel, i.e. $[X_A, Q_A] = [X_B, Q_B] =_{def} 0$.
- (2) A and B must both comprise sufficient degrees of freedom for them both to implement their respective QRFs and to communicate classically. This is, effectively, a large N -limit that assures their separability as physical systems.

We proved in [18, Thm. 1] that in the operational setting of a two-agent LOCC protocol [8], two potential provers, A and B , cannot operationally distinguish monogamous entanglement from a topological identification of points in their respective local spacetimes, one local to A , and the other local to B . Specifically:

Theorem 1. [18, Thm. 1] *In any LOCC protocol in which all systems are finite, and in which the boundary \mathcal{B} between the communicating agents A and B and their joint environment E is a holographic screen, as the entanglement made available to A and B by the quantum channel approaches pairwise monogamy, and hence the decoherence in the quantum channel detectable by A or B decreases to zero, the number of environmental degrees of freedom of E required to implement the quantum channel becomes operationally indistinguishable, by A or B , from zero in the limit of monogamous entanglement.*

The proof is straightforward, and can be sketched as follows. Let q_A and q_B be distinct (collections of) qubits accessible only to A and B , respectively, and suppose $|q_A q_B\rangle \neq |q_A\rangle|q_B\rangle$, i.e. there is a quantum channel Q shared by A and B . If this channel is embedded in E as shown in Diagram (1), then we can consider the interaction $H_{Q\bar{Q}}$, where \bar{Q} is the complement of Q in E , i.e. $Q\bar{Q} = E$. Monogamous entanglement of q_A and q_B requires that Q be decoherence-free, i.e. that $H_{Q\bar{Q}} \rightarrow 0$. This can be achieved topologically by folding the boundary \mathcal{B} in a way that decreases the degrees of freedom of E used to implement Q to zero, in which case Q is simply the joint state $|q_A q_B\rangle$; see [18] for details.

Theorem 1 has two significant corollaries as noted in [18]:


Corollary 1. *The codespace dimension of a perfect QECC is operationally indistinguishable from the code dimension.*

Corollary 2. *In any LOCC protocol in which all systems are finite, and in which the boundary \mathcal{B} between the communicating agents A and B and their joint environment E is a holographic screen, a quantum channel implementing a shared, monogamously-entangled pair of qubits (“EPR”) is operationally indistinguishable from a topological identification of the locally-measured locations x_A and x_B of the qubits accessed by A and B respectively (“ER”).*

Hence the acclaimed hypothesis $ER = EPR$ [32] can be recovered as an operational theorem, free of any embedding geometry, with the consequence that the local topology of spacetime is observer-relative, and providing a straightforward demonstration of the non-traversability of ER bridges.

3 MIP* machines are not operationally identifiable

To apply Theorem 1 to the operational context of a verifier C interacting with a MIP* machine, we add C to Diagram (1) as follows:

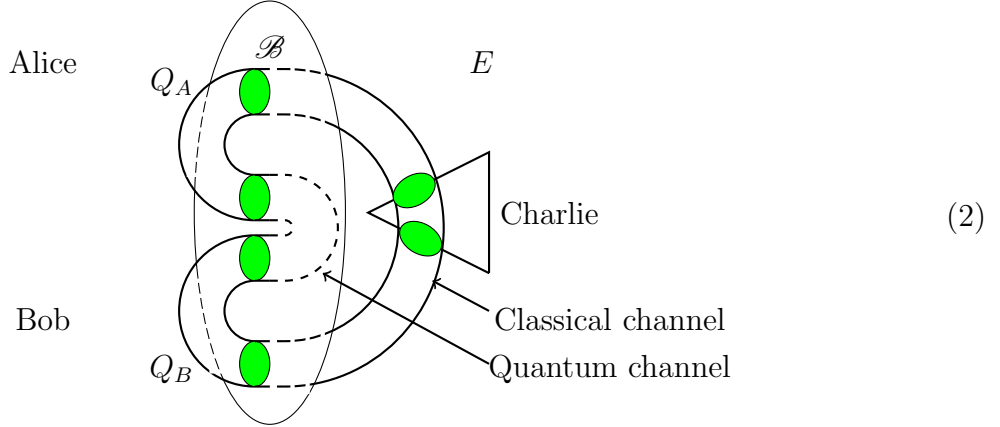

Here C interacts with A and B separately, and only via a classical channel, as required by the definition of MIP*.

We assume for convenience that A and B interact, respectively, with q_A and q_B in a computational basis in which single-qubit measurements have eigenvalues in $\{+1, -1\}$; no generality is lost in also assuming that q_A and q_B are each single qubits. The data items A_i and B_i reported by A and B , respectively, using the classical channel always, therefore, have values in $\{+1, -1\}$. We also assume that C has sufficient degrees of freedom, and in particular, access to sufficient classical memory, to collect sufficient classical data from both A and B to compute the CHSH expectation value with negligible uncertainty. The CHSH expectation value is:

$$EXP = | \langle\langle A_1, B_1 \rangle\rangle + \langle\langle A_1, B_2 \rangle\rangle + \langle\langle A_2, B_1 \rangle\rangle - \langle\langle A_2, B_2 \rangle\rangle |,$$

where $\langle\langle x, y \rangle\rangle$ denotes the expectation value for a collection of joint measurements of x and y . If $EXP > 2$, classical data reported by A and B violate the CHSH inequality, indicating entanglement between q_A and q_B [10]. For single qubits, the upper limit is $EXP \leq 2\sqrt{2}$, the relevant Tsirelson bound [11].

By assuming that C has the computational resources to obtain the relevant classical data from A and B and compute Eq. (3), we have assumed that the interaction H_{CE} is large enough to provide C with the required thermodynamic free energy [37]. We also assume that C can turn on, or off, a “decohering” component H_{dec} of H_{CE} such that when $H_{dec} \neq 0$, classical data obtained from A and B satisfy $EXP \leq 2$, but when $H_{dec} = 0$, classical data obtained from A and B are such that $2 < EXP \leq 2\sqrt{2}$.

Recall from above that a MIP* machine requires independent provers that communicate classically with C , i.e. Diagram (2) represents the interaction of C with a MIP* machine only if A and B are separable, i.e. $|AB\rangle = |A\rangle|B\rangle$ for all occupied states $|A\rangle$, $|B\rangle$. We can therefore ask whether C can decide operationally, i.e. based on data received from A and B , whether this condition is met.

We first note an important ambiguity in the classical data received by C . Let E_C be the total environment with which C interacts, i.e. the composite system $E_C = EAB$. From Diagram (2), we clearly have $H_{CE} = H_{CEC}$.

Lemma 1. *C cannot distinguish data A_i, B_i sent by A and B via a classical channel from measurements of E_C using observables \hat{A}_i, \hat{B}_i that yield outcomes A_i, B_i .*

Proof. Let c_A and c_B be the degrees of freedom of the classical channel with which C directly interacts using \hat{A}_i and \hat{B}_i , respectively. The classical channel is a component of E , so c_A and c_B are degrees of freedom of E and hence degrees of freedom of E_C . C can determine by measurement whether violations of the CHSH inequality by the data A_i, B_i correlate with turning on, or off, the decohering interaction H_{dec} with E , but C cannot determine the internal interaction H_E or measure the entanglement entropy $\mathcal{S}(E_1, E_2) = -\text{Tr}[\text{Tr}_{E_2}(\rho_{E_1, E_2}) \ln(\text{Tr}_{E_2}(\rho_{E_1, E_2}))]$ across any decompositional boundary separating components E_1 and E_2 entirely within E . Hence C cannot demonstrate by measurement that the degrees of freedom c_A and c_B are coupled to any components A, B of E_C that do not include c_A or c_B . \square

The fact that all instances of classical communication require a quantum measurement, by the receiving system, of some physical encoding of the communicated information has previously been emphasized by Tipler [40] among others. Hence, we have, using the reasoning employed for Theorem 1:

Theorem 2. *An observer C embedded in an environment E cannot determine, either by monitoring classical communication between A and B , or by performing local measurements within E , whether or not A and B are employing a LOCC protocol with classical and quantum channels traversing E .*

Theorem 2 follows immediately from Lemma 1 above:

Proof. The construction of Diagram (2) provides C with three items of data: the value of H_{dec} that C sets and the classical data A_i and B_i obtained by measuring c_A and c_B , from which a value of EXP can be computed. We assume that C computes EXP using these data. There are two relevant cases: either $EXP \leq 2$ or $EXP > 2$, the latter of which is realized if $H_{dec} = 0$. If $EXP \leq 2$, C can infer that A and B are either classically correlated, which does not require a LOCC protocol since it does not require an operational quantum channel, or A and B are correlated through entangled pairs that respect the CHSH inequality, e.g. Werner states in appropriate parameter ranges [43]. Hence in this case, C cannot determine whether A and B are not employing a LOCC protocol, or employing a LOCC protocol without violating the CHSH inequality. If, on the other hand, $EXP > 2$, C can infer unambiguously that A and B share a quantum channel. However, C cannot determine that A and B meet the separability condition $|AB\rangle = |A\rangle|B\rangle$ required by LOCC, as $EXP > 2$ is compatible with A and B being entangled (i.e. $|AB\rangle \neq |A\rangle|B\rangle$), which violates the conditions for a LOCC protocol. Hence C cannot determine whether A and

B are employing a LOCC protocol, regardless of the value of EXP that C computes from the available data. \square

The fact that C cannot distinguish, on the basis of reported observational outcomes, between A and B sharing an entangled state and A and B being components of an entangled state is indeed well known, and is often discussed in terms of “conspiracy” or superdeterminism [27]. Treating A and B as “effectively classical” experimenters jointly manipulating an entangled state while remaining separable from each other – as required by the definition of LOCC – amounts, therefore, to a “for all practical purposes (FAPP)” [5] assumption, not a demonstrable fact; see [24] for a general discussion.

To see that there is no dependence of the above on the definition of C , consider the limit in which $C \rightarrow E$, in which case C has maximal direct access to A and B , and recall the general notion of entanglement entropy for any system X :

$$\mathcal{S}(X) =_{def} \max_{X_1, X_2 | X_1 X_2 = X} \mathcal{S}(X_1 X_2), \quad (3)$$

where $\mathcal{S}(X_1 X_2)$ is defined as in Lemma 1. In Diagram (2), E has no means of determining the location of the boundary between A and B . Hence we have:

Lemma 2. *E cannot determine the entanglement entropy $\mathcal{S}(AB)$.*

Proof. For details, see the discussion and proof of [22, Thm. 3.1]. Briefly, separability of E from the joint system AB requires a weak interaction between the two, and specifically that $N = \ln \dim(\mathcal{H}_{\mathcal{B}}) \ll \ln \dim(\mathcal{H}_E), \ln \dim(\mathcal{H}_{AB})$. Therefore \mathcal{B} cannot encode, and hence E cannot measure, $\dim(\mathcal{H}_{AB})$. Therefore E cannot measure the entanglement entropy of any decomposition of the joint system AB . \square

Hence we have an alternative proof of Theorem 2:


Proof. (Theorem 2) Consider the boundary \mathcal{B}_C separating C from the rest of E , and let W denote everything outside of \mathcal{B}_C . Then by Lemma 2, C cannot determine $\mathcal{S}(W_i W_j)$ between any components W_i and W_j of W . Hence C cannot detect any quantum channel in W , whether between A and B or between any other pair of subsystems of W . \square

No component $C \subseteq E$, therefore, can determine $\mathcal{S}(AB)$. Hence C cannot determine, either by monitoring classical communication between A and B or by performing local measurements, that A and B are separable, i.e. C cannot operationally distinguish between a MIP* machine and a monolithic quantum computer. Any claim that a MIP* machine has solved a TM-undecidable problem is, therefore, circular, as the problem of deciding whether a physical system is a MIP* machine is itself TM-undecidable.

4 Closed Timelike Curves

We now look at a similar situation of non-operational identifiability in a setting in which *closed timelike curves* (CTCs) are allowed as computational resources. The idea of CTCs evolved from a number of cosmological questions, particularly pertaining to Black Hole theory, such as those concerning the construction and stability of ER-bridges [36, 26] (for a historical survey, see e.g. [31]). When instrumental in models of classical computation, CTCs make it possible to solve hard computational problems in constant time (surveyed in [7]). David Deutsch [14] demonstrated that quantum computation with quantum data which is capable of traversing CTCs provided a new and powerful physical model of computation, along with self-consistent evolution further engendering (quantum) computational complexity [3]. As pointed out in [1], Deutsch’s approach was to treat a CTC as a region of spacetime where a ‘causal consistency’ condition is imposed; specifically, a region in which the time-evolution operator maps state of the initial hypersurface to itself. This initial state is, therefore, a probabilistic fixed point of the time-evolution operator within the CTC, i.e. a state ρ such that $\Phi(\rho) = \rho$ for the time-evolution operator Φ within the CTC.

To model computation using a CTC, consider a Hilbert space of qubits given by $\mathcal{H} = \mathcal{H}_{\text{ch}} \otimes \mathcal{H}_{\text{tv}}$, where \mathcal{H}_{ch} denotes that of the chronologically respecting qubits, and \mathcal{H}_{tv} that of those which traverse CTCs, as shown in Diagram (4) (*cf.* [14, Fig. 3]):

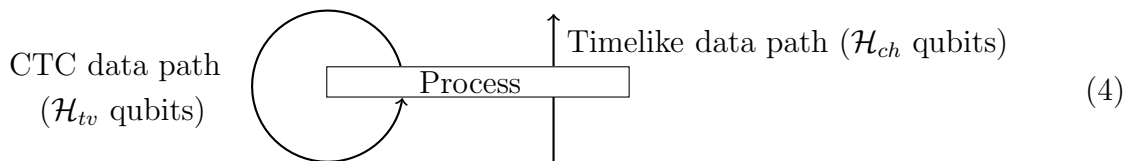

Importantly, the evolution of the CTC qubits is determined by self-consistency — though the qubits themselves are an expendable resource [3]. This means that the state of the CTC qubits at the temporal origin should be the same as those qubits after the evolution \mathbf{U} operator corresponding to the Process in (4). The density matrix ρ as a solution at the former, is given by

$$\rho = \text{Tr}_{\text{ch}}[\mathbf{U}(\rho_{\text{in}} \otimes \rho)\mathbf{U}^\dagger], \quad (5)$$

where ρ_{in} denotes the density matrix of the chronologically respecting qubits, and Tr_{ch} denotes the trace of \mathcal{H}_{ch} [14, 3]. Thinking in terms of a quantum circuit, and the solution in (5), the output ρ_{out} of the circuit is given by [14, 3]:

$$\rho_{\text{out}} = \text{Tr}_{\text{tv}}[\mathbf{U}(\rho_{\text{in}} \otimes \rho)\mathbf{U}^\dagger]. \quad (6)$$

This supposes a ‘gating-free’ system. If gating is applied, then the consistency condition changes, and a previously selected temporal origin now becomes arbitrary. It is shown, however, in [3] that potentially different self-consistency solutions are relatable via a standard change of basis.

Let us now reconsider Diagram (2), treating the joint system AB as an arbitrary quantum computer and setting the decohering interaction H_{CE} to zero, or equivalently, using the

result of Theorem 1 to treat Q as an internal quantum resource used by AB . We can then ask: what can C infer about the computational role of the classical channel connecting the “components” A and B ? This channel being classical requires, by definition, that it is timelike as measured by clocks in E . Taking the limit as $C \rightarrow E$, the channel is timelike as measured by C ’s clocks. Classicality for C also requires that the channel has finite length, i.e. the endpoints of the channel, which we can denote A_c and B_c respectively, must be such that $d_C(A_c, B_c) > 0$ in C ’s distance metric d_C . However, from Lemma 2 above, we have that C cannot determine the entanglement entropy of any state $|AB\rangle$. Hence C cannot determine that A and B are separable as discussed above. In particular:

Lemma 3. *In any physical setting described by Diagram (2), C cannot determine the distance $d_{AB}(A_c, B_c)$, where d_{AB} is the metric employed by AB , between the classical channel endpoints A_c and B_c on \mathcal{B} .*

Proof. The systems E and AB are mutually separable in Diagram (2) by construction, so the result follows from the requirement that mutually separable systems have independent, free choice of QRFs, including space and time QRFs [21]. \square

From Lemma 3, we immediately have:

Theorem 3. *In any physical setting described by Diagram (2), C cannot determine whether AB employs CTCs as computational resources.*

Proof. From Lemma 3, S cannot show that $d_{AB}(A_c, B_c) \neq 0$. If $d_{AB}(A_c, B_c) = 0$, however, the classical channel from A_c to B_c in E is a CTC for AB , and hence is available to AB as a computational resource. \square

Aaronson and Watrous [1] have shown that both classical and quantum computers can employ CTCs to solve any problems in the complexity class PSPACE — this consists of all problems solvable on a classical TM with a polynomial amount of memory. Theorem 3 shows that the problem of deciding whether a physical system is a computer that can employ CTCs as a resource is TM-undecidable. Thus a proffered solution to a PSPACE problem, for which independent means of verification are unavailable, is TM-undecidable.

5 Discussion

We have shown here that whether quantum, or in the case of CTCs even classical, computers employ nonlocal resources when performing computations is generically undecidable in operational settings. All interactions with physically-implemented computers are operational; hence our results apply to all such interactions. They show that the space and time complexity of physically-implemented computational processes cannot be determined unambiguously, and place principled limits on the extent to which formal descriptions of

computational processes, e.g. formal descriptions of MIP* or CTC-using machines, can be demonstrably realized in practice. They also limit our ability to infer from observations and experiments the computational architectures of computers found “in the wild”, including living organisms.

As shown in [12, 33], constraint systems (CS) and CSPs can be formulated in the language of MIP and MIP* architectures, with the verifier C implementing the satisfaction condition. Specifically, [12, §4] and [33, Th. 1.1] demonstrate relations between CSPs, languages in MIP* (and hence in RE), and protocols for the Halting problem of the form CS-MIP*(2,1, c,s), with c and s being the completeness and soundness probabilities, respectively; see [12, Cor. 4] for the special case where $c = 1$. The results of §3 show that C cannot operationally demonstrate independence between constraints and identified partial solutions; this applies to protocols of the form CS-MIP*(2,1, c, s) as special cases. In fact, the Halting problem has been shown [15] to be equivalent to the Frame problem [34]: broadly speaking, the problem of circumscribing whatever is relevant in a given physical situation. What we have shown here is, in essence, that empirically circumscribing resource availability and usage requires solving the Frame problem.

These results can be given a straightforward interpretation: finite interactions with an unknown quantum system can place a lower limit, but not an upper limit, on the Hilbert-space dimension of that system. This extends to quantum systems the limitations on inferences from finite observations proved for classical systems in 1956 [35]. The existence of such limits illustrates the profound distinction between behaviors that can be shown theoretically to be logically possible and behaviors that can be unambiguously observed by finite agents such as ourselves.

References

- [1] Aaronson, S. and Watrous, J. Closed timelike curves make quantum and classical computing equivalent. *Proc. R. Soc. A* 465 (2009), 631–647.
- [2] Atiyah, M. F. Topological quantum field theory. *Publ. Math. IHÉS* 68 (1988), 175-186.
- [3] Bacon, D. Quantum computational complexity in the presence of closed timelike curves. *Phys. Rev. A* 70 (2004), 032309.
- [4] Bartlett, S. D., Rudolph, T. and Spekkens, R. W. Reference frames, super-selection rules, and quantum information. *Rev. Mod. Phys.* 79 (2007), 555-609.
- [5] Bell, J. S. Against ‘measurement’. *Physics World* 3(8) (1990), 33–41.
- [6] Ben-Or, M., Goldwasser, S., Kilian, J. and Wigderson, A. Multi-prover interactive proofs: how to remove intractability assumptions. In *Proc. 20th Annual ACM Symposium on Theory of Computing, STOC’88*, pp. 113–131, 1988.

- [7] Brun, T. Computers with closed timelike curves can solve hard problems. *Found. Phys. Lett.* 16 (2003), 245–253.
 - [8] Chitambar, E., Leung, D., Mančinska, L., Ozols, M. and Winter, A. Everything you always wanted to know about LOCC (but were afraid to ask). *Commun. Math. Phys.* 328 (2014), 303–326.
 - [9] Cleve, R., Hoyer, P., Toner, B. and Watrous, J. Consequencies and limits of nonlocal strategies. In *Proceedings. 19th IEEE Annual Conference on Computational Complexity, 2004*, pp. 236–249, 2004.
 - [10] Clauser, J.F., Horne, M.A., Shimony, A. and Holt, R.A. Proposed experiment to test local hidden-variable theories. *Phys. Rev. Lett.* 23 (1969), 880–884.
 - [11] Cirel’son, B.S. Quantum generalizations of Bell’s inequality. *Lett. Math. Phys.* 1980, 4, 93–100.
 - [12] Culf, E. and Mastel, K. RE-completeness of entangled constraint satisfaction problems. arXiv:2410.21223v1 [quant-ph], 2024.
 - [13] Deutsch, D. Quantum theory, the Church-Turing principle and the universal quantum computer. *Proc. R. Soc. A* 400 (1985), 97–117.
 - [14] Deutsch, D. Quantum mechanics near closed timelike lines. *Phys. Rev. D* 44(10) (1991), 3197–3217.
 - [15] Dietrich, E. and Fields, C. Equivalence of the Frame and Halting problems. *Algorithms* 13 (2020), 175.
- D
- [16] Feige, U. and Lovász, L. Two prover one round proof systems. Their power and their problems. In *Proceedings of the 24th annual ACM Symposium on Theory of Computing*, pp. 733–744, ACM, 1992.
 - [17] Fields, C., Glazebrook, J. F. and Marcianò, A. Communication protocols and QECCs from the perspective of TQFT, Part I: Constructing LOCC protocols and QECCs from TQFTs. *Fortschr. Physik* 72 (2024), 202400049.
 - [18] Fields, C., Glazebrook, J. F., Marcianò, A. and Zappala, E. ER=EPR is an operational theorem. *Phys. Lett. B* 860 (2024), 139150.
 - [19] Fields, C. and Glazebrook, J. F. Information flow in context-dependent hierarchical Bayesian inference. *J. Expt. Theor. Artif. Intell.* 34 (2022), 111–142.
 - [20] Fields, C., Glazebrook, J. F. and Marcianò, A. (2022) Sequential measurements, topological quantum field theories, and topological quantum neural networks. *Fortschr. Physik* 70, 202200104.

- [21] Fields, C., Glazebrook, J. F. and Marcianò, A. The physical meaning of the Holographic Principle. *Quanta* 11 (2022), 72-96.
- [22] Fields, C. and Glazebrook, J. F. Separability, contextuality, and the quantum Frame Problem. *Int. J. Theor. Phys.* 62 (2023), 159.
- [23] Fields, C. and Glazebrook, J. F. Nash equilibria and undecidability in generic physical interactions - A free energy perspective. *Games* 15(30) (2024), 22pp.
- [24] Grinbaum, A. How device-independent approaches change the meaning of physical theory. *Studies Hist. Phil. Mod. Phys.* 58 (2017), 22–30.
- [25] Harlow, D. and Hayden, P. Quantum computation vs firewalls. *JHEP* 2013, 85 (2013).
- [26] Hawking, S. W. Chronology protection conjecture . *Phys. Rev. D* 46 (1992), 603.
- [27] Hofer-Szabó, G. EPR correlations, Bell inequalities, and common-cause systems. *Probing the Meaning of Quantum Mechanics*. Singapore, World Scientific, 2014, pp. 263-277. https://doi.org/10.1142/9789814596299_0013
- [28] Hopcroft, J. and Ullman, J. *Introduction to Automata Theory, Languages, and Computation*. Boston, MA: Addison-Wesley, 1979.
- [29] Ji, Z., Natarajan, A., Vidick, T., Wright, J., Yuen, H. MIP* = RE. Preprint arXiv:2001.04383 (2020). Summary: *Comms. ACM* 64(11) (2020), 131–138.
- [30] Kalai, Y., Lombardi, A., Vaikuntanathan, V. and Yang, L. Quantum advantage from any nonlocal game. In *Proc. 55th Ann. ACM Symp. Theory of Computing (STOC '23)* 12pp., ACM New York NY, 2023.
- [31] Luminet, J.-P. Closed timelike curves, singularities and causality: A survey from Gödel to chronological protection. *Universe* 7(1) (2021), 12.
- [32] Maldacena, J. and Susskind, L. Cool horizons for entangled black holes. *Fortschr. Physik* 61 (2013), 781-811.
- [33] Mastel, K. and Slofstra, W. Two prover perfect zero knowledge for MIP*. In *Proc. 56th Annual ACM Symp. on Theory of Computing* (New York, NY, USA, 2024), STOC 2024, Association for Computing Machinery, pp. 991–1002.
- [34] McCarthy, J., Hayes, P. J.: Some philosophical problems from the standpoint of artificial intelligence. In: Michie, D. and Meltzer, B., eds., *Machine Intelligence*, Vol. 4. Edinburgh: Edinburgh University Press, pp. 463–502 (1969).
- [35] Moore, E.F. Gedankenexperiments on sequential machines. In *Autonoma Studies*; Shannon, C.W., McCarthy, J., Eds.; Princeton University Press: Princeton, NJ, USA, 1956; pp. 129–155.

- [36] Morris, M. S., Thorne, K. and Yurtsever, U. Wormholes, time machines, and the weak energy condition. *Phys. Rev. Lett.* 61 (1988), 1446.
- [37] Parrondo, J.M.R.; Horowitz, J.M.; Sagawa, T. Thermodynamics of information. *Nat. Phys.* 2015, 11, 131–139.
- [38] Qin, M. and Yao, P. Decidability of fully quantum nonlocal games with noisy maximally entangled states. In (K. Etessami, U. Fiege and G. Puppis, eds.) *50th Int. Coll. on Automata, Languages and Programming (ICALP) 2023*, Art. 97, pp. 97:1–97 20 Leibniz Int. Proc. in Informatics Schloss Dagstuhl - Leibniz-Zentrum für Informatik, Dagstuhl Publ., Germany.
- [39] Rice, H. G. Classes of recursively enumerable sets and their decision problems. *Trans. Am. Math. Soc.* 74 (1953), 358–366.
- [40] Tipler, F. Quantum nonlocality does not exist. *Proc. Natl. Acad. Sci. USA* 111 (2014), 11281–11286.
- [41] Turing, A. On computable numbers, with an application to the *Entscheidungsproblem*. *Proc. London Math. Soc. Ser. 2* 42 (1937), 230–265.
- [42] Vidick, T. MIP*=RE: A negative resolution to Connes’ embedding problem and Tsirelson’s problem. *Proc. ICM July 6-14 2022* 6, 4996–5025. EMS Press, Zurich CH, 2022.
- [43] Werner, RF. Quantum states with Einstein-Podolsky-Rosen correlations admitting a hidden-variable model. *Physical Review A* 40 (1989), 4277–4281.