

State Space Models for Extractive Summarization in Low Resource Scenarios

Nisrine Ait Khayi
University of Memphis
ntkhynyn@memphis.edu

Abstract

Extractive summarization involves selecting the most relevant sentences from a text. Recently, researchers have focused on advancing methods to improve state-of-the-art results in low-resource settings. Motivated by these advancements, we propose the MPoincareSum method. This method applies the Mamba state space model to generate the semantics of reviews and sentences, which are then concatenated. A Poincare compression is used to select the most meaningful features, followed by the application of a linear layer to predict sentence relevance based on the corresponding review. Finally, we paraphrase the relevant sentences to create the final summary. To evaluate the effectiveness of MPoincareSum, we conducted extensive experiments using the Amazon review dataset. The performance of the method was assessed using ROUGE scores. The experimental results demonstrate that MPoincareSum outperforms several existing approaches in the literature.

Introduction

Extractive text summarization is a fundamental Natural Language Processing (NLP) task that involves selecting the most salient sentences from a text while preserving its meaning. This process typically consists of two sequential steps (Zhou et al., 2018). The first step involves predicting the relevance of sentences using a deep learning model (Gu et al., 2022; Xie et al., 2022; Jia et al., 2020; Narayan et al., 2020). The second step ranks

the sentences based on their relevance scores and selects the top-ranked ones.

However, state-of-the-art models for extractive summarization are often data-hungry, with their complexity increasing in proportion to the large number of parameters. This makes extractive summarization particularly challenging in low-resource scenarios, such as those involving limited annotated datasets or computational resources. These limitations can negatively impact the language representation of sentences and reduce model performance. To address these challenges, several techniques have been proposed, including data augmentation, distant supervision (Liang et al., 2024), embeddings

Gold	fairly strong chemical taste
Ours	my first cup began with a fairly pronounced chemical taste. As I proceeded through the cup, the effect went away somewhat, but completely.
Reviews	my first cup began with a fairly pronounced chemical taste as I proceeded through the cup the effect went away somewhat but entirely; I don't normally drink flavored coffee, but this is not something I would choose to drink again or feel comfortable serving to friends.

Table 1. Example of summaries generated by our model and the golden summaries in the Amazon review dataset.

using pre-trained language models (Bajaj et al., 2021), domain adaptation of language models (Yu et al., 2021), and Meta-Learning (Chen et al.,

2021). Biljon et al. (2020) demonstrated that low-medium pre-trained language models with fewer parameters perform better on few-shot tasks.

One issue with transformer models is their inefficiency when dealing with long sequences. To alleviate this, Gu et al. (2024) proposed a State Space Model (SSM) with linear scaling in sequence length, which has shown improved performance in zero-shot tasks compared to attention-based models. Akbik et al. (2018, 2019b) demonstrated that powerful representations can be generated by concatenating high-resource embeddings from a general domain with low-resource embeddings from a target domain. Lange et al. (2020b) proved that domain-invariant representations can be generated by training embeddings on diverse domains using an adversarial discriminator to distinguish between embedding spaces. Meta-learning algorithms (Dou et al., 2019) aim to learn effective initializations for fine-tuning across various tasks with minimal training data.

In this paper, we frame the task of extractive summarization for the Amazon Review dataset (He and McAuley, 2016) in a low-resource setting as a binary classification of sentences and reviews, followed by paraphrasing the extractive summary to align with human summarization. Motivated by prior successes, our contributions are as follows:

- 2 The semantics of sentences are generated using the State Space Model Mamba (Gu et al., 2024), which employs a selective scan algorithm to compress information, a HiPPPO initialization matrix to capture long-range dependencies, and a hardware-aware algorithm to accelerate computations.
- 3 The generated semantics are further compressed using spectral clustering (Macgregor et al., 2023) and Poincaré distance (Klein & Hilbert, 1999). The distances between embeddings and centroids are used as features.
- 4 We explore parameter-efficient fine-tuning (PEFT) through LoRA (Low-Rank Adaptation) (Hu et al., 2022), which integrates low-rank decomposition matrices into the model layers.

5 Related Work

State-of-the-art models in the extractive summarization research area heavily rely on the quality of sentence semantics. However, limited training datasets or computational resources can lead to a decline in performance. Recently, low-resource extractive summarization has gained increased attention. Yuan and colleagues (2023) applied disentangled representation learning to extractive summarization, separating context and pattern information (e.g., sentence position, n-gram tokens) to enhance generalization in low-resource settings. They proposed two loss functions for encoding and disentangling sentence representations into context and pattern components: 1) an adversarial objective, and 2) a mutual information minimization objective.

To reduce the need for large amounts of training data, Tang and colleagues (2023) introduced ParaSum, which reformulates extractive summarization as paraphrasing. This aligns the task with the self-supervised next-sentence prediction objective of pre-trained language models. Experimental results demonstrated the effectiveness of this approach in low-resource settings. Brazinskas and colleagues (2020) proposed a few-shot framework for abstractive opinion summarization, enabling successful cross-domain adaptation. In the first stage, a conditional transformer is trained to generate product reviews conditioned on summary-related review properties. In the second stage, they fine-tune a module to predict these summary properties. This framework outperforms many extractive and abstractive summarization models.

In this work, we build upon these advancements in enhancing sentence semantics to improve extractive summarization performance in low-resource settings. We propose using the State Space Mamba model, combined with Poincaré compression and Spectral clustering, to generate sentence features. Our approach is evaluated using the Amazon review dataset.

6 Method

In this section, we describe the key components of our proposed model for classifying sentences as relevant or irrelevant for the final summary. First, we outline the main modules of the Mamba block: 1) Recurrent State Space Model (SSM) through discretization, 2) HiPPPO initialization on matrix A to capture long-range dependencies, 3) Selective

scan algorithm for compressing information, and 4) Hardware-aware algorithm to accelerate computations. Next, we explain the Poincaré compression method used to extract the most meaningful features from the Mamba-based embeddings. Finally, we provide details on the Low-Rank Adaptation (LoRA) technique, which incorporates low-rank decomposition matrices into the Mamba model.

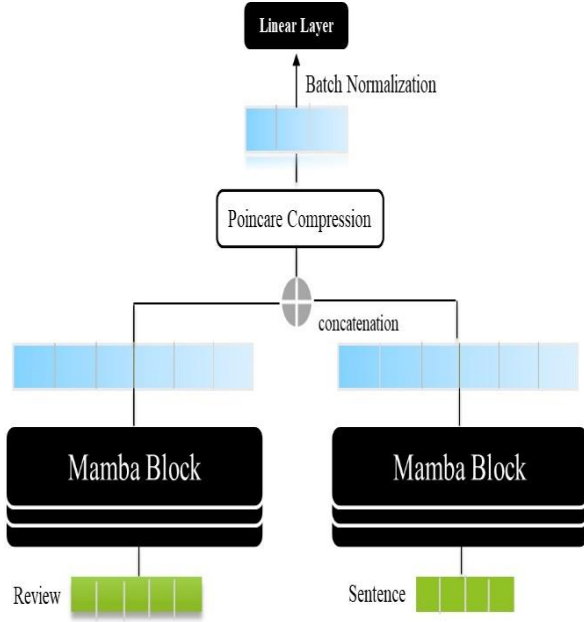


Figure 1. Overview of the proposed model to classify sentences as being relevant or not for the summary. The components of the models are: 1- Mamba Block, 2-Poincare compression, 3- Batch Normalization, 4- Linear Layer

3.1 Task Formulation

We formulate the extractive summarization as a binary classification of a sentence of being relevant or not, given its review. Then, we paraphrase the relevant sentences using BART, sequence-to-sequence model (Lewis et al., 2020).

- Given a review of N sentences $[s_1, s_2, \dots, s_N]$, we pass it, with each sentence, to the State Space Mamba model. Then, we collect the mean of the last hidden state as the representation of the review H_r and the representation of the sentence H_s . Then, we concatenate them as H_{rs} , and we apply Spectral clustering using Poincaré distance to generate the review and the sentence features F_{rs} .

$$F_{rs_i} = d_{\text{poincare}}(H_{rs_i}, C_j) \quad (1)$$

where d_{poincare} is the Poincaré distance between the i^{th} vector of the H_{rs} embedding and the j^{th} centroid.

- Then, we apply a batch normalization and linear layer to predict the class label y for the sentence s_i :

$$y = w \cdot H + b \quad (2)$$

where w is the weight vector, b is the bias and y is the final output.

- After extracting the relevant sentences $[s_1, s_2, \dots, s_m]$, we paraphrase them using BART.

$$\text{sum} = \text{BART}(s_1) \oplus \dots \oplus \text{BART}(s_m) \quad (3)$$

3.2 Selective Space Model

The most recent advances in extractive summarization are based on Transformer-based models. However, a major flaw of Transformers is the slow inference due to the self-attention computations when the sequence length of the input increases. To overcome this drawback, Mamba SSM (Gu et al., 2023) architecture parallelizes training as Transformers and performs inference that scales linearly with the sequence length. This can be an effective model for low-resource scenarios. Mamba SSM has the following properties:

Recurrent SSM

A recurrent technique is used to compute a discretized version of the Mamba model. At each time step, the model calculates how the current input (Bx_k) influences the previous state (Ah_{k-1}) and then calculates the predicted output (Ch_k).

$$\bar{A} = \exp(\Delta A) \quad (4)$$

$$\bar{B} = (\Delta A)^{-1}(\exp(\Delta A) - I) \cdot \Delta B \quad (5)$$

$$h_k = \bar{A}h_{k-1} + \bar{B}x_k \quad (6)$$

$$y_k = Ch_k \quad (7)$$

A , B , and C are the parameters of the model.

This technique has the advantage of fast inference and the disadvantage of slow training.

HiPPO initialization on matrix A

The idea behind HiPPO (High order Polynomial Projection Operators) (Gu et

al.,2020) is to produce a hidden state that memorizes history. This is computed by tracking the coefficients of a Legendre polynomial that approximates all the history. HiPPO is applied to the recurrent presentation to handle long-range dependencies.

Selective scan algorithm

Mamba compresses meaningful data into the state by incorporating the sequence length and batch size into matrices B and C.

Hardware aware algorithm

Mamba reduces the number of times to copy information between SRAM (Static Random Access Memory) and DRAM (Dynamic Random Access Memory). It does it through kernel fusion that continuously performs computation until it's done. The algorithm also recomputes the intermediate states during the backward pass which is less costly.

3.3 Poincare Compression

The semantic vectors used by the Mamba model are dense and high-dimensional, which can slow training and reduce the model's generalizability in low-resource settings. To address this challenge, various compression techniques have been proposed. In this work, we aim to reduce the dimensionality of the Mamba-based embeddings and select the most meaningful vectors using Spectral clustering and Poincaré distance, as outlined in the following algorithm.

Algorithm Poincare Compression

Input: embeddings $\{e_i\}_{i=1}^m$ and dimensionality d
centroids $\{c_j\}_{j=1}^n$

```

for  $i = 1, 2, \dots, m$  do
  for  $j = 1, 2, \dots, n$  do
     $h_{i,j} = d_{\text{poincare}}(e_i, c_j)$ 
  end for
end for

```

Output: Poincare-Spectral embeddings $\{h\}_{i=m, j=n}$

Given Mamba-based embeddings, we apply Spectral clustering. Then, we compute the Poincare distance between each embedding vector and the centroids to generate the features. Spectral clustering and Poincare distance are described in the next sections.

Spectral Clustering

Spectral clustering (Ng et al.,2001) is robust for high-dimensional data as it uses the distance on a graph, which is more meaningful compared to Euclidean distance. Moreover, it is simple, fast, and effective.

Given a graph G with n vertices and k clusters, the spectral clustering algorithm consists of these two steps:

1. Embed the vertices of G into \mathbb{R}^k according to k eigenvectors of the graph Laplacian matrix
2. Apply the k-means clustering algorithm to partition the vertices into k clusters.

Poincare Distance

Nickel et al (2017) have demonstrated that the embeddings in Poincare space outperform the embeddings in Euclidean space as they account for the hierarchal structure of the text. Motivated by this success, we embedded the Mamba-based semantics in the Poincare space.

The Poincare distance $d_{\text{poincare}}(a, b)$ between two points a and b is given by this formula:

$$d_{\text{poincare}}(a, b) = 1 + 2|a - b|^2(1 - |a|^2)(1 - |b|^2) \quad (8)$$

3.4 LoRA (Low-rank adaptation)

Many research findings (Jukic et al.,2023) affirm the superiority of Parameter Efficient Fine Tuning (PEFT) over Full-Fine Tuning (FFT) in low-resource settings. Inspired by this, we apply LoRA (Hu et al., 2021) to our proposed model to improve the performance of our extractive summarization in a low-resource setting. The LoRA technique freezes the pre-trained model weights and incorporates trainable rank decomposition matrices into the model's layers. This results in reducing the trainable parameters for the downstream tasks.

3.5 Paraphrasing

After selecting the relevant sentences in the review, we paraphrase them using the BART model (Lewis et al., 2020). It is a denoising autoencoder for pretraining sequence-to-sequence models. BART is trained by:

1. Corrupting text with an arbitrary noising function
2. Learning a model to reconstruct the original text.

The used transformations are: (1) token masking, (2) token deletion, (3) text infilling, (4) sentence permutation, and (5) document rotation.

7 Experiments and Results

To evaluate the strength of our proposed method, we have conducted several experiments using the Amazon review dataset.

4.1 Amazon Review Dataset

We used the Amazon customer review dataset (He and McAuley, 2016), which includes text reviews, summaries, user information, and product details. For our study, we sampled 136 product reviews for training and 73 for testing. The text reviews were split into individual sentences, which were then annotated as relevant or irrelevant. The annotation process was based on ROUGE scores and the semantic similarity between each sentence and its corresponding review..

4.2 Experiments Settings

We performed our experiments using a P5000 GPU and an A4000 GPU, both equipped with 30 GB of RAM. The proposed model was implemented using HuggingFace's library, with the "mamba-130m-hf" version of the Mamba model and tokenizer. The maximum sequence length for the Mamba model was set to 128. We used the AdamW optimizer (Loshchilov et al., 2017) with a learning rate of $2e-5$ and a weight decay of 0.5. A one-cycle learning rate scheduler (Smith et al., 2015) was employed to adjust the learning rate during training. To address overfitting in our low-resource setting, we applied a dropout rate of 0.5 and used BatchNorm1d for regularization. For LoRA configuration, we set `lora_alpha` to 32 and `lora_dropout` to 0.1.

The dataset was preprocessed by converting text to lowercase, removing URLs, digits, and punctuation, handling missing data via imputation, and normalizing the data before applying Spectral clustering. We evaluated our model using ROUGE-1, ROUGE-2, and ROUGE-L metrics. Each experiment was

repeated multiple times, and we selected the best-performing model.

4.3 Summarization of Results and Analysis

Table 3 presents the empirical results of our proposed method on the Amazon review dataset, comparing it with several existing text summarization models from the literature. We report the ROUGE-1 (R1), ROUGE-2 (R2), and ROUGE-L (RL) scores. As shown in the table, our method, MPoincareSum, outperforms several models, including Copycat (Brazinskas et al., 2020), MeanSum (Chu and Liu, 2019), and LexRank (Erkan and Radev, 2004), in terms of R2 and RL scores. This highlights the effectiveness of State Space models, Poincaré compression, and Parameter-Efficient Fine-Tuning for extractive summarization in low-resource settings.

However, FewSum (Brazinskas et al., 2020) outperforms MPoincareSum in terms of R1 by 0.158. This can be attributed to their use of fluent and informative review summaries generated by a conditional transformer language model. In contrast, Amazon reviews are often unstructured and contain informal language, which may explain the performance gap.

	R1	R2	RL
FewSum	0.372	0.099	0.227
Copycat	0.281	0.058	0.183
MeanSum	0.275	0.035	0.160
LexRank	0.269	0.049	0.161
MPoincareSum	0.214	0.12	0.2

Table 3 Experiments Results

8 Ablation Study

We conducted an ablation study to evaluate the impact of different components in our model. First, we experimented without the Poincaré compression module, meaning the semantics of sentences and reviews were encoded using the SSM Mamba model without dimensionality reduction. The results in Table 4 show that removing the Poincaré compression module leads to a significant drop in performance, indicating that compressing the SSM Mamba embeddings enhances the extractive summarization performance in low resource settings.

Next, we experimented without the sequence routing of the Mamba model, replacing it with a transformer model, such as BERT (Devlin et al., 2019), for encoding the semantics of sentences and reviews. The results in Table 4 reveal that the self-attention mechanism of a transformer and the sequence routing of a state space model have similar impacts on extractive summarization in low-resource settings.

Finally, we explored the effect of Parameter-Efficient Fine-Tuning (PEFT) using LoRA by comparing it to full fine-tuning (FFT) of our proposed model. As shown in Table 4, the ROUGE scores significantly dropped when using full fine-tuning, suggesting that PEFT LoRA improves the performance of extractive summarization in low-resource settings.

Conclusion

We presented the MPoincareSum method for extractive summarization in low-resource settings, applied to the Amazon review dataset. Our proposed approach involves extracting semantic features from reviews and sentences using a State Space Mamba model. These features are then concatenated, and we apply Spectral clustering to select the most meaningful ones. Next, we compute the Poincaré distance between the embedding vectors and the centroids. A linear layer is then used to predict the relevance of each sentence. To reduce the model’s parameters, we incorporate the LoRA technique. Finally, we paraphrase the relevant sentences using the BART sequence-to-sequence model to include them in the final summary.

To evaluate the performance of MPoincareSum, we conducted several experiments. The empirical results demonstrate the effectiveness of State Space models and Poincaré compression for extractive summarization in low-resource settings, yielding competitive ROUGE scores.

Looking ahead, we plan to further improve ROUGE scores in low-resource extractive summarization by experimenting with Mixture of Experts (MoE) models, which offer enhanced training efficiency without compromising inference performance

Ethics Statement

Our research work uses Amazon reviews, a publicly available dataset. Our annotation process does not harm the intellectual property of the original authors of the dataset. The scientific artifacts used are available for research with licenses, including ROUGE, Hugging Face, and PEFT. Their use does not violate their intended use. Our task is a well-defined NLP task which is text summarization. Thus, there are no potential risks of this work.

References

- Ahsaas Bajaj, Pavitra Dangati, Kalpesh Krishna, Pradhiksha Ashok Kumar, Rheeeya Uppaal, Bradford Windsor, Eliot Brenner, Dominic Dotterrer, Rajarshi Das, and Andrew McCallum. 2021. [Long Document Summarization in a Low Resource Setting using Pretrained Language Models](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing: Student Research Workshop*, pages 71–80, Online. Association for Computational Linguistics.
- Alan Akbik, Duncan Blythe, and Roland Vollgraf. 2018. Contextual string embeddings for sequence labeling. In *Proceedings of the 27th International Conference on Computational Linguistics*, pages 1638–1649, Santa Fe, New Mexico, USA. Association for Computational Linguistics.
- Andrew Ng, Michael Jordan, and Yair Weiss. On spectral clustering: Analysis and an algorithm. 15th *Advances in Neural Information Processing Systems (NeurIPS’01)*, 14, 2001
- Arthur Bražinskas, Mirella Lapata, and Ivan Titov. 2020. Unsupervised Opinion Summarization as Copycat-Review Generation. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 5151–5169, Online. Association for Computational Linguistics. <https://doi.org/10.18653/v1/2020.acl-main.461>
- Arthur Bražinskas, Mirella Lapata, and Ivan Titov. 2020. Few-Shot Learning for Opinion Summarization. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 4119–4135, Online. Association for Computational Linguistics. <https://doi.org/10.18653/v1/2020.emnlp-main.337>

- Chen, Y., & Shuai, H. (2021). Meta-Transfer Learning for Low-Resource Abstractive Summarization. *ArXiv, abs/2102.09397*.
- Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2022. LoRA: Low-rank adaptation of large language models. *In Proceedings of the International Conference on Learning Representations*. <https://doi.org/10.48550/arXiv.2106.09685>
- Elan Van Biljon, Arnu Pretorius, and Julia Kreutzer. 2020. *On optimal transformer depth for low-resource language translation*, *Computing Research Repository, ArXiv, , abs/2004.04418*.
- Eric Chu and Peter Liu. 2019. Meansum: a neural model for unsupervised multi-document abstractive summarization. *In Proceedings of International Conference on Machine Learning (ICML)*, pages 1223–1232. <https://doi.org/10.48550/arXiv.1810.05739>
- Gu, A., & Dao, T. (2023). Mamba: *Linear-Time Sequence Modeling with Selective State Spaces*, *Computing Research Repository, ArXiv, abs/2312.00752*.
- Gu, Albert, et al. "Hippo: Recurrent memory with optimal polynomial projections." *Advances in neural information processing systems* 33 (2020): 1474-1487.
- Gunes Erkan and Dragomir R Radev. 2004. Lexrank: Graph-based lexical centrality as salience in text summarization. *Journal of artificial intelligence research*, 22:457–479. <https://doi.org/10.1613/jair.1523>
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. *In Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics. <https://doi.org/10.18653/v1/N19-1423>
- Jukic, J., & vSnajder, J. (2023). *Parameter-Efficient Language Model Tuning with Active Learning in Low-Resource Settings*, *Computing Research Repository, ArXiv, abs/2305.14576*.
- Junzhe Liang, Haifeng Sun, Zirui Zhuang, Qi Qi, Jingyu Wang, and Jianxin Liao. 2024. [Distantly Supervised Contrastive Learning for Low-Resource Scripting Language Summarization](#). *In Proceedings of the 2024 Joint International Conference on Computational Linguistics, Language Resources and Evaluation (LREC-COLING 2024)*, pages 5006–5017, Torino, Italia. ELRA and ICCL.
- Loshchilov, I., & Hutter, F. (2017). *Decoupled Weight Decay Regularization*. International Conference on Learning Representations.
- Lukas Lange, Heike Adel, and Jannik Strötgen. 2020a. On the choice of auxiliary languages for improved sequence tagging. *In Proceedings of the 5th Workshop on Representation Learning for NLP*, pages 95–102, Online. Association for Computational Linguistics. <https://doi.org/10.18653/v1/2020.repl4nlp-1.13>
- Lukas Lange, Heike Adel, Jannik Strötgen, and Dietrich Klakow. 2020b. *Adversarial learning of feature-based meta-embeddings*. *Computing Research Repository, arXiv:2010.12305*.
- Ma, R., Fang, P., Drummond, T., & Harandi, M.T. (2021). *Adaptive Poincaré Point to Set Distance for Few-Shot Classification*, *Computing Research Repository, ArXiv, abs/2112.01719*.
- Macgregor, P. (2023). Fast and Simple Spectral Clustering in Theory and Practice, *Computing Research Repository, ArXiv, abs/2310.10939*.
- Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer. 2020. BART: Denoising Sequence-to-Sequence Pre-training for Natural Language Generation, Translation, and Comprehension. *In Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7871–7880, Online. Association for Computational Linguistics. <https://doi.org/10.18653/v1/2020.acl-main.703>
- Nianlong Gu, Elliott Ash, and Richard Hahnloser. 2022. MemSum: Extractive Summarization of Long Documents Using Multi-Step Episodic Markov Decision Processes. *In Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 6507–6522, Dublin, Ireland. Association for Computational Linguistics. <https://doi.org/10.18653/v1/2022.acl-long.450>
- Nickel, M., & Kiela, D. (2017). Poincaré Embeddings for Learning Hierarchical Representations, *Computing Research Repository, ArXiv, abs/1705.08039*.
- Qianqian Xie, Jimin Huang, Tulika Saha, and Sophia Ananiadou. 2022. GRETEL: Graph Contrastive Topic Enhanced Language Model for Long Document Extractive Summarization. *In Proceedings of the 29th International Conference on Computational Linguistics*, pages 6259–6269, Gyeongju, Republic of Korea. International Committee on Computational Linguistics

- Qingyu Zhou, Nan Yang, Furu Wei, Shaohan Huang, Ming Zhou, and Tiejun Zhao. 2018. Neural document summarization by jointly learning to score and select sentences. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 654–663, Melbourne, Australia. Association for Computational Linguistics. <https://doi.org/10.18653/v1/P18-1061>
- Ruifeng Yuan, Shichao Sun, Zili Wang, Ziqiang Cao, and Wenjie Li. 2023. Separating Context and Pattern: Learning Disentangled Sentence Representations for Low-Resource Extractive Summarization. In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 7575–7586, Toronto, Canada. Association for Computational Linguistics. <https://doi.org/10.18653/v1/2023.findings-acl.479>
- Ruining He and Julian McAuley. 2016. Ups and downs: Modeling the visual evolution of fashion trends with one-class collaborative filtering. In *Proceedings of the 25th international conference on world wide web*, pages 507–517. <https://dl.acm.org/doi/10.1145/2872427.2883037>
- Ruipeng Jia, Yanan Cao, Hengzhu Tang, Fang Fang, Cong Cao, and Shi Wang. 2020. Neural Extractive Summarization with Hierarchical Attentive Heterogeneous Graph Network. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 3622–3631, Online. Association for Computational Linguistics. <https://doi.org/10.18653/v1/2020.emnlp-main.295>
- Shashi Narayan, Joshua Maynez, Jakub Adamek, Daniele Pighin, Blaz Bratanić, and Ryan McDonald. 2020. Stepwise Extractive Summarization and Planning with Structured Transformers. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 4143–4159, Online. Association for Computational Linguistics. <https://doi.org/10.18653/v1/2020.emnlp-main.339>
- Smith, L.N. (2015). Cyclical Learning Rates for Training Neural Networks. *2017 IEEE Winter Conference on Applications of Computer Vision (WACV)*, 464-472.
- Tang, M., Wang, C., Wang, J., Chen, C., Gao, M., Qian, W. (2023). ParaSum: Contrastive Paraphrasing for Low-Resource Extractive Text Summarization. In: Jin, Z., Jiang, Y., Buchmann, R.A., Bi, Y., Ghiran, A.M., Ma, W. (eds) *Knowledge Science, Engineering and Management. KSEM 2023. Lecture Notes in Computer Science, vol 14119*. Springer, Cham. https://doi.org/10.1007/978-3-031-40289-0_9
- Tiezheng Yu, Zihan Liu, and Pascale Fung. 2021. AdaptSum: Towards Low-Resource Domain Adaptation for Abstractive Summarization. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5892–5904, Online. Association for Computational Linguistics.
- Yongtai Liu, Joshua Maynez, Gonçalo Simões, and Shashi Narayan. 2022. Data Augmentation for Low-Resource Dialogue Summarization. In *Findings of the Association for Computational Linguistics: NAACL 2022*, pages 703–710, Seattle, United States. Association for Computational Linguistics.
- Zi-Yi Dou, Keyi Yu, and Antonios Anastasopoulos. 2019. Investigating Meta-Learning Algorithms for Low-Resource Natural Language Understanding Tasks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 1192–1197, Hong Kong, China. Association for Computational Linguistics. <https://doi.org/10.18653/v1/D19-1112>