

Provence: efficient and robust context pruning for retrieval-augmented generation

Nadezhda Chirkova Thibault Formal Vassilina Nikoulina Stéphane Clinchant

NAVER LABS Europe, Grenoble, France

<https://huggingface.co/naver/provence-reranker-debertav3-v1>

Question: Can you eat pumpkin every day?

Retrieved context:

~~Pumpkin is at its peak in the fall.~~ Eating pumpkin every day can help reduce inflammation, strengthen your immune system and promote eye health. It may also help lower blood pressure. However, if you eat too much, you may experience diarrhea from a high dose of fiber. ~~Read on to learn all about pumpkin's nutrition and health benefits.~~

Relevance score:

0.96

PROVENCE

Provence removes sentences that are irrelevant to the user question

... and also outputs a relevance score

Abstract

Retrieval-augmented generation improves various aspects of large language models (LLMs) generation, but suffers from computational overhead caused by long contexts as well as the propagation of irrelevant retrieved information into generated responses. Context pruning deals with both aspects, by removing irrelevant parts of retrieved contexts before LLM generation. Existing context pruning approaches are however limited, and do not provide a universal model that would be both *efficient* and *robust* in a wide range of scenarios, e.g., when contexts contain a variable amount of relevant information or vary in length, or when evaluated on various domains. In this work, we close this gap and introduce Provence (Pruning and Reranking Of retrieVED relevaNt ContExts), an efficient and robust context pruner for Question Answering, which dynamically detects the needed amount of pruning for a given context and can be used out-of-the-box for various domains. The three key ingredients of Provence are formulating the context pruning task as sequence labeling, unifying context pruning capabilities with context reranking, and training on diverse data. Our experimental results show that Provence enables context pruning with negligible to no drop in performance, in various domains and settings, at almost no cost in a standard RAG pipeline. We also conduct a deeper analysis alongside various ablations to provide insights into training context pruners for future work.

1. Introduction

Retrieval-Augmented Generation (RAG) has become a widely-used paradigm for improving factuality, attribution, and adaptability of Large Language Models (LLMs) (Das et al., 2019; Asai et al., 2024; Seo et al., 2019; Lewis et al., 2020; Mallen et al., 2023a; Min et al., 2023). Augmenting a given user's query with retrieved relevant contexts helps to avoid the generation of untruthful information and enables the provision of

references used to generate the answer. Furthermore, using a domain-specific datastore may enable access and reasoning over a previously unknown knowledge – without fine-tuning the LLM. One additional advantage of the RAG approach is the easy plug-and-play architecture (LangChain): practitioners may choose components (retrievers, generator LLMs, context granularity etc.) which best suit their particular cases to maximize the final performance.

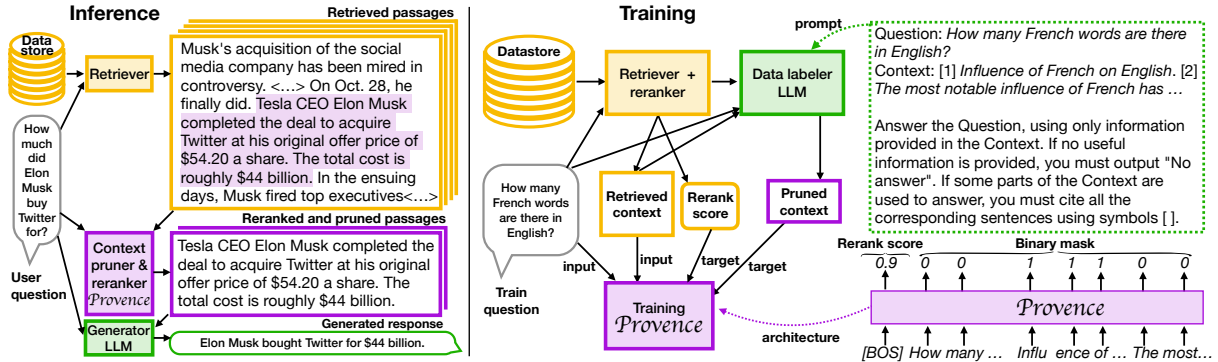


Figure 1: Illustration of inference (left) and training (right) of Provenance.

Table 1: Analysis of existing approaches for context pruning. Violet / Orange highlight practical / less-practical solutions.

Approach	Query-dep.	Granularity	Output	Type	Base arch.	Multi-domain testing	Model re-release
Selective Context	No	token-level	% of tokens	extr.	Llama-7B / GPT2	Yes	Yes
LLMLingua	No	token-level	% of tokens	extr.	Alpaca-7B / GPT2	Yes	Yes
LongLLMLingua	Yes	token-level	% of tokens	extr.	Llama-2-7B-chat	Yes	Yes
LLMLingua2	No	token-level	% of tokens	extr.	RoBERTa / mBERT	Yes	Yes
RECOMP extr.	Yes	sent.-level	k sentences	extr.	BERT	No	Yes
RECOMP abstr.	Yes	sent.-level	≥ 0 sentences	abstr.	T5-L	No	Yes
FilCo	Yes	sent.-level	1 sentence	abstr.	T5-XL / Llama-2-7B	No	No
COMPACT	Yes	sent.-level	≥ 0 sentences	abstr.	Mistral-7B	No	Yes
Provenance (ours)	Yes	sent.-level	≥ 0 sentences	extr.	DeBERTa	Yes	Yes

At the same time, the use of RAG adds *computational overhead* due to both retrieval latency and the increased input length for the LLMs. It may also propagate *irrelevant information* present in retrieved contexts into generated responses. These issues can be solved by developing more efficient and robust LLMs – either by making architectural changes to process long contexts more efficiently (Nawrot et al., 2024; Dao, 2024; Chevalier et al., 2023; Louis et al., 2025) or increasing the diversity of the tuning data to improve processing of irrelevant contexts (Lin et al., 2024). However, tuning the LLM can be highly resource-consuming, or even impossible to apply for proprietary (closed) LLMs. An alternative solution consists in *pruning retrieved contexts* by removing context parts irrelevant to the user’s query – which reduces context lengths and therefore speeds up generation. Such context pruning module can be used in a *plug-and-play manner with any generator LLM*, featuring both easy use and better transparency in the RAG pipeline.

Despite initial efforts on developing context pruners for RAG, none of the existing solutions provide a model ready to be used *out-of-the-box* in practice. First, many approaches are designed for a simplified setting, e.g., with the assumption that only one sentence per context is relevant to the input query (Wang et al., 2023;

Xu et al., 2024), or that the compression ratio is fixed (Jiang et al., 2023; Pan et al., 2024). However, in practice contexts may contain *various portions of relevant information*, from empty to full relevant context, and pruners should detect it in an *adaptable* fashion. Second, many works introduce context pruners that are not efficient enough to be used in practice. This includes using billion-sized LLMs as base models for pruners (Jiang et al., 2024; Pan et al., 2024; Wang et al., 2023), or designing abstractive context compressors which require sequential autoregressive generation of the final context (Wang et al., 2023; Xu et al., 2024). We argue that a more practical and *efficient* setting consists in fine-tuning a *small-size model* such as DeBERTa (He et al., 2021b,a), as an *extractive* pruner, i.e., with a lightweight prediction head for selecting relevant context parts. Third, most of the existing works train context pruners for each dataset individually and do not target nor test pruners *robustness* to various data domains.

Table 1 summarizes the properties of various existing methods along specified dimensions and shows that none of them satisfy all listed criteria. The table also includes a dimension of pruning granularity, i.e., token-level vs sentence-level pruning. In this work, we focus on *query-dependent sentence-level* pruning, which prunes

out semantic units (sentences) that are deemed not relevant to generate the answer. An alternative approach is token-level pruning which prunes out low-level grammatical units such as articles or interjections, usually in a query-independent fashion. The two approaches are orthogonal and could potentially be combined.

To address listed limitations, we introduce Provence (Pruning and Reranking Of retrieVED relevaNt ConteXt), an approach for training an *adaptable*, *efficient* and *robust* sentence-level context pruner for Question Answering, which can be used *out-of-the-box* across various domains and settings. To achieve this, we formulate context pruning as *binary sequence labeling* so that the binary mask predicted by the pruner determines *sentences* (from zero to all) which are relevant to the query, and train our pruner from a lightweight DeBERTa model on diverse data. Furthermore, we notice that context pruning and reranking (i.e., the second step in effective retrieval pipelines) bear a strong resemblance. We therefore propose to **unify these two models into a single one**, completely **eliminating the cost** of context pruning in the RAG pipeline.

More specifically, our contributions are as follows:

- We propose an approach for training an *adaptable*, *robust*, and *efficient* context pruner for QA – and release our trained model. Three key ingredients of our approach are formulating context pruning as sequence labeling, unifying context pruning and reranking in a single model, and training on diverse data.
- We test Provence on various QA domains and show its *out-of-the-box applicability* to prune contexts with negligible to no drop in performance and at almost no cost, substantially outperforming baseline approaches. We also demonstrate Provence capabilities in detecting the number of relevant sentences at any positions in the context and robustness to various context lengths.
- We conduct multiple ablations to demonstrate which techniques are essential for training robust context pruners, to provide insights for future context pruners development.

Definitions. A typical RAG pipeline consists of (0) a user’s question, or query; (1) a *datastore*, i.e., a collection of *documents* (pieces of text) to be retrieved from, (2) an efficient retriever which enables fast retrieval from a large datastore (typically a dual-encoder model, where queries and passages are encoded independently), (3) a more expensive cross-encoder reranker which further reduces and reorders a set of retrieved passages (cross-encoding means encoding a pas-

sage together with a query); and (4) a generator LLM which outputs the final response based on the user’s query and the relevant passages. Such a pipeline can be represented as `retrieve >> rerank >> generate`. Context pruning can be incorporated before generation, i.e., `retrieve >> rerank >> prune >> generate`. In our work, we also propose to incorporate context pruning into reranking, an essential and already present component in RAG (Rau et al., 2024a): `retrieve >> rerank+prune >> generate`. This enables **context pruning at almost zero cost**.

2. Related work

Context pruning. RECOMP (Xu et al., 2024) focuses on context pruning for RAG and proposes both extractive and abstractive context pruners. The extractive RECOMP approach independently encodes sentences in the context and then selects top sentences with embeddings closest to the query embedding. Such an approach limits context understanding, due to independent processing of both sentences and queries. The method also requires specifying the amount of sentences to keep as a hyperparameter – which is usually unknown in practice and should depend on each particular passage. The abstractive RECOMP summarizes key information from the passage relevant to the query (including zero relevant information) by training on silver summaries generated by GPT-3.5. However, it requires inefficient autoregressive generation of the final context, and can eventually hallucinate facts not present in the input context. FilCo (Wang et al., 2023) similarly proposes to generate contexts autoregressively but is trained on extractive targets, i.e., one sentence from the context selected by one of three criteria. The drawbacks are again inefficiency and the simplified assumption of one relevant sentence per context. A recent approach, COMPACT (Yoon et al., 2024), also proposes to generate filtered contexts autoregressively – hence inefficiently – and introduces an iterative approach for gradually updating the relevant context after processing a new portion of retrieved passages. In contrast to all listed efforts, Provence dynamically detects the amount of relevant information in the context – from zero to all sentences – in an extractive and efficient way. Furthermore, we propose a novel approach of integrating context pruning into a reranker.

Concurrently to our work, DSLR (Hwang et al., 2024) performs extractive sentence-level pruning, by encoding sentences one-by-one, together with the query, using existing rerankers. Similarly to Provence, DSLR keeps sentences with scores higher than a threshold and preserves the original order of sentences. However,

in contrast to Provence, DSLR is not capable of keeping groups of semantically connected sentences, due to independent sentence processing.

An orthogonal line of work proposes extractive token-level pruners. LLMingua (Jiang et al., 2023) and Selective Context (Li et al., 2023) use LLMs to remove tokens with high generation probabilities, independently of the query. LLMingua2 (Pan et al., 2024) is a small BERT-based model finetuned to eliminate redundant tokens, also independently of the query. LongLLMLingua (Jiang et al., 2024) proposes query-dependent LLM-based token pruning based on contrastive perplexity. Listed approaches remove tokens in a way that it does not break context understanding for the LLM – hence they are not capable of removing semantic parts of the context. LLMingua models also have many hyperparameters in the interface which are hard to tune in practice. These approaches can however also be combined with sentence-level pruning.

Retrieval granularity. Alternatively to context pruning, one can reformulate datastore content into atomic units, e.g., *propositions* as in Dense-X retrieval (Chen et al., 2024c) or *decontextualized sentences* (Choi et al., 2021). Such preprocessing is expensive and can lead to some information loss.

Passage filtering. Another related – and orthogonal – line of works focuses on filtering entire passages if they are deemed irrelevant for a given question; such an approach can be straightforwardly combined with Provence. A simple method consists in introducing a threshold on the (re)ranking score. LongLLMLingua reranks passages based on the probability of a question given the passage. (Yoran et al., 2024) use natural language inference models to filter out passages that do not entail question-answer pairs, but report that this approach sometimes filters out relevant passages too.

Improving context processing in LLMs. While context pruners aim to remove context parts irrelevant to the user’s query, another line of work aims to process contexts more efficiently and effectively in LLMs. Efficient context processing could be achieved through efficient attention implementations (Dao, 2024; Anagnostidis et al., 2023), KV cache compression (Nawrot et al., 2024), encoding retrieved passages in parallel (Zhu et al., 2024), or compressing contexts into one or more context embeddings (Chevalier et al., 2023; Ge et al., 2024; Rau et al., 2024b; Louis et al., 2025). Other works aim to make LLMs more robust, by exposing them to noisy contexts during training or finetuning (Izacard et al., 2022; Lin et al., 2024). All such approaches usually require LLM adaptation which may complicate

application to an arbitrary picked LLM.

3. Provence

The high-level overview of our proposed approach is illustrated in Figure 1. Our first contribution is to pose the context pruning problem as a sequence labeling task. We fine-tune a DeBERTa model to encode the query–context pair and output binary masks which are used to filter out irrelevant context parts. The labels for training are generated by Llama-3-8B-Instruct (AI@Meta, 2024); we call them *silver labels* since they are generated automatically. Such an approach solves several limitations of existing context pruners: (1) by construction, the model is able to deal with varying noise in contexts and select an appropriate pruning ratio; (2) queries are encoded together with context sentences (cross-encoding), providing richer representations – compared for instance to extractive RECOMP which encodes query and context sentences independently; (3) using a lightweight encoder makes our approach more efficient than LLM-based or abstractive methods.

Our second contribution consists in unifying reranking and context pruning – instead of considering these steps as distinct in the RAG pipeline. In Provence, reranking and pruning can be done *in a single forward step*, thus eliminating the computational overhead due to context pruning – making Provence almost “free”.

Training data. Our approach requires a set of training questions and a retrieval datastore. Specifically, we rely on the train set of the MS MARCO document ranking collection which includes 370k queries (Nguyen et al., 2016). The MS MARCO collection is a domain-diverse datastore of 3.2M documents crawled from the Web – which is required for the final model’s robustness to various domains – and is often used to train retrievers and rerankers. We also consider the train set of Natural Questions which contains 87k queries (Kwiatkowski et al., 2019).

Data processing. We create a retrieval datastore by splitting MS MARCO documents into passages consisting of N consecutive sentences – N being a random integer $\in 1..10$. This is to enable the pruner’s robustness to variable retrieved context lengths. We also prepend page titles to each passage. For each question, we retrieve top-5 relevant passages using a strong retrieval pipeline (Rau et al., 2024a) consisting of a SPLADE-v3 retriever (Lassance et al., 2024) and a DeBERTa-v3 reranker (Lassance & Clinchant, 2023). The resulting set of retrieved passages is naturally diverse w.r.t. relevance or irrelevance to the question, due to imperfections in retrieval.

Silver labels generation. Given a question and a retrieved passage (context), we split the passage into sentences¹ and prompt Llama-3-8B-Instruct to select sentences relevant to the given question. One approach would be to use a straightforward prompt such as “*Output indexes of sentences relevant to the given question*”. However, we decided to utilize the strong LLMs’ capabilities of actually *answering* questions while *citing* relevant context sentences. We therefore instruct the LLM to answer the given question using *only* information provided in the given context, and output “*No answer*” in case no relevant information is provided. We also specify the easy-to-parse citation format [i] and number sentences with the same marker in the context. Our prompt can be found in Appendix – Table 6; we use greedy decoding and parse cited sentences using regular expressions. We also compare different prompting strategies in the ablation study.

We found that Llama-3-8B is well capable of answering only based on a given context in most cases and of outputting a citation ~ 90% of the time. We filter out cases when no citations are produced and “*No answer*” is not present in the LLM’s output, as these are the cases when the context actually contains relevant information but the LLM “forgot” to cite it. The final labels distribution (number of selected sentences per context, their positions) is shown in Appendix – Figure 5.

Training of Provence. Our context pruner receives as input the concatenation of a question and a retrieved context, and outputs *per-token binary labels* denoting whether each token (defined by the pretrained model’s tokenizer) should be included in the selected context. In Section 4.4 (Ablations), we also consider an approach where a special token is inserted at the beginning of each sentence, and labels are predicted per-sentence based on the representations of those tokens. We train Provence as a binary per-token classifier with ground truth labels coming from the silver data labeling, and the model can be used as a standalone pruner, i.e., `retrieve >> rerank >> Provence (standalone) >> generate`.

Unifying compression and reranking. We note that cross-encoder rerankers (Nogueira & Cho, 2020) share both the same architecture and inputs (pairs of question–passages) as Provence. Additionally, the task of context pruning (selecting parts of contexts that are useful for generating the answer to the question) intrinsically bears similarity with re-ranking (estimating the relevance of a context w.r.t. the question) – and we hypothesize the possibility of knowledge transfer be-

tween these two related tasks. We therefore propose to *unify* both approaches in a single model, with two different task heads. More specifically, the reranking head outputs a scalar prediction for the BOS token while the pruning head outputs per-token predictions for the passage tokens, as illustrated in Figure 1. To ease training, we propose to further fine-tune a pretrained reranker on our labeling objective, while adding a ranking “regularizer” to preserve initial reranking capabilities. The regularizer is a Mean Squared Error loss on the reranking scores from the initial reranker. This can be viewed as a straightforward pointwise score distillation process, where the initial model serves as the teacher – a method that has demonstrated great effectiveness in Information Retrieval Hofstätter et al. (2021). The final loss function is as follows:

$$\mathcal{L} = \sum_{n=1}^N \left\{ \sum_{k=1}^{L_n} \log P(y_{n,k} | z_{n,k}) + \lambda (s_n - z_{n,0})^2 \right\} \quad (1)$$

$z_n = \text{Provence}(x_n)$

where N is the number of datapoints (query–passage pairs), x_n is a sequence of $L_n + 1$ input tokens (concatenated query, passage and BOS at the 0-th position), z_n is a sequence of $L_n + 1$ predictions output by the model, y_n is a sequence of L_n target binary labels for context pruning, s_n is the teacher score (initial reranker), $z_{n,0}$ is the ranking score predicted from the BOS representation.

In the case of the unified model, re-ranking and context pruning need a single forward step from the encoder, i.e., `retrieve >> Provence (w/ re-ranking) >> generate` – making context pruning almost free in terms of execution time.

Inference with Provence. At inference, we feed a concatenation of a question and a retrieved passage through Provence, which outputs probabilities of including each token in the final context, as well as the passage score in the case of the unified model. We simply use a threshold T to binarize the token probabilities (keep or not) – which has a direct effect on the compression rate. As shown in the experiments Section, the choice of a threshold is generally transferable across various datasets, making the model flexible to be used out-of-the box in various QA applications².

We note that our model outputs token-level predictions despite the sentence-level labeling task. We found that probabilities of including tokens into the final context are naturally clustered on the sentence level – see example in Appendix Figure 6 – due to the sentence-level targets used in training. However, in rare cases we

¹using the `nltk.sent_tokenize` function: https://www.nltk.org/api/nltk.tokenize.sent_tokenize.html

²Note that tuning the threshold per dataset could of course further improve results.

Table 2: Time/MFLOPS required for context pruning, 50 samples, with batch size set 1 (1 sample consists of a query and top retrieved documents). Top-5 retrieved documents.

Pruner	Time (s)	MFLOPS
LongLLMLingua, rate=0.5	194	5.400e+16
LLMLingua2, rate=0.5	38	9.822e+15
RECOMP extr., top=2	12	1.037e+15
RECOMP abstr.	499	5.357e+14
DSLRL, th=0.5	26	4.391e+15
Provenance (standalone)	25	7.901e+14

Table 3: Speed up in generation due to compression (Provenance, 49% compression). Batch sizes 1 or 256.

Generator	bs 1	bs 256
LLama-2-7B	×1.2	×2
LLama-2-13B	×1.4	×2
SOLAR-10.7B	×1.4	×1.9

could still have partial sentences being selected. To avoid this phenomenon, we apply a “sentence rounding” procedure: for each sentence, we check the ratio of kept tokens (predicted label= 1), and select the entire sentence only if it is higher than 0.5.

4. Experiments

4.1. Experimental setup

Provenance training details. We train Provenance on the data described in Section 3, using PyTorch (Paszke et al., 2019) and HuggingFace transformers (Wolf et al., 2020). We use DeBERTa-v3 (He et al., 2021a) as our pretrained model for training the standalone Provenance. For the unified approach, we start training from an already trained cross-encoder, also based on DeBERTa-v3 (Lassance & Clinchant, 2023). Note that in the latter, we initialize the ranking head from its fine-tuned version, and train the separate pruning head from scratch.

After preliminary experiments, we set the learning rate to 3×10^{-6} , the batch size to 48 and train models for one epoch. For joint training, there is a slight trade-off between pruning and reranking. We set the reranking regularization coefficient λ to 0.05, chosen as the minimal value that does not substantially degrade reranking performance on the MS MARCO development set.

Evaluation datasets. We test Provenance on a diverse set of QA datasets. First, we consider commonly used datasets relying on Wikipedia datastore: Natural Questions (Kwiatkowski et al., 2019), TyDi QA (Clark et al., 2020), PopQA (Mallen et al., 2023b) (all single-hop

questions), and HotpotQA (Yang et al., 2018) (multi-hop questions). Second, we consider datasets with datastores from various domains: BioASQ (Nentidis et al., 2023) (biomedical questions with Pubmed as a datastore), SyllabusQA (Fernandez et al., 2024) (questions about educational course logistics, with courses syllabus as a datastore); and RGB Chen et al. (2024b) (questions about news with Google-searched news as contexts). Further details can be found in Appendix A.

Evaluation settings. We conduct experiments using BERGEN (Rau et al., 2024a), a benchmarking library for RAG, using the recommended experimental setting. For each query, we retrieve top-5 relevant passages using a strong and robust retrieval pipeline: SPLADE-v3 >> DeBERTa-v3 reranker (except for RGB, for which Google-searched passages are already provided). We then pass queries prepended with relevant document (full length or pruned) into LLama-2-7B-chat (Touvron et al., 2023)³ to generate answers; other retrieval-generator settings are further reported in Appendix. Each evaluation dataset comes with short keyword answers, which we use to evaluate responses using LLM-based evaluation (LLMeval in Rau et al., 2024a); match-based metrics are also reported in Appendix. We additionally measure compression as a portion of the context which was pruned out.

We compare Provenance to publicly available context pruning models listed in Table 1, except LLMLingua and Selective Context which were shown to underperform LLMLingua2 (Pan et al., 2024). For all context pruners (except abstractive RECOMP for which it is not available), we enforce the selection of the first (title) passage sentence, to avoid ambiguity in understanding the context by the generator. For extractive RECOMP, we use the model trained on NQ, consider using top-1/2/3 sentences, and prepend the passage title to each sentence. For the LLMLingua family, we vary the compression rate in {0.25, 0.5, 0.75} and use code provided on the official repository⁴. We use the XLM-RoBERTa model for LLMLingua2. For Provenance, we use $T = 0.1$ and $T = 0.5$. We also compare our method to DSLR based on the same reranker as ours, i.e., DeBERTa-v3.

4.2. Main results

Context pruners are often only tested on limited domain data, e.g., with Wikipedia datastore, and an important aspect of our work is evaluating context pruning on a series of QA domains. Figure 2 reports the trade-off

³For main experiments, we chose a “weaker” generator which relies more on contexts, to create a more challenging setting for context pruners; results with stronger generators are reported in Appendix – Figure 8.

⁴<https://github.com/microsoft/LLMLingua>

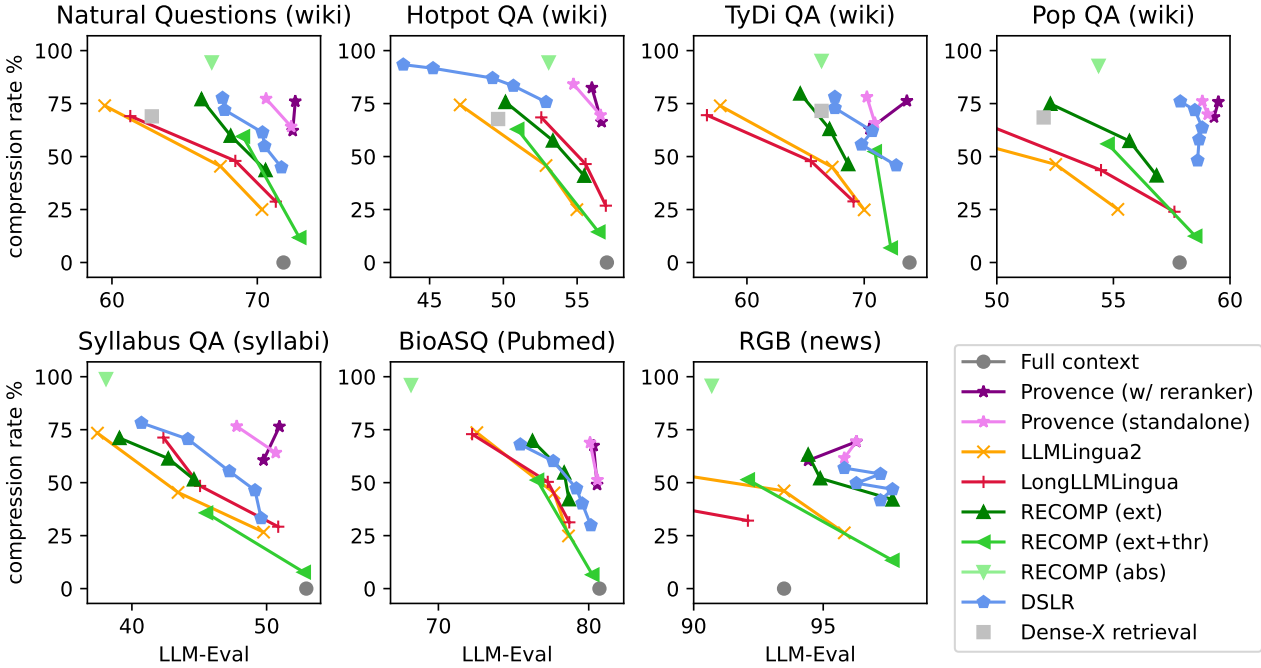


Figure 2: Main results for various QA domains, comparing Provenance and baseline models. *Generator*: Llama-2-7B, *retriever*: SPLADE-v3, *reranker*: DeBERTa-v3 (or Provenance in the unified setting). Plot titles denote “Dataset name (datastore type)”. x -axis denotes QA performance evaluated with LLM-as-a-judge; y -axis denotes the context compression ratio. For both metrics, the higher the better: the best model would be closest to the top right corner. Numerical scores are presented in App. Tables 8–9. Main conclusion: Provenance consistently lies on the Pareto front.

between compression (efficiency) and LLM-evaluated performance (quality), for various QA datasets and context pruning methods. We choose to report a figure per dataset to better assess the **Pareto front** of existing solutions, rather than comparing methods with different compression rates in the same table. Figure 7 in Appendix further reports similar results with match-based metric, and Appendix Tables 11–13 show examples of context pruning with various methods.

First, we observe that Provenance achieves **the highest performance** across pruning methods, for similar compression ratios. Second, it is noteworthy that Provenance outperforms methods requiring more computations such as LLMingua models, showing that efficiency is not traded for effectiveness. Furthermore, Provenance is the only method capable of achieving high compression levels without (or with negligible) performance drops, on all datasets. Moreover, for some datasets, e.g., PopQA, pruning with Provenance leads to performance improvements due to noise filtering.

The effect of threshold. An important aspect in the out-of-the-box applicability of context pruners is how much effort is needed to select the suitable values of hyperparameters. For Provenance, it only consists in setting

the pruning threshold T . In Figure 2 (for which $T = 0.1$ and $T = 0.5$), we observe that Provenance pruning ratio automatically varies from 50% to 80%, depending on the dataset, which demonstrates that the same values for T work well for all considered domains – making Provenance robust to the choice of hyperparameters. If necessary, users can still tune it further for their datasets and/or needs. We note that some models specify the desired compression ratio as a hyperparameter, e.g., LLMingua models or extractive RECOMP (through top- N sentences). While it may seem convenient to estimate inference cost, the “optimal” compression ratio (without losing performance) is specific to each particular question-context pair. Thus, using a threshold as a hyperparameter is more appropriate for this task. We also experimented with specifying a threshold in extractive RECOMP (shown on the same plot) and found that it often leads to lower performance (compared to top- N). The reason is that different queries have different ranges of similarity scores.

Efficiency. We compare Provenance with other pruning methods in terms of efficiency. Table 2 reports compression time and MFLOPS⁵ required by differ-

⁵We use the PyTorch profiler to report FLOPS required by each

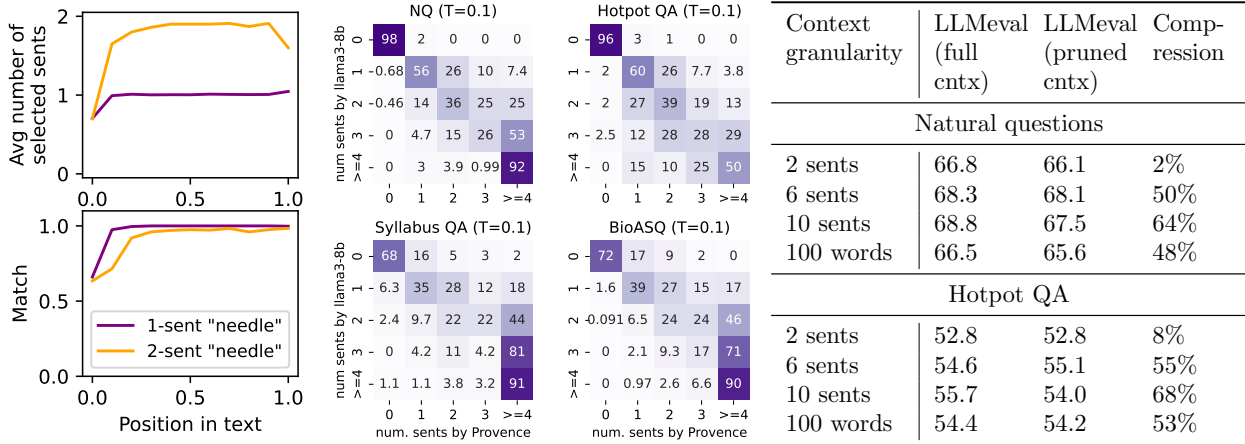


Figure 3: Analyses. (Left) Needle-in-the-haystack test allowing the control of the position of the ground truth sentence(s) in the context. (Middle) Comparison of the number of selected sentences by the silver predictor (LLaMA-3-8B-Instruct) and Provenance. Heatmaps are normalized by rows: a cell in position (i, j) indicates which percentage of contexts that were pruned into i sentences by the silver predictor, were pruned into j sentences by Provenance. (Right) Testing Provenance in settings with different context lengths. All experiments are done with unified Provenance, $T = 0.1$.

ent pruning methods. As expected, LongLLMLingua (based on Llama-2-7B-chat) is the slowest context pruner. RECOMP abstr. requires less MFLOPS compared to Provenance, but its autoregressive nature makes it slower in practice⁶. Note that in the case of the unified model, pruning is almost free – as it’s part of the re-ranking step. Table 3 reports speed-up gains due to compression with Provenance model ($\sim 50\%$ compression rate). All runs were performed on single Tesla V100-SXM2-32GB GPU with vllm Kwon et al. (2023). With large batch sizes, we systematically observe $2\times$ speed-ups at inference, while smaller batch sizes lead to lower gains (especially for smaller models). We assume this is mostly due to the CPU/GPU communication bottleneck, which masks inference gains due to compression.

4.3. Analysis

In this Section, we conduct a more fine-grained evaluation to better understand the properties of Provenance.

Robustness to the position of relevant information in the context. We design a needle-in-the-haystack experiment which allows us to check the performance of Provenance on a simple toy example and to evaluate its robustness w.r.t. the position of the relevant information in the input context. We write 5 questions and answers⁷,

pruner.

⁶This highlights the fact that MFLOPS do not always align with real inference time, due to different architectural choices.

⁷Example: “Which library was used in the experiments?”, answer: “Experiments were conducted using the Bergen library”. Example reformulation into a 2-sentence answer: “Experiments were conducted

and insert answers (“needles”) at random positions between sentences, in a subset of 100 passages sampled from the Wikipedia datastore. Ideally, Provenance should only select the “needle” sentences and filter out all other sentences in contexts. We plot the number of selected sentences and percentage of cases when the pruned context contains the “needle” (Figure 3, (Left)). We consider two settings: with 1- and 2-sentence “needles”. We observe that Provenance correctly selects “needle” sentence(s) in most cases, except at leftmost and rightmost positions.⁸ In most cases Provenance does not select any irrelevant sentences. The results are similar for both simpler (1-sentence) and harder (2-sentence) “needles” showing Provenance’s flexibility in detecting the number of relevant sentences, discussed below in more details.

Adaptability to the variable number of relevant sentences. To evaluate the capability of Provenance to dynamically detect the number of relevant sentences in the context, we compare the number of sentences L selected by Provenance and by a silver oracle, for question-context examples from various datasets. A silver oracle is easy to construct for $L = 0$, by pairing questions with randomly sampled contexts. For $L \geq 1$, we use the labeling produced by Llama-3-8B-Instruct. Figure 3 (Middle) shows that the number of relevant sentences detected

using a library. Its name is Bergen.”

⁸The reason for the drops in the left-most and right-most positions is that training data has little examples of the corresponding types of relevant sentences, see e.g., statistics for the rightmost position in the App. Figure 5, (Right). We plan to work on further improving processing of these positions in future work.

Table 4: Effectiveness of reranking top-50 documents retrieved by SPLADE-v3. DeBERTa-v3 is the “baseline” (initialization point for Providence, which we aim to preserve performance). We report the R@5 on two RAG datasets (NQ and HotpotQA), MRR@10 on MS MARCO passages (dev set), nDCG@10 on TREC DL’19 (Craswell et al., 2020), and mean nDCG@10 on the 13 open datasets from the BEIR benchmark (Thakur et al., 2021) – Table 7 in Appendix reports the full results.

Model	Dataset				
	NQ	HotpotQA	MS	TREC19	BEIR
DeBERTa-v3	83.0	70.4	40.5	77.4	55.4
Providence	84.4	70.5	40.6	77.2	55.9
Providence (NQ)	84.5	70.3	40.2	77.5	55.1

by Providence is close to the silver oracle value in most cases, for all considered datasets. In contrast, extractive RECOMP would always select a prespecified number of sentences.

Robustness w.r.t. context granularity. Figure 3 (Right) shows Providence performance for two datasets, with Wikipedia datastores made of contexts of various granularity. Here, each considered datastore is produced by splitting Wikipedia pages into chunks of N sentences, $N \in \{2, 6, 10\}$, or 100 words, and prepending the page title to each chunk. Providence shows high performance in all cases – the performance with pruned contexts being close to the performance obtained using original contexts. As could be expected, the compression ratio is higher for longer contexts.

Reranking effectiveness. Table 4 compares reranking performance between our reranking baseline and unified Providence – whose training starts from the former. We can see that our joint training procedure (on both pruning and ranking tasks) makes it possible to learn a context pruner that preserves initial reranking capabilities. We further include as a comparison point results from a model trained in similar conditions on NQ. Overall, results are similar – further highlighting the robustness of Providence w.r.t. training data. We further discuss such aspects in Section 4.4 (Ablations).

Applicability in different settings. Figure 8 (App.) demonstrates the applicability of Providence in variable retrieval-generator settings – achieving similar results as the ones reported in Figure 2.

4.4. Ablations

In this Section we analyze various design choices made in Providence development, to provide insights into training context pruners for future works (results shown

in Figure 4). All models in this section are standalone context pruners, trained with the same amount of parameter updates.

Model size. We first observe that DeBERTa-large slightly increases the compression rate – when compared to DeBERTa-base. All other ablations are tuned from a DeBERTa-base model, for efficiency reasons. Note that the final Providence is trained from a DeBERTa-large model (or its equivalent reranker).

Data mixtures. We compare training on NQ (87k queries), MS MARCO downsampled to the same size, and full MS MARCO (370k queries). We observe that using the MS MARCO *type of data* performs similarly to training on NQ – with equal number of queries – and we also find that using larger data (i.e., full MS MARCO) improves results. Our final models are trained on the full MS MARCO – further ablations are conducted on the NQ data, for efficiency reasons.

Labeling strategies. As described in Section 3, we can train the pruner either to perform token-level labeling (with sentence rounding at inference) or to perform sentence-level labeling. In the former case sentence representations are richer but the model also needs to learn to output similar predictions for tokens inside one sentence. In the latter case sentence content must be represented in a single embedding which may limit representation expressivity. In practice we observe close performance, with the token-level strategy slightly outperforming the sentence-level one some datasets. In all other experiments we use the token-level strategy.

Oracle prompts. We compare three options for prompting an oracle LLM to generate silver labeling: (1) *answer oracle*: asking to answer the given question from the given context, citing corresponding sentences; (2) *relevance oracle*: asking to list any *relevant* information in the context to the question, citing corresponding sentences; (3) *straightforward oracle*: asking to output indexes of sentences which answer the given question. We found that the behavior of the *straightforward oracle* varies on different prompts, while the use of the *answer oracle* makes answers more consistent. The motivation for the *relevance oracle* is that often contexts contain distantly relevant information to the query and it could be reasonable to select the corresponding sentences. Comparing the listed prompts, we observe that the *relevance oracle* underperforms the *answer oracle*, and the *straightforward oracle* performs similarly or slightly lower than the *answer oracle*, which is used in all other experiments.

Unification with reranker. In Figure 2 we compare

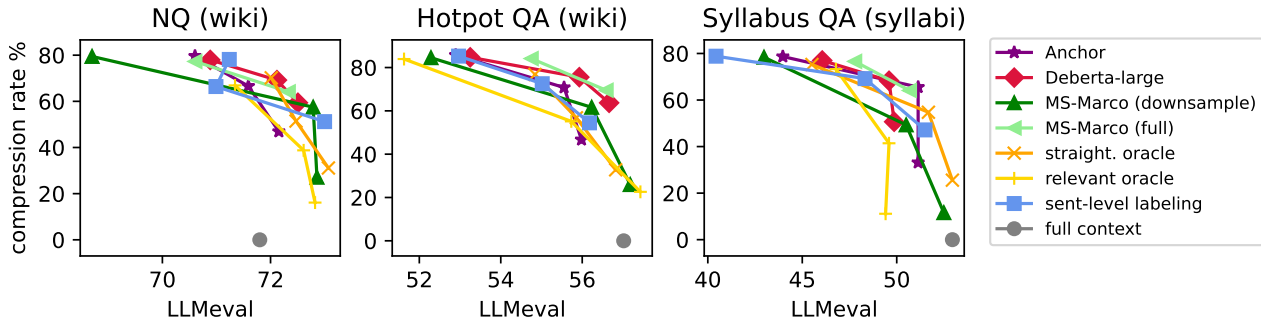


Figure 4: Ablation results. All models are single-component modifications of the anchor model, which is a base-size model, trained on NQ data, with the answer oracle and token-level labeling. Numeric scores for this figure are duplicated in Appendix Table 10, and results with match-based metrics are presented in Appendix – Figure 11.

Provenance trained as a standalone model and as a model unified with reranker, and find that both strategies lead to similar results – although the former relies on two separate inference steps (re-ranking and pruning) in a RAG pipeline.

5. Conclusion

In this work, we present Provenance, a robust, adaptable, and efficient context pruner for Question Answering – either unified in a single model with reranking capabilities or available as a lightweight standalone model. In contrast to previous extractive approaches, Provenance dynamically detects the needed pruning ratio for a given context and can be used out-of-the-box for various QA domains. In extensive experiments, we demonstrate that Provenance prunes contexts with negligible to no drops in performance and in some cases even brings performance improvement due to removing context noise. We also show Provenance capabilities in correctly detecting the number of relevant sentences in contexts, located at any position, and with contexts of various lengths. Finally, the ablation study highlights the importance of using a large training data and the appropriate prompt in the silver oracle.

Limitations. Despite Provenance being ready to use in various settings, demonstrated in the paper, it is focusing only on QA applications, with a single passage processed at a time, and is trained on English-only data. Future work could consider extending it to other tasks, multi-passage contexts, and languages beyond English.

References

AI@Meta. Llama 3 model card. 2024. URL https://github.com/meta-llama/llama3/blob/main/MODEL_CARD.md. 4

Sotiris Anagnostidis, Dario Pavllo, Luca Biggio, Lorenzo

Noci, Aurélien Lucchi, and Thomas Hofmann. Dynamic context pruning for efficient and interpretable autoregressive transformers. *ArXiv*, abs/2305.15805, 2023. URL <https://api.semanticscholar.org/CorpusID:258888224>. 4

Akari Asai, Zexuan Zhong, Danqi Chen, Pang Wei Koh, Luke Zettlemoyer, Hannaneh Hajishirzi, and Wen-tau Yih. Reliable, adaptable, and attributable language models with retrieval. *arXiv preprint arXiv:2403.03187*, 2024. 1

Jianlv Chen, Shitao Xiao, Peitian Zhang, Kun Luo, Defu Lian, and Zheng Liu. Bge m3-embedding: Multi-lingual, multi-functionality, multi-granularity text embeddings through self-knowledge distillation, 2024a. URL <https://arxiv.org/abs/2402.03216>. 18

Jiawei Chen, Hongyu Lin, Xianpei Han, and Le Sun. Benchmarking large language models in retrieval-augmented generation. *Proceedings of the AAAI Conference on Artificial Intelligence*, 38(16):17754–17762, Mar. 2024b. doi: 10.1609/aaai.v38i16.29728. URL <https://ojs.aaai.org/index.php/AAAI/article/view/29728>. 6, 15

Tong Chen, Hongwei Wang, Sihao Chen, Wenhao Yu, Kaixin Ma, Xinran Zhao, Hongming Zhang, and Dong Yu. Dense X retrieval: What retrieval granularity should we use? In Yaser Al-Onaizan, Mohit Bansal, and Yun-Nung Chen (eds.), *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pp. 15159–15177, Miami, Florida, USA, November 2024c. Association for Computational Linguistics. URL <https://aclanthology.org/2024.emnlp-main.845>. 4

Alexis Chevalier, Alexander Wettig, Anirudh Ajith, and Danqi Chen. Adapting language models to compress contexts. In Houda Bouamor, Juan Pino, and Ka-

- lika Bali (eds.), *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pp. 3829–3846, Singapore, December 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.emnlp-main.232. URL <https://aclanthology.org/2023.emnlp-main.232>. 2, 4
- Eunsol Choi, Jennimaria Palomaki, Matthew Lamm, Tom Kwiatkowski, Dipanjan Das, and Michael Collins. Decontextualization: Making sentences stand-alone. *Transactions of the Association for Computational Linguistics*, 9:447–461, 2021. doi: 10.1162/tacl_a_00377. URL <https://aclanthology.org/2021.tacl-1.27>. 4
- Jonathan H. Clark, Eunsol Choi, Michael Collins, Dan Garrette, Tom Kwiatkowski, Vitaly Nikolaev, and Jennimaria Palomaki. TyDi QA: A benchmark for information-seeking question answering in typologically diverse languages. *Transactions of the Association for Computational Linguistics*, 8:454–470, 2020. doi: 10.1162/tacl_a_00317. URL <https://aclanthology.org/2020.tacl-1.30>. 6
- Nick Craswell, Bhaskar Mitra, Emine Yilmaz, Daniel Campos, and Ellen M. Voorhees. Overview of the trec 2019 deep learning track, 2020. URL <https://arxiv.org/abs/2003.07820>. 9
- Nick Craswell, Bhaskar Mitra, Emine Yilmaz, Daniel Campos, and Jimmy Lin. Ms marco: Benchmarking ranking models in the large-data regime. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR ’21, pp. 1566–1576, New York, NY, USA, 2021. Association for Computing Machinery. ISBN 9781450380379. doi: 10.1145/3404835.3462804. URL <https://doi.org/10.1145/3404835.3462804>. 15
- Tri Dao. Flashattention-2: Faster attention with better parallelism and work partitioning. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=mZn2Xyh9Ec>. 2, 4
- Rajarshi Das, Shehzaad Dhuliawala, Manzil Zaheer, and Andrew McCallum. Multi-step retriever-reader interaction for scalable open-domain question answering. In *International Conference on Learning Representations*, 2019. URL <https://openreview.net/forum?id=HkfPSh05K7>. 1
- Nigel Fernandez, Alexander Scarlatos, and Andrew Lan. SyllabusQA: A course logistics question answering dataset. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar (eds.), *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 10344–10369, Bangkok, Thailand, August 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.acl-long.557. URL <https://aclanthology.org/2024.acl-long.557>. 6, 15
- Tao Ge, Hu Jing, Lei Wang, Xun Wang, Si-Qing Chen, and Furu Wei. In-context autoencoder for context compression in a large language model. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=uREj4ZuGJE>. 4
- Pengcheng He, Jianfeng Gao, and Weizhu Chen. Debertav3: Improving deberta using electra-style pre-training with gradient-disentangled embedding sharing, 2021a. 2, 6
- Pengcheng He, Xiaodong Liu, Jianfeng Gao, and Weizhu Chen. {DEBERTA}: {DECODING}-{enhanced} {bert} {with} {disentangled} {attention}. In *International Conference on Learning Representations*, 2021b. URL <https://openreview.net/forum?id=XPZiaotutsD>. 2
- Sebastian Hofstätter, Sophia Althammer, Michael Schröder, Mete Sertkan, and Allan Hanbury. Improving efficient neural ranking models with cross-architecture knowledge distillation, 2021. URL <https://arxiv.org/abs/2010.02666>. 5
- Jennifer Hsia, Afreen Shaikh, Zhiruo Wang, and Graham Neubig. Ragged: Towards informed design of retrieval augmented generation systems. *arXiv preprint arXiv:2403.09040*, 2024. 15
- Taeho Hwang, Soyeong Jeong, Sukmin Cho, SeungYoon Han, and Jong Park. DSLR: Document refinement with sentence-level re-ranking and reconstruction to enhance retrieval-augmented generation. In Wenhao Yu, Weijia Shi, Michihiro Yasunaga, Meng Jiang, Chenguang Zhu, Hananeh Hajishirzi, Luke Zettlemoyer, and Zhihan Zhang (eds.), *Proceedings of the 3rd Workshop on Knowledge Augmented Methods for NLP*, pp. 73–92, Bangkok, Thailand, August 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.knowledgenlp-1.6. URL <https://aclanthology.org/2024.knowledgenlp-1.6>. 3
- Gautier Izacard, Patrick Lewis, Maria Lomeli, Lucas Hosseini, Fabio Petroni, Timo Schick, Jane Dwivedi-Yu, Armand Joulin, Sebastian Riedel, and Edouard Grave. Atlas: Few-shot Learning with Retrieval Augmented Language Models, November 2022. URL <http://>

- arxiv.org/abs/2208.03299. arXiv:2208.03299 [cs]. 4
- Huiqiang Jiang, Qianhui Wu, Chin-Yew Lin, Yuqing Yang, and Lili Qiu. LLMingua: Compressing prompts for accelerated inference of large language models. In Houda Bouamor, Juan Pino, and Kalika Bali (eds.), *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pp. 13358–13376, Singapore, December 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.emnlp-main.825. URL <https://aclanthology.org/2023.emnlp-main.825>. 2, 4
- Huiqiang Jiang, Qianhui Wu, Xufang Luo, Dongsheng Li, Chin-Yew Lin, Yuqing Yang, and Lili Qiu. LongLLM-Lingua: Accelerating and enhancing LLMs in long context scenarios via prompt compression. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar (eds.), *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 1658–1677, Bangkok, Thailand, August 2024. Association for Computational Linguistics. URL <https://aclanthology.org/2024.acl-long.91>. 2, 4
- Dahyun Kim, Chanjun Park, Sanghoon Kim, Wonsung Lee, Wonho Song, Yunsu Kim, Hyeonwoo Kim, Yungi Kim, Hyeonju Lee, Jihoo Kim, Changbae Ahn, Seonghoon Yang, Sukyung Lee, Hyunbyung Park, Gyoungjin Gim, Mikyoung Cha, Hwalsuk Lee, and Sunghun Kim. Solar 10.7b: Scaling large language models with simple yet effective depth up-scaling, 2023. 15
- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, et al. Natural questions: a benchmark for question answering research. *Transactions of the Association for Computational Linguistics*, 7:453–466, 2019. 4, 6, 15
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. Efficient memory management for large language model serving with page-dattention, 2023. 8
- LangChain. LangChain Documentation. <https://python.langchain.com/>. 1
- Carlos Lassance and Stéphane Clinchant. Naver labs europe (splade) @ trec deep learning 2022, 2023. URL <https://arxiv.org/abs/2302.12574>. 4, 6
- Carlos Lassance, Hervé Déjean, Thibault Formal, and Stéphane Clinchant. Splade-v3: New baselines for splade, 2024. 4
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. Retrieval-Augmented Generation for Knowledge-Intensive NLP Tasks. In *Advances in Neural Information Processing Systems*, volume 33, pp. 9459–9474. Curran Associates, Inc., 2020. URL <https://proceedings.neurips.cc/paper/2020/hash/6b493230205f780e1bc26945df7481e5-Abstract.html>. 1
- Yucheng Li, Bo Dong, Frank Guerin, and Chenghua Lin. Compressing context to enhance inference efficiency of large language models. In Houda Bouamor, Juan Pino, and Kalika Bali (eds.), *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pp. 6342–6353, Singapore, December 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.emnlp-main.391. URL <https://aclanthology.org/2023.emnlp-main.391>. 4
- Jimmy Lin, Xueguang Ma, Sheng-Chieh Lin, Jheng-Hong Yang, Ronak Pradeep, and Rodrigo Nogueira. Pyserini: A python toolkit for reproducible information retrieval research with sparse and dense representations. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR ’21, pp. 2356–2362, New York, NY, USA, 2021. Association for Computing Machinery. ISBN 9781450380379. doi: 10.1145/3404835.3463238. URL <https://doi.org/10.1145/3404835.3463238>. 15
- Xi Victoria Lin, Xilun Chen, Mingda Chen, Weijia Shi, Maria Lomeli, Richard James, Pedro Rodriguez, Jacob Kahn, Gergely Szilvassy, Mike Lewis, Luke Zettlemoyer, and Wen tau Yih. RA-DIT: Retrieval-augmented dual instruction tuning. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=220Tbutug9>. 2, 4
- Maxime Louis, Hervé Déjean, and Stéphane Clinchant. Pisco: Pretty simple compression for retrieval-augmented generation. *arXiv preprint*, 2025. 2, 4
- Alex Mallen, Akari Asai, Victor Zhong, Rajarshi Das, Daniel Khashabi, and Hannaneh Hajishirzi. When not to trust language models: Investigating effectiveness of parametric and non-parametric memories. In Anna

- Rogers, Jordan Boyd-Graber, and Naoaki Okazaki (eds.), *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 9802–9822, Toronto, Canada, July 2023a. Association for Computational Linguistics. doi: 10.18653/v1/2023.acl-long.546. URL <https://aclanthology.org/2023.acl-long.546>. 1
- Alex Mallen, Akari Asai, Victor Zhong, Rajarshi Das, Daniel Khashabi, and Hannaneh Hajishirzi. When not to trust language models: Investigating effectiveness of parametric and non-parametric memories. In Anna Rogers, Jordan Boyd-Graber, and Naoaki Okazaki (eds.), *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 9802–9822, Toronto, Canada, July 2023b. Association for Computational Linguistics. doi: 10.18653/v1/2023.acl-long.546. URL <https://aclanthology.org/2023.acl-long.546>. 6, 15
- Sewon Min, Kalpesh Krishna, Xinxu Lyu, Mike Lewis, Wen tau Yih, Pang Wei Koh, Mohit Iyyer, Luke Zettlemoyer, and Hannaneh Hajishirzi. Factscore: Fine-grained atomic evaluation of factual precision in long form text generation, 2023. URL <https://arxiv.org/abs/2305.14251>. 1
- Piotr Nawrot, Adrian Lañcucki, Marcin Chochowski, David Tarjan, and E. Ponti. Dynamic memory compression: Retrofitting llms for accelerated inference. *ArXiv*, abs/2403.09636, 2024. URL <https://api.semanticscholar.org/CorpusID:268384862>. 2, 4
- Anastasios Nentidis, Georgios Katsimpras, Anastasia Krithara, Salvador Lima-López, Eulalia Farré-Maduell, Luis Gasco Sanchez, Martin Krallinger, and Georgios Paliouras. *Overview of BioASQ 2023: The Eleventh BioASQ Challenge on Large-Scale Biomedical Semantic Indexing and Question Answering*, pp. 227–250. 09 2023. ISBN 978-3-031-42447-2. doi: 10.1007/978-3-031-42448-9_19. 6, 15
- Tri Nguyen, Mir Rosenberg, Xia Song, Jianfeng Gao, Saurabh Tiwary, Rangan Majumder, and Li Deng. Ms marco: A human generated machine reading comprehension dataset. November 2016. URL <https://microsoft.github.io/msmarco/>. 4
- Rodrigo Nogueira and Kyunghyun Cho. Passage re-ranking with bert, 2020. 5
- Zhuoshi Pan, Qianhui Wu, Huiqiang Jiang, Menglin Xia, Xufang Luo, Jue Zhang, Qingwei Lin, Victor Ruhle, Yuqing Yang, Chin-Yew Lin, H. Vicky Zhao, Lili Qiu, and Dongmei Zhang. LLMingua-2: Data distillation for efficient and faithful task-agnostic prompt compression. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar (eds.), *Findings of the Association for Computational Linguistics ACL 2024*, pp. 963–981, Bangkok, Thailand and virtual meeting, August 2024. Association for Computational Linguistics. URL <https://aclanthology.org/2024.findings-acl.57>. 2, 4, 6
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Köpf, Edward Yang, Zach DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. *PyTorch: an imperative style, high-performance deep learning library*. Curran Associates Inc., Red Hook, NY, USA, 2019. 6
- David Rau, Hervé Déjean, Nadezhda Chirkova, Thibault Formal, Shuai Wang, Stéphane Clinchant, and Vassilina Nikoulina. BERGEN: A benchmarking library for retrieval-augmented generation. In Yaser Al-Onaizan, Mohit Bansal, and Yun-Nung Chen (eds.), *Findings of the Association for Computational Linguistics: EMNLP 2024*, pp. 7640–7663, Miami, Florida, USA, November 2024a. Association for Computational Linguistics. doi: 10.18653/v1/2024.findings-emnlp.449. URL <https://aclanthology.org/2024.findings-emnlp.449/>. 3, 4, 6, 15
- David Rau, Shuai Wang, Hervé Déjean, and Stéphane Clinchant. Context embeddings for efficient answer generation in rag, 2024b. URL <https://arxiv.org/abs/2407.09252>. 4
- Minjoon Seo, Jinhyuk Lee, Tom Kwiatkowski, Ankur Parikh, Ali Farhadi, and Hannaneh Hajishirzi. Real-time open-domain question answering with dense-sparse phrase index. In Anna Korhonen, David Traum, and Lluís Màrquez (eds.), *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 4430–4441, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1436. URL <https://aclanthology.org/P19-1436>. 1
- Xiao Shitao, Liu Zheng, Shao Yingxia, and Cao Zhao. Retromae: Pre-training retrieval-oriented language models via masked auto-encoder. In *EMNLP*, 2022. URL <https://arxiv.org/abs/2205.12035>. 18
- Nandan Thakur, Nils Reimers, Andreas Rücklé, Abhishek Srivastava, and Iryna Gurevych. BEIR: A heterogeneous benchmark for zero-shot evaluation of in-

- formation retrieval models. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 2)*, 2021. URL <https://openreview.net/forum?id=wCu6T5xFjeJ>. 9
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. Llama 2: Open foundation and fine-tuned chat models, 2023. 6
- Zhiruo Wang, Jun Araki, Zhengbao Jiang, Md Rizwan Parvez, and Graham Neubig. Learning to filter context for retrieval-augmented generation, 2023. URL <https://arxiv.org/abs/2311.08377>. 2, 3
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Remi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander Rush. Transformers: State-of-the-art natural language processing. In Qun Liu and David Schlangen (eds.), *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pp. 38–45, Online, October 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-demos.6. URL <https://aclanthology.org/2020.emnlp-demos.6>. 6
- Fangyuan Xu, Weijia Shi, and Eunsol Choi. RECOMP: Improving retrieval-augmented LMs with context compression and selective augmentation. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=mlJLVigNHp>. 2, 3
- Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. HotpotQA: A dataset for diverse, explainable multi-hop question answering. In Ellen Riloff, David Chiang, Julia Hockenmaier, and Jun’ichi Tsujii (eds.), *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pp. 2369–2380, Brussels, Belgium, 2018. Association for Computational Linguistics. doi: 10.18653/v1/D18-1259. URL <https://aclanthology.org/D18-1259>. 6, 15
- Chanwoong Yoon, Taewhoo Lee, Hyeon Hwang, Minbyul Jeong, and Jaewoo Kang. Compact: Compressing retrieved documents actively for question answering, 2024. URL <https://arxiv.org/abs/2407.09014>. 3
- Ori Yoran, Tomer Wolfson, Ori Ram, and Jonathan Berant. Making retrieval-augmented language models robust to irrelevant context. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=ZS4m74kZpH>. 4
- Yun Zhu, Jia-Chen Gu, Caitlin Sikora, Ho Ko, Yinxiao Liu, Chu-Cheng Lin, Lei Shu, Liangchen Luo, Lei Meng, Bang Liu, and Jindong Chen. Accelerating inference of retrieval-augmented generation via sparse context selection. *ArXiv*, abs/2405.16178, 2024. URL <https://api.semanticscholar.org/CorpusID:270062557>. 4

A. Data

Evaluation datasets. We consider the following datasets:

- Datasets with Wikipedia as a datastore:
 - Natural Questions (Kwiatkowski et al., 2019). We use a test set of 2.8k questions, distributed as a part of the KILT collection (https://huggingface.co/datasets/facebook/kilt_tasks);
 - HotpotQA (Yang et al., 2018). We use a test set of 5.6k questions, distributed as a part of the KILT collection (https://huggingface.co/datasets/facebook/kilt_tasks);
 - PopQA (Mallen et al., 2023b). We use a test set of 14k questions distributed by the dataset authors.
- Datasets with individual datastores:
 - BioASQ (Nentidis et al., 2023). We use a version of the dataset provided by (Hsia et al., 2024), with 3.8k queries. We only use queries from categories “yes/no”, “factoid”, and “list”.
 - Syllabus QA (Fernandez et al., 2024). We use the test set of 1.1k questions distributed by the authors;
 - RGB (Chen et al., 2024b). We use the test set of 200 English questions distributed by the authors.

All datasets provide short answers (keywords) for each query, which we use to evaluate both match-based metrics such as Recall and LLM-based metrics Rau et al. (2024a)⁹.

Datastores. For training Provence, we use the MS MARCO document collection (Craswell et al., 2021). We split each document into overlapping chunks of N sentences, where N is random in $\in 1..10$ – with a higher probability for longer contexts – to train Provence on various context lengths. Each chunk is prepended with a page title. The resulting datastore contains 34M passages. We also process the Wikipedia datastore in a similar fashion, for ablation experiments. We download a 2024 Wikipedia dump and process it using scripts provided by Pyserini (Lin et al., 2021)¹⁰. We also prepare versions of this Wikipedia datastore with passages of N sentences with overlaps of $N/2$ sentences, for testing Provence robustness to various context lengths.

All other evaluations on Wikipedia-based datasets – including main evaluations – are con-

ducted on the Wikipedia datastore provided at <https://huggingface.co/datasets/castorini/odqa-wiki-corpora>. We use a version with passages of 6 sentences with a 3-sentence overlap – making 9M passages in total.

For Pubmed, we use the version of the dataset provided by Hsia et al. (2024) at <https://huggingface.co/datasets/jenhsia/ragged>. It consists of 58M passages, extracted from Pubmed abstracts. Each passage (chunk) is prepended with the page’s title.

For SyllabusQA, we split each syllabus (provided by the authors) into passages of 100 words (each passage is prepended with the title). For RGB, the retrieved contexts are provided by the authors; we provide 3 relevant and 2 irrelevant contexts for each question (60% noise context).

B. Models

We list in Table 5 all the main models used to conduct experiments for Provence.

⁹Using SOLAR-10.7B (Kim et al., 2023).

¹⁰At <https://github.com/castorini/pyserini/blob/master/docs/experiments-wiki-corpora.md>.

Model	Checkpoint
SPLADE-v3	naver/splade-v3
RetroMAE	Shitao/RetroMAE_MS MARCO_distill
DeBERTa-v3	microsoft/deberta-large
DeBERTa-v3 (RR)	naver/trecdl22-crossencoder-debertav3
BGE-M3	BAAI/bge-reranker-v2-m3
LLama-2-7B-chat	meta-llama/Llama-2-7b-chat-hf
LLaMA-3-8B-Instruct	meta-llama/Meta-Llama-3-8B-Instruct
Mistral-7B-instruct	mistralai/Mistral-7B-Instruct-v0.2
SOLAR-10.7B-Instruct-v1.0	upstage/SOLAR-10.7B-Instruct-v1.0

Table 5: List of all the models used in the experiments with their corresponding HuggingFace checkpoints.

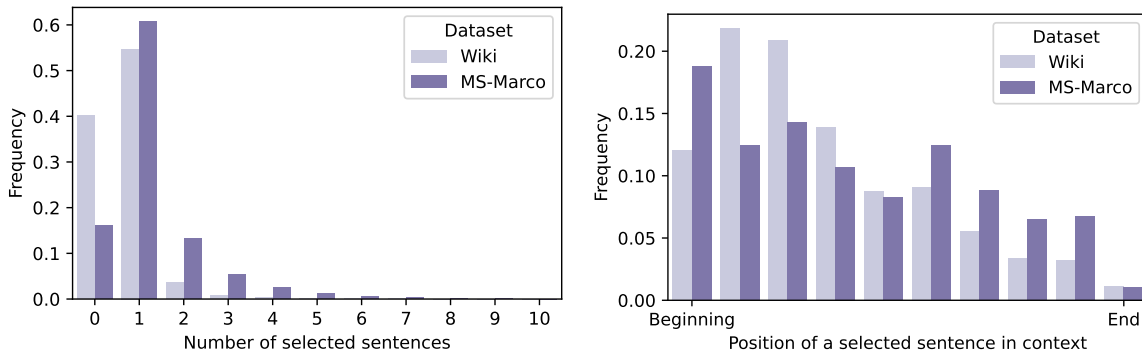


Figure 5: Statistics of the silver contexts labeled by LLaMA-3-8B-Instruct. (Left) the distribution of the number of sentences in silver contexts. (Right) the distribution of the position of the selected sentences in contexts.

Table 6: Prompt used for generating silver labeling with LLaMA-3-8B-Instruct. The sentence citations in the response are parsed using regular expression.

Question: {question}
 Context: [1] {sentence1} [2] {sentence2} [3] {sentence3} ...
 Answer the Question, using ONLY information provided in the Context. If no useful information is provided, you MUST output "No answer". If some parts of the Context are used to answer, you MUST cite ALL the corresponding sentences. Use the symbols [] to indicate when a fact comes from a sentence in the context, e.g [0] for a fact from sentence 0. You should only answer the given question and should not provide any additional information.

Table 7: nDCG@10 on the 13 open BEIR datasets.

Corpus	DeBERTav3	Provenance
TREC-COVID	88.3	88.3
NFCorpus	37.5	37.8
NQ	66.7	66.5
HotpotQA	74.5	74.9
FiQA-2018	47.8	47.6
ArguAna	29.8	33.2
Touché-2020	33.5	33.4
Quora	84.8	85.4
DBPedia	48.9	49.2
SCIDOCS	19.2	19.6
FEVER	86.6	87.9
Climate-FEVER	27.4	28.1
SciFact	75.8	75.3
average	55.4	55.9

how many french words are there in the english language **I** **n** **f** **l** **u** **e** **n** **c** **e** **o** **f** **F** **r** **e** **n** **c** **h** **o** **n** **E** **n** **g** **l** **i** **s** **h** . The most notable influence of French on English has been its extensive contribution to the English lex icon . It has been estimated that about a third of the words in English are French in origin ; lingu ist Henri ette Walter claims that this total may be as high as two thirds . **L** **i** **n** **g** **u** **i** **s** **t** **A** **n** **t** **h** **o** **n** **y** **L** **a** **c** **o** **u** **d** **r** **e** **h** **a** **s** **e** **s** **t** **i** **m** **a** **t** **e** **d** **t** **h** **a** **t** **o** **v** **e** **r** **4** **0** **,** **0** **0** **0** **E** **n** **g** **l** **i** **s** **h** **w** **o** **r** **d** **s** **c** **o** **m** **e** **d** **i** **r** **e** **c** **t** **l** **y** **f** **r** **o** **m** **F** **r** **e** **n** **c** **h** **a** **n** **d** **m** **a** **y** **b** **e** **u** **n** **d** **e** **r** **s** **t** **o** **o** **r** **d** **e** **r** **e** **c** **o** **n** **s** **i** **d** **e** **r** **e** **d** **u** **c** **e** **d** **b** **y** **F** **r** **e** **n** **c** **h** **s** **p** **e** **a** **k** **e** **r** **s** . Albert C . B augh and Thomas Cable note that " although this influx of French words was brought about by the victory of the Conquer or and by the political and social consequences of that victory , it was neither sudden nor immediately apparent . Rather it began slowly and continued with varying tempo for a long time . COLORS: 0.99 0.1 0

Figure 6: Example visualization of per-token probabilities of being selected in the final context.

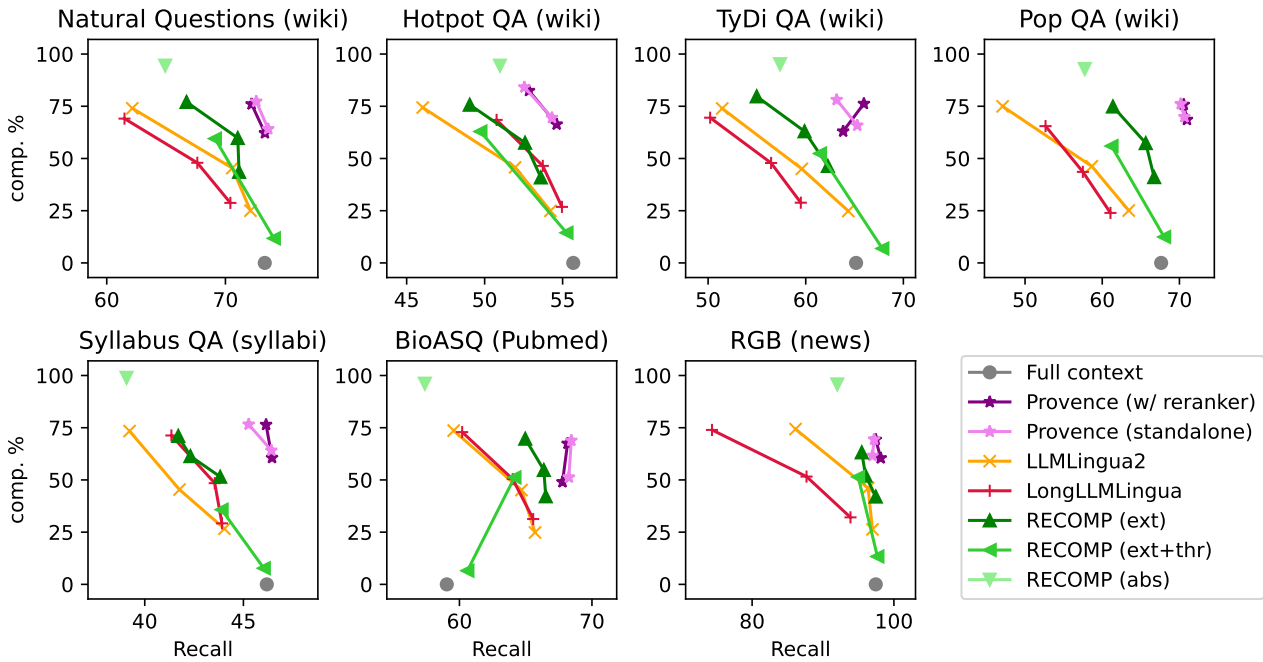


Figure 7: Main results for various QA domains, comparing Provence and baseline models, metric: Recall. *Generator*: Llama-2-7B, *retriever*: SPLADE-v3, *reranker*: DeBERTa-v3 (or Provence in the unified setting). Plot titles denote “Dataset name (datastore type)”. *x*-axis denotes QA performance evaluated with Recall; *y*-axis denotes the context compression ratio. For both metrics, the higher the better: the best model would be closest to the top right corner.

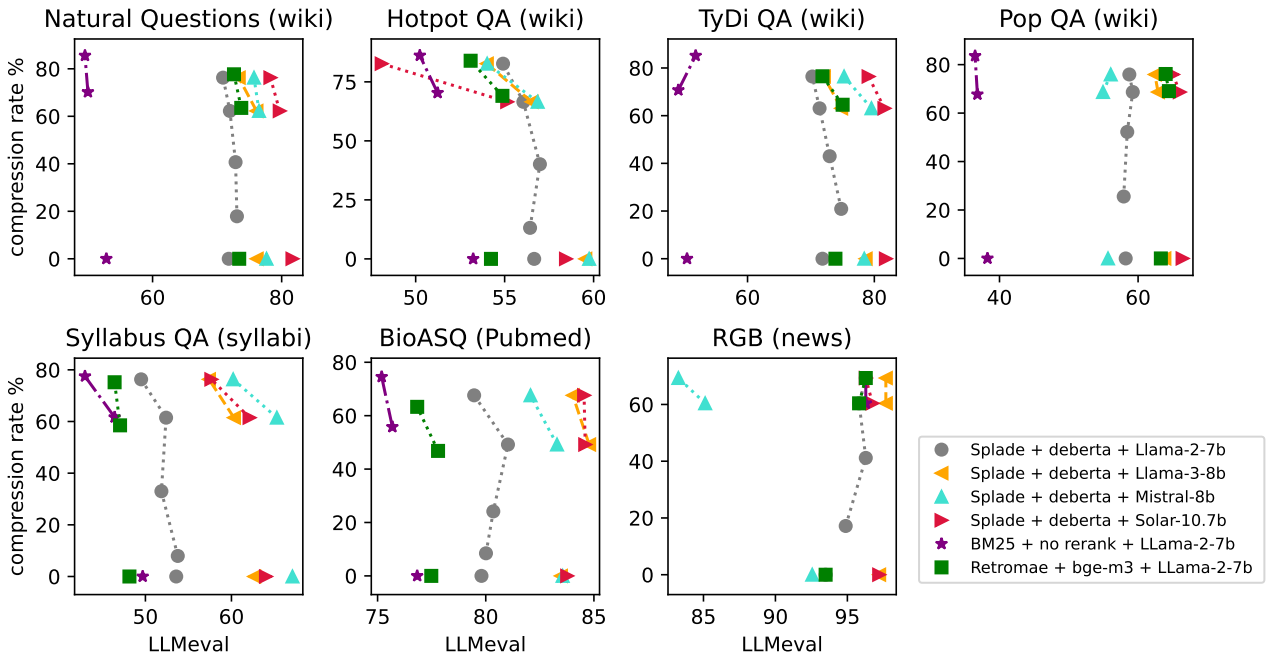


Figure 8: Testing Provence in various RAG settings (retrieval, re-ranking, generator).

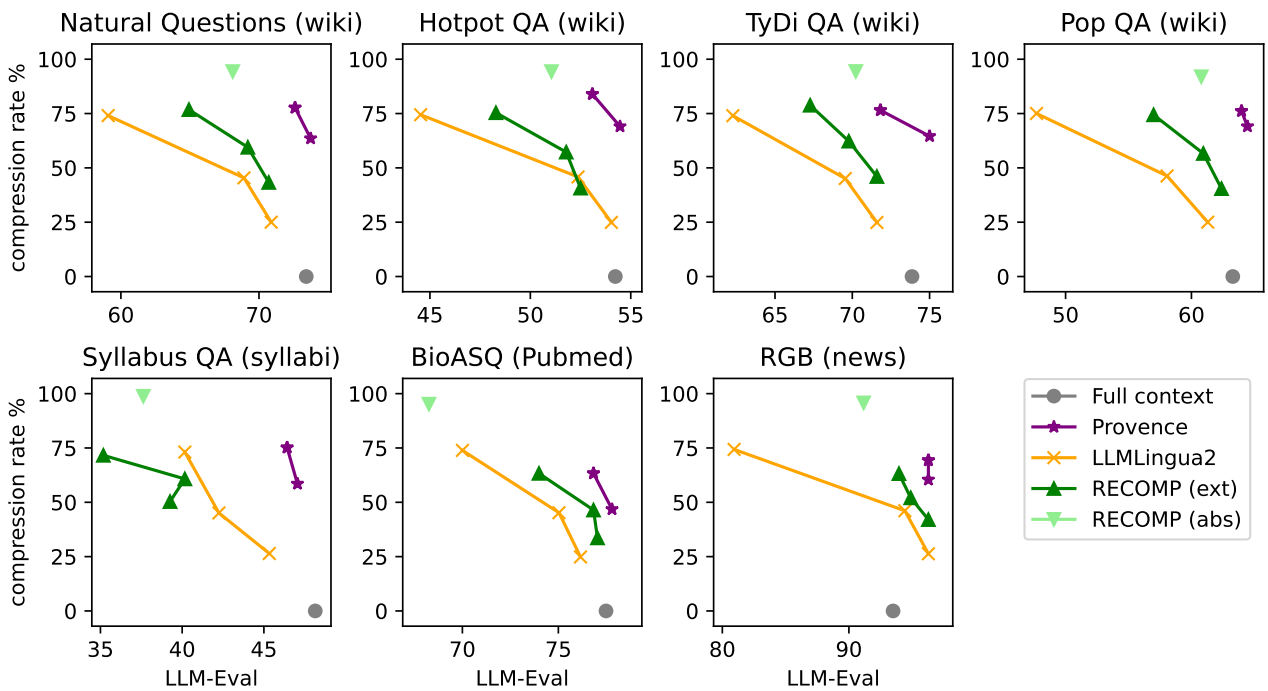


Figure 9: Comparing Provence to a subset of baselines with *retriever*: RetroMAE (Shitao et al., 2022), *reranker*: BGE-M3 (Chen et al., 2024a), *generator*:: Llama-2-7B-chat.

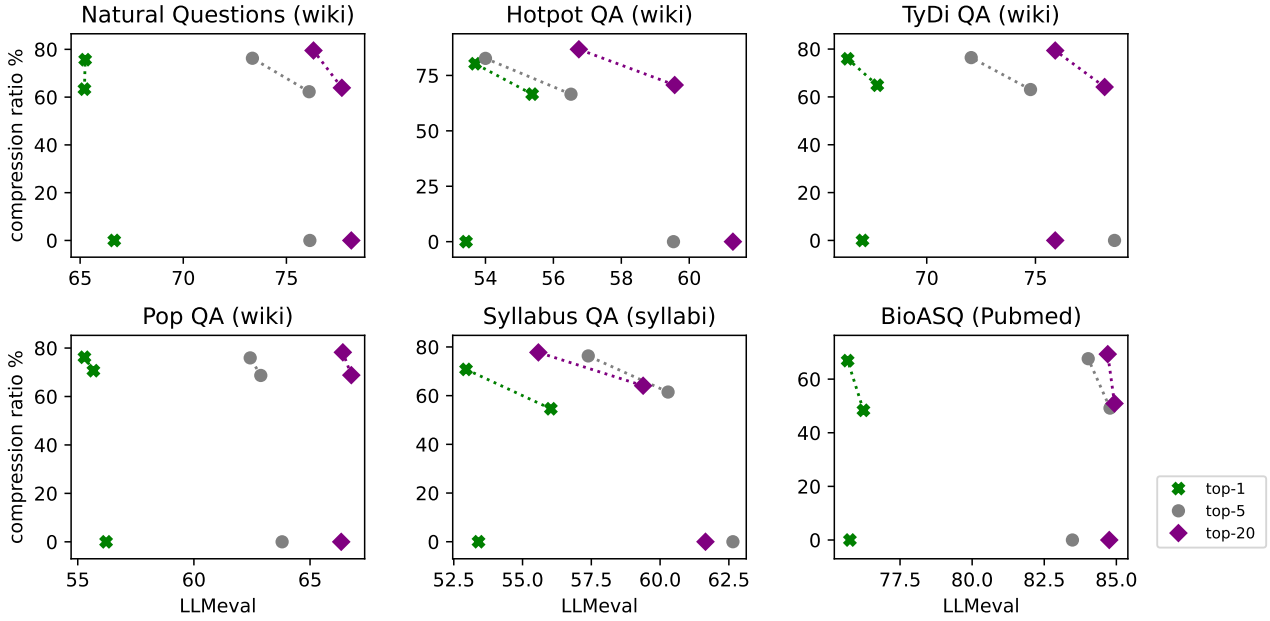


Figure 10: Testing Provenance with different top- k documents provided to the generator. The setting is the same as the one in Figure 2.

Table 8: Numerical scores corresponding to Figure 2 – NQ, Hotpot QA, Tydi QA, and Pop QA.

	NQ		HotPot QA		Tydi QA		PopQA		
	LLM-Eval	Comp. rate %	LLM-Eval	Comp. rate %	LLM-Eval	Comp. rate %	LLM-Eval	Comp. rate %	
Full context	71.8	0.0	57.0	0.0	73.9	0.0	57.8	0.0	
Provenance	72.4	62.2	56.7	66.4	70.5	63.0	59.3	68.6	
(w/ reranker)	72.6	76.0	56.0	82.4	73.6	76.2	59.5	75.8	
Provenance	72.3	64.1	56.6	69.5	70.9	65.8	59.0	69.9	
(standalone)	70.6	77.3	54.8	84.1	70.2	78.1	58.8	76.1	
LLMLingua2	59.5	74.0	47.1	74.4	57.7	73.9	42.9	75.0	
	67.5	45.4	52.9	45.8	67.3	45.0	52.5	46.3	
	70.3	25.0	55.0	24.9	70.0	24.8	55.2	25.1	
LongLLMLingua	61.3	69.1	52.6	68.5	56.6	69.5	49.5	65.5	
	68.5	47.9	55.6	46.5	65.5	47.8	54.5	43.6	
	71.3	28.7	56.9	26.8	69.1	28.8	57.6	23.9	
RECOMP	70.6	43.6	55.5	40.9	68.6	46.4	56.9	41.1	
(ext)	68.2	59.8	53.4	57.5	67.0	63.0	55.7	57.4	
	66.2	77.1	50.1	75.7	64.5	79.7	52.3	74.9	
RECOMP	69.0	59.5	50.9	62.9	70.9	52.4	54.8	56.0	
(ext+thr)	72.9	11.8	56.4	14.4	72.3	6.9	58.5	12.4	
RECOMP (abs)	66.9	94.5	53.1	94.4	66.4	95.2	54.4	92.8	
DSLRL	71.7	44.9	52.9	75.7	72.7	45.8	58.6	48.1	
	70.5	54.9	50.7	83.4	69.8	55.6	58.7	58.1	
	70.4	61.4	49.3	87.0	70.7	62.0	58.8	63.7	
	67.7	72.0	45.2	91.7	67.5	72.9	58.5	71.9	
	67.6	77.7	43.2	93.4	67.5	78.1	57.9	76.0	
Dense-X retrieval	re-	62.7	69.0	49.6	67.7	66.4	71.5	52.0	68.5

Table 9: Numerical scores corresponding to Figure 2: Syllabus QA, BioASQ, and RGB.

	Syllabus QA		BioASQ		RGB	
	LLM-Eval	Comp. rate %	LLM-Eval	Comp. rate %	LLM-Eval	Comp. rate %
Full context	52.9	0.0	80.7	0.0	93.5	0.0
Provenance	49.8	60.6	80.6	49.0	94.4	60.5
(w/ reranker)	51.0	76.5	80.3	67.4	96.3	69.3
Provenance (standalone)	50.7	64.1	80.6	51.3	95.8	61.6
LLMLingua2	47.8	76.6	80.1	68.9	96.3	69.4
	37.4	73.4	72.6	73.6	78.6	74.3
	43.4	45.4	77.7	45.2	93.5	46.1
	49.8	26.6	78.7	24.8	95.8	26.3
LongLLMLingua	42.3	71.3	72.2	72.9	71.6	73.9
	45.1	48.5	77.3	50.4	83.3	51.6
	50.9	29.2	78.7	31.3	92.1	32.1
RECOMP (ext)	44.6	51.5	78.7	42.2	97.7	42.0
	42.7	61.4	78.4	54.8	94.9	52.1
	39.1	71.1	76.3	69.7	94.4	63.2
RECOMP (ext+thr)	45.5	35.7	76.6	51.2	92.1	51.4
	52.8	7.7	80.2	6.5	97.7	13.4
RECOMP (abs)	38.1	98.9	68.2	96.1	90.7	95.7
DSLRL	49.6	33.2	80.1	29.9	97.2	41.6
	49.1	46.4	79.6	40.1	97.7	46.9
	47.2	55.4	79.2	47.3	96.3	49.7
	44.2	70.6	77.6	60.2	97.2	54.1
	40.7	78.2	75.4	68.0	95.8	56.9

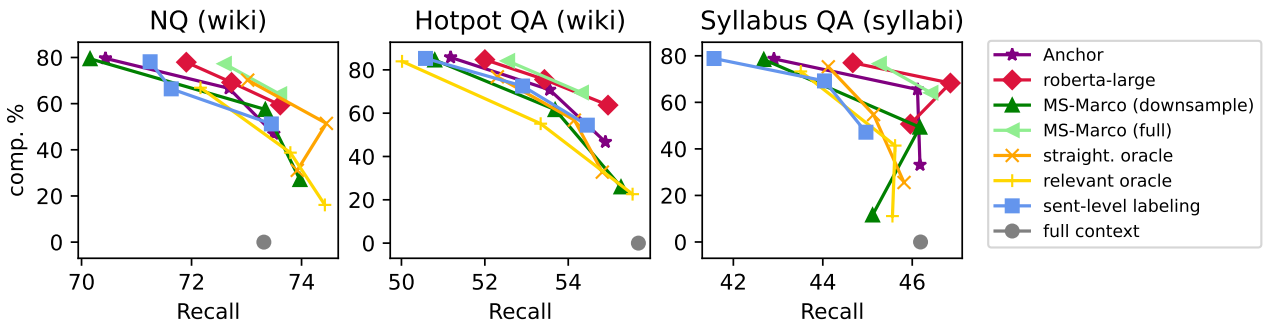


Figure 11: Ablation results with Recall (match-based metric).

Table 10: Numerical scores corresponding to Figure 4.

	Thresh.	NQ		HotPot QA		Syllabus QA	
		LLM-Eval	Comp. rate %	LLM-Eval	Comp. rate %	LLM-Eval	Comp. rate %
Anchor	0.01	72.2	46.9	56.0	46.7	51.1	33.1
	0.1	71.6	66.6	55.6	70.8	51.1	65.5
	0.5	70.6	79.6	52.9	85.8	44.0	78.7
Deberta-large	0.01	72.5	59.4	56.7	63.7	49.9	50.7
	0.1	72.1	69.2	55.9	75.6	49.6	68.3
	0.5	70.9	78.0	53.2	84.7	46.1	77.0
MS-Marco (downsample)	0.01	72.9	27.1	57.2	25.9	52.5	11.6
	0.1	72.8	57.5	56.2	61.6	50.5	49.3
	0.5	68.7	79.4	52.3	84.5	43.0	78.4
MS-Marco (full)	0.1	72.3	64.1	56.6	69.5	50.7	64.1
	0.5	70.6	77.3	54.8	84.1	47.8	76.6
straight. oracle	0.01	73.1	31.1	56.8	32.8	52.9	25.6
	0.1	72.5	51.4	55.9	56.8	51.7	54.7
	0.5	72.0	70.2	54.8	76.8	45.5	75.3
relevant oracle	0.01	72.8	16.1	57.4	22.6	49.4	11.1
	0.1	72.6	38.8	55.7	55.1	49.6	41.4
	0.5	71.3	66.9	51.6	83.9	46.8	73.3
sent-level labeling	0.01	73.0	51.2	56.2	54.5	51.5	47.2
	0.1	71.0	66.4	55.0	72.5	48.3	69.2
	0.5	71.2	78.2	53.0	85.3	40.4	78.8
full context	0.01	71.8	0.0	57.0	0.0	52.9	0.0

Table 11: Example of context pruning with various approaches. Provence selects one sentence about the Shepard’s pie and removes sentences about other similar dishes, which is RECOMP (ext) is not capable of by design. RECOMP (abs) correctly generates a summary; LongLLMLingua removes the part relevant to the Shepard’s pie, and LLMLingua2 uniformly removes no-informative tokens.

Question	what goes on the bottom of shepherd’s pie
Original context	Shepherd’s pie. History. In early cookery books, the dish was a means of using leftover roasted meat of any kind, and the pie dish was lined on the sides and bottom with mashed potato, as well as having a mashed potato crust on top. Variations and similar dishes. Other potato-topped pies include: The modern "Cumberland pie" is a version with either beef or lamb and a layer of breadcrumbs and cheese on top. In medieval times, and modern-day Cumbria, the pastry crust had a filling of meat with fruits and spices.. In Quebec, a variation on the cottage pie is called "Pâté chinois". It is made with ground beef on the bottom layer, canned corn in the middle, and mashed potato on top.. The "shepherdess pie" is a vegetarian version made without meat, or a vegan version made without meat and dairy.. In the Netherlands, a very similar dish called "philosopher’s stew" () often adds ingredients like beans, apples, prunes, or apple sauce.. In Brazil, a dish called in refers to the fact that a manioc puree hides a layer of sun-dried meat.
Provence	Shepherd’s pie. In early cookery books, the dish was a means of using leftover roasted meat of any kind, and the pie dish was lined on the sides and bottom with mashed potato, as well as having a mashed potato crust on top.
RECOMP (ext, top-3)	In early cookery books, the dish was a means of using leftover roasted meat of any kind, and the pie dish was lined on the sides and bottom with mashed potato, as well as having a mashed potato crust on top. The "shepherdess pie" is a vegetarian version made without meat, or a vegan version made without meat and dairy.. In the Netherlands, a very similar dish called "philosopher’s stew" () often adds ingredients like beans, apples, prunes, or apple sauce..
RECOMP (abs)	Shepherd’s pie is a dish made with leftover roasted meat and mashed potato on the bottom, with variations including a version with beef or lamb and a layer of breadcrumbs and cheese on top. The dish has a history of being used as a means of using leftover roasted meat and has variations on the toppings.
LLMLingua2 (comp.50%)	Shepherd’s pie History early cookery books dish leftover roasted meat lined mashed potato mashed potato crust top Variations similar dishes potato-topped pies include modern "Cumberland pie" beef or lamb breadcrumbs cheese medieval modern-day Cumbria pastry crust filling meat fruits spices Quebec variation cottage pie "Pâté ground beef bottom canned corn middle mashed potato top "shepherdess pie" vegetarian without meat vegan version without meat dairy Netherlands similar dish "philosopher’s stew" adds ingredients beans apples prunes apple sauce Brazil dish manioc puree hides sun-dried meat
LongLLMLingua (comp. 50%). Processes all passages together and dynamically decides on the compression ratio of each passage.	Shepherd’s pie. Other potato-topped pies include: The modern "Cumberland pie" is a version with either beef or lamb and a layer of breadcrumbs and cheese on top. In medieval times, and modern-day Cumbria, the pastry crust had a filling of meat with fruits and spices.. In Quebec, a variation on the cottage pie is called "Pâté chinois". It is made with ground beef on the bottom layer, canned corn in the middle, and mashed potato on top.. The "shepherdess pie" is a vegetarian version made without meat, or a vegan version made without meat and dairy.. In the Netherlands, a very similar dish called "philosopher’s stew" () often adds ingredients like beans, apples, prunes, or apple sauce.. In Brazil, a dish called in refers to the fact that a manioc puree hides a layer of sun-dried meat.

Table 12: Example of context pruning with various approaches. Provence correctly detects that the entire passage is relevant to the query, same as LongLLMLingua, while RECOMP (ext) is by design not capable of making such a decision.

Question	where does the sweetness of fruit come from
Original context	Sweetness. A number of plant species produce glycosides that are sweet at concentrations much lower than sugar. The most well-known example is glycyrrhizin, the sweet component of licorice root, which is about 30 times sweeter than sucrose. Another commercially important example is stevioside, from the South American shrub "Stevia rebaudiana". It is roughly 250 times sweeter than sucrose. Another class of potent natural sweeteners are the sweet proteins such as thaumatin, found in the West African katemfe fruit. Hen egg lysozyme, an antibiotic protein found in chicken eggs, is also sweet.
Provence	Sweetness. A number of plant species produce glycosides that are sweet at concentrations much lower than sugar. The most well-known example is glycyrrhizin, the sweet component of licorice root, which is about 30 times sweeter than sucrose. Another commercially important example is stevioside, from the South American shrub "Stevia rebaudiana". It is roughly 250 times sweeter than sucrose. Another class of potent natural sweeteners are the sweet proteins such as thaumatin, found in the West African katemfe fruit. Hen egg lysozyme, an antibiotic protein found in chicken eggs, is also sweet.
RECOMP (ext, top-3)	It is roughly 250 times sweeter than sucrose. Another commercially important example is stevioside, from the South American shrub "Stevia rebaudiana". A number of plant species produce glycosides that are sweet at concentrations much lower than sugar.
RECOMP (abs)	[empty context]
LLMLingua2 (comp.50%)	Sweetness plant species produce glycosides sweet lower sugar glycyrrhizin sweet licorice root 30 times sweeter sucrose stevioside South American shrub "Stevia 250 times sweeter sucrose sweeteners sweet proteins thaumatin West African katemfe fruit Hen egg lysozyme antibiotic protein chicken eggs sweet
LongLLMLingua (comp. 50%)	Sweetness. A number of plant species produce glycosides that are sweet at concentrations much lower than sugar. The most well-known example is glycyrrhizin, the sweet component of licorice root, which is about 30 times sweeter than sucrose. Another commercially important example is stevioside, from the South American shrub "Stevia rebaudiana". It is roughly 250 times sweeter than sucrose. Another class of potent natural sweeteners are the sweet proteins such as thaumatin, found in the West African katemfe fruit. Hen egg lysozyme, an antibiotic protein found in chicken eggs, is also sweet.

Table 13: Example of context pruning with various approaches. Provence selects one most relevant sentence, which is also ranked first by RECOMP (ext). RECOMP (abs) decides that no information is relevant to the query, while LongLLMLingua on the contrary keeps the entire input, dropping some punctuation marks. LLMingua2 removes too many tokens which makes text hardly understandable.

Question	what was the tower of london originally used for
Original context	Tower of London. In the 16th century, the Tower acquired an enduring reputation as a grim, forbidding prison. This had not always been the case. As a royal castle, it was used by the monarch to imprison people for various reasons, however these were usually high-status individuals for short periods rather than common citizenry as there were plenty of prisons elsewhere for such people. Contrary to the popular image of the Tower, prisoners were able to make their life easier by purchasing amenities such as better food or tapestries through the Lieutenant of the Tower. As holding prisoners was originally an incidental role of the Tower – as would have been the case for any castle – there was no purpose-built accommodation for prisoners until 1687 when a brick shed, a "Prison for Soldiers", was built to the north-west of the White Tower. The Tower's reputation for torture and imprisonment derives largely from 16th-century religious propagandists and 19th-century romanticists.
Provence	Tower of London. As a royal castle, it was used by the monarch to imprison people for various reasons, however these were usually high-status individuals for short periods rather than common citizenry as there were plenty of prisons elsewhere for such people.
RECOMP (ext, sorted top-3 sents)	As a royal castle, it was used by the monarch to imprison people for various reasons, however these were usually high-status individuals for short periods rather than common citizenry as there were plenty of prisons elsewhere for such people. This had not always been the case. The Tower's reputation for torture and imprisonment derives largely from 16th-century religious propagandists and 19th-century romanticists.
RECOMP (abs)	[empty context]
LLMLingua2 (comp.25%)	Tower London 16th century grim prison royal castle monarch high-status common citizenry prisoners amenities food Lieutenant Tower no-built accommodation until 1687 "Prison for north-west White Tower reputation torture imprisonment 16th-century propagandists 19th-century romanticists
LongLLMLingua (comp. 25%)	Tower of London In the 6th century, the acquired an enduring reputation as grim, forbid prison. This had always been the case As a royal castle, it was by the to imprison people for various reasons however these were usually high-status individuals for short rather than common citizenry as there were plenty of prisons elsewhere for such people. Contrary popular of the Tower, prisoners were able to make their life easier purchasing amenities such better food or tapestries through Lieutenant of the Tower. holding prisoners was originally incident role of the-would have been the case for any – was purpose- accommodation for prisoners until 167 a "Prison for Sold", was to thewest of White Tower. The's reputation torture imprisonment derives largely from 6th- religious propagandists and 19th-century romanticists.